

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID
08.26.2026

APPROVALS RECOMMENDATIONS FOR APPROVAL OF CONSTRUCTION	
DIRECTOR - BUILDING DESIGN AND CONSTRUCTION DIVISION, DPWES	DATE
CHIEF OF POLICE	DATE
DEPUTY DIRECTOR DEPARTMENT OF PUBLIC WORKS AND ENVIRONMENTAL SERVICES	DATE

In accordance with the Code of Virginia Section 2.2-3705.2 the documents herein contain critical security information that is exempt from disclosure because the disclosure of which may jeopardize the safety or security of its occupants.




ARCHITECTURAL DEWBERRY 8401 Arlington Blvd Fairfax, VA 22031 703.849.0100	INTERIOR DESIGN DEWBERRY 8401 Arlington Blvd Fairfax, VA 22031 703.849.0100	CIVIL DEWBERRY 13575 Heathcote Blvd Gainesville, VA 20155 703.468.2211	STRUCTURAL DEWBERRY 2610 Wycliff Road Raleigh, NC 27607 919.881.9939	TECHNOLOGY DEWBERRY 401 Southwest Water St Peoria, IL 61602 309.282.8000	MEP DEWBERRY 8401 Arlington Blvd Fairfax, VA 22031 703.849.0100
--	--	---	---	---	--


STANDARD ABBREVIATIONS

AB	ANCHOR BOLT	FLR	FLOOR	PTR	PAPER TOWEL RECEPTACLE
ACST	ACOUSTIC(IAL)	FRP	FIBER REINFORCED PLASTIC	PVG	POLYVINYL CHLORIDE PAVING
ADDL	ADDITIONAL	FTG	FOOTING	R	RISER, RADIUS, THERMAL RESISTANCE (R-VALUE)
ADDN	ADDITION	FURG C	FURRING CHANNEL	RB	RESILIENT BASE
ADH	ADHESIVE	FURN	FURNACE	RCP	REFLECTED CEILING PLAN
ADJ	ADJACENT, ADJOINING, ADJUSTABLE	FWC	FABRIC WALLCOVERING	RD	ROOF DRAIN, ROAD
AED	AUTOMATED EXTERNAL DEFIBRILLATOR	GA	GAGE, GAUGE	REF	REFERENCE, REFRIGERATOR
AFF	ABOVE FINISH FLOOR	GALV	GALVANIZED	REIN	REINFORCE
ALT	ALTERNATE	GB	GRAB BAR	REQD	REQUIRED
ALUM	ALUMINUM	GFRG	GLASS-FIBER REINFORCED CONCRETE	RFG	RESILIENT FLOORING
ANCH	ANCHOR	GL	GLASS	RF	REMOVABLE FLOOR MAT
ANOD	ANODIZE(D)	GL BLK	GLASS BLOCK	RH	RIGHT HAND
AP	ACCESS PANEL	GLZ CMU	GLAZED CONCRETE MASONRY UNIT	RO	ROUGH OPENING
APC	ACOUSTICAL PANEL CEILING	GRFG	GLASS-FIBER REINFORCED GYPSUM	RSE	RESINOUS FLOORING
APPROX	APPROXIMATE	GT	GROUT	RST	REINFORCING STEEL
ASPH	ASPHALT	QWH	GAS FIRED WATER HEATER	RTF	RESILIENT TILE FLOORING
AUTO	AUTOMATIC	GYP BD	GYPSUM WALL BOARD	RV	ROOF VENTILATOR
AVE	AVERAGE	H	HIGH, HATCH (ROOF)	SC	SEALED CONCRETE
AWT	ACOUSTICAL WALL TREATMENT	HB	HOSE BIB	SCHED	SCHEDULE
BAL SHT	BALANCE SHEET	HBNR	HARDENER	SCR	SHOWER CURTAIN ROD
BC	BRICK COLOR	HDR	HARDWARE	SCWD	SOLID CORE WOOD DOOR
BCS	BABY CHANGING STATION	HDWD	HARDWOOD	SD	SOAD DISPENSER
BD	BOARD	HM	HOLLOW METAL	SECT	SECTION
BITUM	BITUMINOUS	HORIZ	HORIZONTAL	SF	STOREFRONT
BLDG	BUILDING	HT	HEIGHT	SH	SHINGLES, SINGLE HUNG (WINDOW)
BLKG	BLOCKING (WOOD)	HTG	HEATING	SHT	SHEET
BOIT	BOTTLE	HVAC	HEATING, VENTILATING, AND AIR CONDITIONING	SHTHG	SHEATHING
BRDG	BRIDGING	ID	INSIDE DIAMETER, INSIDE DIMENSION	SHV	SHELVING
BRG	BEARING	IF	INSIDE FACE	SEALNT	SEALANT
BRK PV	BRICK PAVERS	INCL	INCLUDED	SND	SANITARY NAPKIN DISPENSER
BRKT	BRACKET	INSUL	INSULATION	SNDU	SANITARY NAPKIN DISPOSAL UNIT
BSMT	BASEMENT	INT	INTERIOR	SOG	SLAB ON GRADE
BTWN	BETWEEN	INV	INVERT	SPCR	SPECIFICATION
BUR	BUILT UP ROOFING	JOINT	JOINT	SQ	SQUARE
CAB	CABINET	KD	KNOCKED DOWN	SS	SERVICE SINK, SOLID SURFACING
CB	CHALKBOARD	KOP	KNOCK OUT PANEL	SST	STAINLESS STEEL, SHOWER SEAT
CC	CUBICLE CURTAIN	L	LONG, ANGLE	STD	STANDARD
CCT	CUBICLE CURTAIN TRACK	LAM	LAMINATE(D)	STL	STEEL
CCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED	LAV	LAVATORY	STL JST	STEEL JOIST
CFMF	COLD-FORMED METAL FRAMING	LH	LEFT HAND	STL LINTL	STEEL LINTEL
CG	CORNER GUARD	LINO	LINOLEUM	STL PL	STEEL PLATE
CH	COAT HOOK	LKR	LOCKER	STL RF DK	STEEL ROOF DECK
CIP CONC	CAST-IN-PLACE CONCRETE	LL	LIVE LOAD, LOW LEVEL	STL TR	STEEL TRUSS
CJ	CONTROL JOINT, CONSTRUCTION JOINT	LLH	LONG LEG HORIZONTAL	STN	STAIN
CLG	CEILING	LLV	LONG LEG VERTICAL	STRUCT	STRUCTURAL
CLR	CLEAR	LT	LIGHT	SUSP	SUSPEND
CMU	CONCRETE MASONRY UNIT	LVL	LEVEL	SV	SHEET VINYL
CNTR	COUNTER	LVR	LOUVER	SWP	SHEET WALL PROTECTION
CO	CLEAN OUT, CASED OPENING	MAS	MASONRY	SYMM	SYMMETRICAL
COL	COLUMN	MATL	MATERIAL	SYNTH	SYNTHETIC
COMB	COMBINATION, COMBINED	MAX	MAXIMUM	T	TILE, TREAD
COMP	COMPRESSIBLE	MB	MARKERBOARD	T&G	TONGUE AND GROOVE
COMPT	COMPARTMENT	MBH	MOB/BROOM HOLDER	T/S	TUB/SHOWER
CONC	CONCRETE	MECH	MECHANICAL	TB	TOWEL BAR, TACKBOARD
CONC CTG	CONCRETE COATING	MED	MEDIUM	TC	TOILET COMPARTMENT
COND	CONDITION	MEZZ	MEZZANINE	TD	TRENCH DRAIN
CONT	CONTINUOUS	MFR	MANUFACTURER	TER	TERRAZZO
CONTR	CONTRACTOR	MI	MIRROR	THK	THICK
CORR	CORRIDOR	MIN	MINIMUM, MINUTE	THK	THICK
CPRS	COMPRESSIBLE	MISC	MISCELLANEOUS	TOB	TOP OF BEAM
CPT	CARPET	MO	MASONRY OPENING	TOC	TOP OF CONCRETE, TOP OF CURB
CR	CLOSET ROD	MOD	MODEL, MODULE, MODULAR	TOF	TOP OF FOOTING
CRL	CRASH RAIL	MSB	MOP SERVICE BASIN	TOM	TOP OF MASONRY
CRS	COLD-ROLLED STEEL	MTL	METAL	TOS	TOP OF SLAB, TOP OF STEEL
CTR	CENTER	NDU	NEEDLE DISPOSAL UNIT	TOW	TOP OF WALL
CUH	CABINET UNIT HEATER	NIC	NOT IN CONTRACT, NOISE ISOLATION	TPH	TOILET PAPER HOLDER
CUV	CABINET UNIT VENTILATOR	NO	NUMBER	TR	TOWEL RACK
CW	CURTAINWALL	NTS	NOT TO SCALE	TS	TUBE STEEL, TRANSITION STRIP
D	DEEP, DEPTH, PENNY NAIL	OA	OVERALL	UNO	UNLESS NOTED OTHERWISE
DC	DISPLAY CASE	OC	ON CENTER	VCT	VINYL COMPOSITION TILE
DET	DETAIL	OD	OUTSIDE DIAMETER, OUTSIDE DIMENSION	VERT	VERTICAL
DETN	DETENTION	OF	OUTSIDE FACE	VIF	VERIFY IN FIELD
DF	DRINKING FOUNTAIN	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED	VVC	VINYL WALL COVERING
DIA	DIAMETER	OFD	OVERFLOW DRAIN	W	WIDE, WEST
DIM	DIMENSION	OFI	OWNER FURNISHED OWNER INSTALLED	WC	WALL COVERING
DN	DOWN	OH	OVERHEAD	WD	WOOD, WOOD DOOR
DP	DECORATIVE PANEL	OH DR	OVERHEAD DOOR	WDW	WINDOW
DR	DOOR	OP	OPPOSITE	WP	WALL PATTERN, WATERPROOFING
DS	DOWNSPOUT	OPH	OPPOSITE HAND	WT	WEIGHT, WINDOW TREATMENT
DWG	DRAWING(S)	OPNG	OPENING	WWF	WELDED WIRE FABRIC
EHD	ELECTRIC HAND DRYER	OPP	OPPOSITE		
EJ	EXPANSION JOINT	OS	OVERFLOW SCUPPER		
EL	ELEVATION	PC	PORTLAND CEMENT, POINT OF CURVE, POLYCARBONATE		
ELEC	ELECTRIC, ELECTRICAL	PCC	PRECAST CONCRETE		
ELEV	ELEVATOR	PERIM	PERIMETER		
EMBED	EMBEDMENT	PJ	PROJECTOR		
EMER	EMERGENCY	PL	PLATE, PLASTIC LAMINATE		
EPDM	ETHYLENE PROPYLENE DIENE MONOMER	PLAS	PLASTER		
EQ	EQUIP	PLBG	PLUMBING		
ES	EXPOSED STRUCTURE	PLYWD	PLYWOOD		
ETR	EXISTING TO REMAIN	PS	PROJECTION SCREEN		
EW	EACH WAY	PSE	POUNDS PER SQUARE FOOT		
ENC	ELECTRIC WATER COOLER	PT	PAINT		
EWB	ELECTRIC WATER HEATER	PTD	PAPER TOWEL DISPENSER		
EXIST	EXISTING	PTDR	PAPER TOWEL DISPENSER & RECEPCTACLE		
EXP	EXPANSION	PTN	PARTITION		
EXT	EXTERIOR				
FAB	FABRIC				
FD	FLOOR DRAIN				
FDN	FOUNDATION				
FE	FIRE EXTINGUISHER				
FEC	FIRE EXTINGUISHER CABINET				
FF	FINISH FLOOR				
FHC	FIRE HOSE CABINET				
FIN	FINISH				
FLASH	FLASHING				
FLP	FLOOR PATTERN				

STANDARD DRAFTING SYMBOLS

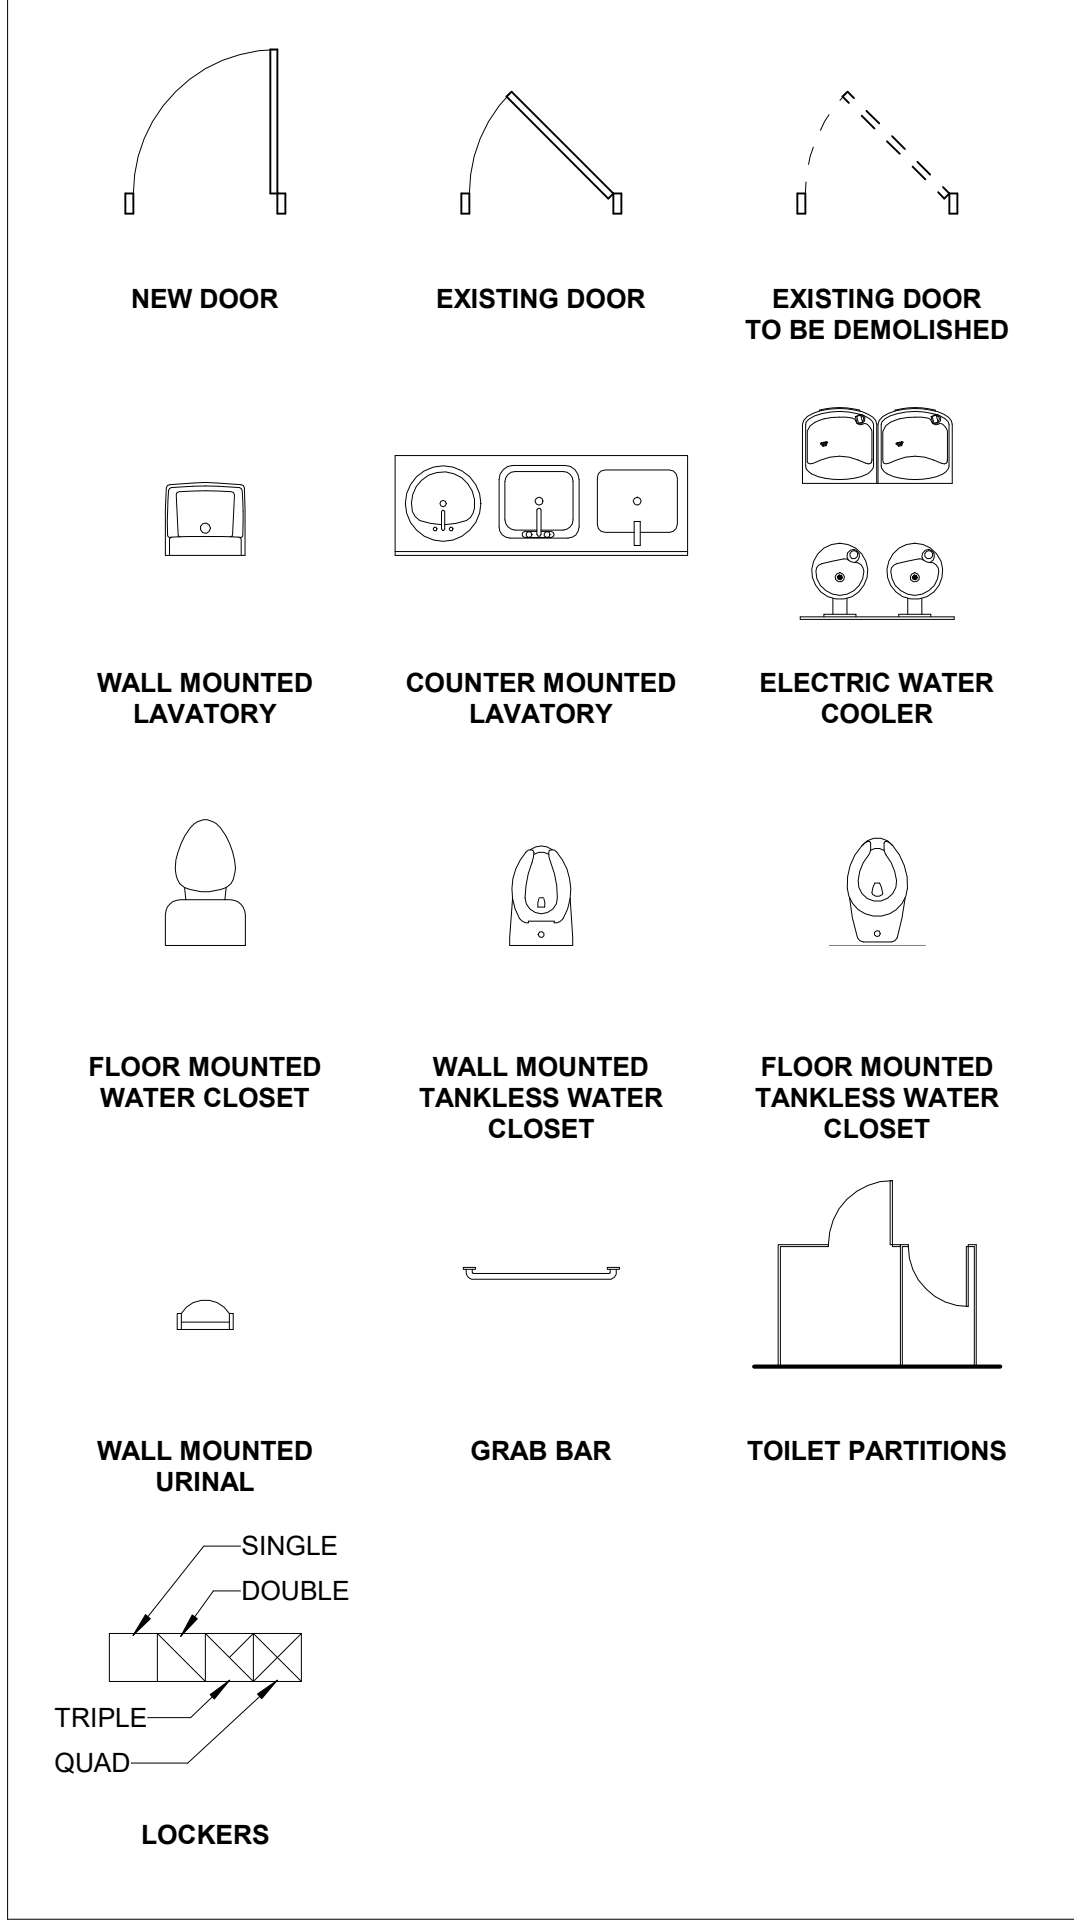


VICINITY MAP

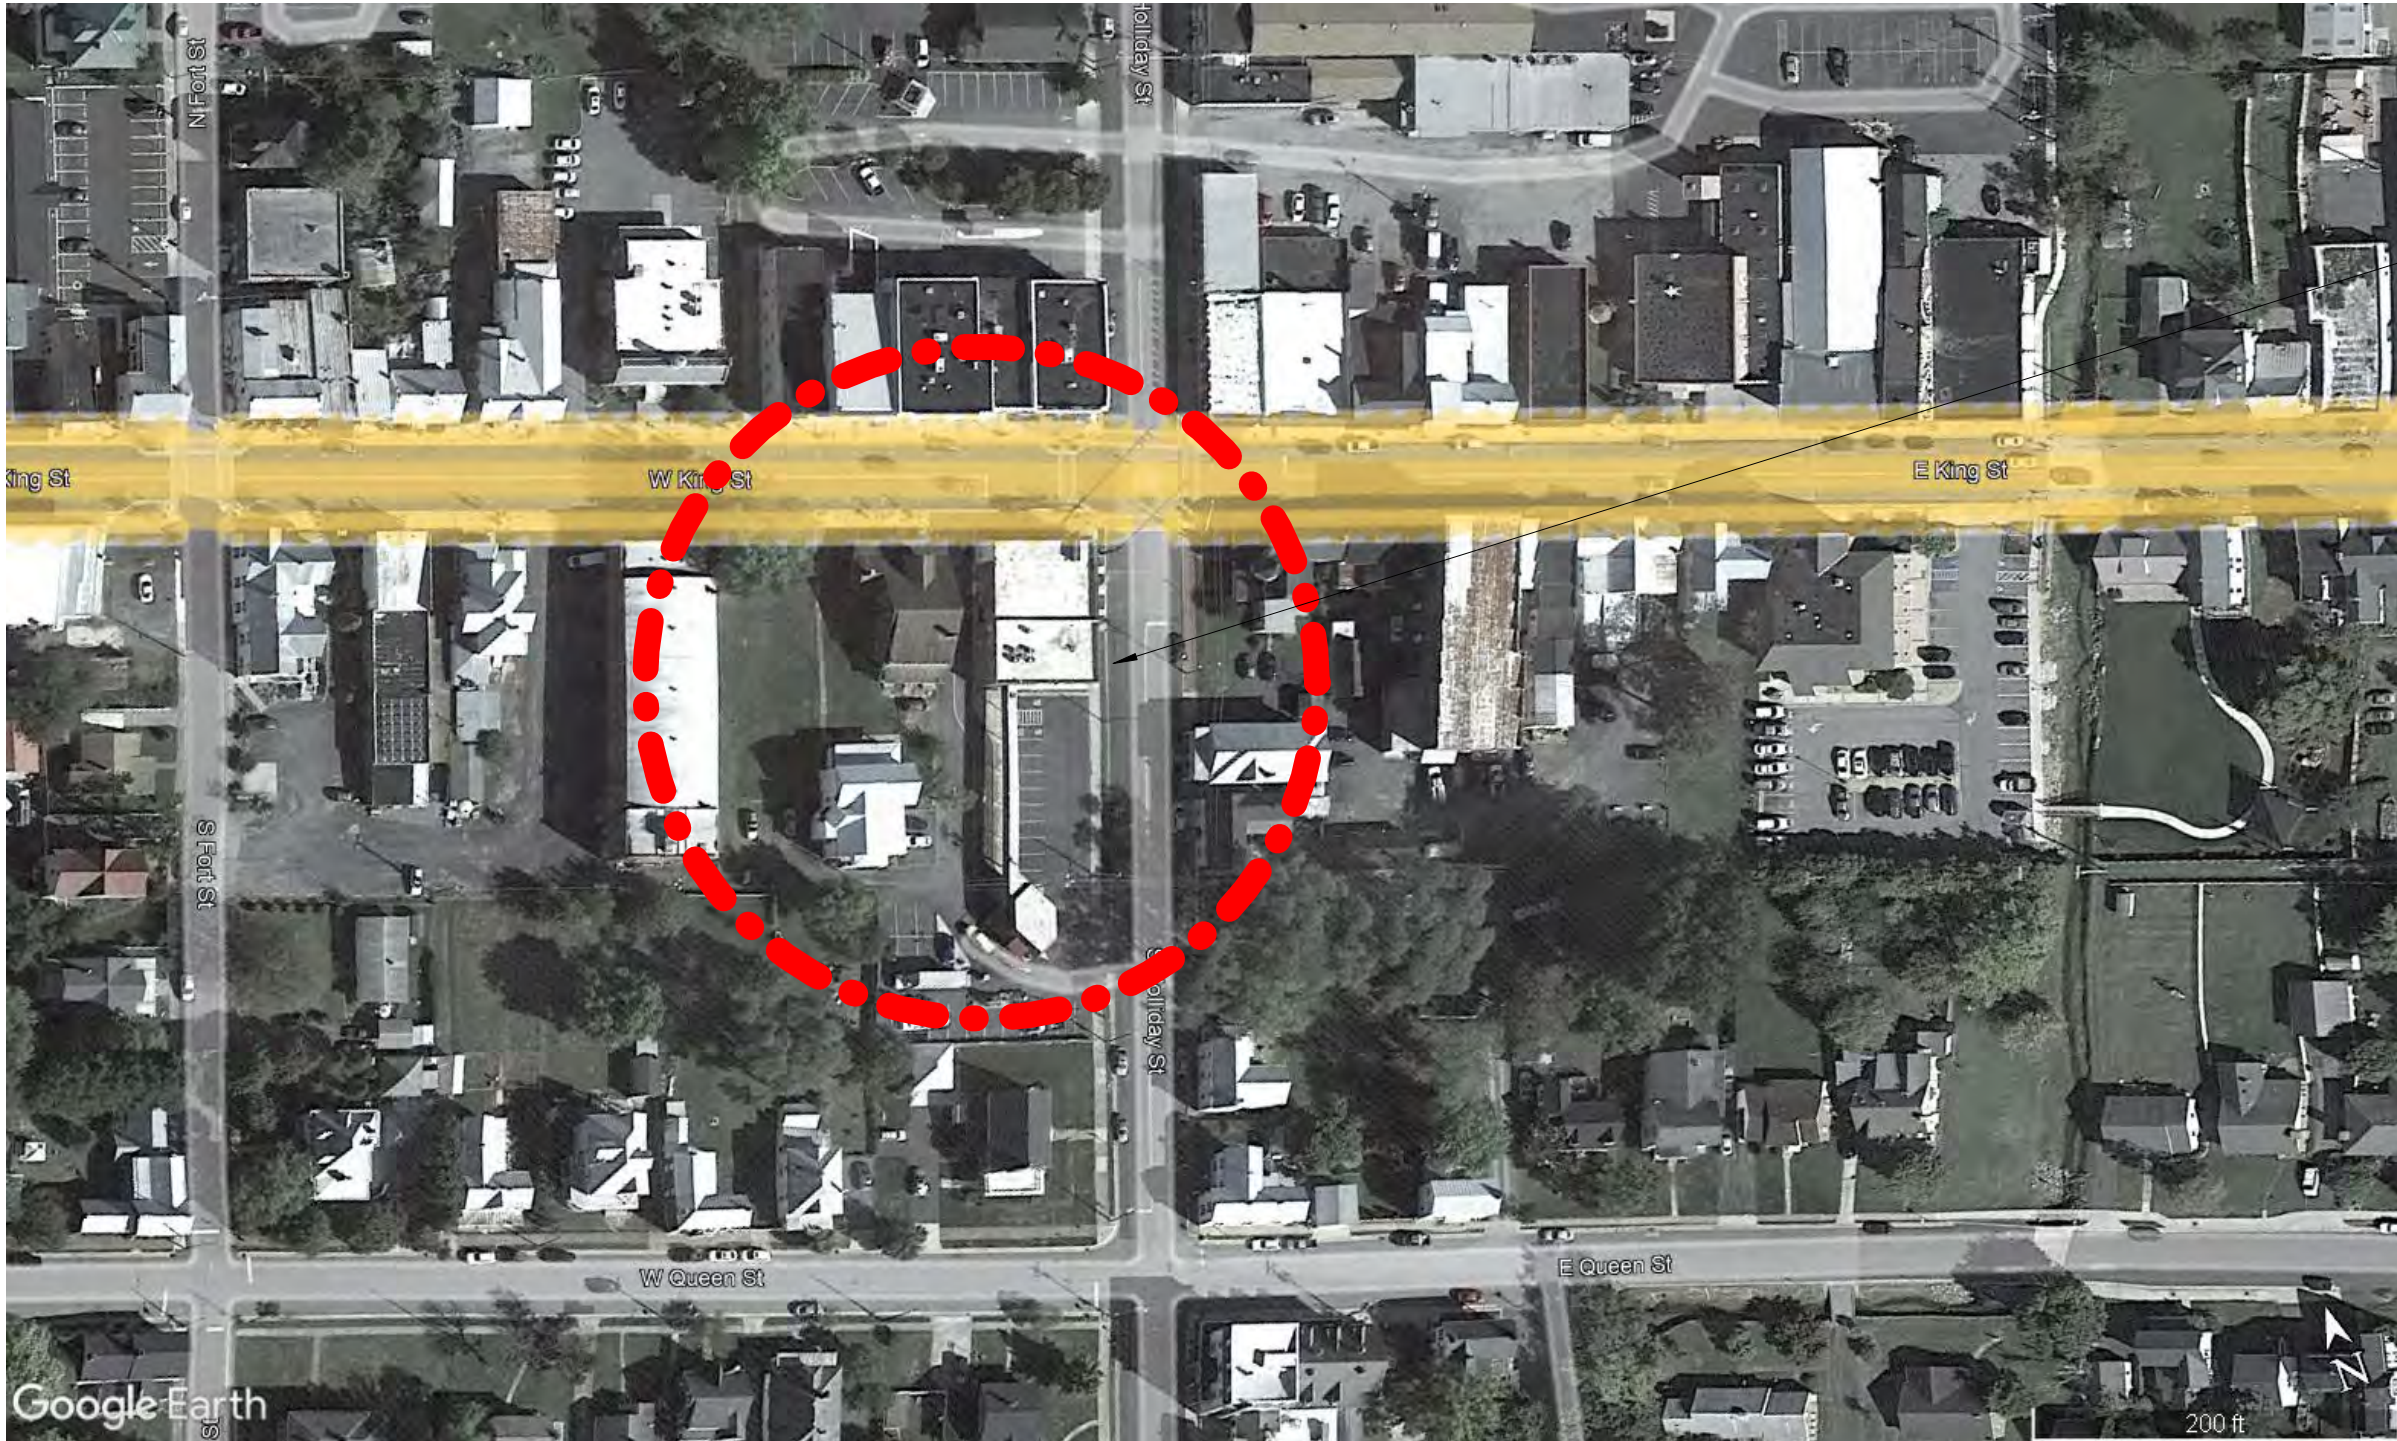


PROJECT LOCATION

LOCATION MAP

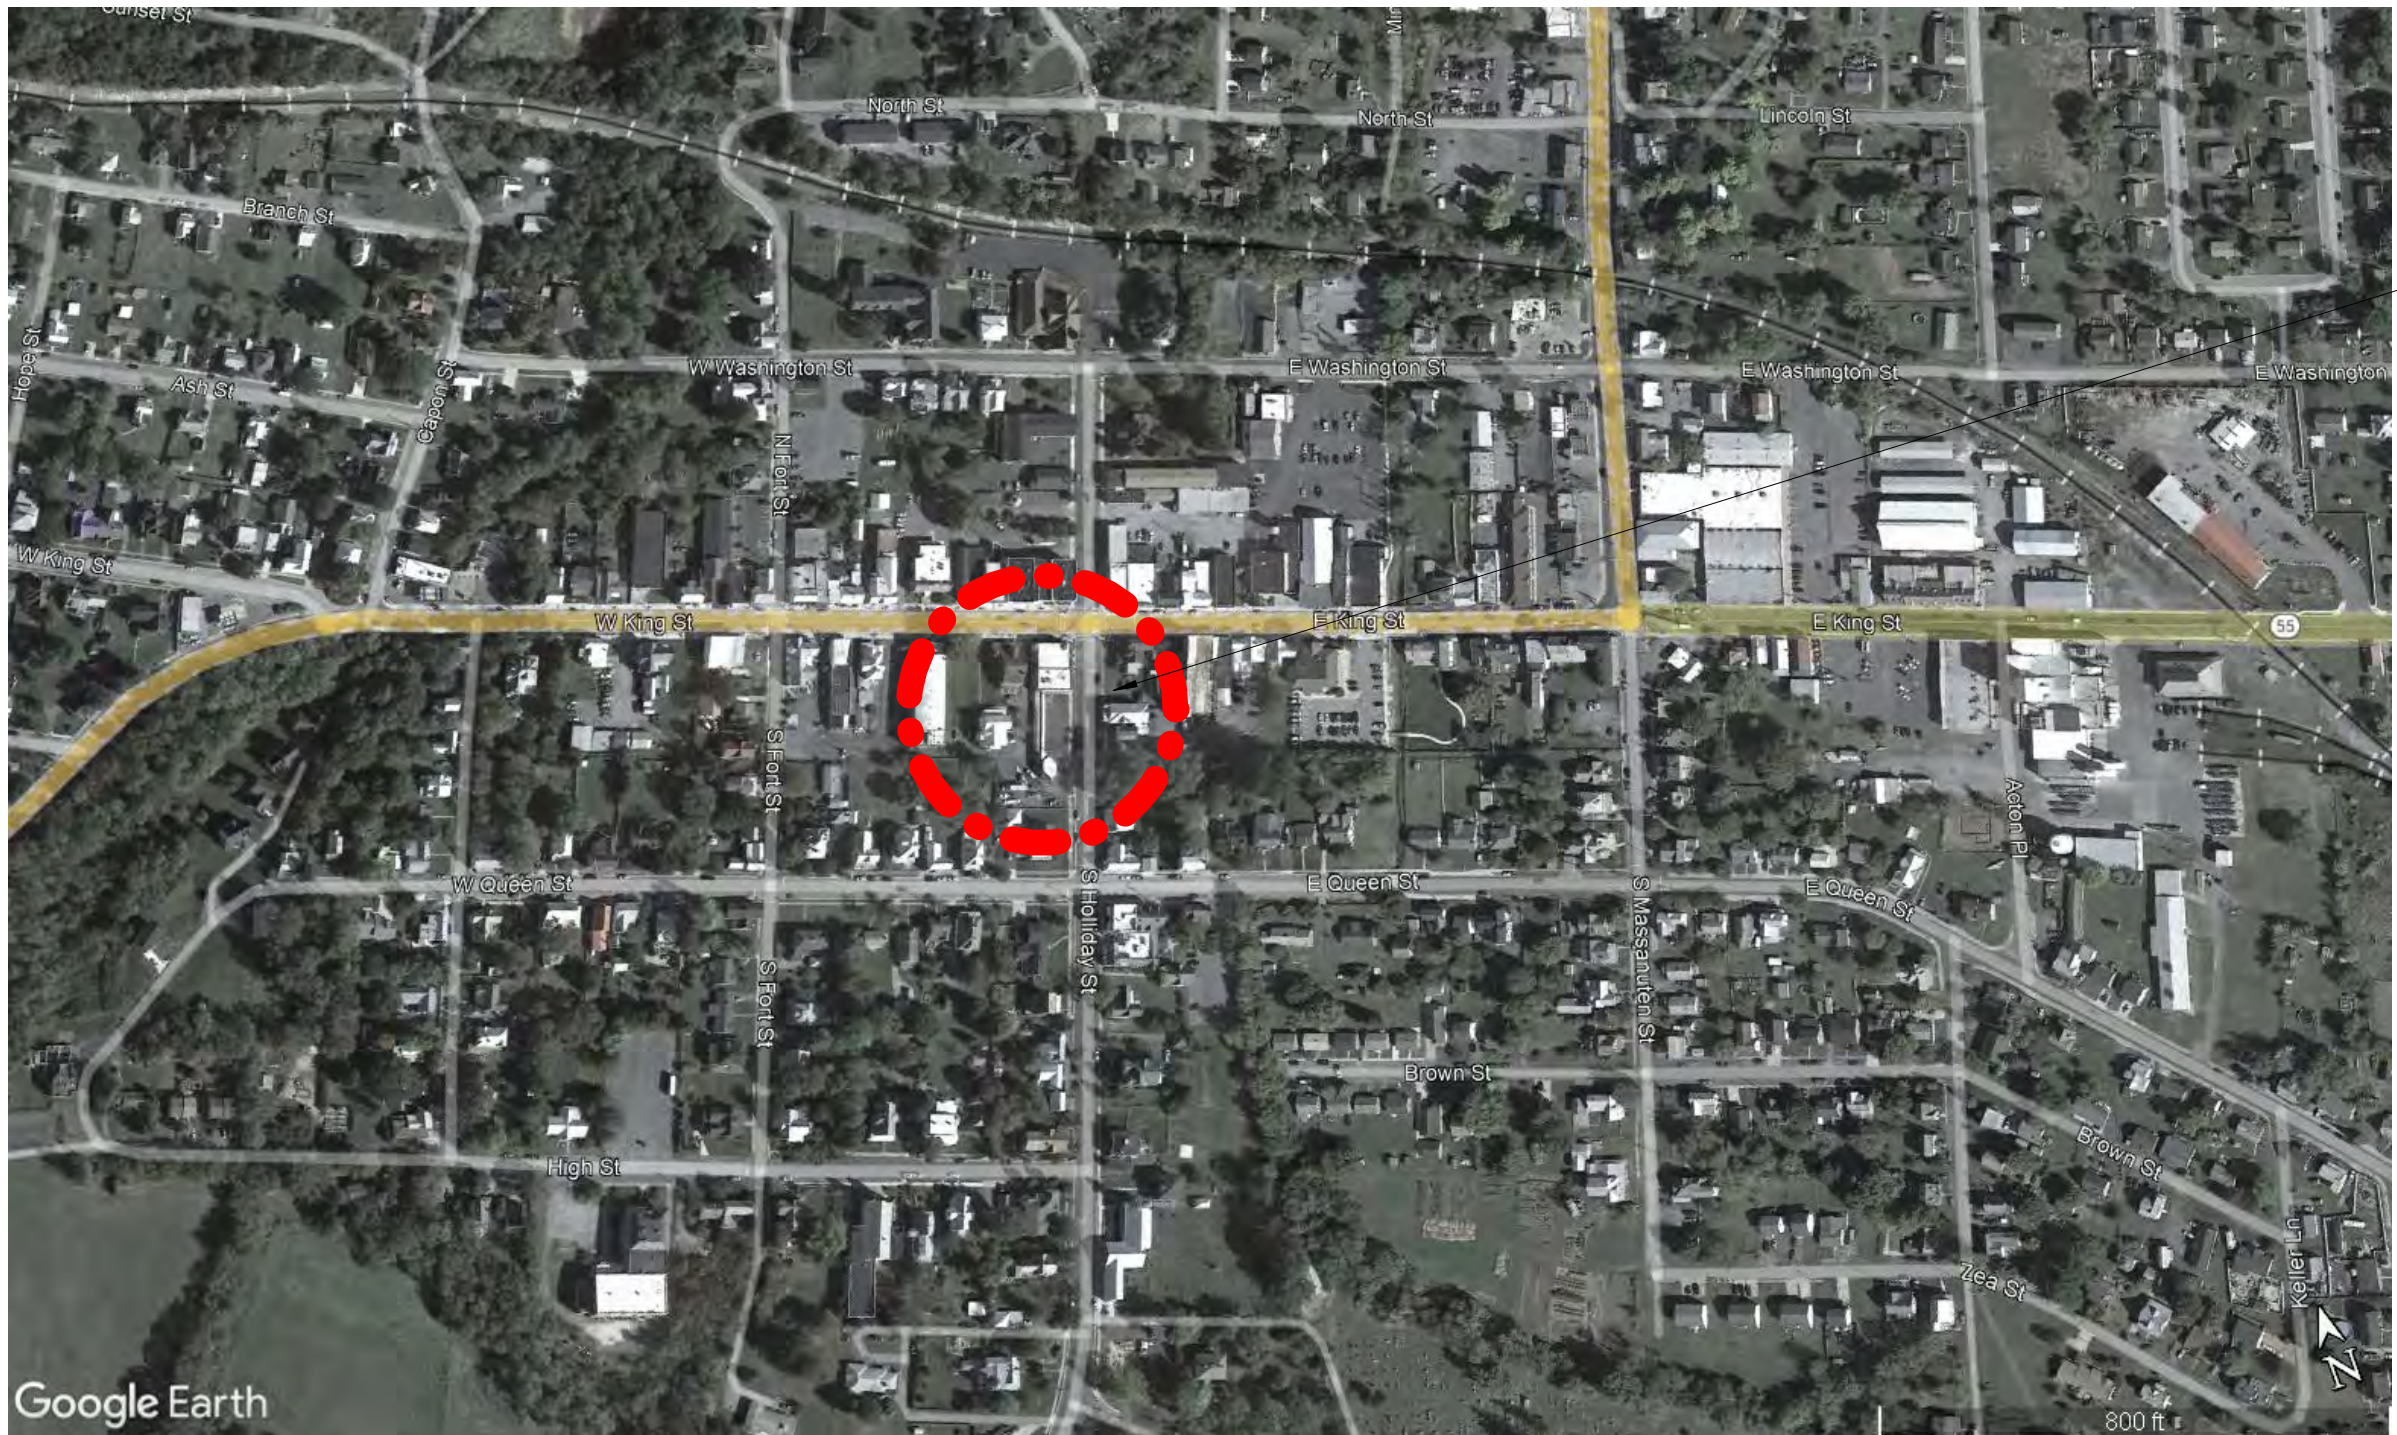

PROJECT LOCATION

STANDARD DETAILING SYMBOLS

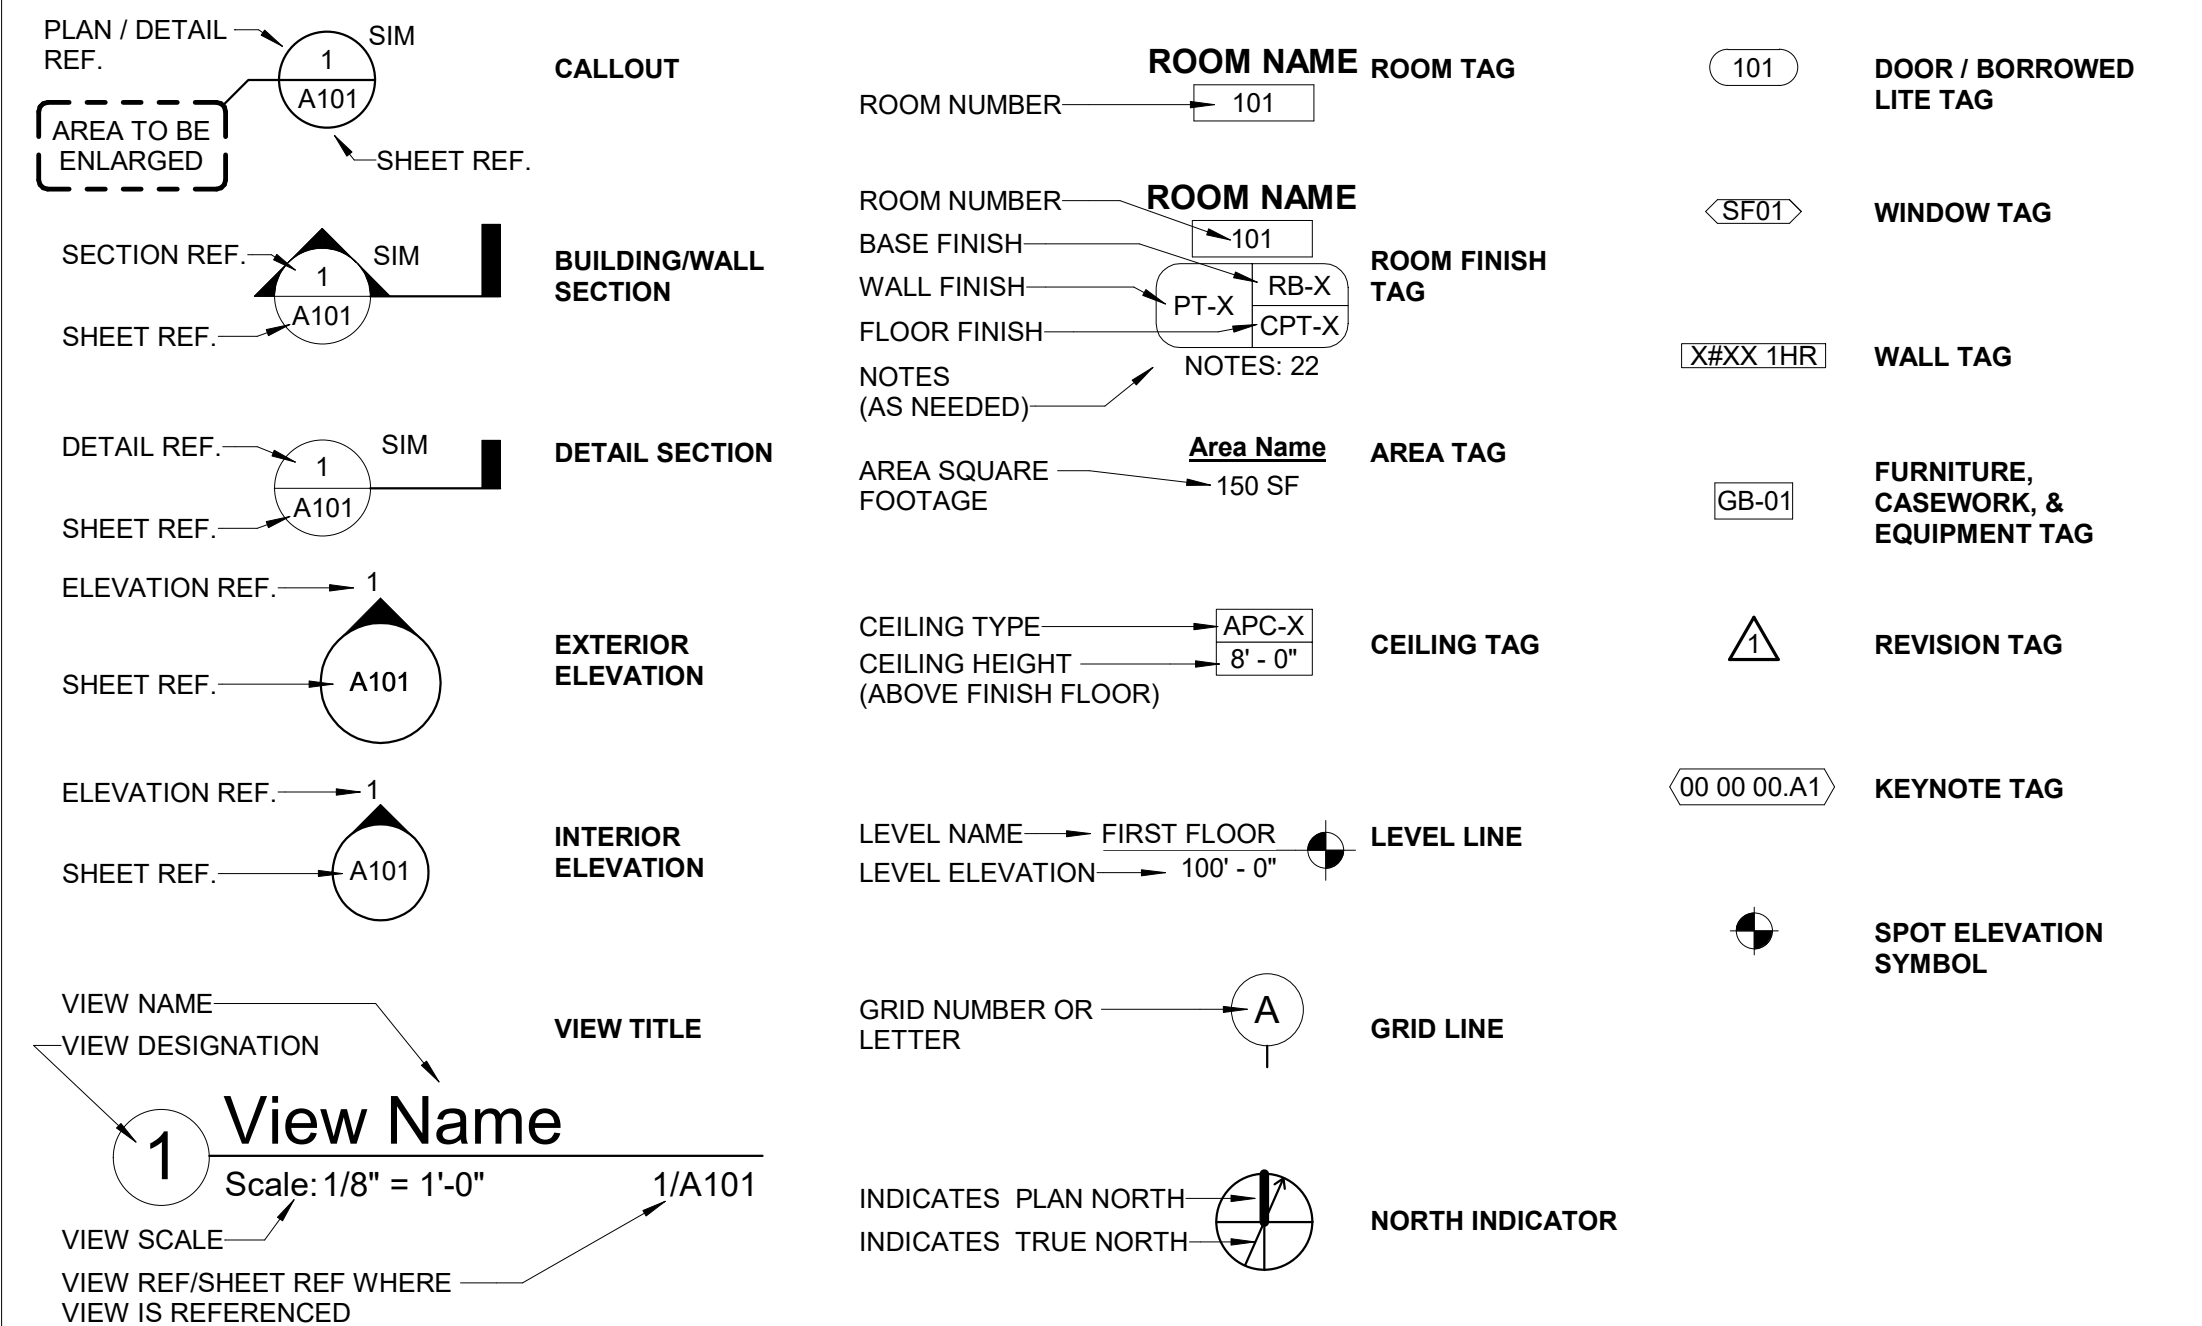

SHEET INDEX	
SHEET NO.	SHEET NAME
GENERAL	
G-000	COVER
G-001	INDEX
G-002	CODE ANALYSIS
G-003	CODE & LIFE SAFETY PLAN
G-004	ADA STANDARDS

CIVIL	
C-001	COVER SHEET
C-002	EXISTING CONDITIONS & DEMOLITION PLAN
C-003	SITE PLAN

STRUCTURAL	
S-001	GENERAL STRUCTURAL NOTES
S-100	STRUCTURAL FOUNDATION PLAN AND DETAILS
S-110	SECOND FLOOR PLAN
S-120	ROOF FRAMING PLAN
S-200	STRUCTURAL BRACE FRAME ELEVATIONS AND DETAILS
S-201	STRUCTURAL BRACE FRAME STANDARD DETAILS
S-700	STRUCTURAL STANDARD DETAILS

ARCHITECTURAL	
ASD-101	ARCHITECTURAL DEMOLITION SITE PLAN
AS-101	ARCHITECTURAL SITE PLAN
AD-101	FIRST FLOOR DEMOLITION PLAN
AD-102	FIRST FLOOR DEMOLITION RCP
AD-111	SECOND FLOOR DEMOLITION PLAN
AD-112	SECOND FLOOR DEMOLITION RCP
AD-121	ROOF DEMOLITION PLAN
AD-201	DEMOLITION EXTERIOR ELEVATIONS
AD-202	DEMOLITION EXTERIOR ELEVATIONS
A-101	FIRST FLOOR ANNOTATION PLAN
A-102	FIRST FLOOR DIMENSION PLAN
A-103	FIRST FLOOR REFLECTED CEILING PLAN
A-104	FIRST FLOOR FINISH PLAN AND SCHEDULE
A-111	SECOND FLOOR ANNOTATION PLAN
A-112	SECOND FLOOR DIMENSION PLAN
A-113	SECOND FLOOR REFLECTED CEILING PLAN
A-114	SECOND FLOOR FINISH PLAN
A-121	ROOF PLAN
A-201	EXTERIOR ELEVATIONS
A-202	EXTERIOR ELEVATIONS
A-301	BUILDING SECTIONS
A-311	WALL SECTIONS
A-321	ENLARGED PLAN AND SECTION DETAILS
A-410	ENLARGED PLANS & INTERIOR ELEVATIONS
A-411	ENLARGED PLANS & INTERIOR ELEVATIONS
A-412	ENLARGED PLANS & INTERIOR ELEVATIONS
A-413	ENLARGED PLANS & INTERIOR ELEVATIONS
A-431	MILLWORK DETAILS
A-432	MILLWORK DETAILS
A-450	ENLARGED STAIR AND RAMP DETAILS
A-501	ROOF DETAILS
A-601	DOOR SCHEDULES, ELEVATIONS, AND DETAILS
A-602	DOOR HEAD, JAMB, AND SILL DETAILS
A-603	DOOR HARDWARE SCHEDULE
A-604	DOOR HARDWARE SCHEDULE
A-611	GLAZING SCHEDULES, ELEVATIONS, AND DETAILS
A-631	WALL PARTITIONS, ASSEMBLIES, AND DETAILS

INTERIORS	
I-101	FIRST FLOOR FURNITURE & EQUIPMENT
I-102	FIRST FLOOR SIGNAGE PLAN
I-111	SECOND FLOOR FURNITURE & EQUIPMENT
I-112	SECOND FLOOR SIGNAGE PLAN
I-301	SIGNAGE SCHEDULE

PLUMBING	
P-001	PLUMBING SYMBOLS, ABBREVIATIONS & NOTES
P-101	FIRST FLOOR PLUMBING PLAN
P-102	SECOND FLOOR PLUMBING PLAN
P-501	PLUMBING DETAILS

MECHANICAL	
M-001	MECHANICAL SYMBOLS, ABBREVIATIONS & NOTES
M-002	MECHANICAL CALCULATIONS
M-101	FIRST FLOOR MECHANICAL PLAN
M-102	SECOND FLOOR MECHANICAL PLAN
M-103	ROOF MECHANICAL PLAN
M-401	MECHANICAL ENLARGED PLANS AND SECTIONS
M-501	MECHANICAL DETAILS
M-502	MECHANICAL DETAILS
M-601	MECHANICAL SCHEDULES

ELECTRICAL	
E-001	ELECTRICAL SYMBOLS, ABBREVIATIONS & NOTES
ES-101	ELECTRICAL EXTERIOR PLANS
ED-101	ELECTRICAL DEMOLITION PLANS
EL-101	ELECTRICAL LIGHTING PLANS
EP-101	ELECTRICAL POWER PLANS
ES-102	ELECTRICAL EXTERIOR PHOTOMETRICS PLAN
EF-101	ELECTRICAL FIRE ALARM PLANS
E-601	ELECTRICAL DETAILS
E-701	ELECTRICAL RISER & SCHEDULES

TECHNOLOGY	
TT-001	LEGEND SHEET - TELECOM
TD-111	FIRST FLOOR PLAN DEMOLITION - TECHNOLOGY
TD-121	SECOND FLOOR PLAN DEMOLITION - TECHNOLOGY
TT-111	FIRST FLOOR PLAN - TELECOM
TT-112	FIRST FLOOR RCP - TELECOM
TT-121	SECOND FLOOR PLAN - TELECOM
TT-122	SECOND FLOOR RCP - TELECOM
TT-401	LARGE SCALE PLANS - TELECOM
TT-501	DETAILS - TELECOM
TT-502	DETAILS - TELECOM
TT-503	DETAILS - TELECOM
TT-601	BLOCK DIAGRAMS - TELECOM
TT-602	BLOCK DIAGRAMS - AV
TT-603	BLOCK DIAGRAMS - AV

SECURITY	
TY-001	LEGEND SHEET - SECURITY
TY-101	SITE PLAN - SECURITY
TY-111	FIRST FLOOR PLAN - SECURITY
TY-112	FIRST FLOOR RCP - SECURITY
TY-121	SECOND FLOOR PLAN - SECURITY
TY-122	SECOND FLOOR RCP - SECURITY
TY-401	LARGE SCALE PLANS - SECURITY
TY-501	DETAILS - SECURITY
TY-502	DETAILS - SECURITY
TY-503	DETAILS & SCHEDULES - SECURITY
TY-601	BLOCK DIAGRAMS - SECURITY




DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

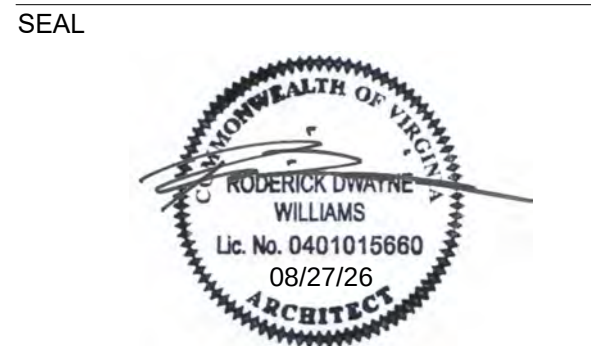

KEY PLAN

SCALE

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY	TF
APPROVED BY	RW
CHECKED BY	Checker
DATE	08.26.2026

TITLE

INDEX

PROJECT NO. 50165756

G-001

SHEET NO.

A

B

C

D

E

F

CHAPTER 4 - CHAPTER 4 - SPECIAL DETAILED REQUIREMENTS BASED ON USE AND OCCUPANCY	
406.3 PRIVATE GARAGE AND CARPORTS	PRIVATE GARAGES AND CARPORTS SHALL COMPLY WITH SECTIONS 406.2 AND 406.3.
406.3.1 CLASSIFICATION	PRIVATE GARAGES AND CARPORTS SHALL BE CLASSIFIED AS GROUP U OCCUPANCIES. EACH PRIVATE GARAGE SHALL BE NOT GREATER THAN 1,000 SQUARE FEET.
406.3.2 SEPARATION	FOR OTHER THAN PRIVATE GARAGES ADJACENT TO DWELLING UNITS, THE SEPARATION OF PRIVATE GARAGES FROM OTHER OCCUPANCIES SHALL COMPLY WITH SECTION 508.

CHAPTER 3 - USE AND OCCUPANCY CLASSIFICATION	
302.1 OCCUPANCY CLASSIFICATION	PRIMARY USE AND OCCUPANCY GROUP: BUSINESS GROUP B
OTHER USES AND OCCUPANCY GROUPS:	STORAGE GROUP S-1
303.1.2 SMALL ASSEMBLY SPACES	THE FOLLOWING ROOMS AND SPACES SHALL NOT BE CLASSIFIED AS ASSEMBLY OCCUPANCIES: 1. A ROOM OR SPACE USED FOR ASSEMBLY PURPOSES WITH AN OCCUPANT LOAD OF LESS THAN 50 PEOPLE AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS A GROUP B OCCUPANCY OR AS PART OF THAT OCCUPANCY. 2. A ROOM OR SPACE USED FOR ASSEMBLY PURPOSES THAT IS LESS THAN 750 SQUARE FEET IN AREA AND ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS A GROUP B OCCUPANCY OR AS PART OF THAT OCCUPANCY.
311.1.1 ACCESSORY STORAGE SPACES	A ROOM OR SPACE USED FOR STORAGE PURPOSES THAT IS ACCESSORY TO ANOTHER OCCUPANCY SHALL BE CLASSIFIED AS PART OF THAT OCCUPANCY.
312.2 PRIVATE GARAGES AND CARPORTS	PRIVATE GARAGES AND CARPORTS SHALL COMPLY WITH SECTION 406.3.

CHAPTER 6 – ALTERATIONS	
601.1 GENERAL	EXCEPT AS MODIFIED IN CHAPTER 9 OR THIS CHAPTER, ALTERATIONS TO ANY BUILDING OR STRUCTURE SHALL COMPLY WITH THE REQUIREMENTS OF THE VCC FOR NEW CONSTRUCTION. ALTERATIONS SHALL BE SUCH THAT THE EXISTING BUILDINGS OR STRUCTURES IS NO LESS CONFORMING TO THE PROVISIONS OF THE VCC THAN THE EXISTING BUILDING OR STRUCTURE WAS PRIOR TO THE ALTERATION. PORTIONS OF THE BUILDING OR STRUCTURE NOT BEING ALTERED SHALL NOT BE REQUIRED TO COMPLY WITH THE REQUIREMENTS OF THE VCC. EXCEPTION 1 - ANY STAIRWAY REPLACING AN EXISTING STAIRWAY SHALL NOT BE REQUIRED TO COMPLY WITH THE REQUIREMENTS OF SECTION 1011 OF THE VCC WHERE THE EXISTING SPACE AND CONSTRUCTION DOES NOT ALLOW A REDUCTION IN PITCH OR SLOPE. EXCEPTION 2 - HANDRAILS OTHERWISE REQUIRED TO COMPLY WITH SECTION 1011.11 OF THE VCC SHALL NOT BE REQUIRED TO COMPLY WITH THE REQUIREMENTS OF SECTION 1014.6 OF THE VCC GRADING FULL EXTENSION OF THE HANDRAILS WHERE SUCH EXTENSIONS WOULD BE HAZARDOUS DUE TO PLAN CONFIGURATION.
601.2.2 LEVEL 2 ALTERATION	COMPLY WITH SECTIONS 602 AND 603.
603 ALTERATION - LEVEL 2	LEVEL 2 ALTERATIONS AS DESCRIBED IN SECTION 601.2.2 SHALL COMPLY WITH THE REQUIREMENTS OF THIS SECTION.
603.3 COMPLIANCE	ALL NEW CONSTRUCTION ELEMENTS, COMPONENTS, SYSTEMS, AND SPACES SHALL COMPLY WITH THE REQUIREMENTS OF THE VCC. EXCEPTION 4 - THE MINIMUM CEILING HEIGHT OF THE NEWLY CREATED HABITABLE AND OCCUPIABLE SPACES AND CORRIDORS SHALL BE 7 FEET.
603.7 STRUCTURAL	STRUCTURAL ELEMENTS AND SYSTEMS WITHIN BUILDINGS UNDERGOING LEVEL 2 ALTERATIONS SHALL COMPLY WITH SECTIONS 603.7 THROUGH 603.7.6.

REVIEWED PER 2021 VIRGINIA EXISTING BUILDING CODE	
CHAPTER 4 – ACCESSIBILITY	
CHAPTER 4 – ACCESSIBILITY	
404.2 ALTERATIONS	SHALL COMPLY WITH CHAPTER 11 OF THE VCC. EXCEPTION 2 - ACCESSIBLE MEANS OF EGRESS REQUIRED BY CHAPTER 10 OF VCC ARE NOT REQUIRED TO BE PROVIDED IN EXISTING FACILITIES.
404.3 ALTERATIONS AFFECTING AN AREA CONTAINING A PRIMARY FUNCTION	WHERE AN ALTERATION AFFECTS THE ACCESSIBILITY TO, OR CONTAINS AN AREA OF PRIMARY FUNCTION, THE ROUTE TO THE PRIMARY FUNCTION SHALL BE ACCESSIBLE.
404.10 TOILET ROOMS	ALTER EXISTING TOILET TO BE ACCESSIBLE OR PROVIDE AN ACCESSIBLE FAMILY OR ASSISTED-USE TOILET IN ACCORDANCE WITH SECTION 1109.2.1 OF THE VCC.

GENERAL INFORMATION	
PROJECT NAME:	STRASBURG POLICE STATION
BUILDING LOCATION:	115 W KING STREET, STRASBURG, VA 22657
CONSTRUCTION:	EST. YEAR OF COMPLETION 2026
OCCUPANCY:	PRIMARY - BUSINESS OTHERS - ASSEMBLY, STORAGE, UTILITY & MISCELLANEOUS
BUILDING GROSS SQUARE FOOTAGE:	TOTAL: 6,380 GSF
BUILDING DESCRIPTION:	THIS PROJECT INCLUDES THE FULL INTERIOR RENOVATION OF AN EXISTING BANK BUILDING FOR USE AS A NEW POLICE STATION FOR THE TOWN OF STRASBURG POLICE DEPARTMENT. THE SCOPE OF WORK INCLUDES ARCHITECTURAL, INTERIOR, MECHANICAL, ELECTRICAL, PLUMBING, TELECOM, AND SECURITY UPGRADES TO THE EXISTING BUILDING.

APPLICABLE CODE AND CRITERIA	
2021 (VUSBC) 2021 (VEBC) 2021 (VPC) 2021 (IBC) 2021 (IEBC) 2021 (NFPA-101) 2021 (IMC) 2021 (IPC) 2020 (NEC) 2021 (IECC) 2021 (IFC) 2010 (ADA) - TOWN OF STRASBURG HISTORIC DISTRICT DESIGN GUIDELINES	- VIRGINIA UNIFORM STATEWIDE BUILDING CODE - VIRGINIA EXISTING BUILDING CODE - VIRGINIA PLUMBING CODE - INTERNATIONAL BUILDING CODE - INTERNATIONAL EXISTING BUILDING CODE - NATIONAL FIRE SAFETY CODE - INTERNATIONAL MECHANICAL CODE - INTERNATIONAL PLUMBING CODE - NATIONAL ELECTRICAL CODE - INTERNATIONAL ENERGY CONSERVATION CODE - INTERNATIONAL FIRE CODE - ICC/ANSI A117.1 ACCESSIBILITY CODE - TOWN OF STRASBURG HISTORIC DISTRICT DESIGN GUIDELINES

CHAPTER 8 - INTERIOR FINISHES

802.1 INTERIOR WALL AND CEILING FINISH	THE PROVISIONS OF SECTION 803 SHALL LIMIT THE ALLOWABLE FIRE PERFORMANCE AND SMOKE DEVELOPMENT OF INTERIOR WALL AND CEILING FINISH MATERIALS BASED ON OCCUPANCY CLASSIFICATION.		
802.2 INTERIOR FLOOR FINISH	THE PROVISION OF SECTION 804 SHALL LIMIT THE ALLOWABLE FIRE PERFORMANCE OF INTERIOR FLOOR FINISH MATERIALS BASED ON OCCUPANCY CLASSIFICATION.		
802.3 DECORATIVE MATERIALS AND TRIM	DECORATIVE MATERIALS AND TRIM SHALL BE RESTRICTED BY COMBUSTIBILITY, FIRE PERFORMANCE OR FLAME PROPAGATION PERFORMANCE CRITERIA IN ACCORDANCE WITH SECTION 806.		
DECORATIVE MATERIALS AND TRIM SHALL BE RESTRICTED BY COMBUSTIBILITY, FIRE PERFORMANCE OR FLAME PROPAGATION PERFORMANCE CRITERIA IN ACCORDANCE WITH SECTION 806.			
TABLE 803.13 INTERIOR WALL AND CEILING FINISH REQUIREMENTS BY OCCUPANCY - FOR NON-SPRINKLERED			
OCCUPANCY	INTERIOR EXIT PASSAGEWAYS	CORRIDOR	ROOMS
GROUP B	CLASS A	CLASS B	CLASS C
GROUP S	CLASS B	CLASS B	CLASS C

CHAPTER 7 - FIRE-RESISTANCE-RATED CONSTRUCTION	
705.2 PROJECTIONS	CORNICES, EAVE OVERHANGS, EXTERIOR BALCONIES AND SIMILAR PROJECTIONS EXTENDING BEYOND THE EXTERIOR WALL SHALL CONFORM TO THE REQUIREMENTS OF THIS SECTION AND SECTION 1405. EXCEPTION 1 - BUILDINGS ON THE SAME LOT AND CONSIDERED AS PORTIONS OF ONE BUILDING IN ACCORDANCE WITH SECTION 705.3 ARE NOT REQUIRED TO COMPLY WITH THIS SECTION FOR PROJECTIONS BETWEEN THE BUILDINGS. PROVIDED: EXISTING BUILDING AND CARPORT CONNECTED BY EXISTING COVERED WALKWAY.
705.3 BUILDINGS ON THE SAME LOT	FOR THE PURPOSES OF DETERMINING THE REQUIRED WALL AND OPENING PROTECTION, PROJECTIONS AND ROOF COVERING REQUIREMENTS, BUILDINGS ON THE SAME LOT SHALL BE ASSUMED TO HAVE AN IMAGINARY LINE BETWEEN THEM, WHERE ARE NEW BUILDING IS TO BE ERECTED ON THE SAME LOT AS AN EXISTING BUILDING, THE LOCATION OF THE ASSUMED IMAGINARY LINE WITH RELATION TO THE EXISTING BUILDING SHALL BE SUCH THAT THE EXTERIOR WALL AND OPENING PROTECTION OF THE EXISTING BUILDING MEET THE CRITERIA AS SET FORTH IN SECTIONS 705.5 AND 705.8. EXCEPTION 1 - TWO OR MORE BUILDINGS ON THE SAME LOT SHALL BE EITHER REGULATED AS SEPARATE BUILDINGS OR SHALL BE CONSIDERED AS PORTIONS OF ONE BUILDING IF THE AGGREGATE AREA OF SUCH BUILDINGS IS WITHIN THE LIMITS SPECIFIED IN CHAPTER 5 FOR A SINGLE BUILDING, WHERE THE BUILDINGS CONTAIN DIFFERENT OCCUPANCY GROUPS OR ARE OF DIFFERENT TYPES OF CONSTRUCTION, THE AREA SHALL BE THAT ALLOWED FOR THE MOST RESTRICTIVE OCCUPANCY OR CONSTRUCTION.
705.5 FIRE-RESISTANCE RATING REQUIREMENTS FOR EXTERIOR WALLS BASED ON FIRE SEPARATION DISTANCE	FSR TYPE OF CONSTRUCTION REQUIRED SEPARATION X ≥ 30 ALL 0
SECTION 707 FIRE BARRIERS	

CHAPTER 6 - TYPES OF CONSTRUCTION	
601 - FIRE-RESISTANCE RATING REQUIREMENTS FOR BUILDING ELEMENTS (HOURS)	
BUILDING ELEMENTS	TYPE IIB CONSTRUCTION
PRIMARY STRUCTURAL FRAME	0 HOURS
EXTERIOR BEARING WALLS	0 HOURS
INTERIOR BEARING WALLS	0 HOURS
FLOOR CONSTRUCTION	0 HOURS
ROOF CONSTRUCTION	0 HOURS
602 CONSTRUCTION CLASSIFICATION	BUILDING CONSTRUCTION MATERIAL: TYPE IIB (EXISTING)
603.1 ALLOWABLE MATERIALS	COMBUSTIBLE MATERIALS SHALL BE PERMITTED IN BUILDINGS TYPE I OR II CONSTRUCTION IN THE FOLLOWING APPLICATIONS AND IN ACCORDANCE WITH SECTIONS 603.1.1 THROUGH 603.1.3.

CHAPTER 5 - GENERAL BUILDING HEIGHTS AND AREAS	
502.1 ADDRESS IDENTIFICATION	NEW BUILDINGS SHALL BE PROVIDED WITH APPROVED ADDRESS IDENTIFICATION. THE ADDRESS IDENTIFICATION SHALL BE LEGIBLE AND PLACED IN A POSITION THAT IS VISIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY. ADDRESS IDENTIFICATION CHARACTERS SHALL CONTRACT WITH THEIR BACKGROUND. ADDRESS NUMBERS SHALL BE ARABIC NUMBERS OR ALPHABETICAL LETTERS. NUMBERS SHALL NOT BE SPELLED OUT. EACH CHARACTER SHALL BE A MINIMUM OF 4 INCHES HIGH WITH A MINIMUM STROKE WIDTH OF ¼ INCH. WHERE REQUIRED BY THE FIRE CODE OFFICIAL, ADDRESS IDENTIFICATION SHALL BE PROVIDED IN ADDITIONAL APPROVED LOCATIONS TO FACILITATE EMERGENCY RESPONSE. WHERE ACCESS IS BY MEANS OF A PRIVATE ROAD AND THE BUILDING ADDRESS CANNOT BE VIEWED FROM THE PUBLIC WAY, A MONUMENT, POLE OR OTHER APPROVED SIGN OR MEANS SHALL BE USED TO IDENTIFY THE STRUCTURE. PROVIDED: BUILDING IDENTIFICATION PROVIDED ON ENTRANCE CANOPY ALONG W. KING STREET
503.1.2 BUILDINGS ON SAME LOT	TWO OR MORE BUILDINGS ON THE SAME LOT SHALL BE REGULATED AS SEPARATE BUILDINGS OR SHALL BE CONSIDERED AS PORTIONS OF ONE BUILDING WHERE THE BUILDING HEIGHT, NUMBER OF STORIES OF EACH BUILDING AND THE AGGREGATE BUILDING AREA OF THE BUILDINGS ARE WITHIN THE LIMITATIONS SPECIFIED IN SECTIONS 504 AND 506. THE PROVISIONS OF THIS CODE APPLICABLE TO THE AGGREGATE BUILDING SHALL BE APPLICABLE TO EACH BUILDING.
504.2 MIXED OCCUPANCY	IN A BUILDING CONTAINING MIXED OCCUPANCIES IN ACCORDANCE WITH SECTION 508, NO INDIVIDUAL OCCUPANCY SHALL EXCEED THE HEIGHT AND NUMBER OF STORY LIMITS SPECIFIED IN THIS SECTION FOR THE APPLICABLE OCCUPANCIES.
504.3 ALLOWABLE BUILDING HEIGHT IN FEET ABOVE GRADE PLANE	OCCUPANCY ALLOWABLE HEIGHT (TYPE IIB CONSTRUCTION, NON-SPRINKLERED) BUSINESS 55 FEET STORAGE 55 FEET
PROPOSED:	XX FEET (EXISTING)
504.4 ALLOWABLE NUMBER OF STORIES ABOVE GRADE PLANE	OCCUPANCY ALLOWABLE HEIGHT (TYPE IIB CONSTRUCTION, NON-SPRINKLERED) BUSINESS 3 STORIES STORAGE 2 STORIES
PROPOSED:	2 STORIES (EXISTING)
506.2 ALLOWABLE AREA FACTOR	ALLOWABLE HEIGHT (TYPE IIB CONSTRUCTION, NON-SPRINKLERED) BUSINESS 23,000 SQUARE FEET STORAGE 17,500 SQUARE FEET
PROPOSED:	6,900 SQUARE FEET
506.2.2 MIXED-OCCUPANCY BUILDINGS	THE ALLOWABLE AREA OF EACH STORY OF A MIXED-OCCUPANCY BUILDING SHALL BE DETERMINED IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF SECTION 508.4.2 FOR SEPARATED OCCUPANCIES.
508.2 ACCESSORY OCCUPANCIES	ACCESSORY OCCUPANCIES ARE THOSE OCCUPANCIES THAT ARE ANCILLARY TO THE MAIN OCCUPANCY OF THE BUILDING OR PORTION THEREOF. ACCESSORY OCCUPANCIES SHALL COMPLY WITH THE PROVISIONS OF SECTIONS 508.2.1 THROUGH 508.2.4.
508.4 SEPARATED OCCUPANCIES	BUILDING OR PORTIONS OF BUILDING THAT COMPLY WITH THE PROVISION OF THIS SECTION SHALL BE CONSIDERED AS SEPARATED OCCUPANCIES. OCCUPANCY ADJACENCY REQUIRED SEPARATION (NON-SPRINKLERED) BUSINESS (B) & STORAGE (S-1) NO SEPARATION REQUIRED
508.4.4.1 CONSTRUCTION	REQUIRED SEPARATIONS SHALL BE FIRE BARRIERS CONSTRUCTED IN ACCORDANCE WITH SECTION 707.
509.1 INCIDENTAL USES	CONFIRM WITH MEP

CHAPTER 9 - FIRE PROTECTION & LIFE SAFETY SYSTEMS	
903.2 WHERE REQUIRED	APPROVED AUTOMATIC SPRINKLER SYSTEMS IN NEW BUILDINGS AND STRUCTURES SHALL BE PROVIDED IN THE LOCATIONS DESCRIBED IN SECTIONS 903.2.1 THROUGH 903.2.12.
903.2.9 GROUP S-1	AN AUTOMATIC SPRINKLER SYSTEM SHALL BE PROVIDED THROUGHOUT ALL BUILDINGS CONTAINING A GROUP S-1 OCCUPANCY WHERE ONE OF THE FOLLOWING CONDITIONS EXISTS: 1. A GROUP S-1 FIRE AREA EXCEEDS 12,000 SQUARE FEET (1115 M2). 2. A GROUP S-1 FIRE AREA IS LOCATED MORE THAN THREE STORIES ABOVE GRADE PLANE. 3. THE COMBINED AREA OF ALL GROUP S-1 FIRE AREAS ON ALL FLOORS, INCLUDING ANY MEZZANINES, EXCEEDS 24,000 SQUARE FEET (2230 M2). 4. A GROUP S-1 FIRE AREA IS THE STORAGE OF COMMERCIAL MOTOR VEHICLES WHERE THE FIRE AREA EXCEEDS 5,000 SQUARE FEET (464 M2).
PROVIDED:	EXISTING BUILDING IS NON-SPRINKLERED, NONE OF THE CONDITIONS LISTED IN SECTION 903.2.9 OR OTHERWISE IN SECTIONS 903.2.1 THROUGH 903.2.12 ARE APPLICABLE TO THIS PROJECT. THE
PROPOSED BUILDING WILL NOT INCLUDE THE INSTALLATION OF AN AUTOMATIC SPRINKLER SYSTEM.	
SECTION 905 – STANDPIPE SYSTEMS IS NOT REQUIRED.	
SECTION 906 – PORTABLE FIRE EXTINGUISHERS	1. PORTABLE FIRE EXTINGUISHERS SHALL BE INSTALLED IN ALL OF THE FOLLOWING LOCATIONS: IN GROUPS B AND S OCCUPANCIES. 2. WITHIN 30 FEET DISTANCE OF TRAVEL FROM COMMERCIAL COOKING EQUIPMENT IN AREAS WHERE FLAMMABLE OR COMBUSTIBLE LIQUIDS ARE STORE, USED OR DISPENSED. 3. ON EACH FLOOR OF THE STRUCTURE UNDER CONSTRUCTION 4. WHERE REQUIRED BY THE IBC SECTIONS INDICATED IN TABLE 906.1
906.3 906.3 FIRE EXTINGUISHERS FOR CLASS A FIRE HAZARDS	LOW HAZARD/MODERATE HAZARD HIGH HAZARD MIN.-RATED EXTINGUISHER 2-A 2-A 4-A MAX. FA PER UNIT OF A 3,000 SF 1,500 SF 1,000 SF MAX. FA FOR EXTINGUISHER 11,250 SF 11,250 SF 11,250 SF MAX. DISTANCE OF TRAVEL 75 FEET 75 FEET 75 FEET
906.9 EXTINGUISHER INSTALLATION	THE INSTALLATION OF PORTABLE FIRE EXTINGUISHERS SHALL BE IN ACCORDANCE WITH SECTIONS 906.9.1 THROUGH 906.9.3.
907.2 WHERE REQUIRED - NEW BUILDINGS AND STRUCTURES	AN APPROVED FIRE ALARM SYSTEM INSTALLED IN ACCORDANCE WITH THE PROVISIONS OF THIS CODE AND NFPA 72 SHALL BE PROVIDED IN NEW BUILDINGS AND STRUCTURES IN ACCORDANCE WITH SECTIONS 907.2.1 THROUGH 907.2.12. PROVIDE OCCUPANT NOTIFICATION IN ACCORDANCE WITH SECTION 907.5, UNLESS OTHER REQUIREMENTS ARE PROVIDED BY ANOTHER SECTION OF THIS CODE.

CHAPTER 10 - MEANS OF EGRESS	
1003.2 CEILING HEIGHT	THE MEANS OF EGRESS SHALL HAVE A CEILING HEIGHT OF NOT LESS THAN 7 FEET 6 INCHES ABOVE THE FINISHED FLOOR. EXCEPTION: ALLOWABLE CEILING HEIGHT OF 7 FEET PER SECTION 603.3 OF THE VECC.
1003.3 PROTRUDING OBJECTS	PROTRUDING OBJECTS ON CIRCULATION PATHS SHALL COMPLY WITH THE REQUIREMENTS OF SECTIONS 1003.3.1 THROUGH 1003.4.
1004.2.1 INTERVENING SPACES OR ACCESSORY AREAS	WHERE OCCUPANTS EGRESS FROM ONE OR MORE ROOMS, AREAS OR SPACES THROUGH OTHERS, THE DESIGN OCCUPANT LOAD SHALL BE THE COMBINED OCCUPANT LOAD OF INTERCONNECTED ACCESSORY OR INTERVENING SPACES. DESIGN OF EGRESS PATH CAPACITY SHALL BE BASED ON THE CUMULATIVE PORTION OF OCCUPANT LOADS OF ALL ROOMS, AREAS OR SPACES TO THAT POINT ALONG THE PATH OF EGRESS TRAVEL.
1004.4 MULTIPLE OCCUPANCIES	WHERE A BUILDING CONTAINS TWO OR MORE OCCUPANCIES, THE MEANS OF EGRESS REQUIREMENTS SHALL APPLY TO EACH PORTION OF THE BUILDING BASED ON THE OCCUPANCY OF THAT SPACE. WHERE TWO OR MORE OCCUPANCIES UTILIZE PORTIONS OF THE SAME MEANS OF EGRESS SYSTEM, THOSE EGRESS COMPONENTS SHALL MEET THE MORE STRINGENT REQUIREMENTS OF ALL OCCUPANCIES THAT ARE SERVED.
1004.5 MAXIMUM FLOOR AREA ALLOWANCES PER OCCUPANT	FUNCTION OF SPACE OCC. LOAD FACTOR NUMBER OF OCCUPANTS BUSINESS AREAS 150 GROSS 35 ACCESSORY STORAGE AREAS & MECH 300 GROSS 7 PARKING GARAGE 600 GROSS TOTAL BUILDING OCCUPANT LOAD = 44 OCCUPANTS
1005.3.1 STAIRWAYS	THE CAPACITY OF THE MEANS OF EGRESS STAIRWAYS SHALL BE CALCULATED BY MULTIPLYING THE OCCUPANT LOAD SERVED BY SUCH STAIRWAYS BY A MEANS OF EGRESS CAPACITY FACTOR OF 0.3 INCH PER OCCUPANT. WHERE STAIRWAYS SERVE MORE THAN ONE STORY, ONLY THE OCCUPANT LOAD OF EACH STORY CONSIDERED SEPARATELY SHALL BE USED IN CALCULATING THE REQUIRED CAPACITY OF THE STAIRWAYS SERVING THAT STORY. EXCEPTION - SECTION 601.1 EXCEPTION 1 OF THE 2021 VECC.
PROVIDED: EXISTING STAIR TO REMAIN WITH NO ALTERATIONS.	
1005.3.2 OTHER EGRESS COMPONENTS	THE CAPACITY, IN INCHES, OF MEANS OF EGRESS COMPONENTS OTHER THAN STAIRWAYS SHALL BE CALCULATED BY MULTIPLYING THE OCCUPANT LOAD SERVED BY SUCH COMPONENT BY A MEANS OF EGRESS CAPACITY FACTOR OF 0.2 INCH (5.1 MM) PER OCCUPANT.
1005.7.1 DOORS	DOORS, WHEN FULLY OPENED, SHALL NOT REDUCE THE REQUIRED WIDTH BY MORE THAN 7 INCHES (178 MM). DOORS IN ANY POSITION SHALL NOT REDUCE THE REQUIRED WIDTH BY MORE THAN ONE-HALF.
1006.2.1 EGRESS BASED ON OCCUPANT LOAD AND COMMON PATH OF EGRESS TRAVEL DISTANCE	TWO EXITS OR EXIT ACCESS DOORWAYS FROM ANY SPACE SHALL BE PROVIDED WHERE THE DESIGN OCCUPANT LOAD OR THE COMMON PATH OF EGRESS TRAVEL DISTANCE EXCEEDS THE VALUES LISTED IN TABLE 1006.2.1. THE CUMULATIVE OCCUPANT LOAD FROM ADJACENT ROOMS, AREAS OR SPACES SHALL BE DETERMINED IN ACCORDANCE WITH SECTION 1004.2. EXCEPTION 1 - THE NUMBER OF EXITS FROM FOYERS, LOBBIES, VESTIBULES OR SIMILAR SPACES NEED NOT BE BASED ON CUMULATIVE OCCUPANT LOADS FOR AREAS DISCHARGING THROUGH SUCH SPACES, BUT THE CAPACITY OF THE EXITS FROM SUCH SPACES SHALL BE BASED ON APPLICABLE CUMULATIVE OCCUPANT LOADS. EXCEPTION 3 - UNOCCUPIED MECHANICAL ROOMS AND PENTHOUSES ARE NOT REQUIRED TO COMPLY WITH THE COMMON PATH OF EGRESS TRAVEL DISTANCE MEASUREMENT.
TABLE 1006.2.1 SPACES WITH ONE EXIT OR EXIT ACCESS DOORWAY (NON-SPRINKLERED)	OCCUPANCY MAX OCC. LOAD OF SPACE MAX COMMON PATH OF TRAVEL (FEET) B 100 FEET (OL<30) 75 FEET (OL>30) S 29 100 FEET (OL<30) 75 FEET (OL>30) U 50 100 FEET (OL<30) 75 FEET (OL>30)
PROVIDED: 44 TOTAL BUILDING OCCUPANTS, MAX. COMMON PATH OF TRAVEL = 60'-0"	
TABLE 1006.3.3 MINIMUM NUMBER OF EXITS OR ACCESS TO EXITS PER STORY	REQUIRED: 2 EXITS PROVIDED: 3 EXITS (FIRST FLOOR) & 1 EXIT (SECOND FLOOR)
1006.3.4 SINGLE EXITS	A SINGLE EXIT OR ACCESS TO A SINGLE EXIT SHALL BE PERMITTED FROM ANY STORY OR OCCUPIED ROOF WHERE ONE OF THE FOLLOWING CONDITIONS EXIST: 1. THE OCCUPANT LOAD, NUMBER OF DWELLING UNITS AND EXIT ACCESS TRAVEL DISTANCE DO NOT EXCEED THE VALUES IN TABLE 1006.3.4(1) OR 1006.3.4(2).
TABLE 1006.3.4 STORIES WITH ONE EXIT OR ACCESS TO ONE EXIT FOR OTHER OCCUPANCIES	STORY OCCUPANCY MAX OCCUPANT LOAD PER STORY MAX. EXIT ACCESS TRAVEL DISTANCE SECOND B, S 29 75 FEET
PROVIDED: SECOND STORY: OCCUPANT LOAD OF 12 OCCUPANTS AND A MAX TRAVEL DISTANCE OF 60'-0"	
1007.1.1 TWO EXITS OR EXIT ACCESS DOORWAYS	WHERE TWO EXITS, EXIT ACCESS DOORWAYS, EXIT ACCESS STAIRWAYS OR RAMPS, OR ANY COMBINATION THEREOF, ARE REQUIRED FROM ANY PORTION OF THE EXIT ACCESS, THEY SHALL BE PLACED A DISTANCE APART EQUAL TO NOT LESS THAN ONE-HALF OF THE LENGTH OF THE MAXIMUM ALLOWED DIAGONAL DIMENSION OF THE BUILDING OR AREA TO BE SERVED MEASURED IN A STRAIGHT LINE BETWEEN THEM. INTERLOCKING OR SCISSOR STAIRWAYS SHALL BE COUNTED AS ONE EXIT STAIRWAY.
REQUIRED: AREA DIAGONAL = 93'-4" / 2 = 46'-8"	PROVIDED: DISTANCE BETWEEN EXIT 1 AND EXIT 2 = 48'-0" (EXISTING)
1010.1 GENERAL	DOORS IN THE MEANS OF EGRESS SHALL COMPLY WITH THE REQUIREMENTS OF SECTIONS 1010.1.1 THROUGH 1010.3.4. EXTERIOR EXIT DOORS SHALL ALSO COMPLY WITH THE REQUIREMENTS OF SECTION 1022.2.
DOORS, GATES AND TURNSTILES PROVIDED FOR EGRESS PURPOSES IN NUMBERS GREATER THAN REQUIRED BY THIS CODE SHALL COMPLY WITH THE REQUIREMENTS OF THIS SECTION.	
DOORS IN THE MEANS OF EGRESS SHALL BE EASILY DISTINGUISHABLE FROM THE ADJACENT CONSTRUCTION AND FINISHES SUCH THAT THE DOORS ARE EASILY RECOGNIZABLE AS DOORS, MIRRORS OR SIMILAR REFLECTIVE MATERIALS SHALL NOT BE USED ON MEANS OF EGRESS DOORS. MEANS OF EGRESS DOORS SHALL NOT BE CONCEALED BY CURTAINS, DRAPES, DECORATIONS OR SIMILAR MATERIALS.	
1010.1.1 SIZE OF DOORS	THE REQUIRED CAPACITY OF EACH DOOR OPENING SHALL BE SUFFICIENT FOR THE OCCUPANT LOAD THEREOF AND SHALL PROVIDE A MINIMUM CLEAR OPENING WIDTH OF 32 INCHES (813 MM). THE CLEAR OPENING WIDTH OF DOORWAYS WITH SWINGING DOORS SHALL BE MEASURED BETWEEN THE FACE OF THE DOOR AND THE STOP, WITH THE DOOR OPEN 90 DEGREES (1.57 RAD). THE MINIMUM CLEAR OPENING HEIGHT OF DOORS SHALL BE NOT LESS THAN 80 INCHES (2032 MM).
1010.1.2 EGRESS DOOR TYPES	EGRESS DOORS SHALL BE OF THE SIDE-HINGED SWINGING DOOR, PIVOTED DOOR, OR BALANCED DOOR TYPES. EXCEPTION 1 - PRIVATE GARAGES, OFFICE AREAS, FACTORY AND STORAGE AREAS WITH AN OCCUPANT LOAD OF 10 OR LESS.

CHAPTER 10 - MEANS OF EGRESS (CONT'D)	
1010.1.2.1 DIRECTION OF SWING	SIDE-HINGED SWINGING DOORS, PIVOTED DOORS AND BALANCED DOORS SHALL SWING IN THE DIRECTION OF EGRESS TRAVEL WHERE SERVING A ROOM OR AREA CONTAINING AN OCCUPANT LOAD OF 50 OR MORE PERSONS.
TABLE 1017.2 EXIT ACCESS TRAVEL DISTANCE (NON-SPRINKLERED)	OCCUPANCY MAX. TRAVEL DISTANCE (FEET) B 1 S-1 200
TABLE 1020.2 CORRIDOR FIRE-RESISTANCE RATING	OCCUPANT LOAD SERVED BY CORRIDOR WITHOUT SPRINKLER SYSTEM B, S GREATER THAN 30 1 HOUR

CHAPTER 11 - ACCESSIBILITY	
1102.1 DESIGN	BUILDINGS AND FACILITIES SHALL BE DESIGNED AND CONSTRUCTED TO BE ACCESSIBLE IN ACCORDANCE WITH THIS CODE AND ICC A117.1.
1104.1 SITE ARRIVAL POINTS	AT LEAST ONE ACCESSIBLE ROUTE WITHIN THE SITE SHALL BE PROVIDED FROM PUBLIC TRANSPORTATION STOPS, ACCESSIBLE PARKING, ACCESSIBLE PASSENGER LOADING ZONES, AND PUBLIC STREETS OR SIDEWALKS TO THE ACCESSIBLE BUILDING ENTRANCE SERVED.
1104.2 WITHIN A SITE	AT LEAST ONE ACCESSIBLE ROUTE SHALL CONNECT ACCESSIBLE BUILDINGS, ACCESSIBLE FACILITIES, ACCESSIBLE ELEMENTS AND ACCESSIBLE SPACES THAT ARE ON THE SAME SITE.
1104.3.1 EMPLOYEE WORK AREAS	COMMON USE CIRCULATION PATHS WITHIN EMPLOYEE WORK AREAS SHALL BE ACCESSIBLE ROUTES.
1104.4 MULTISTORY BUILDING AND FACILITIES	AT LEAST ONE ACCESSIBLE ROUTE SHALL CONNECT EACH ACCESSIBLE STORY, MEZZANINE AND OCCUPIED ROOFS IN MULTILEVEL BUILDINGS AND FACILITIES. EXCEPTION 2 - STORIES, MEZZANINES OR OCCUPIED ROOFS THAT DO NOT CONTAIN ACCESSIBLE ELEMENTS OR OTHER SPACES AS DETERMINED BY SECTION 1108 OR 1109 ARE NOT REQUIRED TO BE SERVED BY AN ACCESSIBLE ROUTE FROM AN ACCESSIBLE LEVEL.
PROVIDED:	EXISTING BUILDING IS NOT EQUIPPED WITH AN ELEVATOR. PROJECT DOES NOT INCLUDE ADDING AN ELEVATOR TO THE EXISTING BUILDING. PROJECT DOES NOT INCLUDE ACCESSIBLE ELEMENTS OR SPACES OUTLINED IN SECTION 1108 OR 1109.
1105.1 PUBLIC ENTRANCES	IN ADDITION TO ACCESSIBLE ENTRANCES REQUIRED BY SECTIONS 1105.1.1 THROUGH 1105.1.7, AT LEAST 60 PERCENT OF ALL PUBLIC ENTRANCES SHALL BE ACCESSIBLE. PROVIDED: PUBLIC ENTRANCE IS ACCESSIBLE.
1110.2 TOILET AND BATHING FACILITIES	EACH TOILET ROOM AND BATHING ROOM SHALL BE ACCESSIBLE. WHERE A FLOOR LEVEL IS NOT REQUIRED TO BE CONNECTED BY AN ACCESSIBLE ROUTE, THE ONLY TOILET ROOMS OR BATHING ROOMS PROVIDED WITHIN THE FACILITY SHALL NOT BE LOCATED ON THE INACCESSIBLE FLOOR, EXCEPT AS PROVIDED FOR IN SECTIONS 1110.2.2 THROUGH 1110.2.6, AT LEAST ONE OF EACH TYPE OF FIXTURE, ELEMENT, CONTROL, OR DISPENSER IN EACH ACCESSIBLE TOILET ROOM AND BATHING ROOM SHALL BE ACCESSIBLE.
1110.4 KITCHENS AND KITCHENETTES	WHERE KITCHENS AND KITCHENETTES ARE PROVIDED 1) INACCESSIBLE SPACES OR ROOMS, THEY SHALL BE ACCESSIBLE.
1110.5.1 MINIMUM NUMBER (OF DRINKING FOUNTAINS)	NO FEWER THAN TWO DRINKING FOUNTAINS SHALL BE PROVIDED. ONE DRINKING FOUNTAIN SHALL COMPLY WITH THE REQUIREMENTS FOR PEOPLE WHO USE A WHEELCHAIR AND ONE DRINKING FOUNTAIN SHALL COMPLY WITH THE REQUIREMENTS FOR STANDING PERSONS.
1110.10 STORAGE	WHERE FIXED OR BUILT-IN STORAGE ELEMENTS SUCH AS CABINETS, COATS HOOKS, SHELVES, MEDICINE CABINETS, LOCKERS AND DRAWERS ARE PROVIDED IN REQUIRED ACCESSIBLE SPACES, AT LEAST 5 PERCENT, BUT NOT LESS THAN ONE OF EACH TYPE SHALL BE ACCESSIBLE.
1110.13.2 SALES AND SERVICE COUNTERS AND WINDOWS	WHERE COUNTERS OR WINDOWS ARE PROVIDED FOR SALE OR DISTRIBUTION OF GOODS OR SERVICES, AT LEAST ONE OF EACH TYPE OF COUNTER AND WINDOW PROVIDED SHALL BE ACCESSIBLE. WHERE SUCH COUNTERS OR WINDOWS ARE DISPENSED THROUGHOUT THE BUILDING OR FACILITY, ACCESSIBLE COUNTERS OR WINDOWS SHALL ALSO BE DISPENSED.
1110.15 CONTROLS, OPERATING MECHANISMS AND HARDWARE	CONTROLS, OPERATING MECHANISMS AND HARDWARE INTENDED FOR OPERATION BY THE OCCUPANT, INCLUDING SWITCHES THAT CONTROL LIGHTING AND VENTILATION AND ELECTRICAL CONVENIENCE OUTLETS, IN ACCESSIBLE SPACES, ALONG ACCESSIBLE ROUTES OR AS PARTS OF ACCESSIBLE ELEMENTS SHALL BE ACCESSIBLE.

508.2 ACCESSORY OCCUPANCIES	
ACCESSORY OCCUPANCIES ARE THOSE OCCUPANCIES THAT ARE ANCILLARY TO THE MAIN OCCUPANCY OF THE BUILDING OR PORTION THEREOF. ACCESSORY OCCUPANCIES SHALL COMPLY WITH THE PROVISIONS OF SECTIONS 508.2.1 THROUGH 508.2.4.	
508.4 SEPARATED OCCUPANCIES	
BUILDING OR PORTIONS OF BUILDING THAT COMPLY WITH THE PROVISION OF THIS SECTION SHALL BE CONSIDERED AS SEPARATED OCCUPANCIES.	
OCCUPANCY ADJACENCY	<u>REQUIRED SEPARATION (NON-SPRINKLERED)</u>
BUSINESS (B) & STORAGE (S-1)	NO SEPARATION REQUIRED
508.4.4.1 CONSTRUCTION	
REQUIRED SEPARATIONS SHALL BE FIRE BARRIERS CONSTRUCTED IN ACCORDANCE WITH SECTION 707.	
508.1 INCIDENTAL USES	
CONFIRM WITH MEP	

508.2 ACCESSORY OCCUPANCIES

ACCESSORY OCCUPANCIES ARE THOSE OCCUPANCIES THAT ARE ANCILLARY TO THE MAIN OCCUPANCY OF THE BUILDING OR PORTION THEREOF. ACCESSORY OCCUPANCIES SHALL COMPLY WITH THE PROVISIONS OF SECTIONS 508.2.1 THROUGH 508.2.4.

508.4 SEPARATED OCCUPANCIES

BUILDING OR PORTIONS OF BUILDING THAT COMPLY WITH THE PROVISION OF THIS SECTION SHALL BE CONSIDERED AS SEPARATED OCCUPANCIES:

OCCUPANCY AGENCY	<u>REQUIRED SEPARATION (NON-SPRINKLERED)</u>
BUSINESS (B) & STORAGE (S-1)	NO SEPARATION REQUIRED

508.4.4.1 CONSTRUCTION

REQUIRED SEPARATIONS SHALL BE FIRE BARRIERS CONSTRUCTED IN ACCORDANCE WITH SECTION 707.

508.1 INCIDENTAL USES

CONFORM WITH MEP

508.2 ACCESSORY OCCUPANCIES	
ACCESSORY OCCUPANCIES ARE THOSE OCCUPANCIES THAT ARE ANCILLARY TO THE MAIN OCCUPANCY OF THE BUILDING OR PORTION THEREOF. ACCESSORY OCCUPANCIES SHALL COMPLY WITH THE PROVISIONS OF SECTIONS 508.2.1 THROUGH 508.2.4.	
508.4 SEPARATED OCCUPANCIES	
BUILDING OR PORTIONS OF BUILDING THAT COMPLY WITH THE PROVISION OF THIS SECTION SHALL BE CONSIDERED AS SEPARATED OCCUPANCIES.	
OCCUPANCY ADJACENCY	<u>REQUIRED SEPARATION (NON-SPRINKLERED)</u>
BUSINESS (B) & STORAGE (S-1)	NO SEPARATION REQUIRED
508.4.4.1 CONSTRUCTION	
REQUIRED SEPARATIONS SHALL BE FIRE BARRIERS CONSTRUCTED IN ACCORDANCE WITH SECTION 707.	
508.1 INCIDENTAL USES	
CONFIRM WITH MEP	

508.2 ACCESSORY OCCUPANCIES

ACCESSORY OCCUPANCIES ARE THOSE OCCUPANCIES THAT ARE ANCILLARY TO THE MAIN OCCUPANCY OF THE BUILDING OR PORTION THEREOF. ACCESSORY OCCUPANCIES SHALL COMPLY WITH THE PROVISIONS OF SECTIONS 508.2.1 THROUGH 508.2.4.

508.4 SEPARATED OCCUPANCIES

BUILDING OR PORTIONS OF BUILDING THAT COMPLY WITH THE PROVISION OF THIS SECTION SHALL BE CONSIDERED AS SEPARATED OCCUPANCIES.


OCCUPANCY AGENCY	<u>REQUIRED SEPARATION (NON-SPRINKLERED)</u>
BUSINESS (B) & STORAGE (S-1)	NO SEPARATION REQUIRED

508.4.4.1 CONSTRUCTION

REQUIRED SEPARATIONS SHALL BE FIRE BARRIERS CONSTRUCTED IN ACCORDANCE WITH SECTION 707.


508.1 INCIDENTAL USES

CONFORM WITH MEP

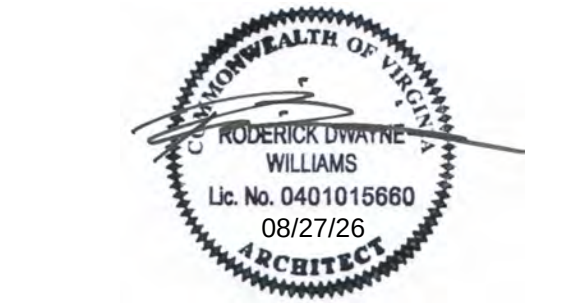

REVISIONS		

NO.	DESCRIPTION	DATE
-----	-------------	------

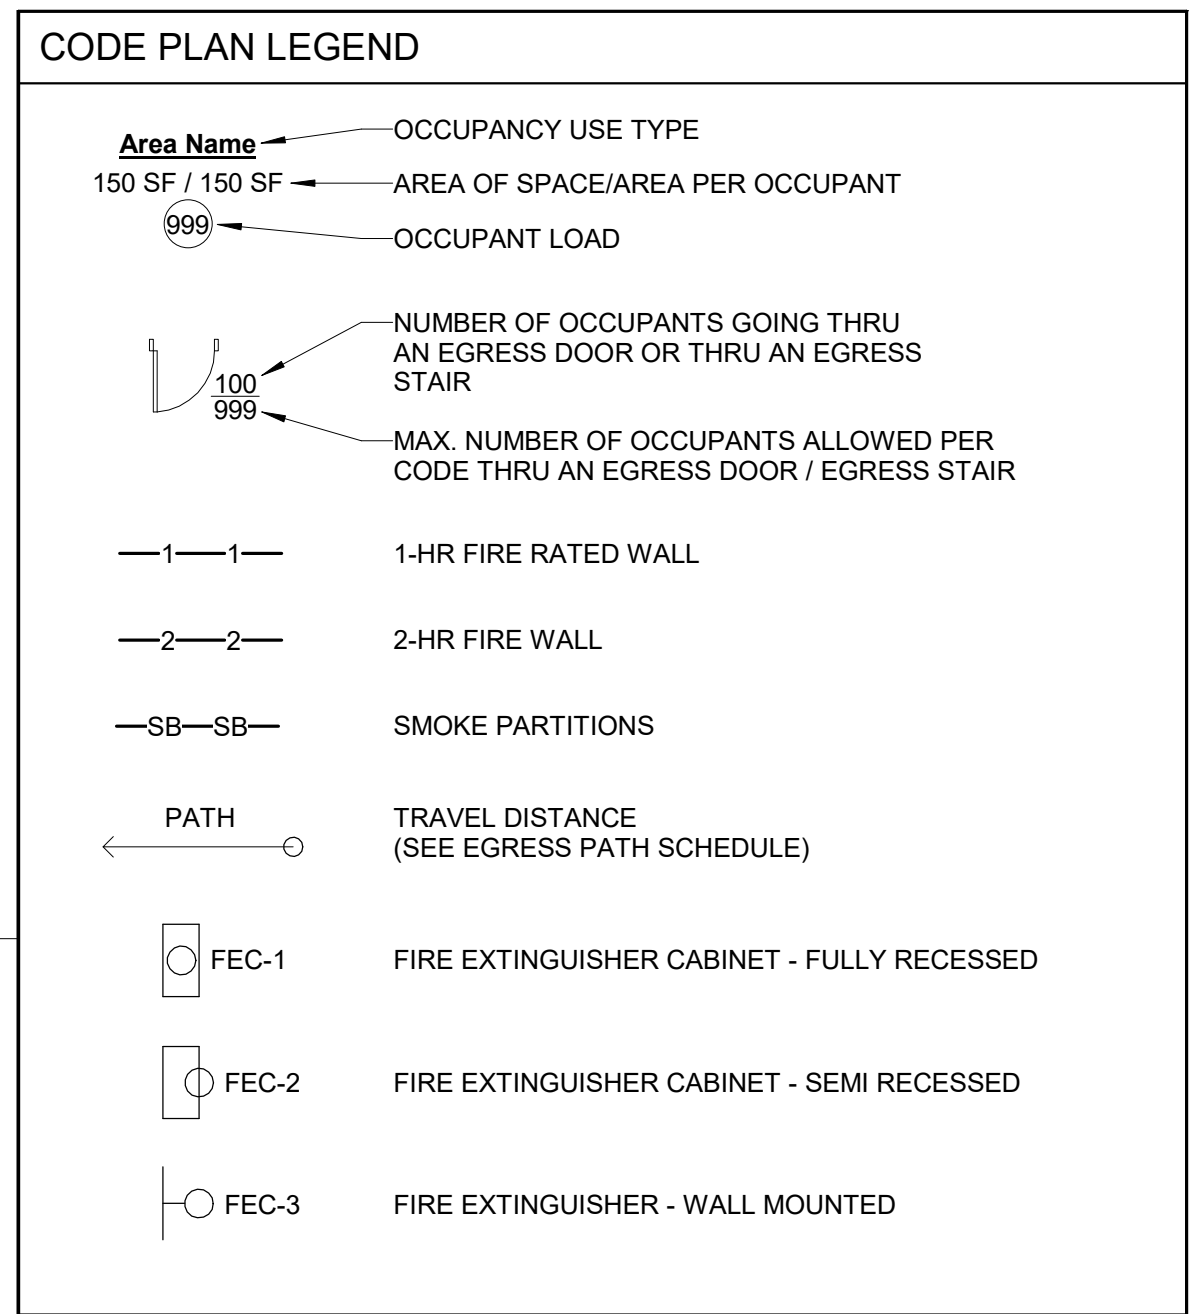


Egress Path Schedule	
PATH NAME	PATH LENGTH
PATH A	95'-3"
PATH B	74'-4"
PATH C	53'-8"
PATH D	39'-1 1/2"
PATH E	57'-11"

OCCUPANCY TYPE


BUSINESS

STORAGE - 1

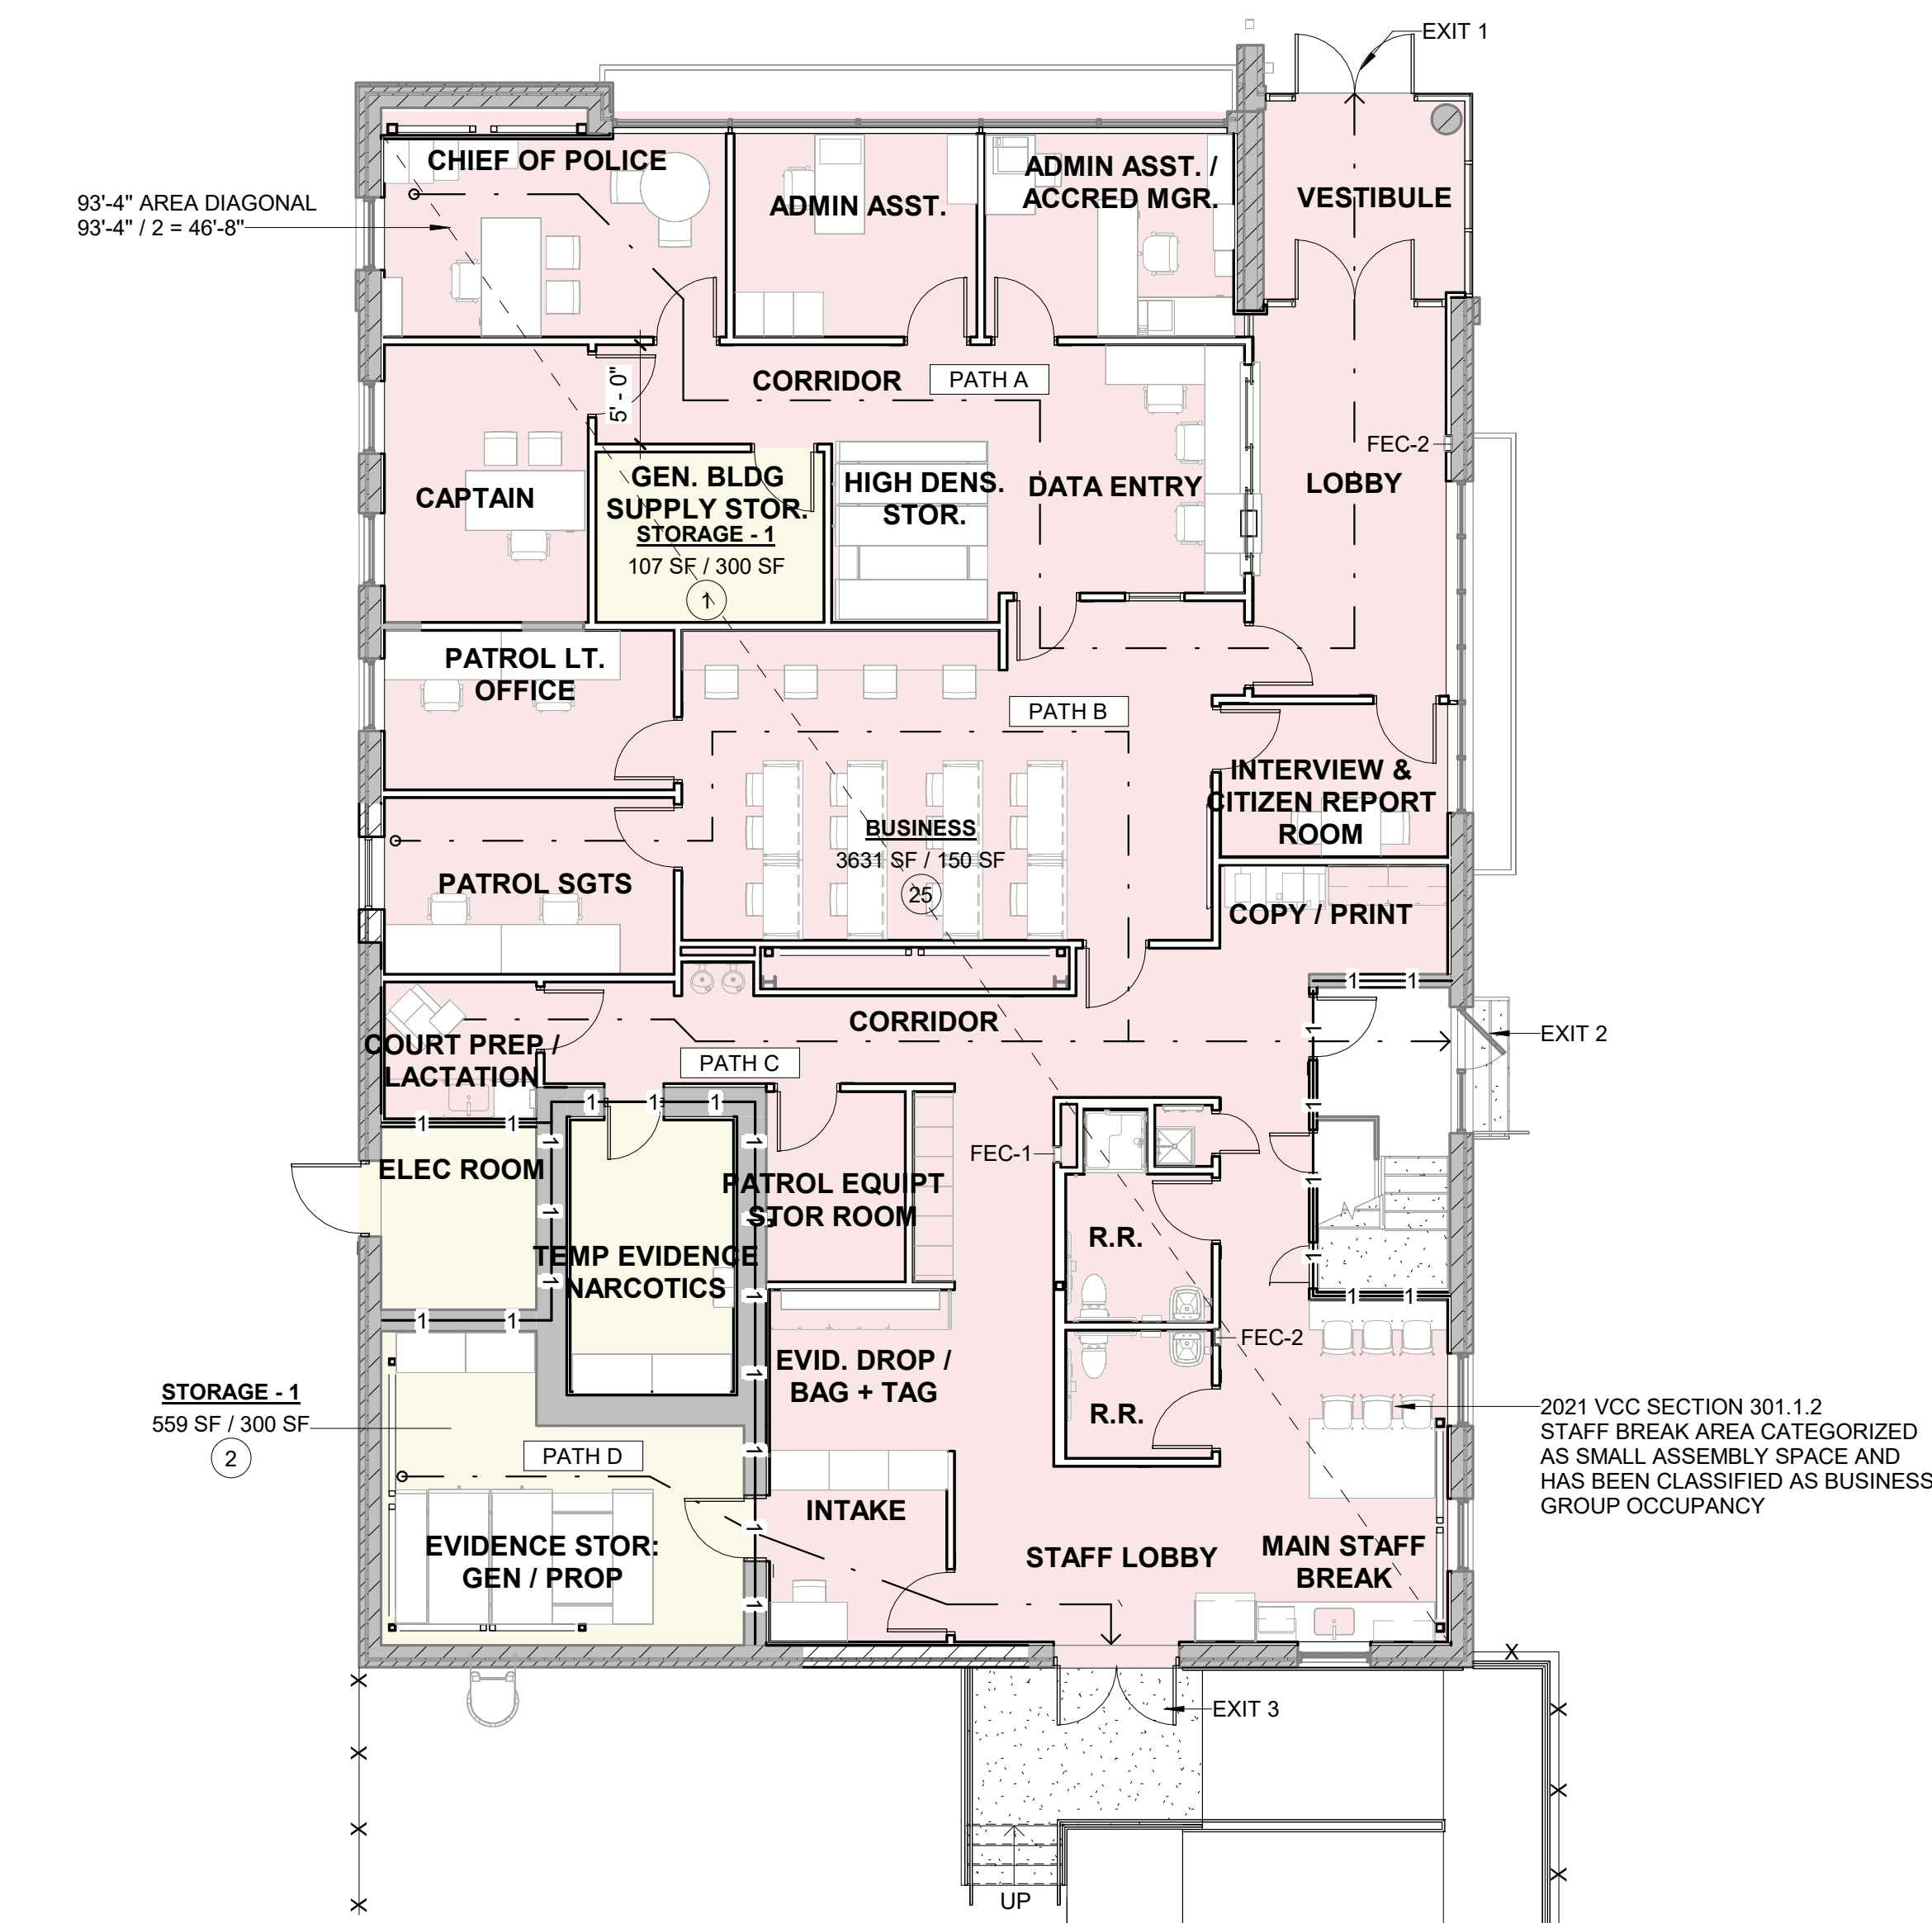


1 FIRST FLOOR LIFE SAFETY PLAN

Scale: 1/8" = 1'-0"

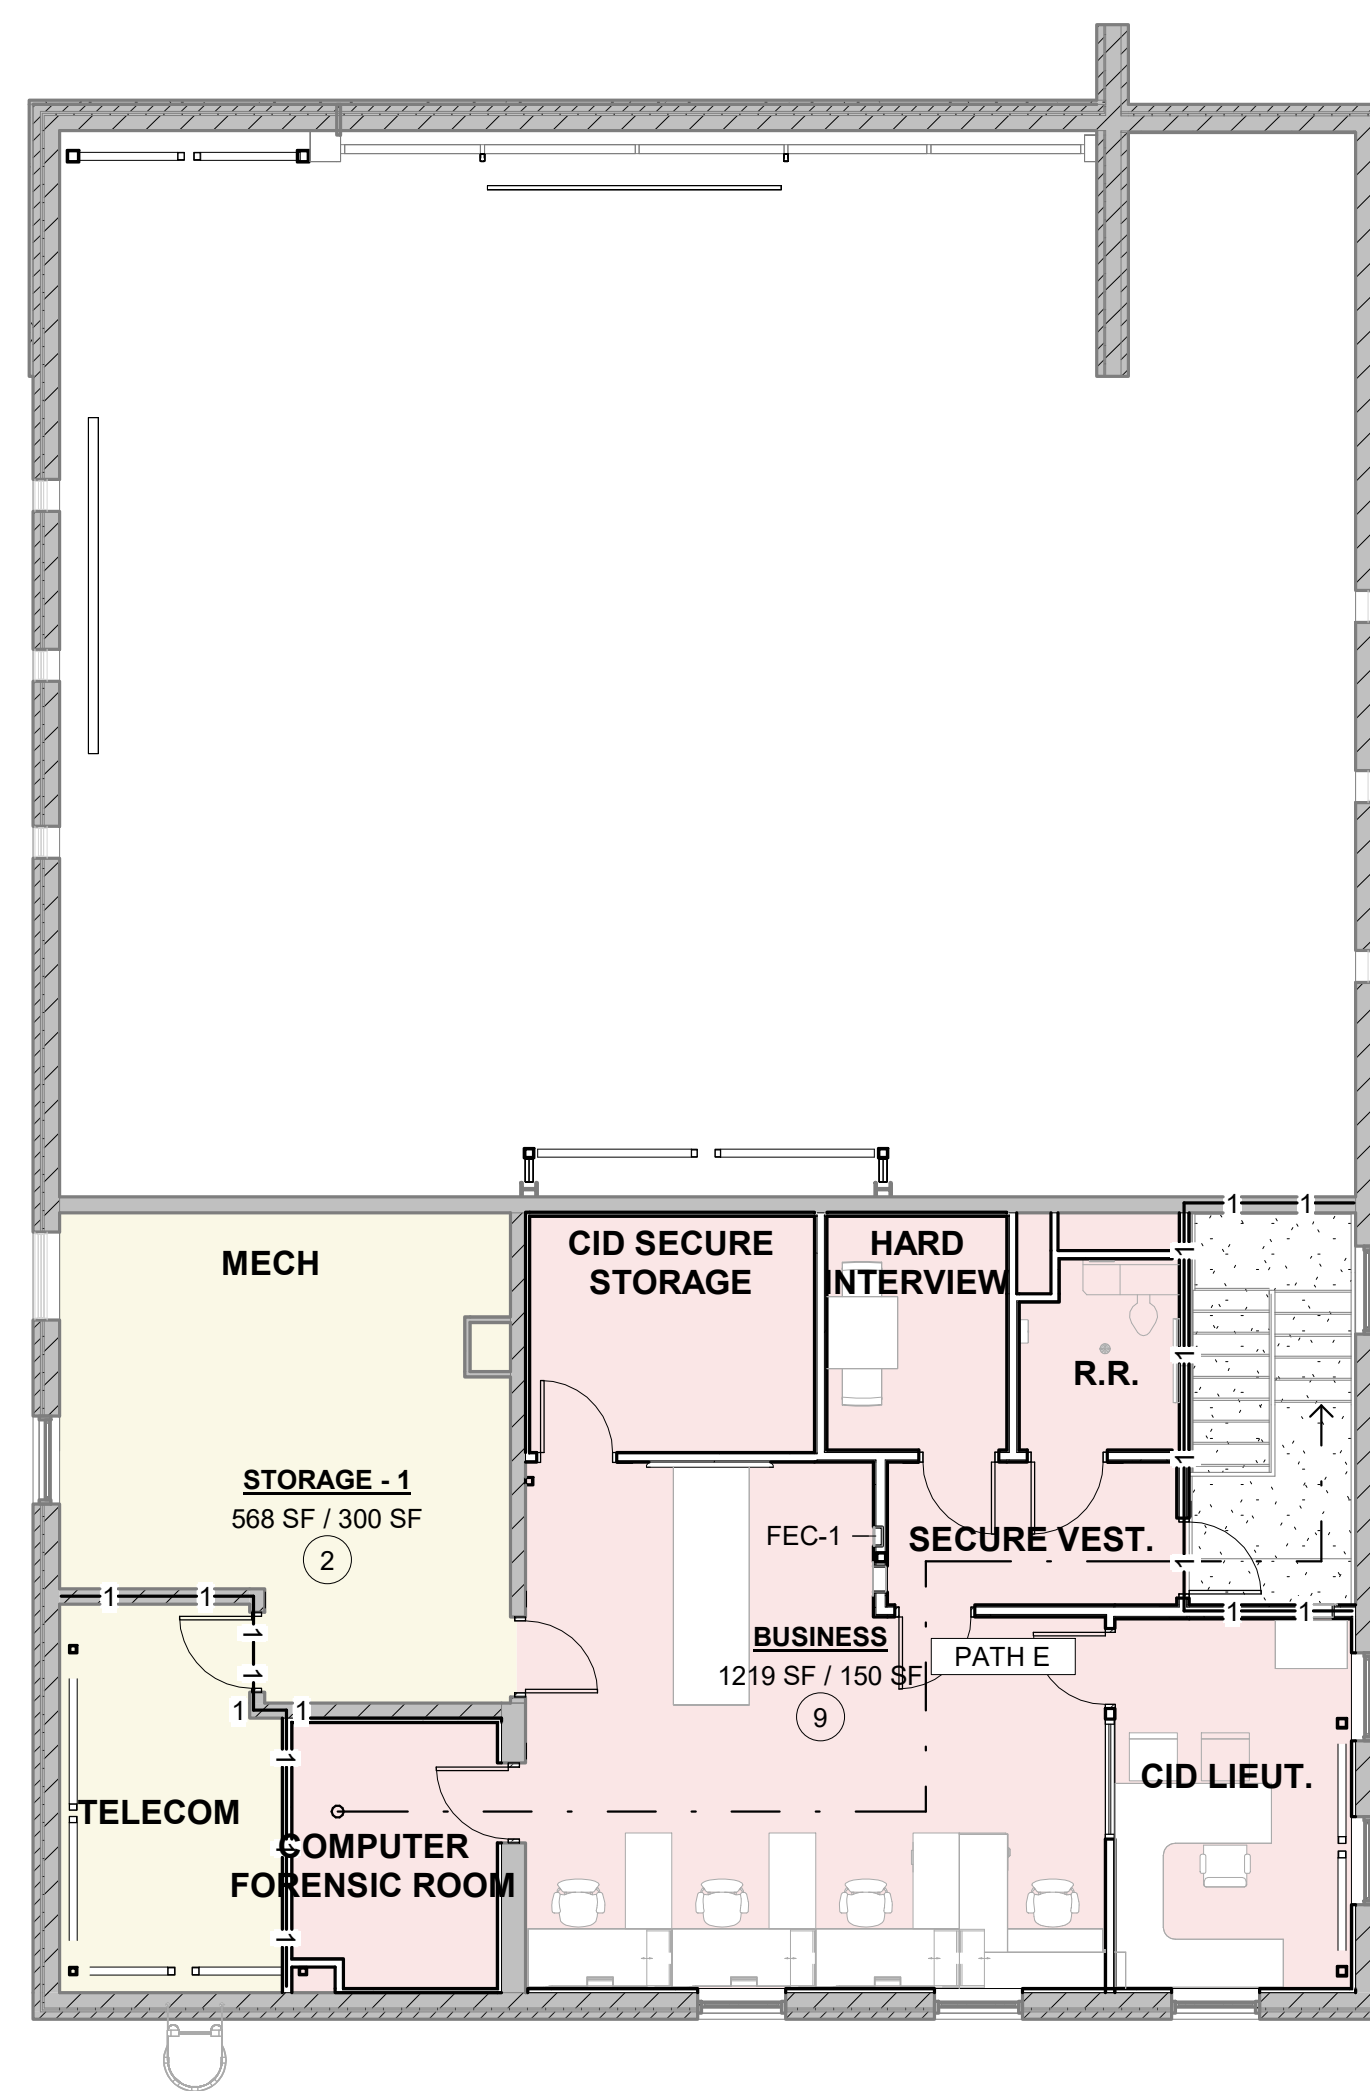

2 SECOND FLOOR LIFE SAFETY PLAN

Scale: 1/8" = 1'-0"

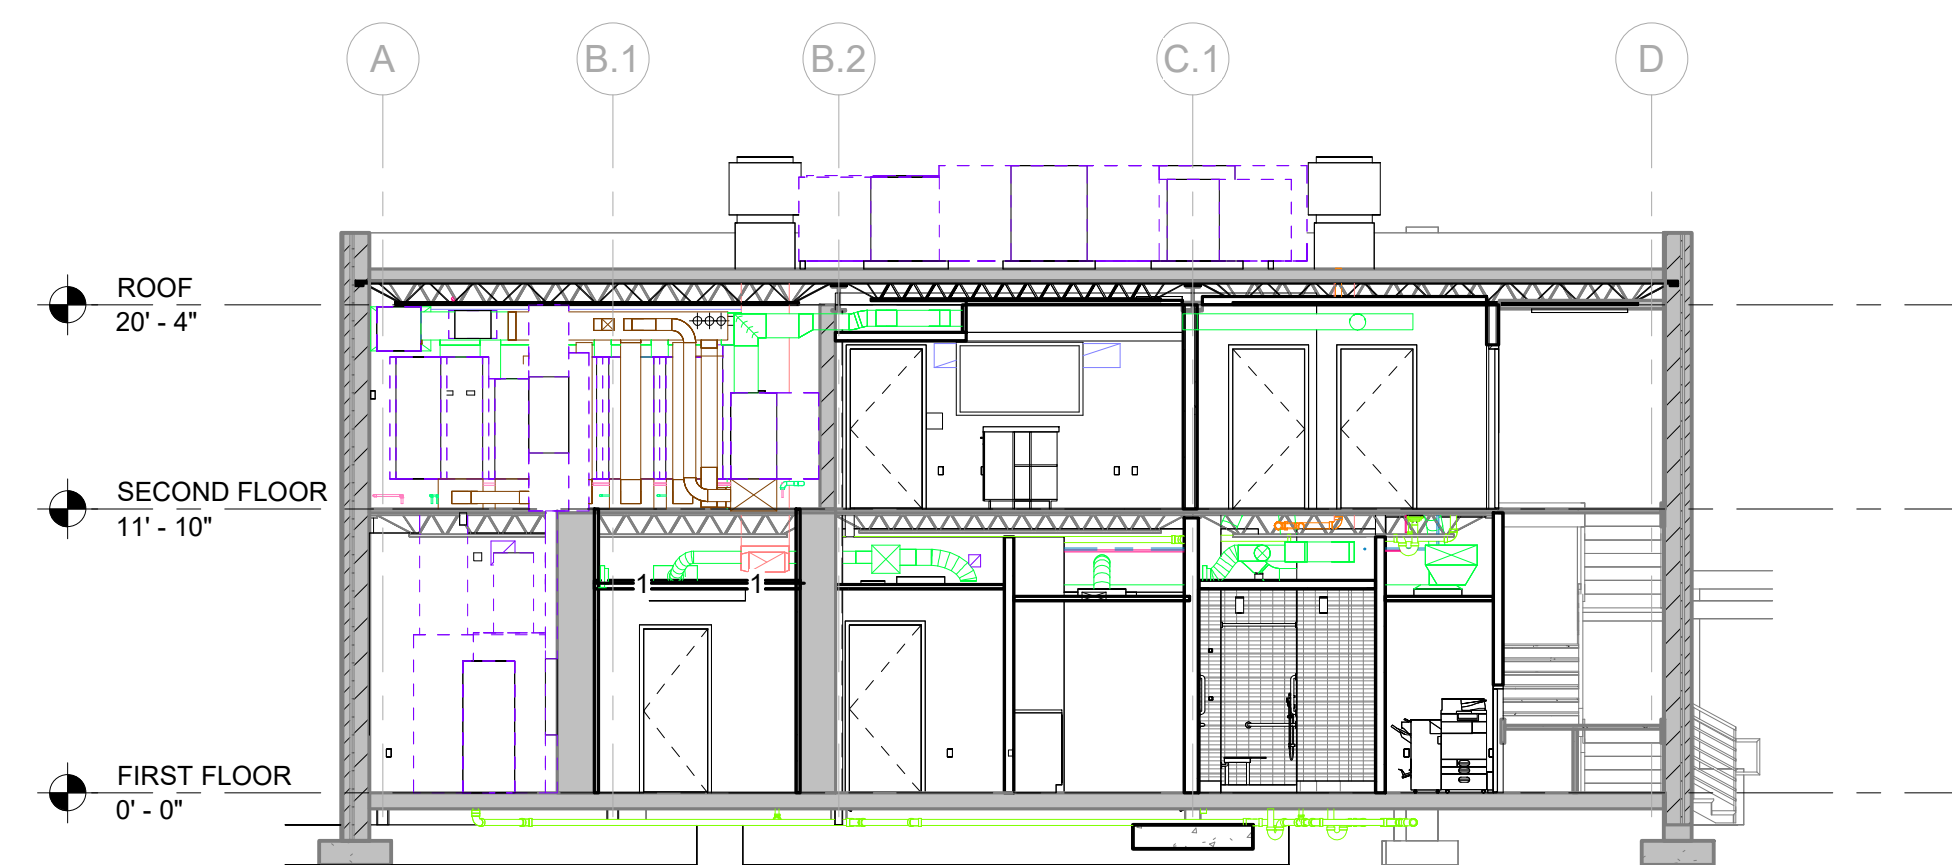

3 BUILDING SECTION LIFE SAFETY PLAN

Scale: 1/8" = 1'-0"

8/24/2026 11:55:52 AM

A

B

C


D

E


F

OBSTRUCTIONS AND REACH RANGES: 2010 ADA SECT. 307, 308


□ DENOTES WALL MOUNTED OR WALL RECESSED OBJECTS TO BE REACHED

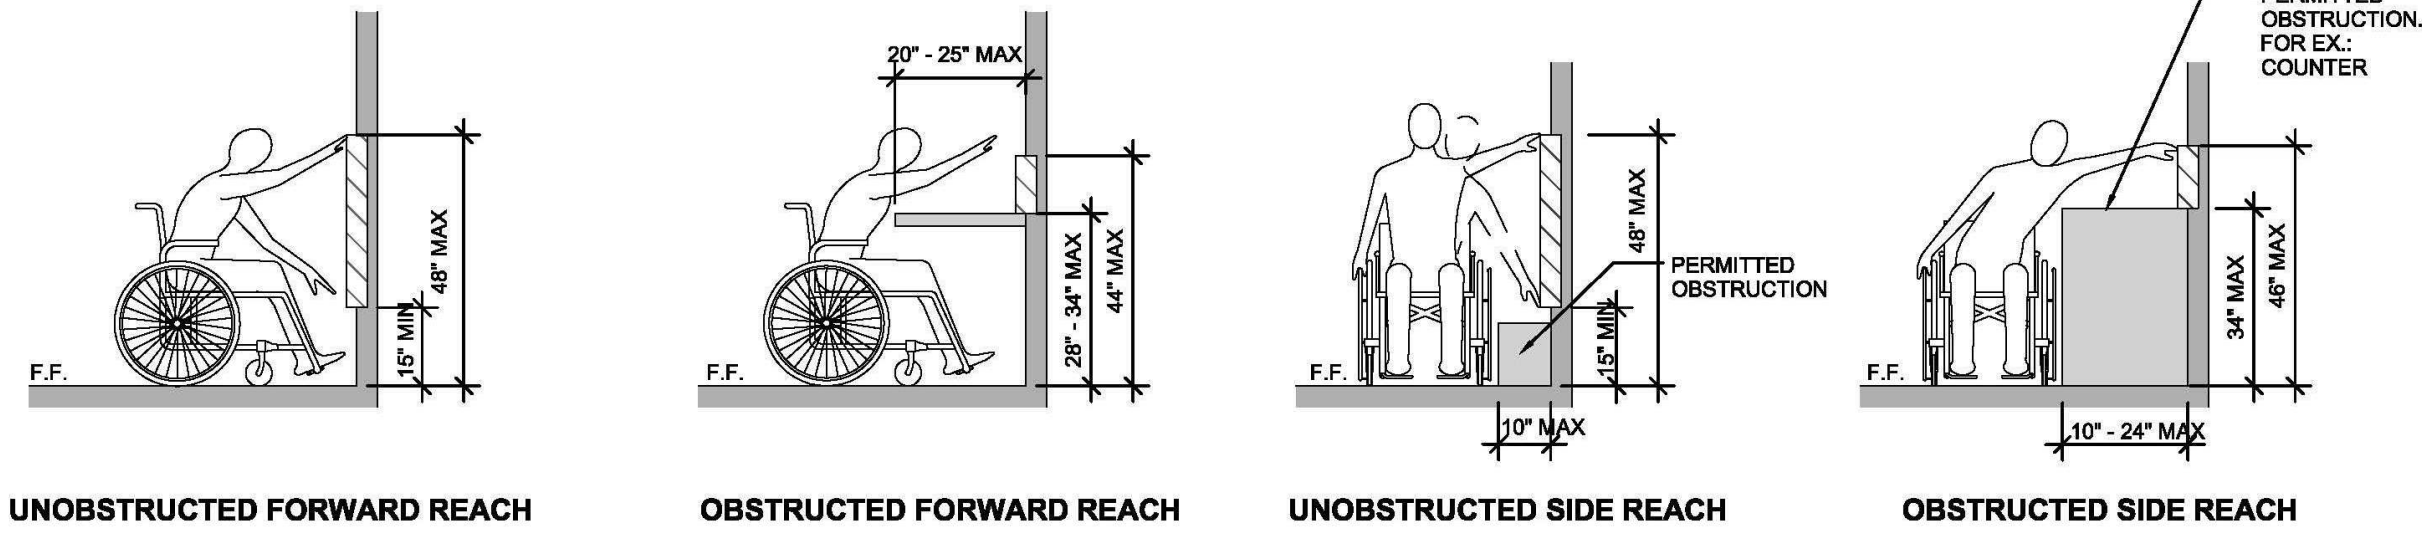


INTERIOR LEVEL CHANGES
1/4" TO 1/2": 2010 ADA
SECT. 303

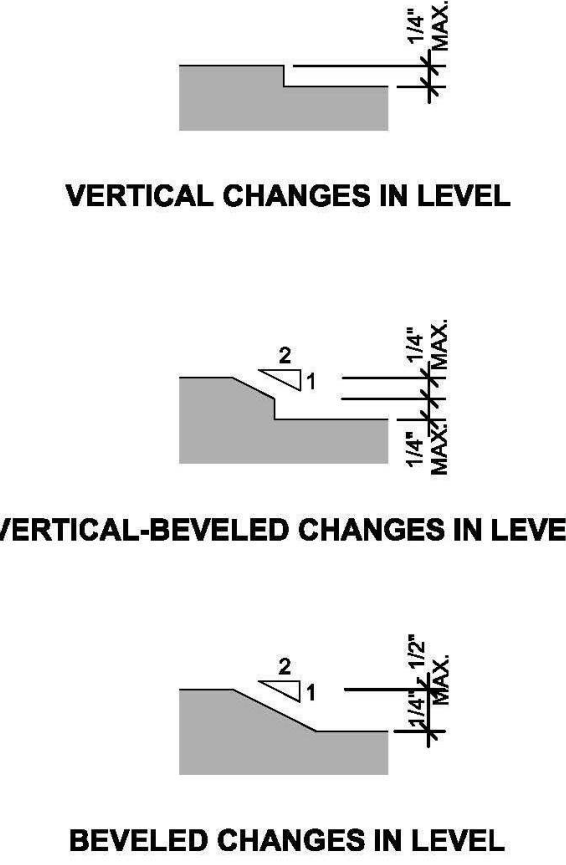


EXTERIOR CURB RAMPS
2010 ADA SECT. 406

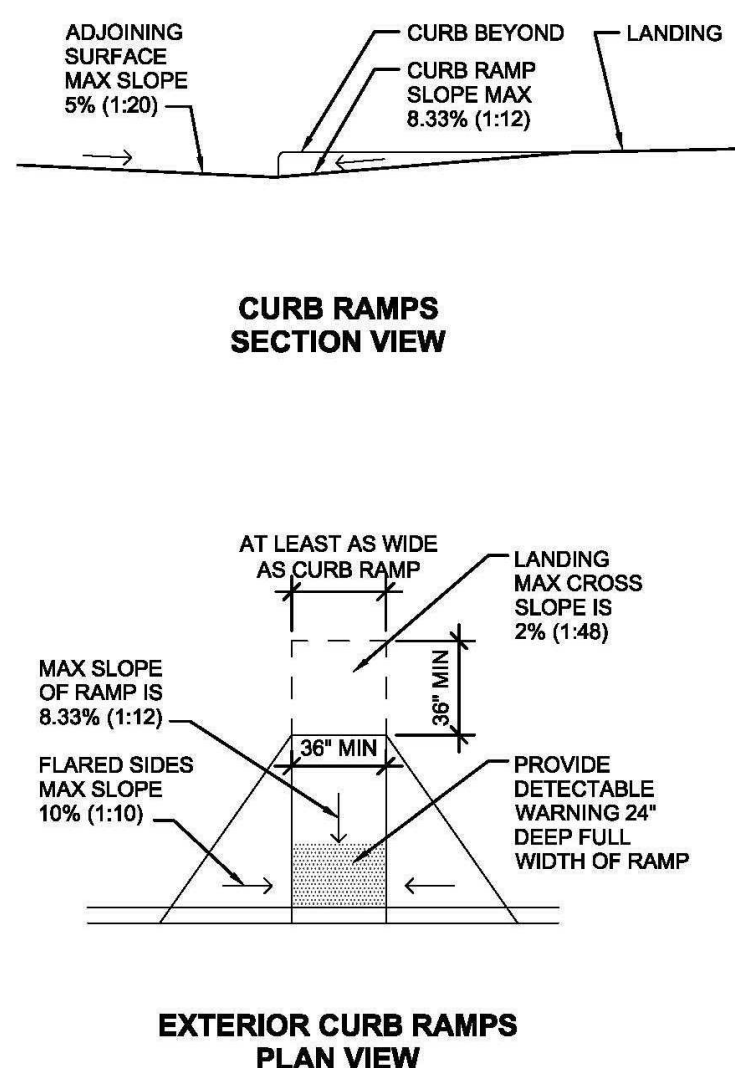


STAIRS, HANDRAILS AND OVERHEAD HAZARDS:
2010 ADA SECT. 307, 505

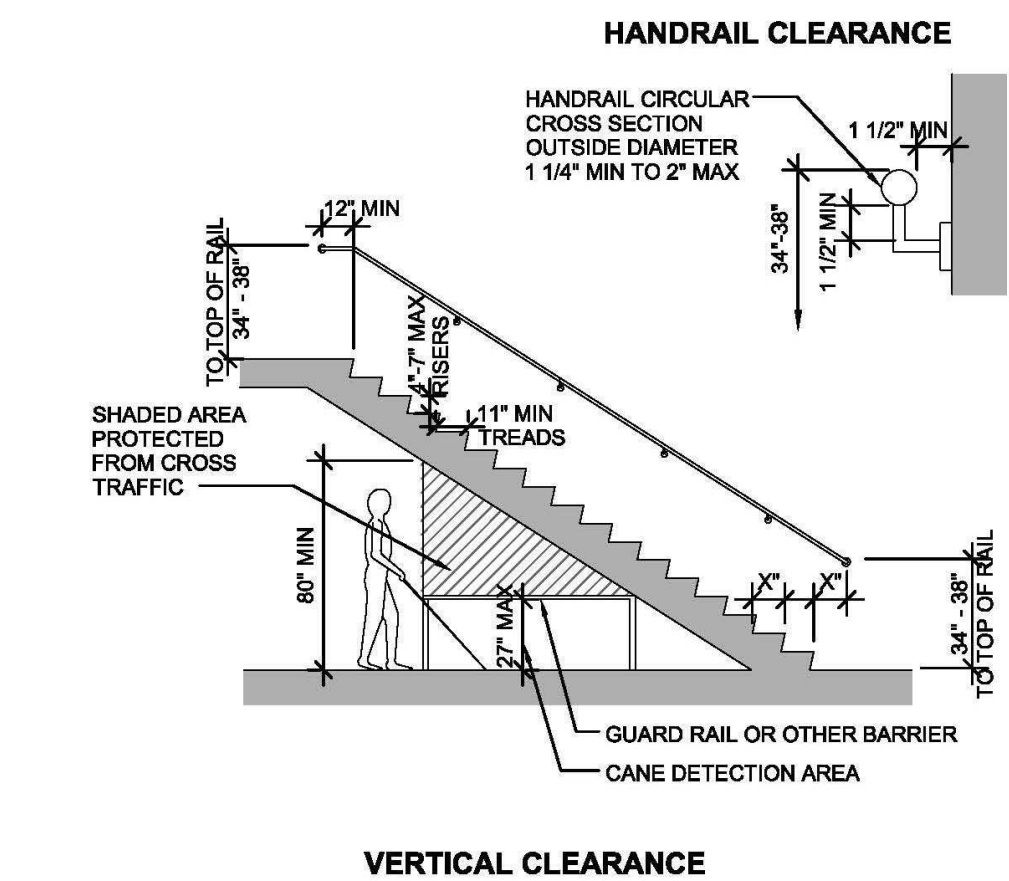


MANEUVERING CLEARANCES: 2010 ADA SECT. 404

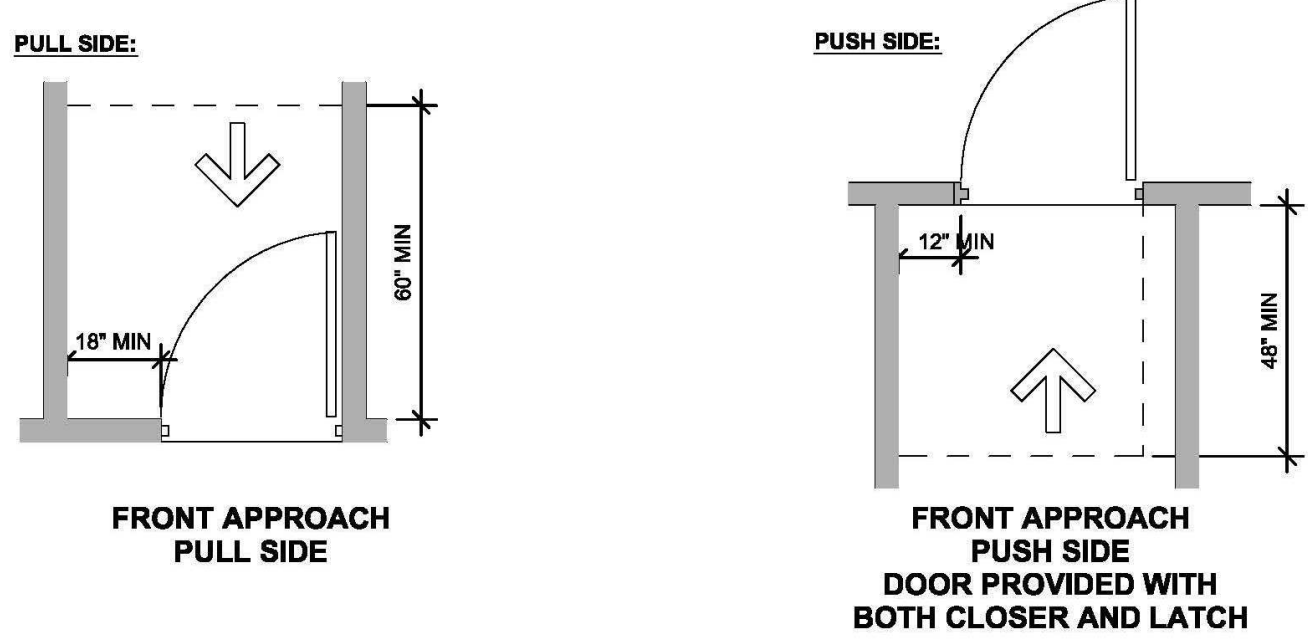


ACCESSIBLE ROUTE: 2010 ADA SECT. 401

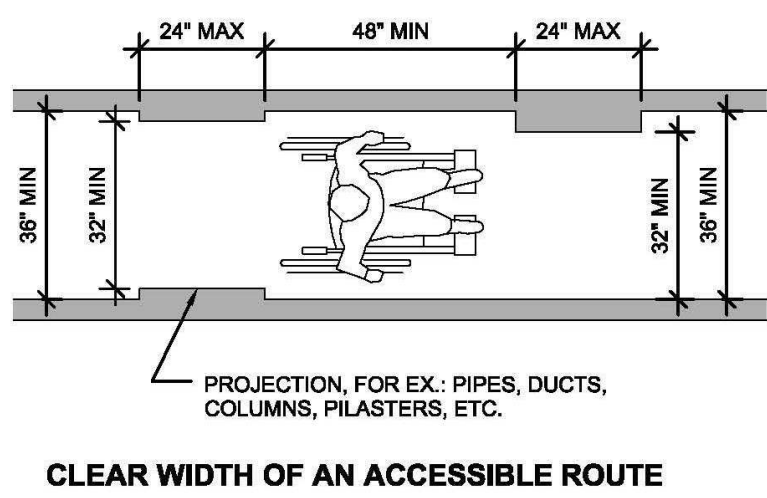


RAMPS INTERIOR AND EXTERIOR: 2010 ADA SECT. 405, 406, 505

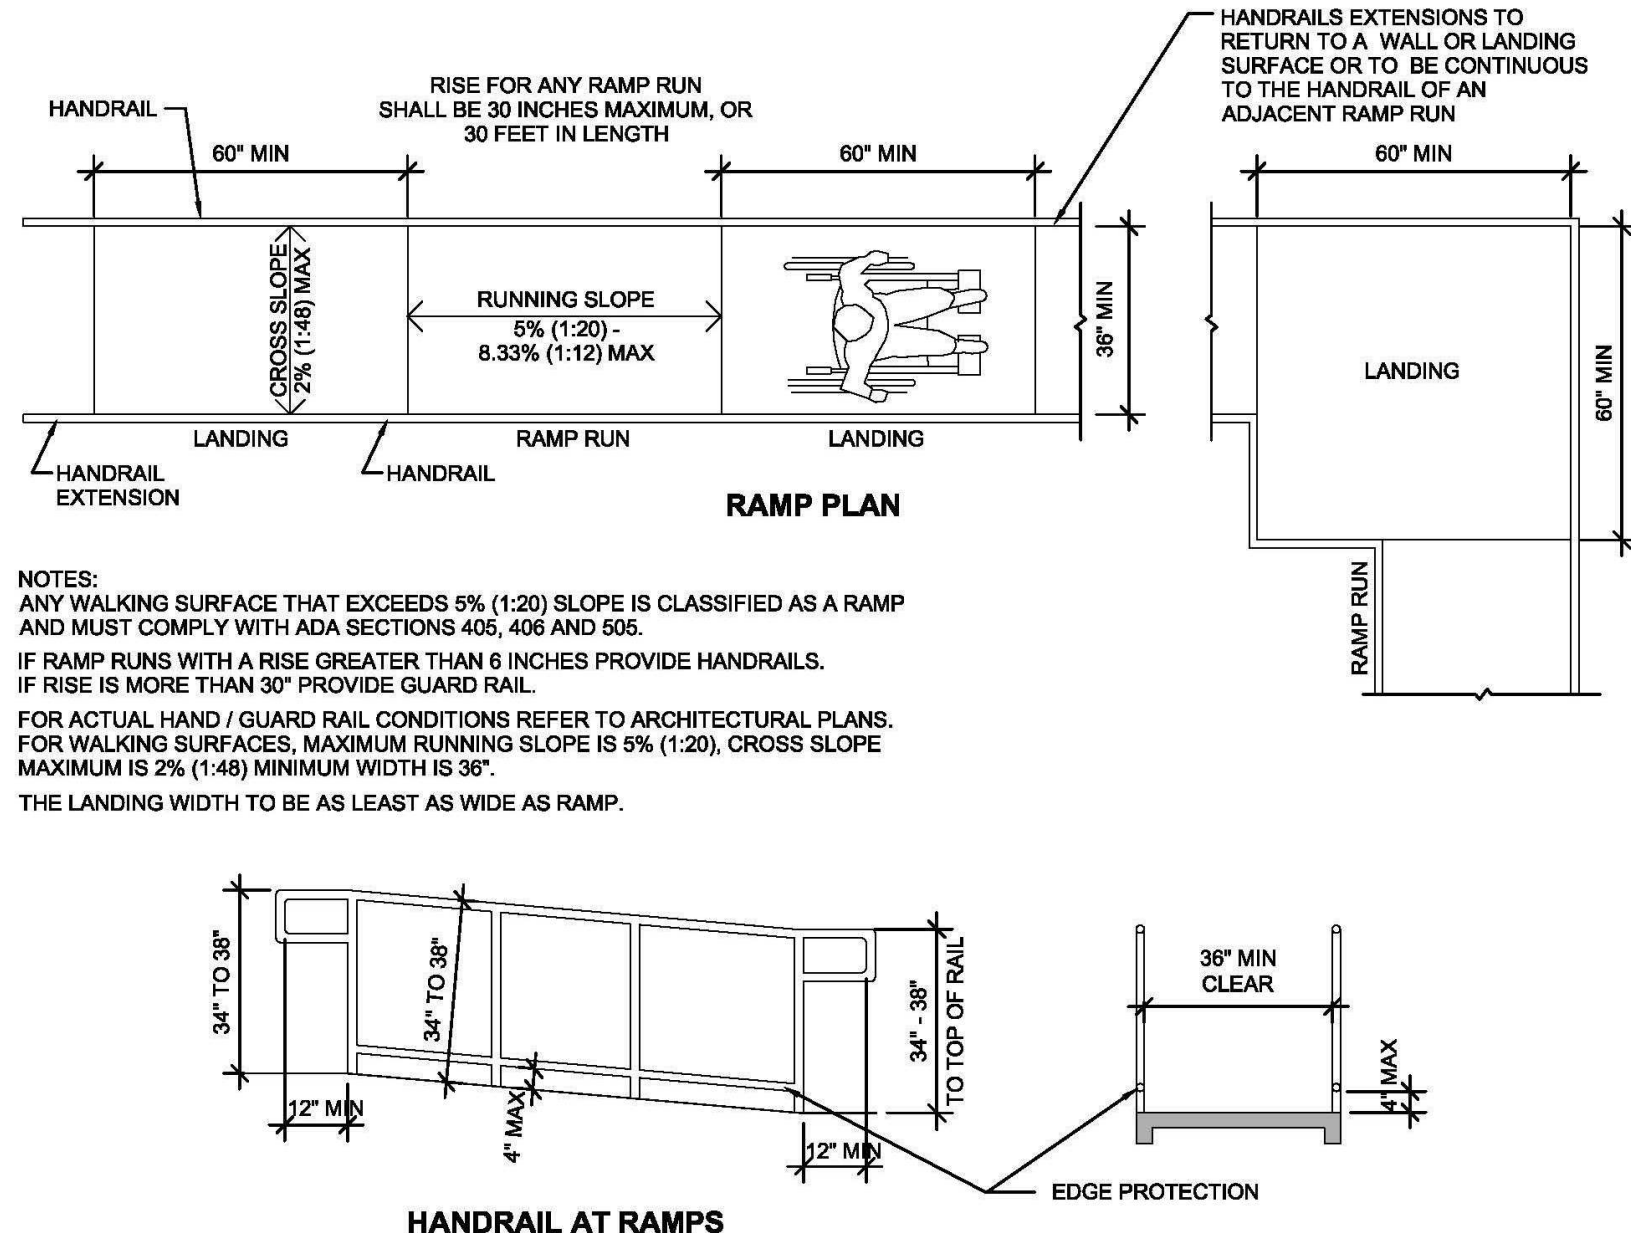


VEHICLE PARKING SPACES 2010 ADA SECT. 502

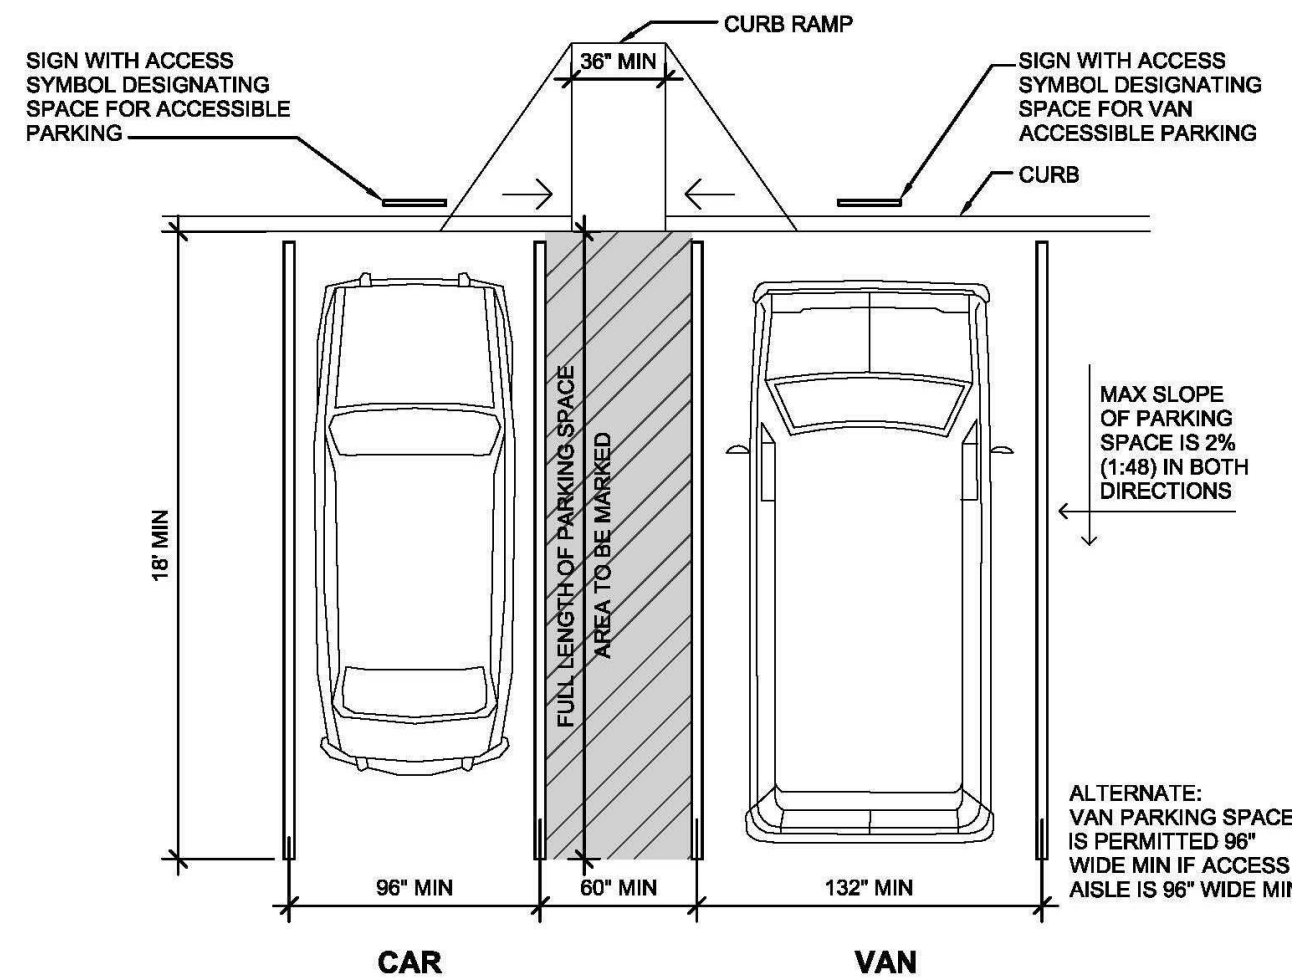


2010 ADA SECT. 307

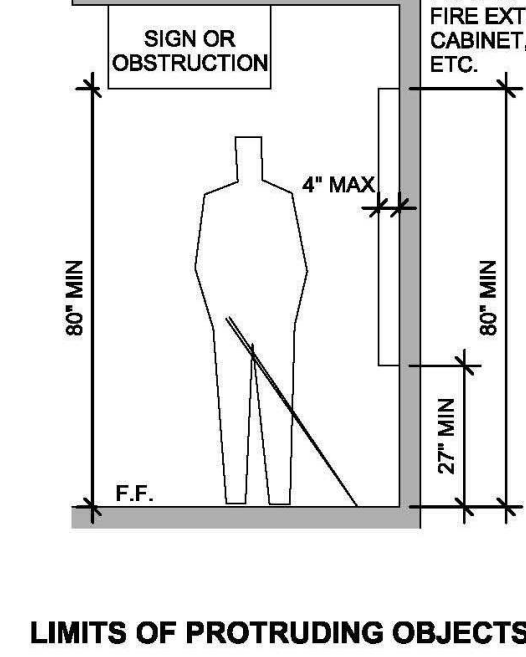


DOOR CLEAR WIDTH:
2010 ADA SECT. 404.2.3

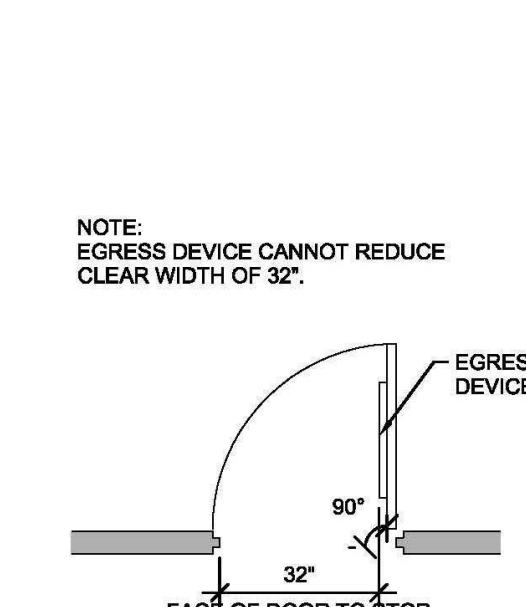


MOUNTING HEIGHTS: 2010 ADA SECT. 309

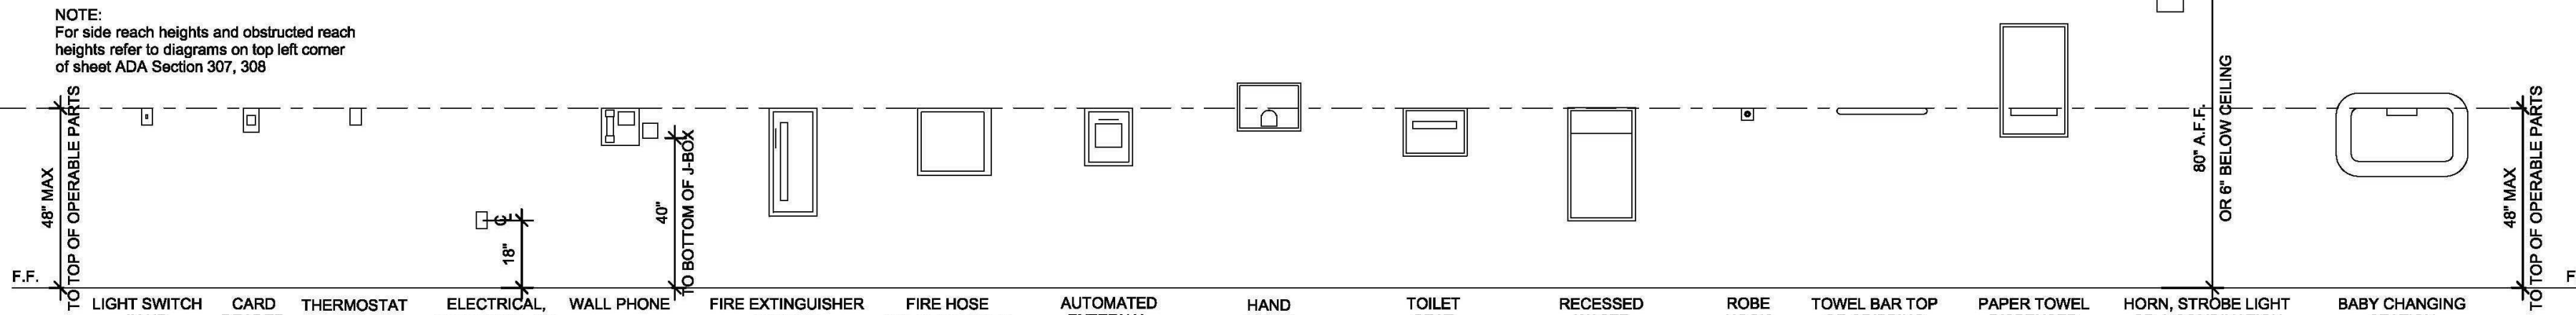


LOCKER ROOMS: 2010 ADA SECT. 903

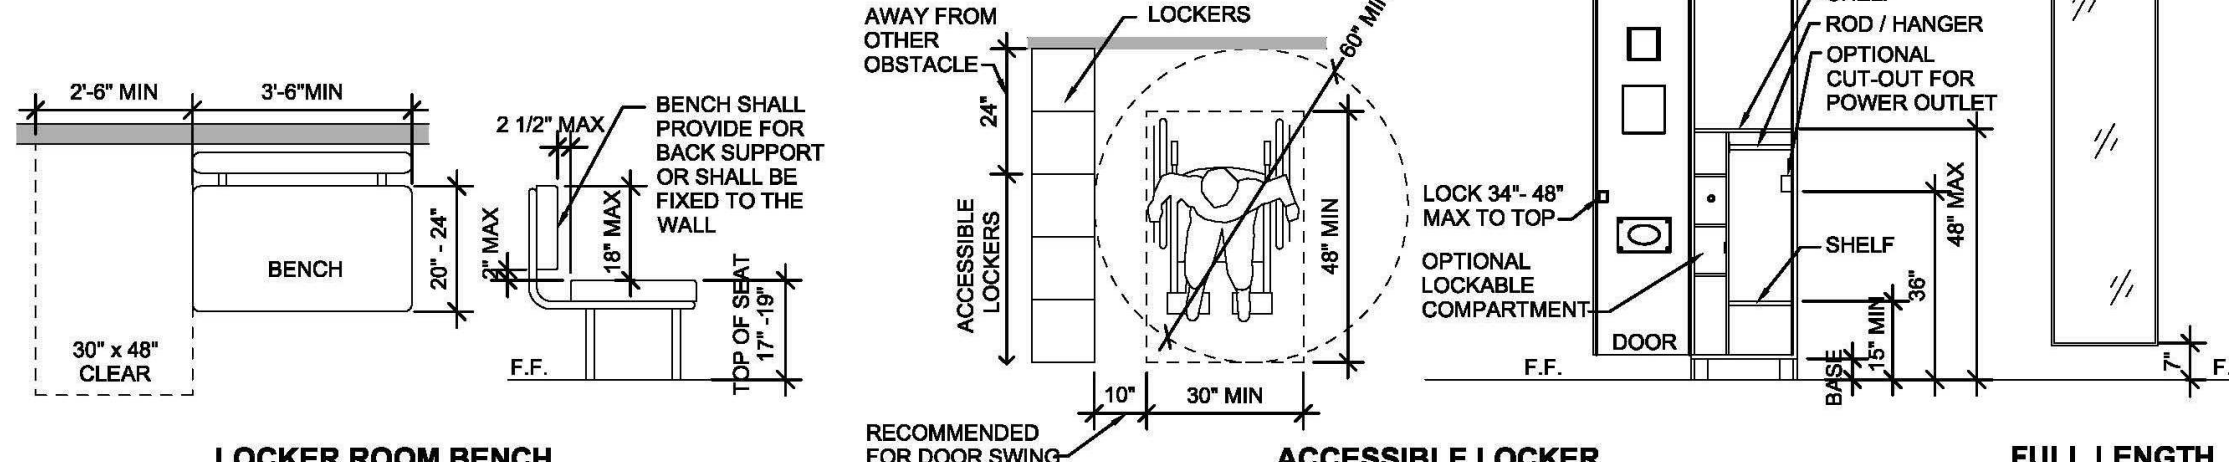

RESTROOMS: 2010 ADA SECT. 604, 605 AND ANSI SECT. 604

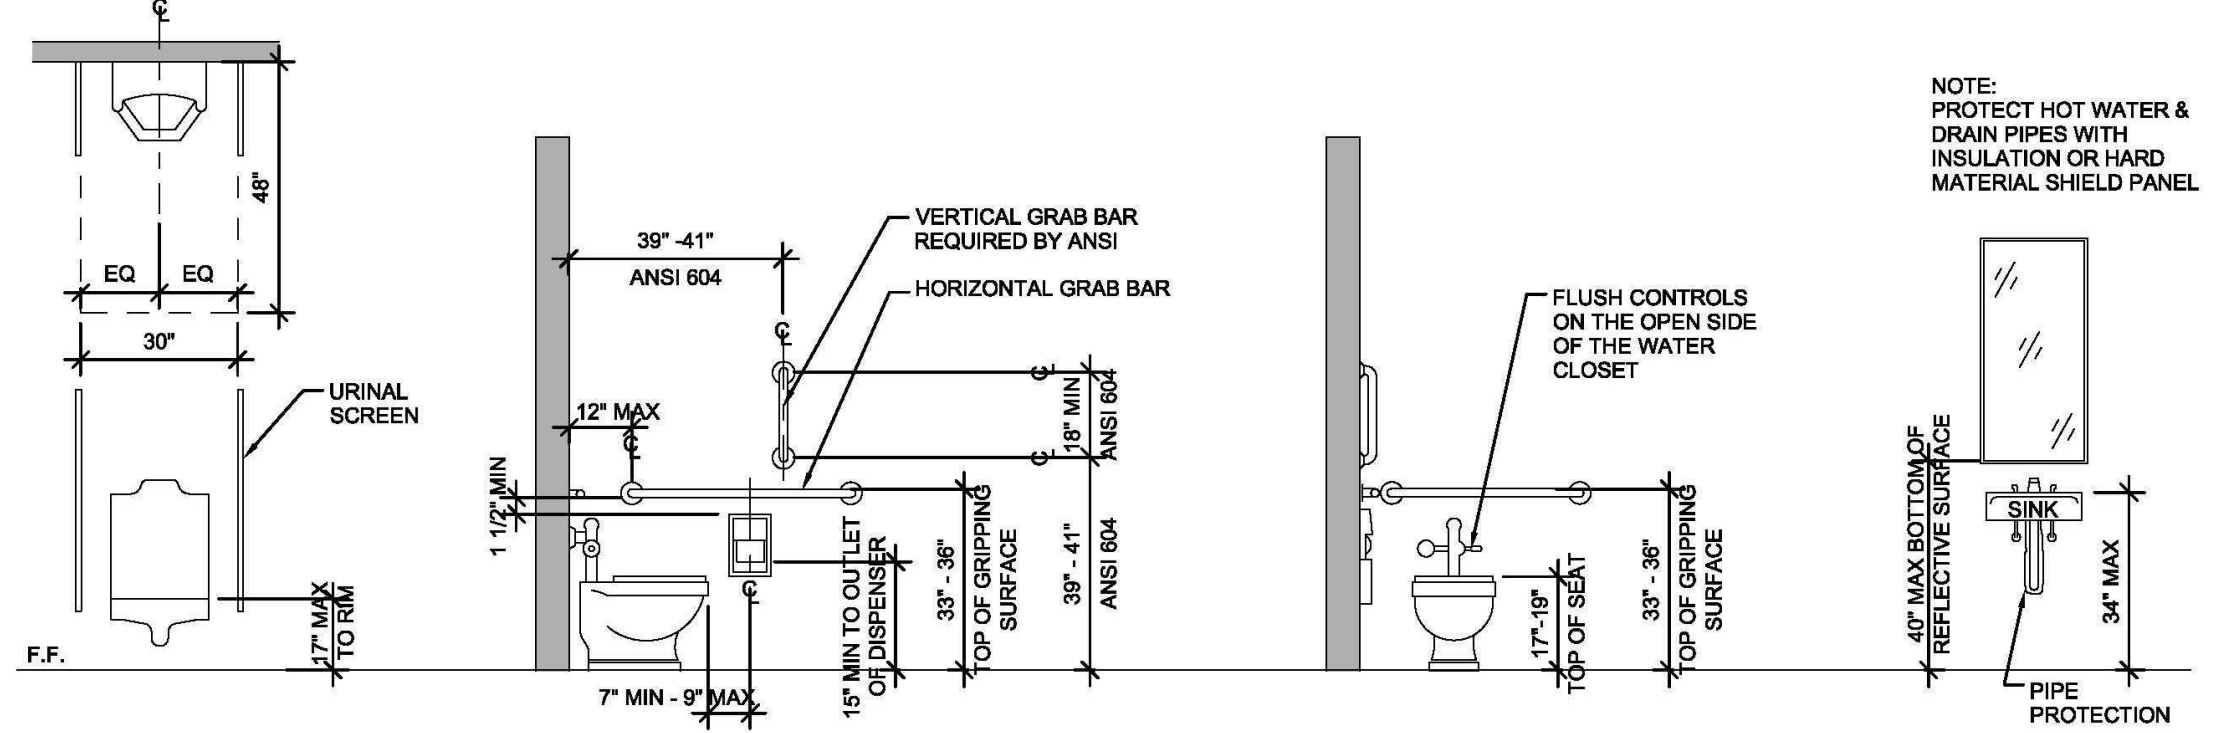


ACCESSIBLE URINAL

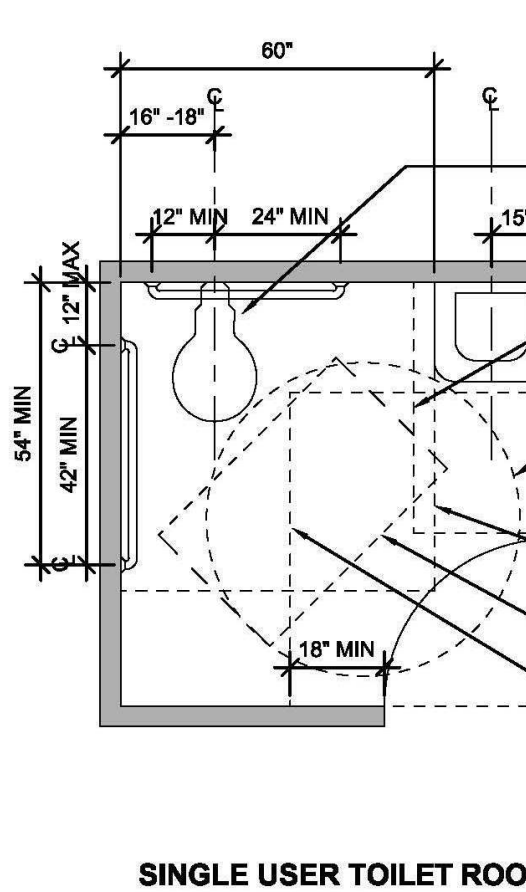


SINGLE USER TOILET ROOM


2010 ADA SECT. 306

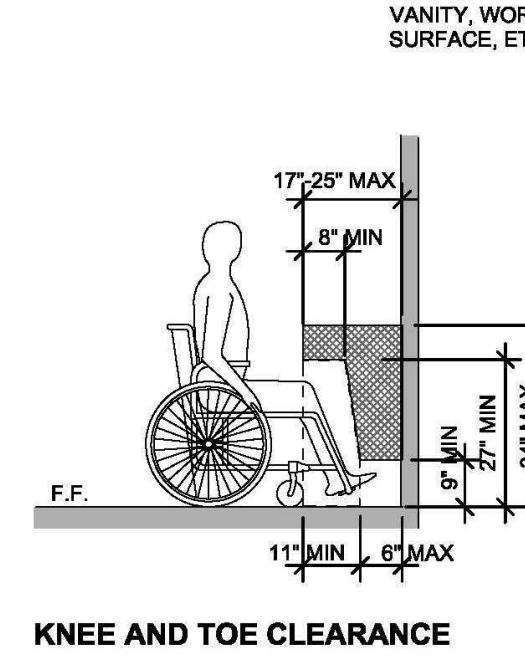


ROOM SIGNAGE & DOOR HARDWARE: 2010 ADA SECT. 404, 703

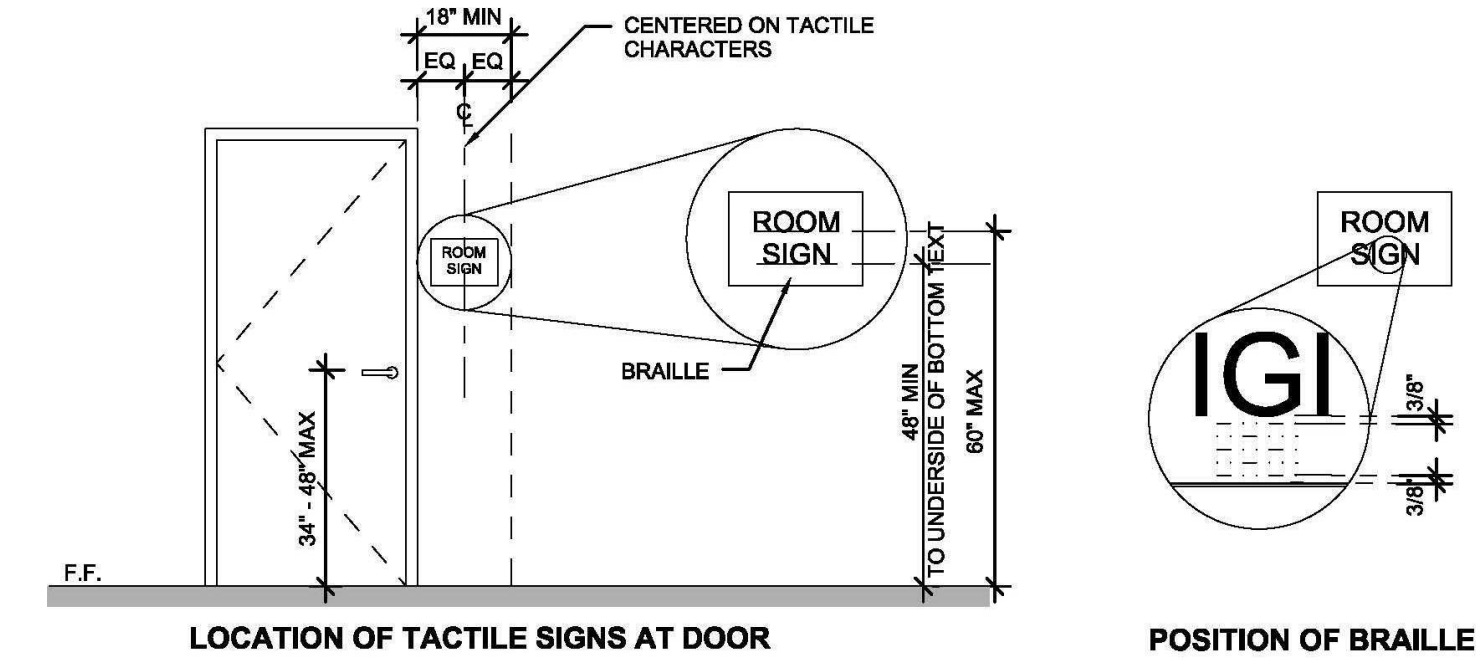


LOCKER ROOM BENCH

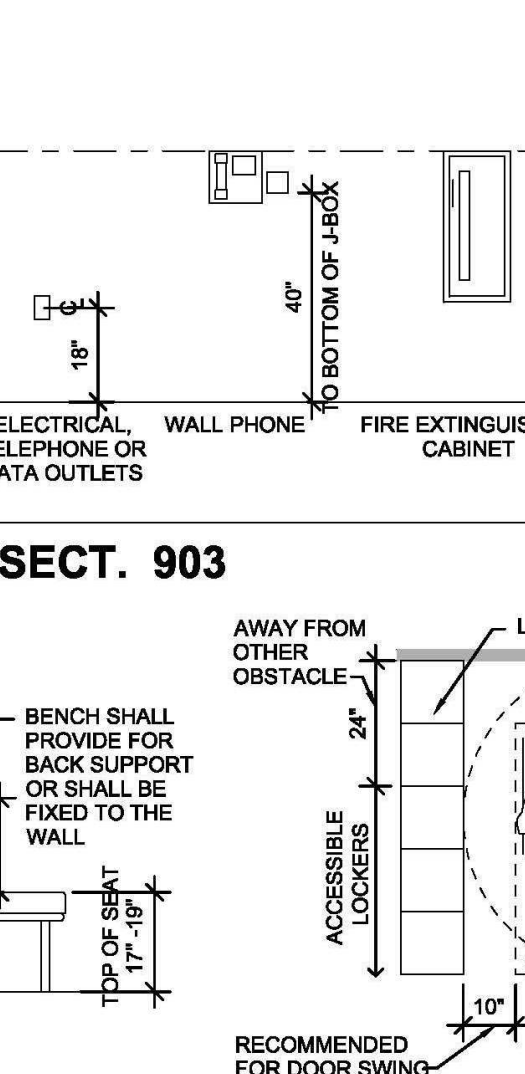

WATER CLOSET/TOILET STALL (SIDE VIEW)

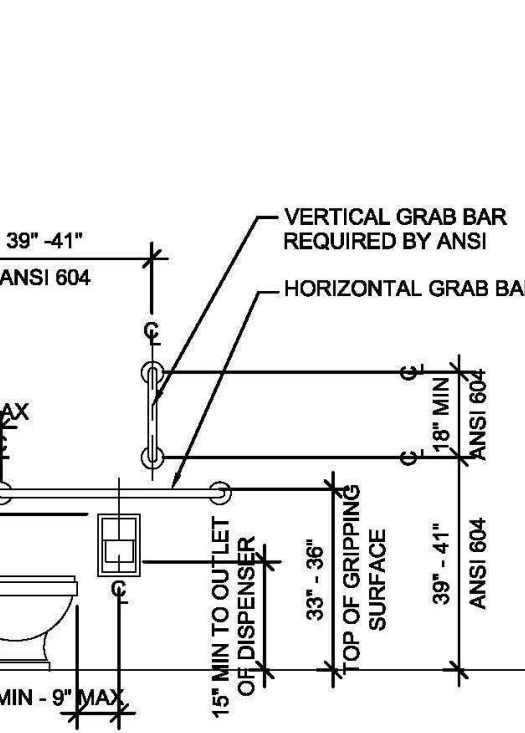


WATER CLOSET/TOILET STALL (FRONT VIEW)

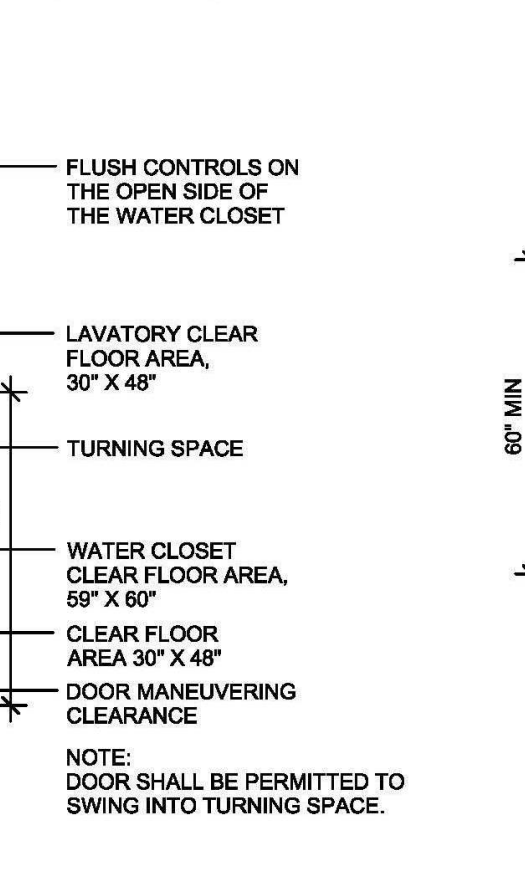


AMBULATORY TOILET STALL


CLEARANCES AND TURNING SPACES LEGEND:
2010 ADA SECT. 304, 305, 306

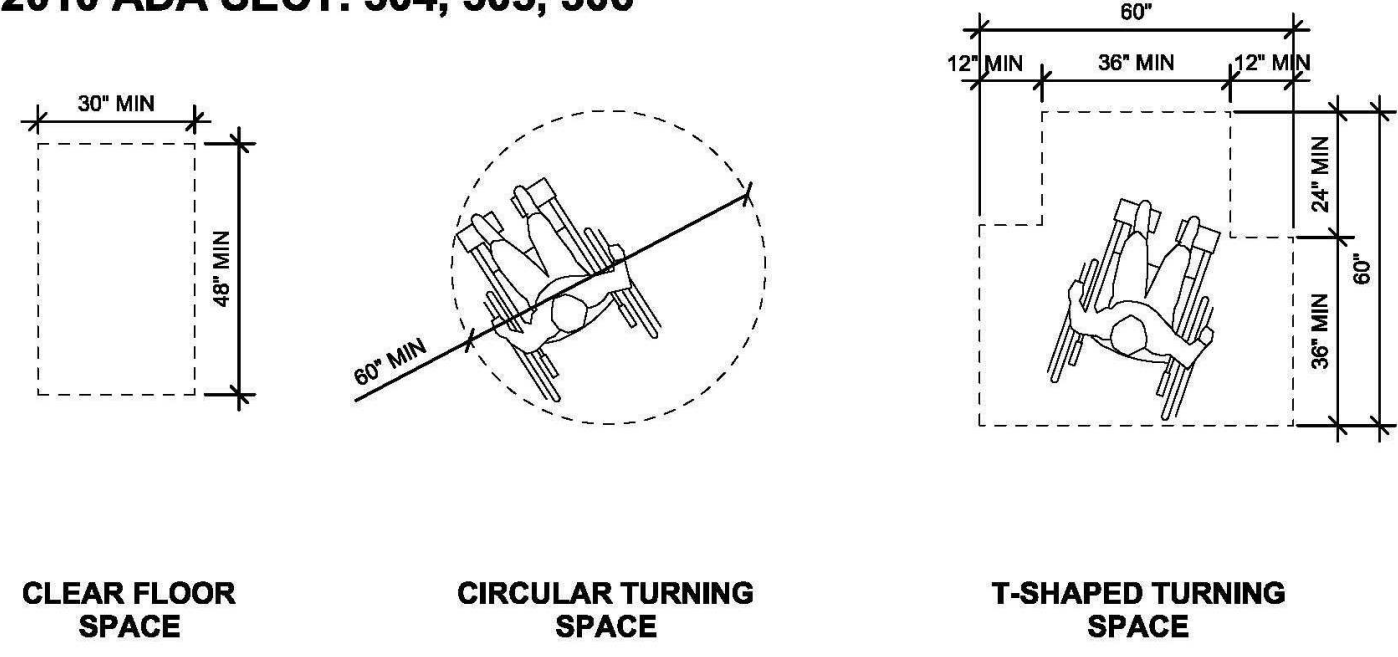


ROOM SIGNAGE & DOOR HARDWARE: 2010 ADA SECT. 404, 703

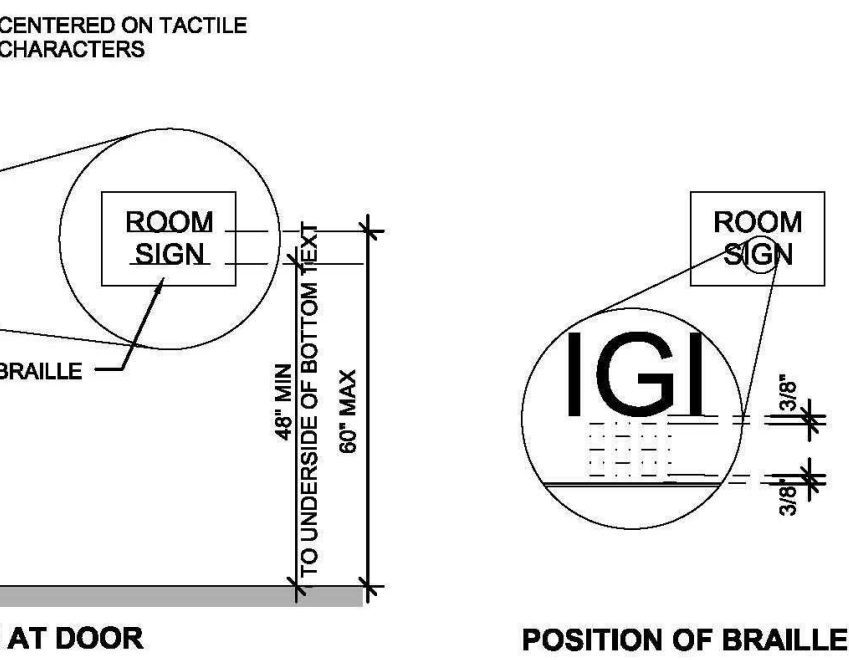

WATER CLOSET/TOILET STALL (FRONT VIEW)

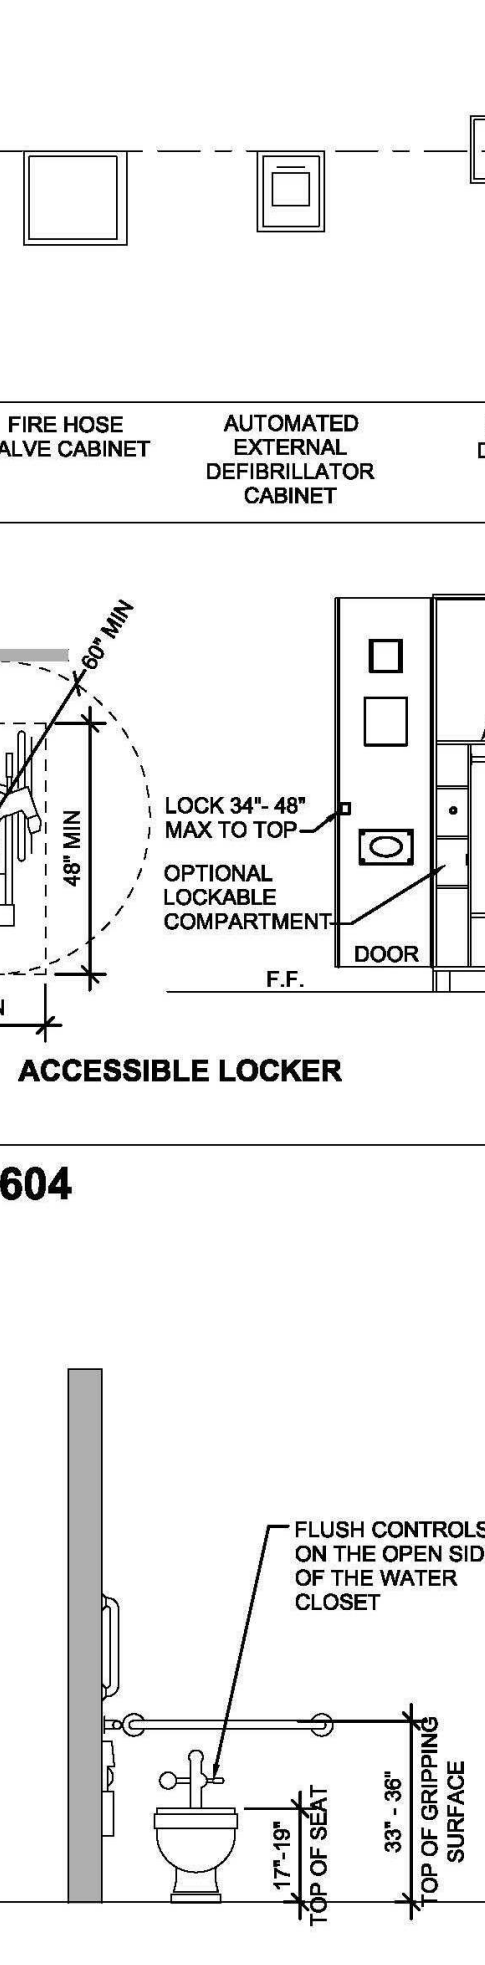

MIRROR ABOVE LAVATORY OR COUNTER

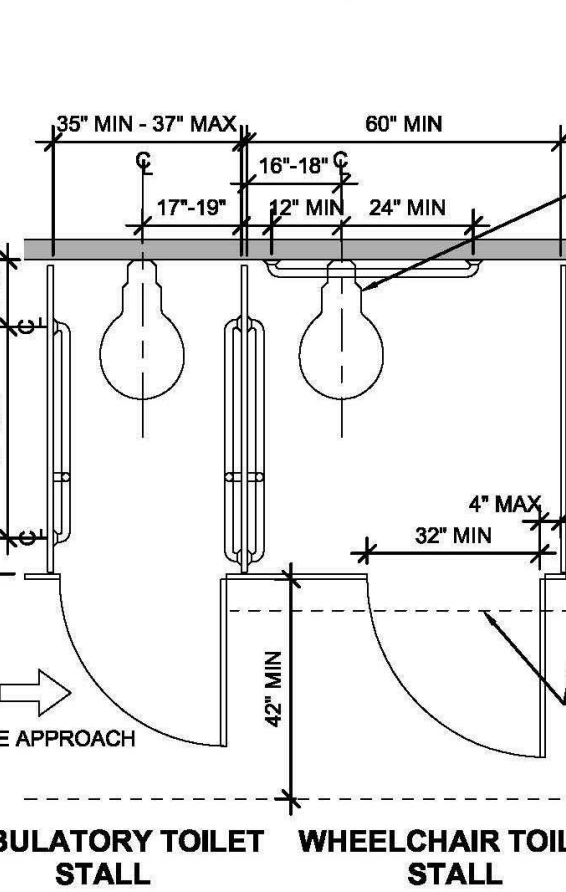


WHEELCHAIR TOILET STALL


GENERAL NOTES:

- REFERENCE 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN AND ANSI 117.1 2009 EDITION. THE MORE RESTRICTIVE ONE GOVERNS.
- ILLUSTRATIONS ARE TYPICAL. REFER TO ARCHITECTURAL PLANS FOR PROJECT SPECIFIC CONFIGURATION.
- THIS SHEET DOES NOT REPRESENT THE ENTIRETY OF THE 2010 ADA CODE REQUIREMENTS.
- ALL DIMENSIONS ARE TO FINISH FACE OF PARTITION.
- THE ADA SHEET IS FOR THE CONTRACTOR'S USE AND THE ADA 2010 STANDARDS GOVERN.
- THE CONTRACTOR SHALL BRING ANY DISCREPANCIES BETWEEN THE ADA SHEET AND CONSTRUCTION DOCUMENT PLANS, SPECS AND DETAILS TO THE OWNER'S ATTENTION.
- NOT TO SCALE


CLEAR FLOOR AREA REQUIRED FOR ACCESSIBLE KITCHENS:
2010 ADA SECT. 804

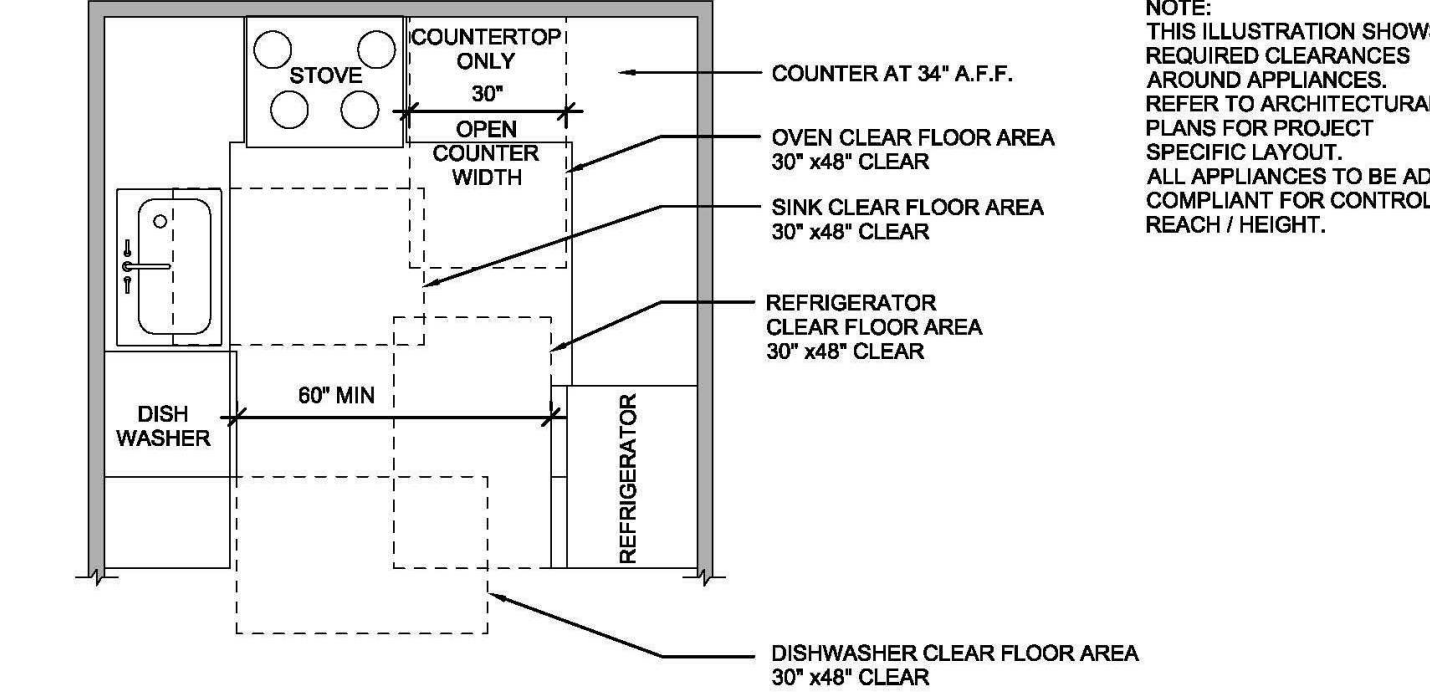


DRINKING FOUNTAINS: 2010 ADA SECT. 602

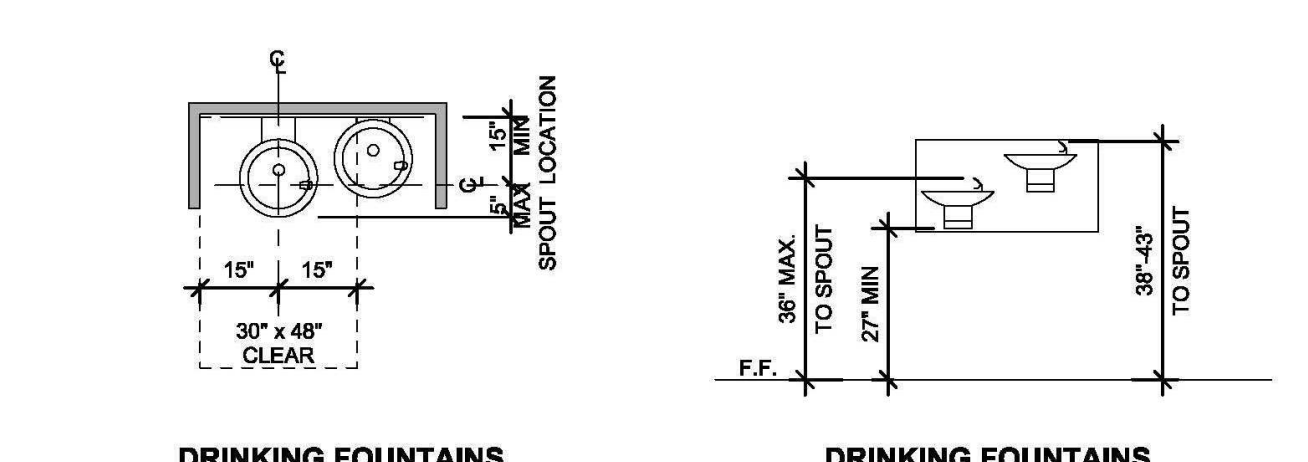

SHOWERS: 2010 ADA SECT. 608 AND ANSI SECT. 608

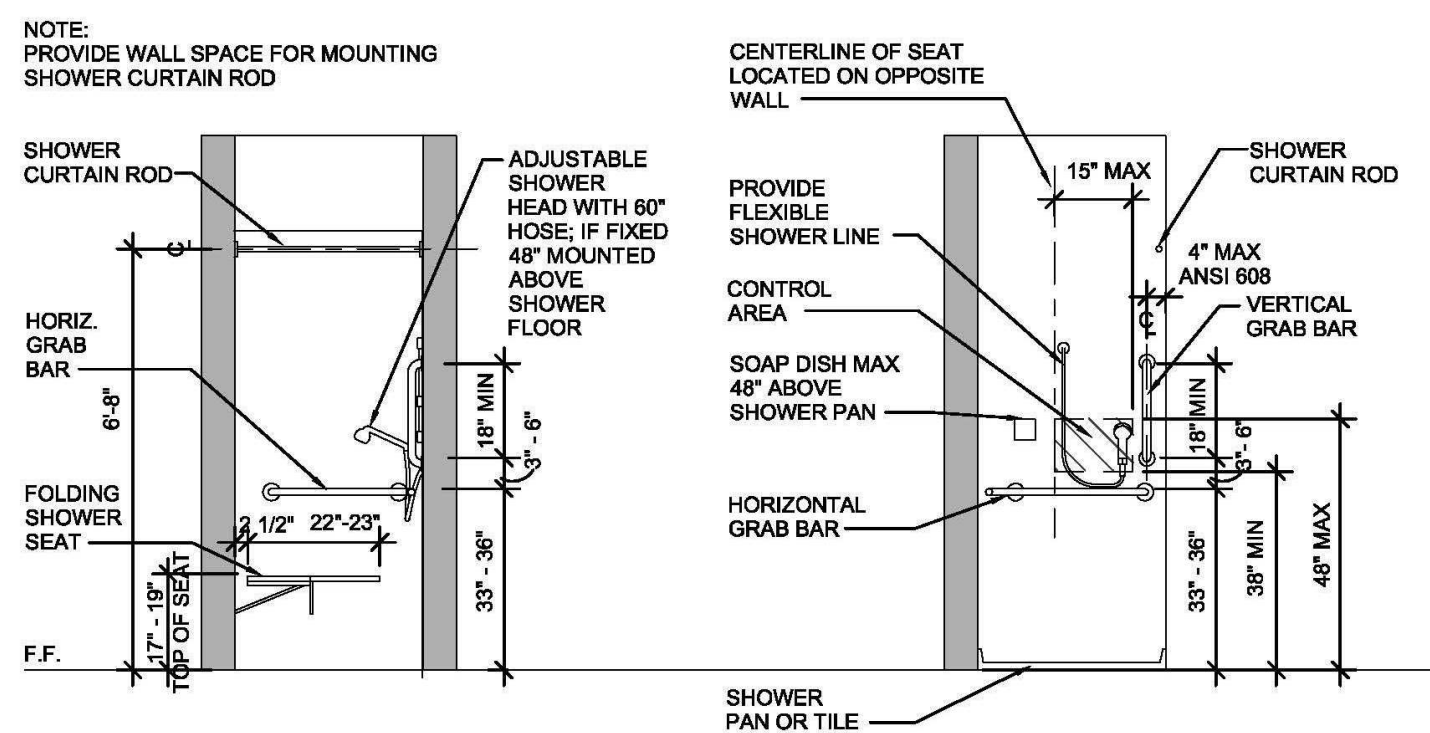


TRANSFER SHOWER BACK WALL

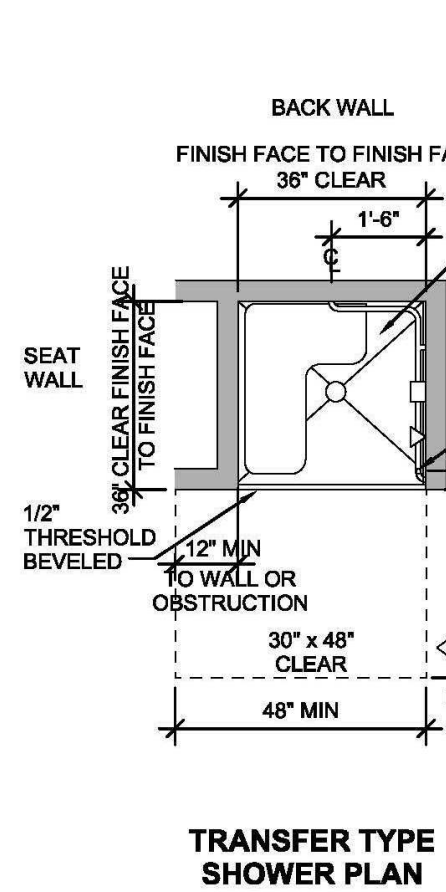


TRANSFER TYPE SHOWER PLAN

TRANSFER SHOWER CONTROL WALL

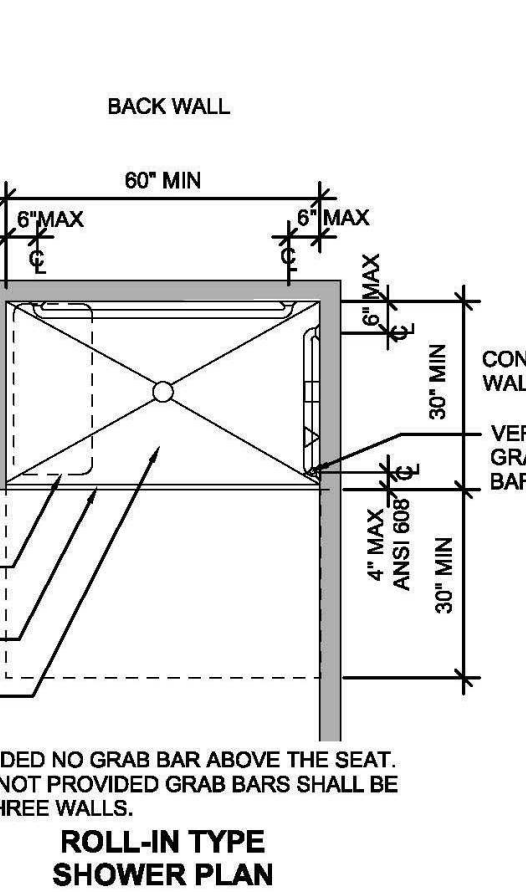

ROLL-IN TYPE SHOWER PLAN

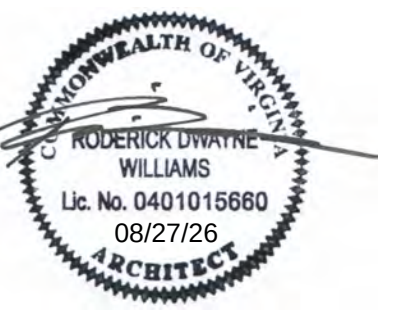

NO.	DESCRIPTION	DATE

DRAWN BY	TF
APPROVED BY	RW
CHECKED BY	RW / LP
DATE	08.26.2026
TITLE	

MINOR SITE PLAN

TOWN OF STRASBURG POLICE STATION

DISTRICT 6

SHENANDOAH COUNTY, VIRGINIA

APPLICANT/DEVELOPER/OWNER

TOWN OF STRASBURG
174 E KING ST
STRASBURG, VA 22657

RESPONSIBLE LAND DISTURBER

TBD

CIVIL ENGINEER / SURVEYOR



CONTACT: ALVARO DE LA VEGA
(703) 468-2246
adelavega@dewberry.com

SURVEY AND TOPOGRAPHIC
INFORMATION

- Horizontal and vertical control surveys were performed by DEWBERRY ENGINEERS INC. in July, 2024 (Year)
- All elevations must be referenced to the North American Vertical Datum of 1988 (NAVD 88).
- Source of topographic mapping is DEWBERRY ENGINEERS INC. dated July, 2024 (Boundary check of AECOM's ALTA)
- Boundary survey was performed by DEWBERRY ENGINEERS INC. dated July, 2024 (Boundary check of AECOM's ALTA)
- The application of the professional's seal and signature as required by Section 1.14 of the STATE BOARD OF ARCHITECTS, PROFESSIONAL ENGINEERS, LAND SURVEYORS AND CERTIFIED LANDSCAPE ARCHITECTS RULES AND REGULATIONS shall be evidence that: the boundary data is correct to the best of the land surveyor's knowledge, and complies with the minimum standards and procedures of the said Board; the topographic information is accurate to within one-half of the contour interval, as shown. Application of the seal and signature indicates acceptance of responsibility for the work shown herein.

SITE INFORMATION:


- SITE ADDRESS: 174 E KING ST STRASBURG, VA 22657
- TAX MAP/PARCEL NO.: 025A3A168
- SITE AREA: 0.549 AC.
- ZONING: CC, COMMUNITY COMMERCIAL STRASBURG HISTORIC DISTRICT

- EXISTING USE: VACANT
- PROPOSED USE: TOWN OF STRASBURG POLICE STATION

- SETBACKS:
- FRONT = 0 FT (FROM R/W)
 - REAR = 25 FT (FROM LOT LINE)
 - SIDE = 0 FT (FROM R/W)
 - SIDE = 25 FT (FROM LOT LINE)

DISTURBED AREA: 0.10 ACRES (4,115 SF)

FLOODPLAIN NOTE:
THIS PROPERTY DOES NOT FALL WITHIN ANY FLOODPLAIN ZONE AS SHOWN ON FIRM COMMUNITY PANEL # 51171C0180C
EFFECTIVE DATE: 7/16/03

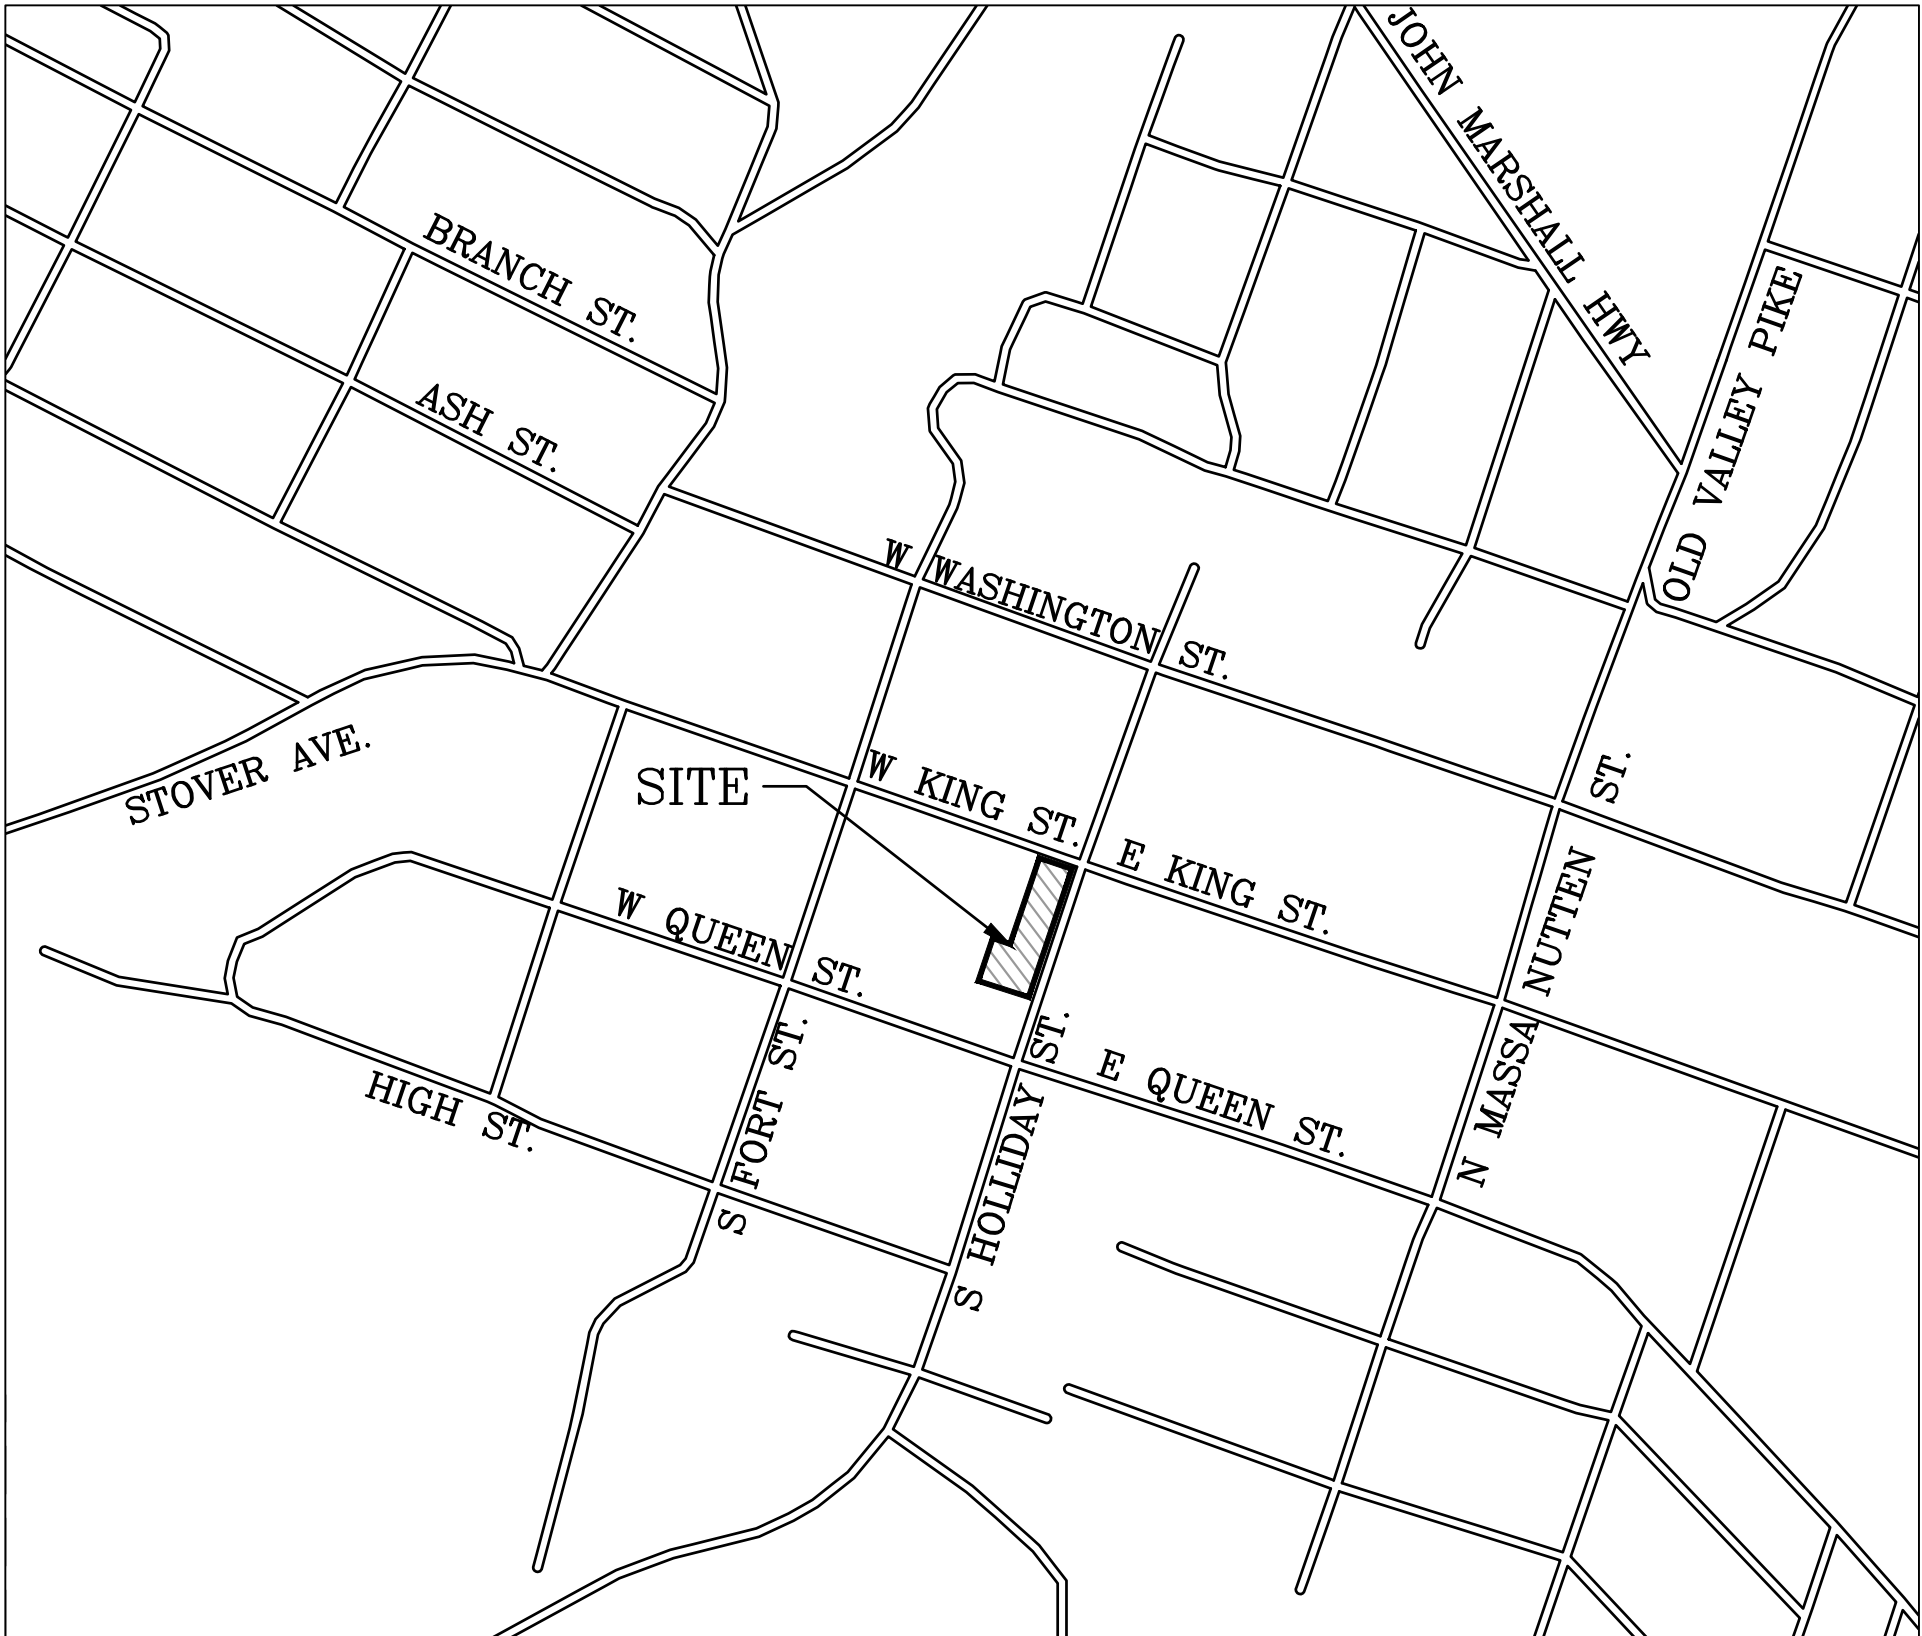

VICINITY MAP
SCALE: 1" = 400'



DATE: AUGUST 12, 2025

SHEET INDEX

- C-001.....COVER SHEET
- C-002.....EXISTING CONDITIONS & DEMOLITION PLAN
- C-003.....SITE PLAN

TOWN OF STRASBURG
APPROVALS

PLANNING DEPARTMENT
APPROVAL BLOCK

Planning and Zoning Administrator _____ Date _____
Planning Commission Approval Date _____

PUBLIC WORKS DEPARTMENT
APPROVAL BLOCK

Director of Public Works _____ Date _____

SCOPE OF APPROVAL

Pursuant to the Town of Strasburg Unified Development Ordinance, Section 2.31.8: *Scope of Approval*, this approval shall expire **FIVE (5) YEARS** from the approval date unless further extension of approval is otherwise provided by Section 15.2-2261 of the Code of Virginia. Also see the Town approval letter for additional conditions, requirements, and information.

RESPONSIBLE LAND DISTURBER
CERTIFICATION

I hereby certify that I am the certified land disturber for this project and that I have a valid certification from the Commonwealth of Virginia.

Signature _____ Date _____

Name (Print Clearly) _____

174 East King Street, Strasburg VA 22657
540-465-9197 (ph) 540-465-3252 (fax)
www.strasburgva.com

NO.	DATE	DESCRIPTION	BY
08.26.2026		ISSUE FOR BID	
1	07.01.2026	REVISED PARKING LAYOUT & FENCE LINE	
COUNTY REVISIONS			


C-001
SP-787

GENERAL NOTES:

- ALL CONSTRUCTION SHALL CONFORM TO TOWN OF STRASBURG AND VIRGINIA DEPARTMENT OF TRANSPORTATION STANDARDS AND SPECIFICATIONS.
- WHEN DURING THE COURSE OF CONSTRUCTION, ANY OBJECT OF AN UNUSUAL NATURE IS ENCOUNTERED, THE CONTRACTOR SHALL CEASE WORK IN THAT AREA AND IMMEDIATELY NOTIFY THE PROPER AUTHORITY AND/OR THE ARCHITECT/ENGINEER.
- PRIOR TO BEGINNING WORK, THE CONTRACTOR IS RESPONSIBLE TO CONTACT MISS UTILITY AND/OR A PRIVATE UTILITY LOCATING PROVIDER AS NEEDED TO MARK EXISTING UTILITIES WITHIN THE LAND DISTURBANCE AREA.
- THE EXISTING UNDERGROUND UTILITIES SHOWN HEREON ARE BASED UPON AVAILABLE INFORMATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION OF ALL UTILITIES BEFORE COMMENCING WORK AND FOR ANY DAMAGES WHICH OCCUR BY HIS FAILURE TO LOCATE OR PRESERVE THESE UNDERGROUND UTILITIES. IF DURING CONSTRUCTION OPERATIONS THE CONTRACTOR SHOULD ENCOUNTER UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER AND TAKE NECESSARY AND PROPER STEPS TO PROTECT THE FACILITY AND ASSURE THE CONTINUANCE OF SERVICE.
- TOPOGRAPHY SHOWN WAS TAKEN FROM SURVEY PREPARED BY DEWBERRY DATED JULY 2024.
- CONTROLLED FILLS SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY AS DETERMINED BY METHOD "A" PER STANDARD PROCTOR ASHTO-199, ASTM-D698, OR VTM-1 AS APPLICABLE. DENSITY SHALL BE CERTIFIED BY A THIRD PARTY TESTING AGENCY.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO HIRE A GEOTECH TO ANALYZE THE EXISTING SOIL CONDITIONS AND DETERMINE IF SOIL IMPORTS AND/OR EXPORTS ARE NECESSARY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY REQUIRED SOIL IMPORTS OR EXPORTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY UNDERCUTTING AND REPLACEMENT OF SOILS NECESSARY UP TO A FOOT BELOW PROPOSED GRADES.
- ALL FINISHED GRADING, SEEDING, SODDING OR PAVING SHALL BE DONE IN SUCH A MANNER TO PRECLUDE THE PONDING OF WATER ON THE SITE PARTICULARLY ADJACENT TO SWALES & STORM INLETS.
- AN APPROVED SET OF PLANS AND ALL APPLICABLE PERMITS MUST BE AVAILABLE AT THE CONSTRUCTION SITE. ALSO, A REPRESENTATIVE OF THE CONTRACTOR MUST BE AVAILABLE AT ALL TIMES.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO CLEAN AND FLUSH ALL STREETS, SIDEWALKS, AND STORM SEWER SYSTEMS AS NECESSARY DURING AND AFTER CONSTRUCTION. ALL SEDIMENT REMOVAL SHALL BE PERFORMED IN ACCORDANCE WITH TOWN OF STRASBURG REQUIREMENTS AND THE VESCH.
- THE CONTRACTOR SHALL PROVIDE CONTRACTION/CONTROL JOINTS AT EQUALLY SPACED INTERVALS NO GREATER THAN 5'. THE CONTRACTOR SHALL PROVIDE ISOLATION JOINTS ALONG RETAINING WALLS, CURB AND GUTTER, STORM SEWER STRUCTURES AND EXISTING CONCRETE AS NECESSARY TO ENSURE PROPER EXPANSION, CONTRACTION, AND MOVEMENT OF THE CONCRETE.
- EXISTING PARKING LOT TO BE USED AS STAGING AREA. IF REQUIRED, THE CONTRACTOR WILL PROVIDE NECESSARY E&S MEASURES FOR STAGING AREA.
- INSTALL SILT FENCE AROUND THE LIMITS OF CONSTRUCTION AND ALONG CURB AS NEEDED.
- THE CONTRACTOR SHALL PROVIDE DESIGNATED CONCRETE WASH-OUT AREA ONSITE.
- THE OWNER RESERVES THE RIGHT TO HIRE A LICENSED MATERIALS TESTING AGENCY, SUPPORTED BY A REGISTERED PROFESSIONAL ENGINEER TO PROVIDE ONSITE INSPECTIONS, CONCRETE TESTING AND VERIFY IN THE FIELD THAT ALL BACKFILL AND PAVEMENT HAS BEEN PLACED WITH PROPER NUMBER OF LAYERS AND THICKNESS AND COMPACTED IN ACCORDANCE WITH THE PLANS.
- PER ADA STANDARDS FOR ACCESSIBLE DESIGN, THESE MAXIMUM SLOPES SHALL NOT BE EXCEEDED:
FOR ACCESSIBLE ROUTES:
 - RUNNING SLOPE NOT TO EXCEED 5.0%
 - CROSS SLOPE NOT TO EXCEED 2.0%
 - RAMP RUNNING SLOPE NOT TO EXCEED 8.33%PARKING SPACES AND ACCESS AISLES SERVING THEM NOT TO EXCEED 2.0% IN ANY DIRECTION.
- ACCESS TO S HOLIDAY ST. & W KING ST. FOR ADJACENT PROPERTIES MUST BE MAINTAINED AND AVAILABLE AT ALL TIMES.



DEMOLITION NOTES:



- ALL DEMOLITION ACTIVITIES AND DISPOSAL OF DEBRIS SHALL COMPLY WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL REGULATIONS.
- THE CONTRACTOR SHALL VISIT THE SITE TO VERIFY EXISTING SITE CONDITIONS AND GET FAMILIAR WITH DEMOLITION WORK. ALL DEMOLITION WORK SHOWN IN THIS PLAN WILL BE PERFORMED BY THE CONTRACTOR. THE CONTRACTOR IS RESPONSIBLE FOR NOTIFYING THE ENGINEER OF RECORD OF ANY DISCREPANCIES BETWEEN THIS PLAN AND THE ACTUAL FIELD CONDITIONS PRIOR TO COMMENCING DEMOLITION.
- THE CONTRACTOR SHALL NOT INTERRUPT EXISTING UTILITIES SERVICING ADJACENT PROPERTIES DURING THE DEMOLITION WORK. IF A UTILITY INTERRUPTION IS REQUIRED THE CONTRACTOR SHALL COORDINATE THE INTERRUPTION WITH THE UTILITY COMPANY AND SHALL ISSUE PROPER NOTIFICATION TO ADJACENT USER/OWNER.
- CONTRACTOR SHALL ERECT ALL NECESSARY PROTECTIVE DEVICES AROUND THE LIMITS OF CONSTRUCTION AND PROVIDE PEDESTRIAN AND VEHICULAR TRAFFIC CONTROL MEASURES DURING CONSTRUCTION AS NEEDED.
- CONTRACTOR IS RESPONSIBLE FOR CONTACTING MISS UTILITY PRIOR TO DEMOLITION OR EXCAVATION.

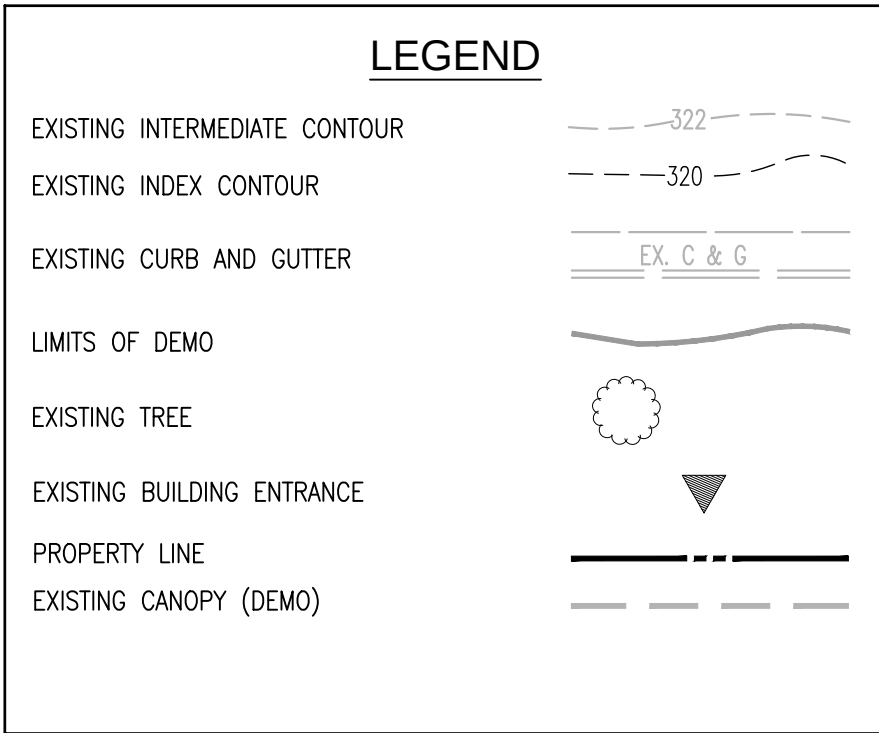

SITE INFORMATION:

- SITE ADDRESS: 174 E KING ST STRASBURG, VA 22657
- TAX MAP: PARCEL NO.: 025A3A168
- SITE AREA: 0.549 AC.
- ZONING: CC, COMMUNITY COMMERCIAL STRASBURG HISTORIC DISTRICT
- EXISTING USE: VACANT
- PROPOSED USE: TOWN OF STRASBURG POLICE STATION
- DISTURBED AREA: 0.10 ACRES (4,115 SF)


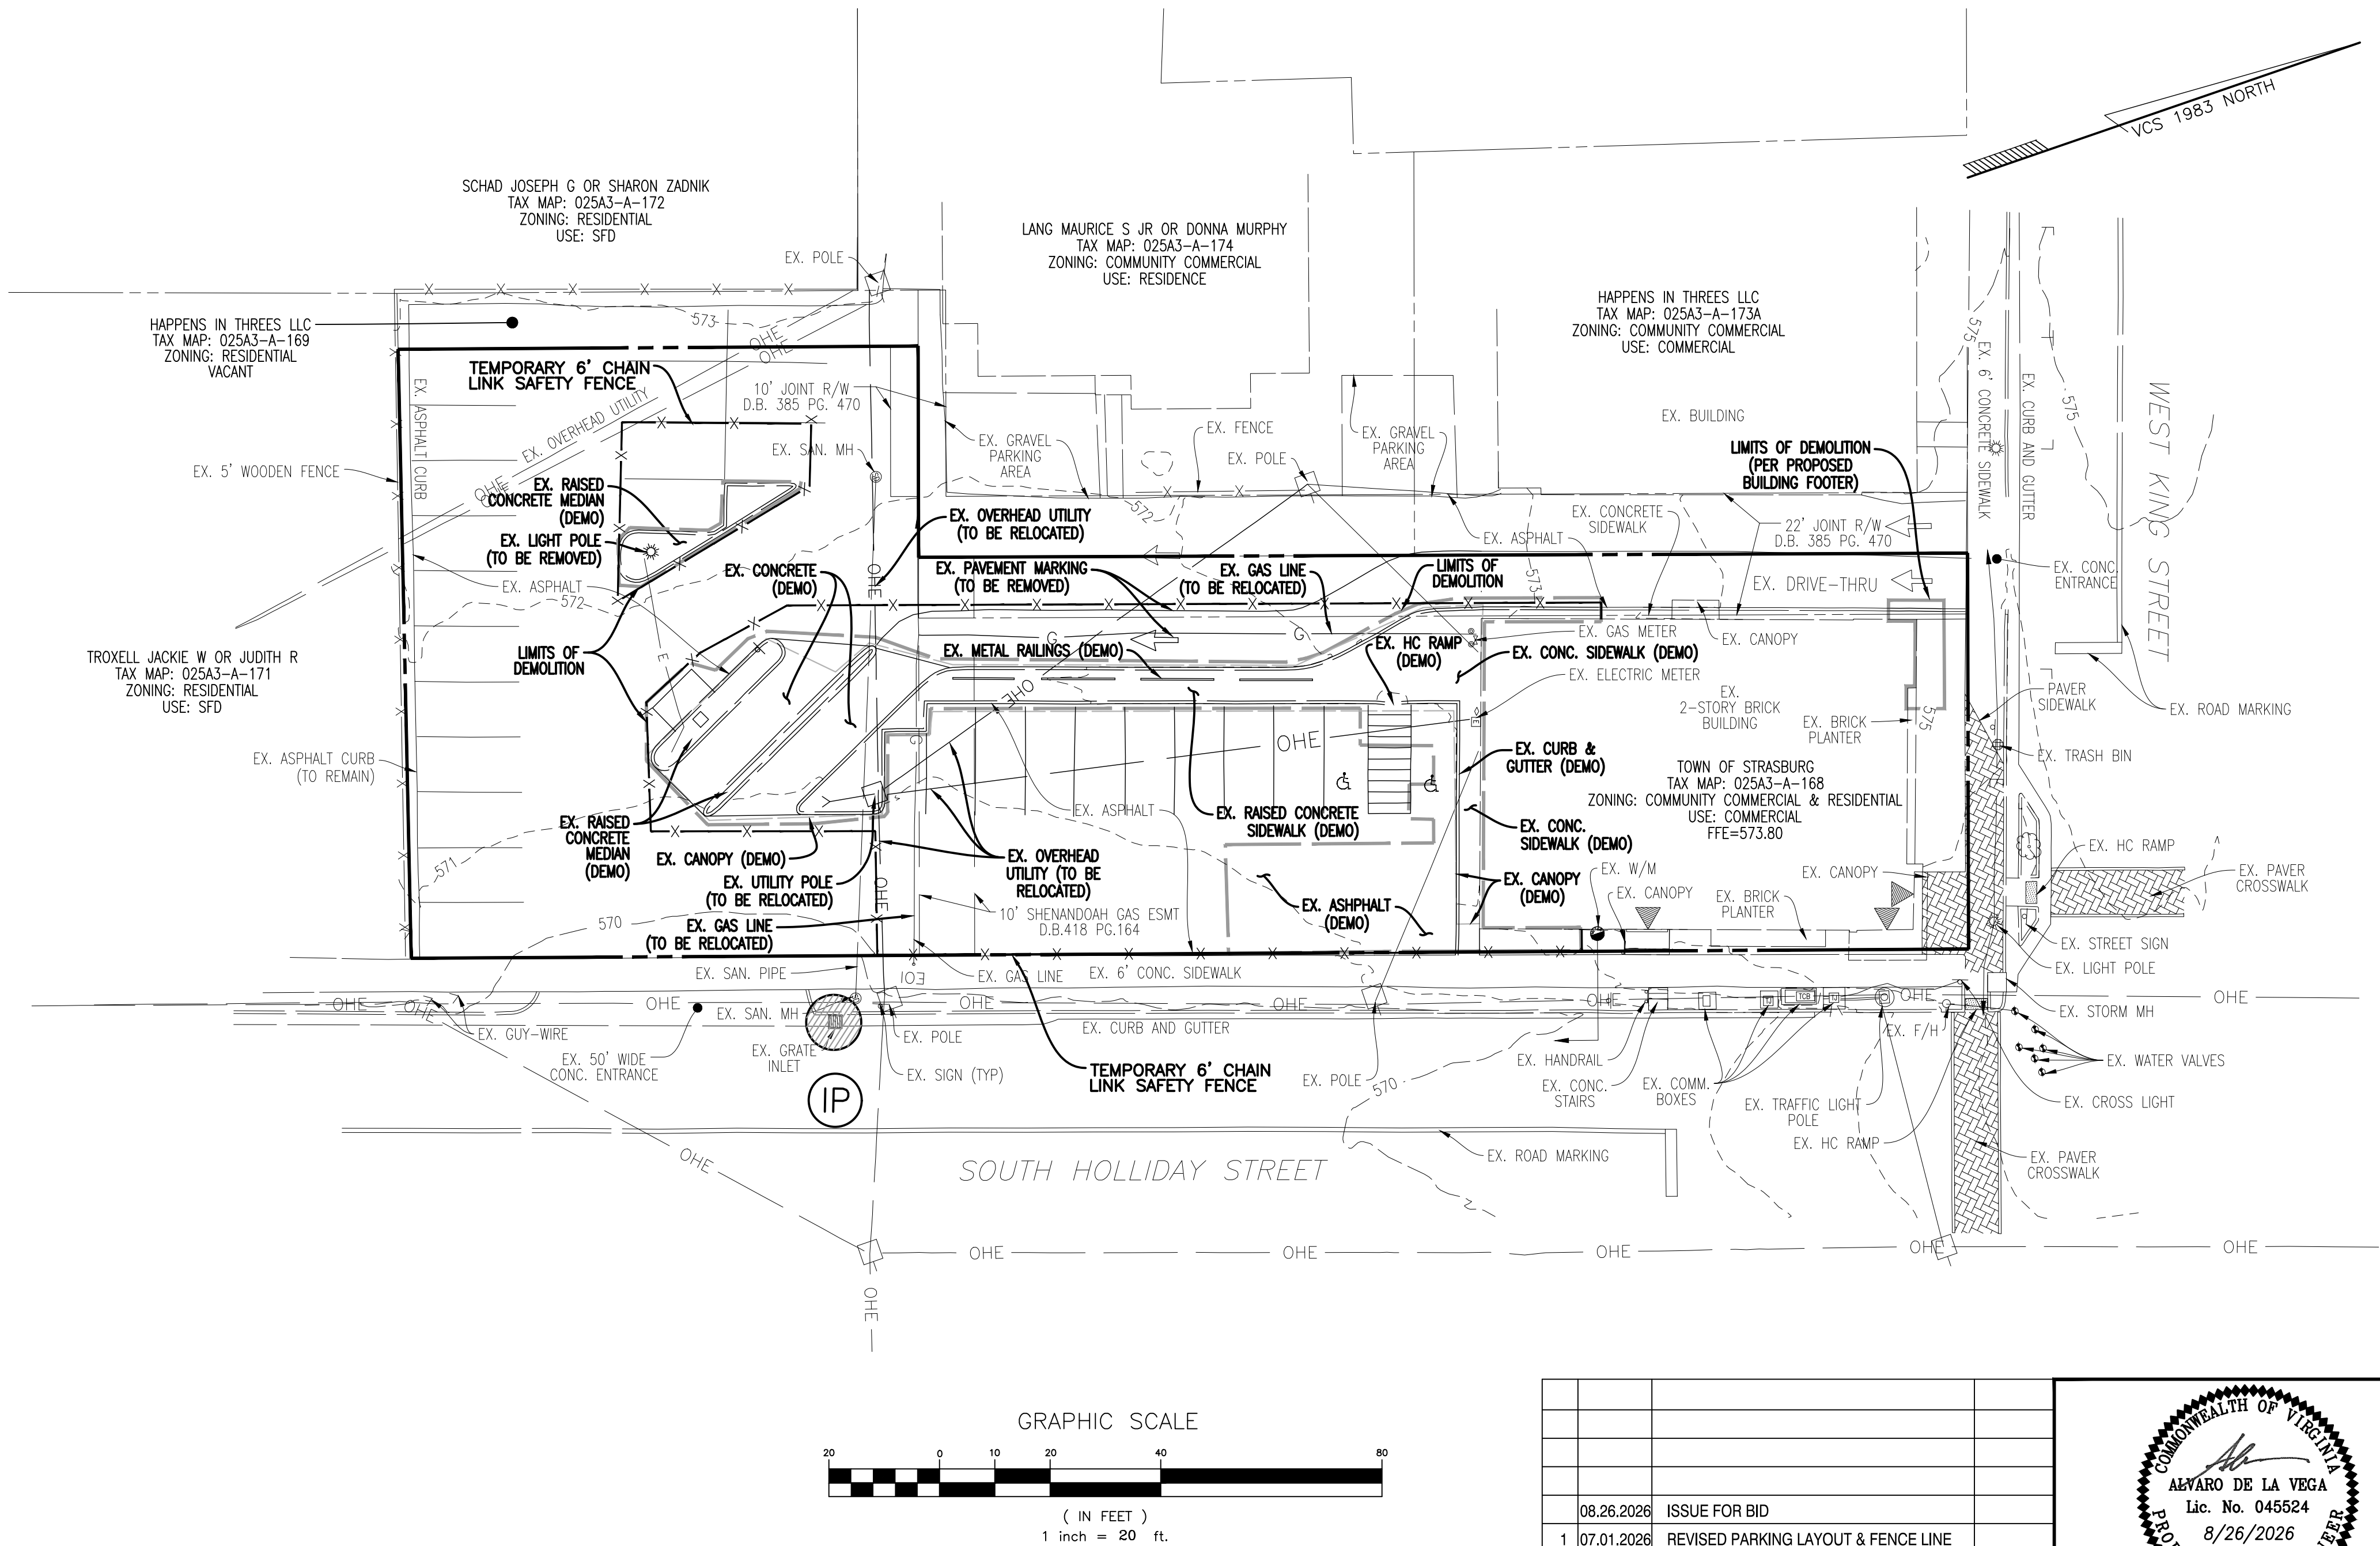
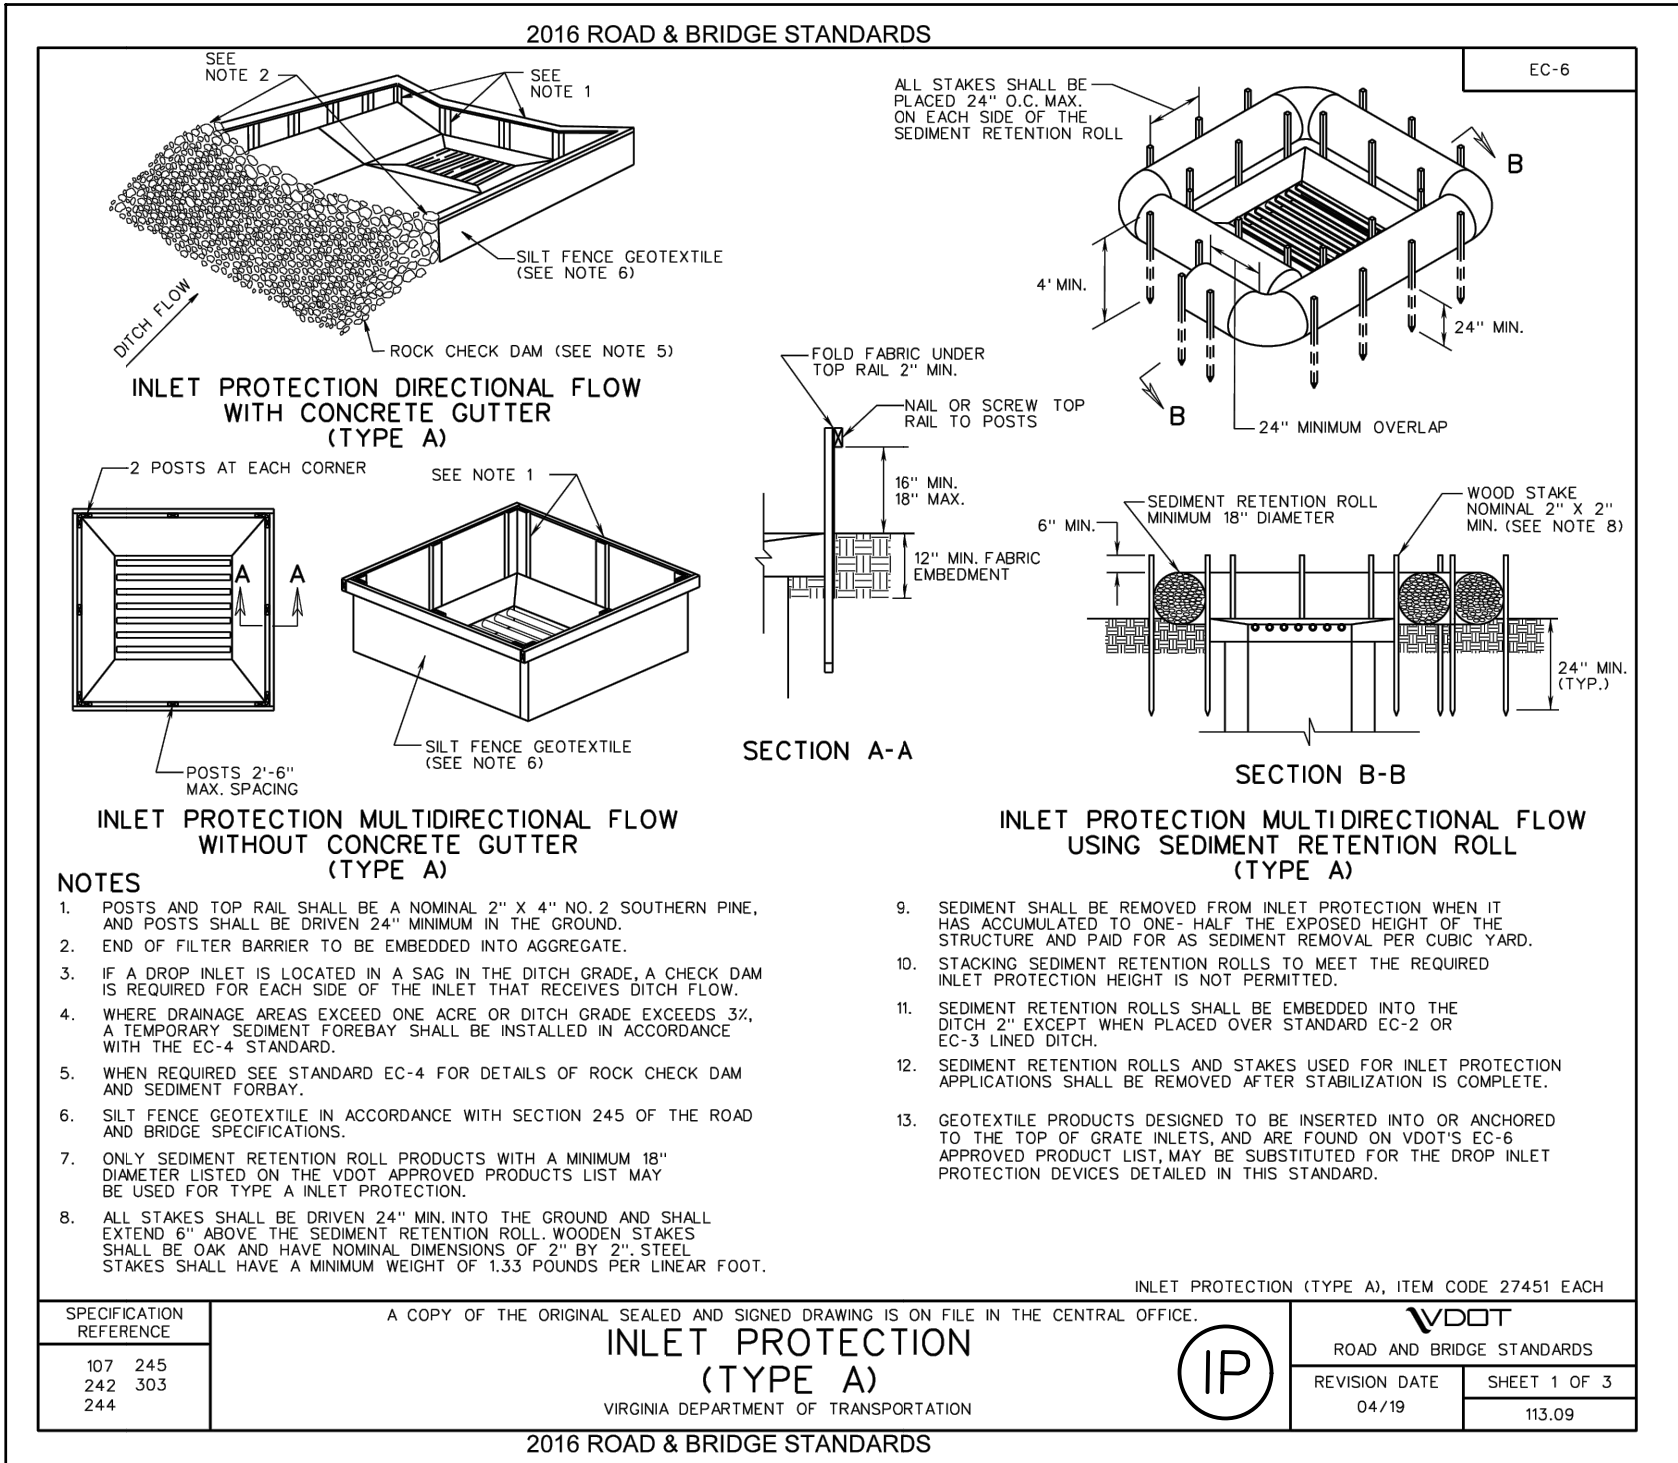


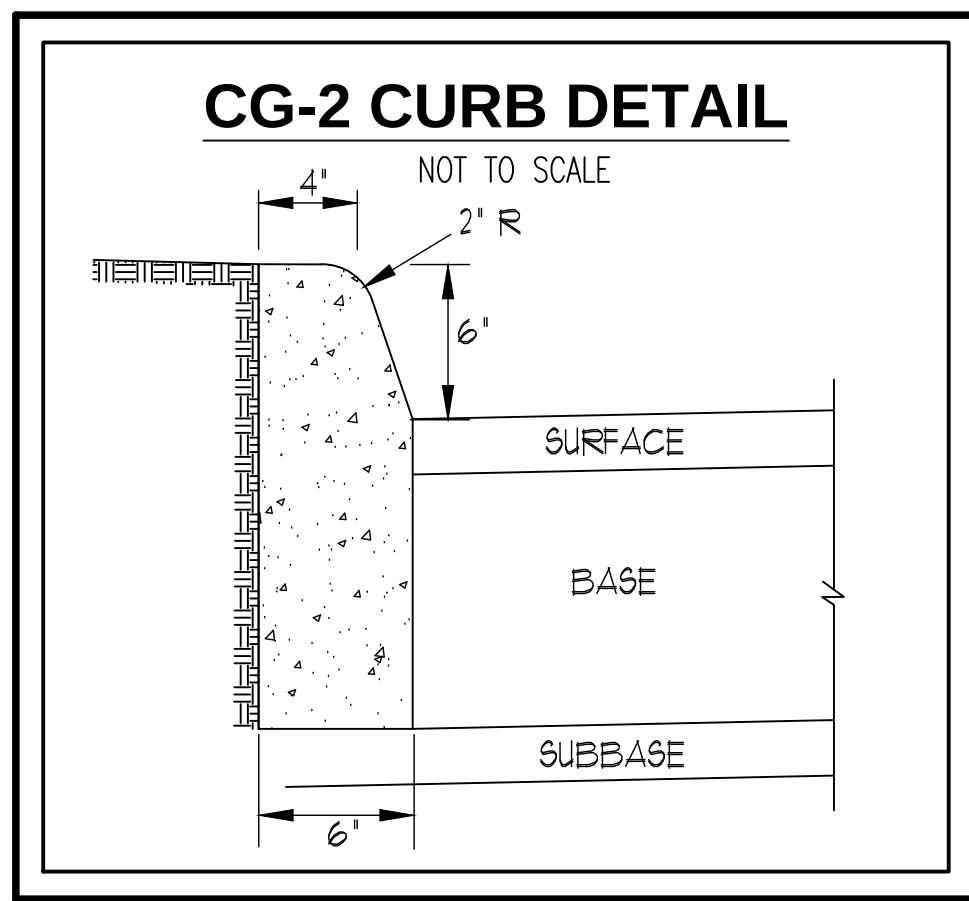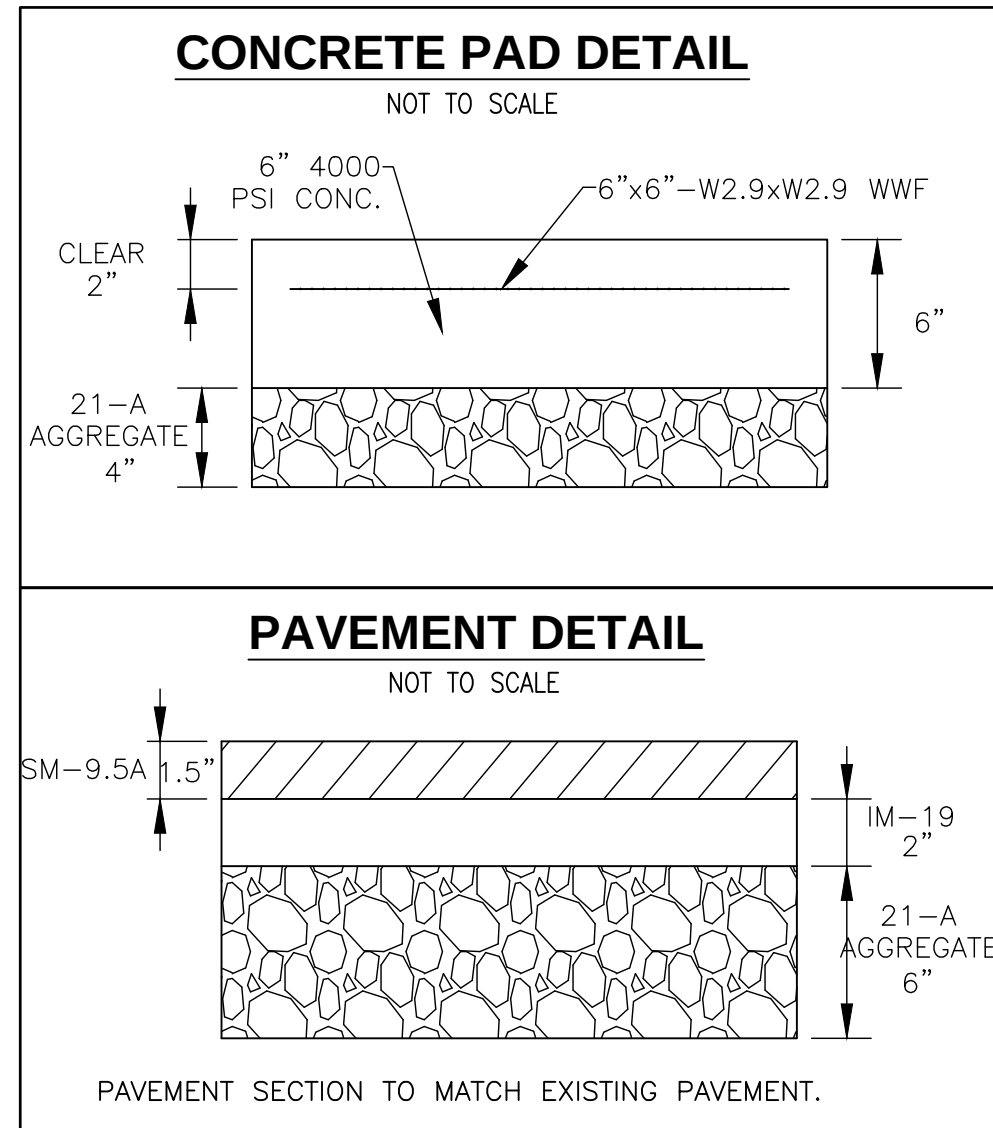



PARKING TABULATION:

	EXISTING	ULTIMATE
STANDARD SPACES	28	32
HANDICAP SPACES	0	0
H.C. VAN ACCESS SPACES	2	2
TOTAL SPACES	30	34
NET = 4 ADDITIONAL SPACES		

SITE PLAN

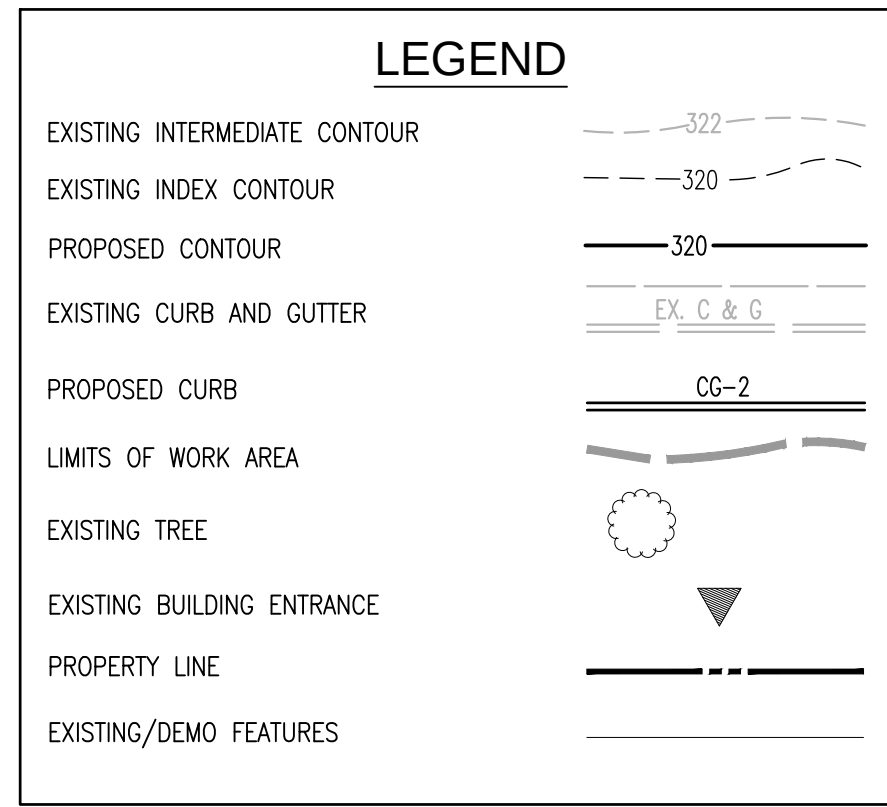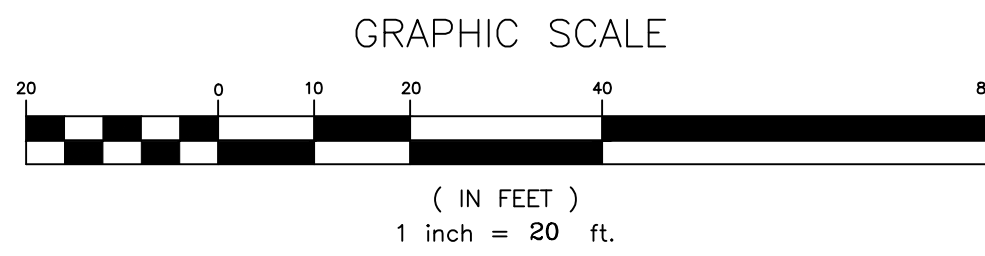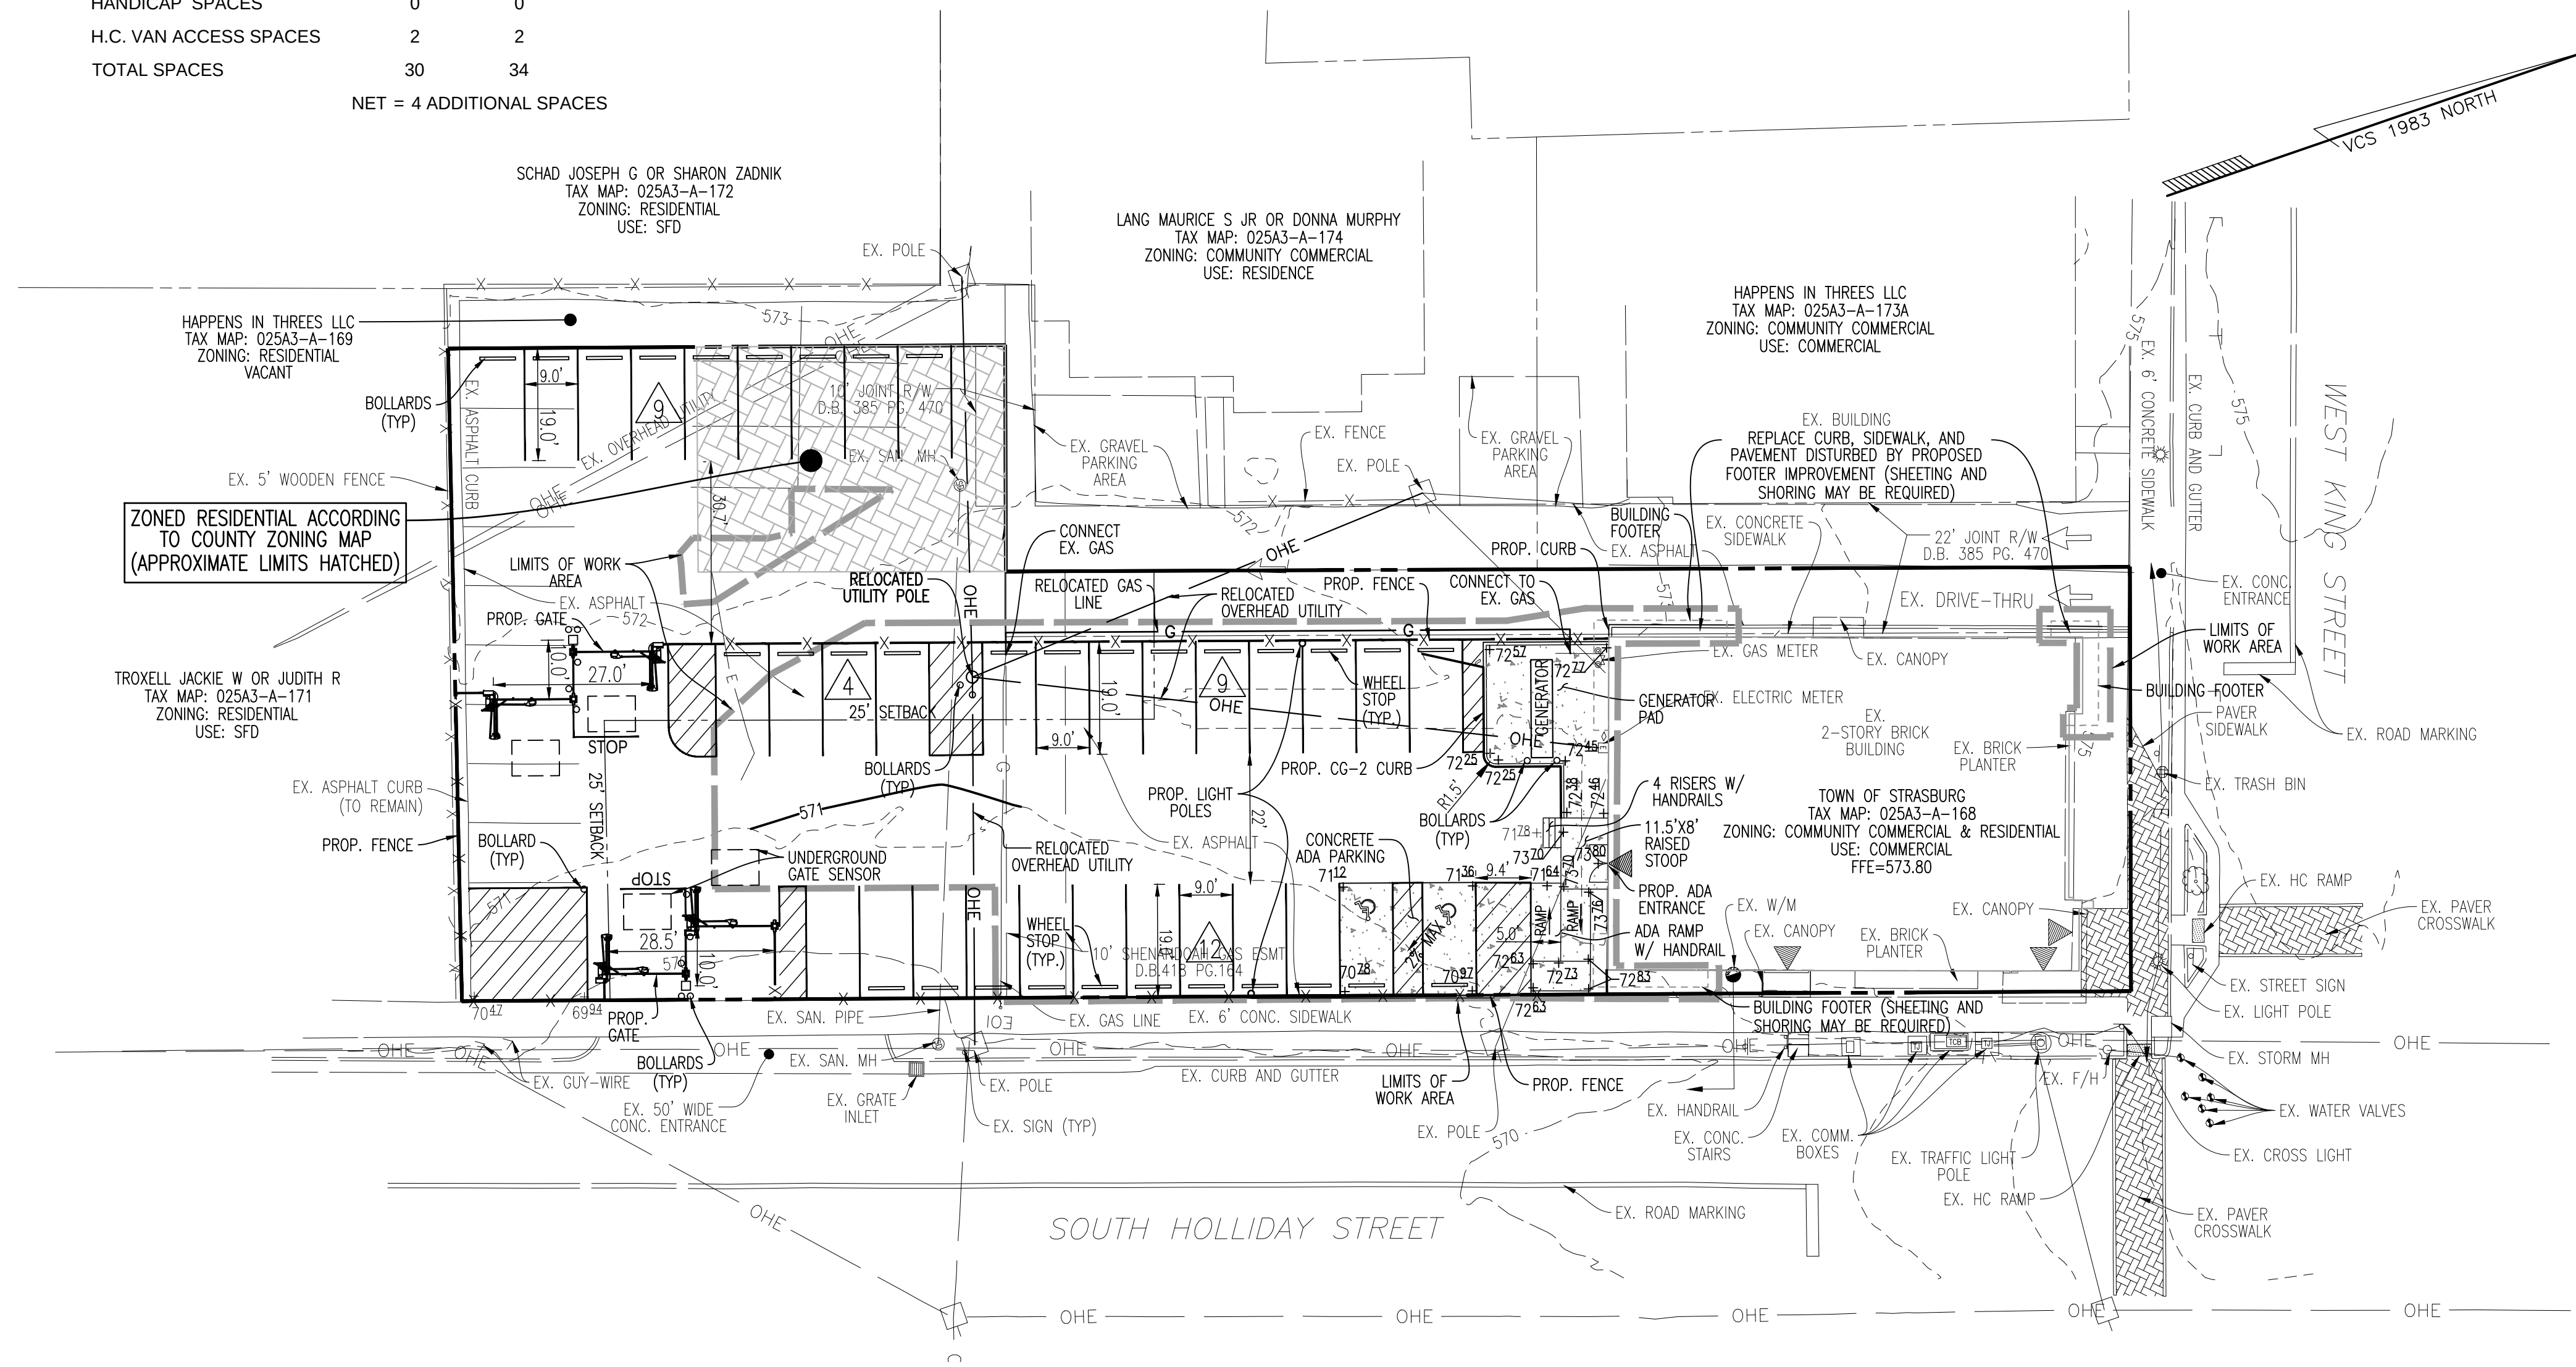

PAVEMENT & PAVEMENT MARKING PLAN

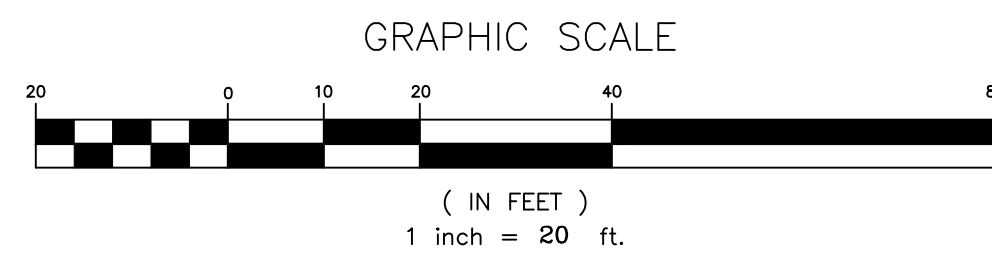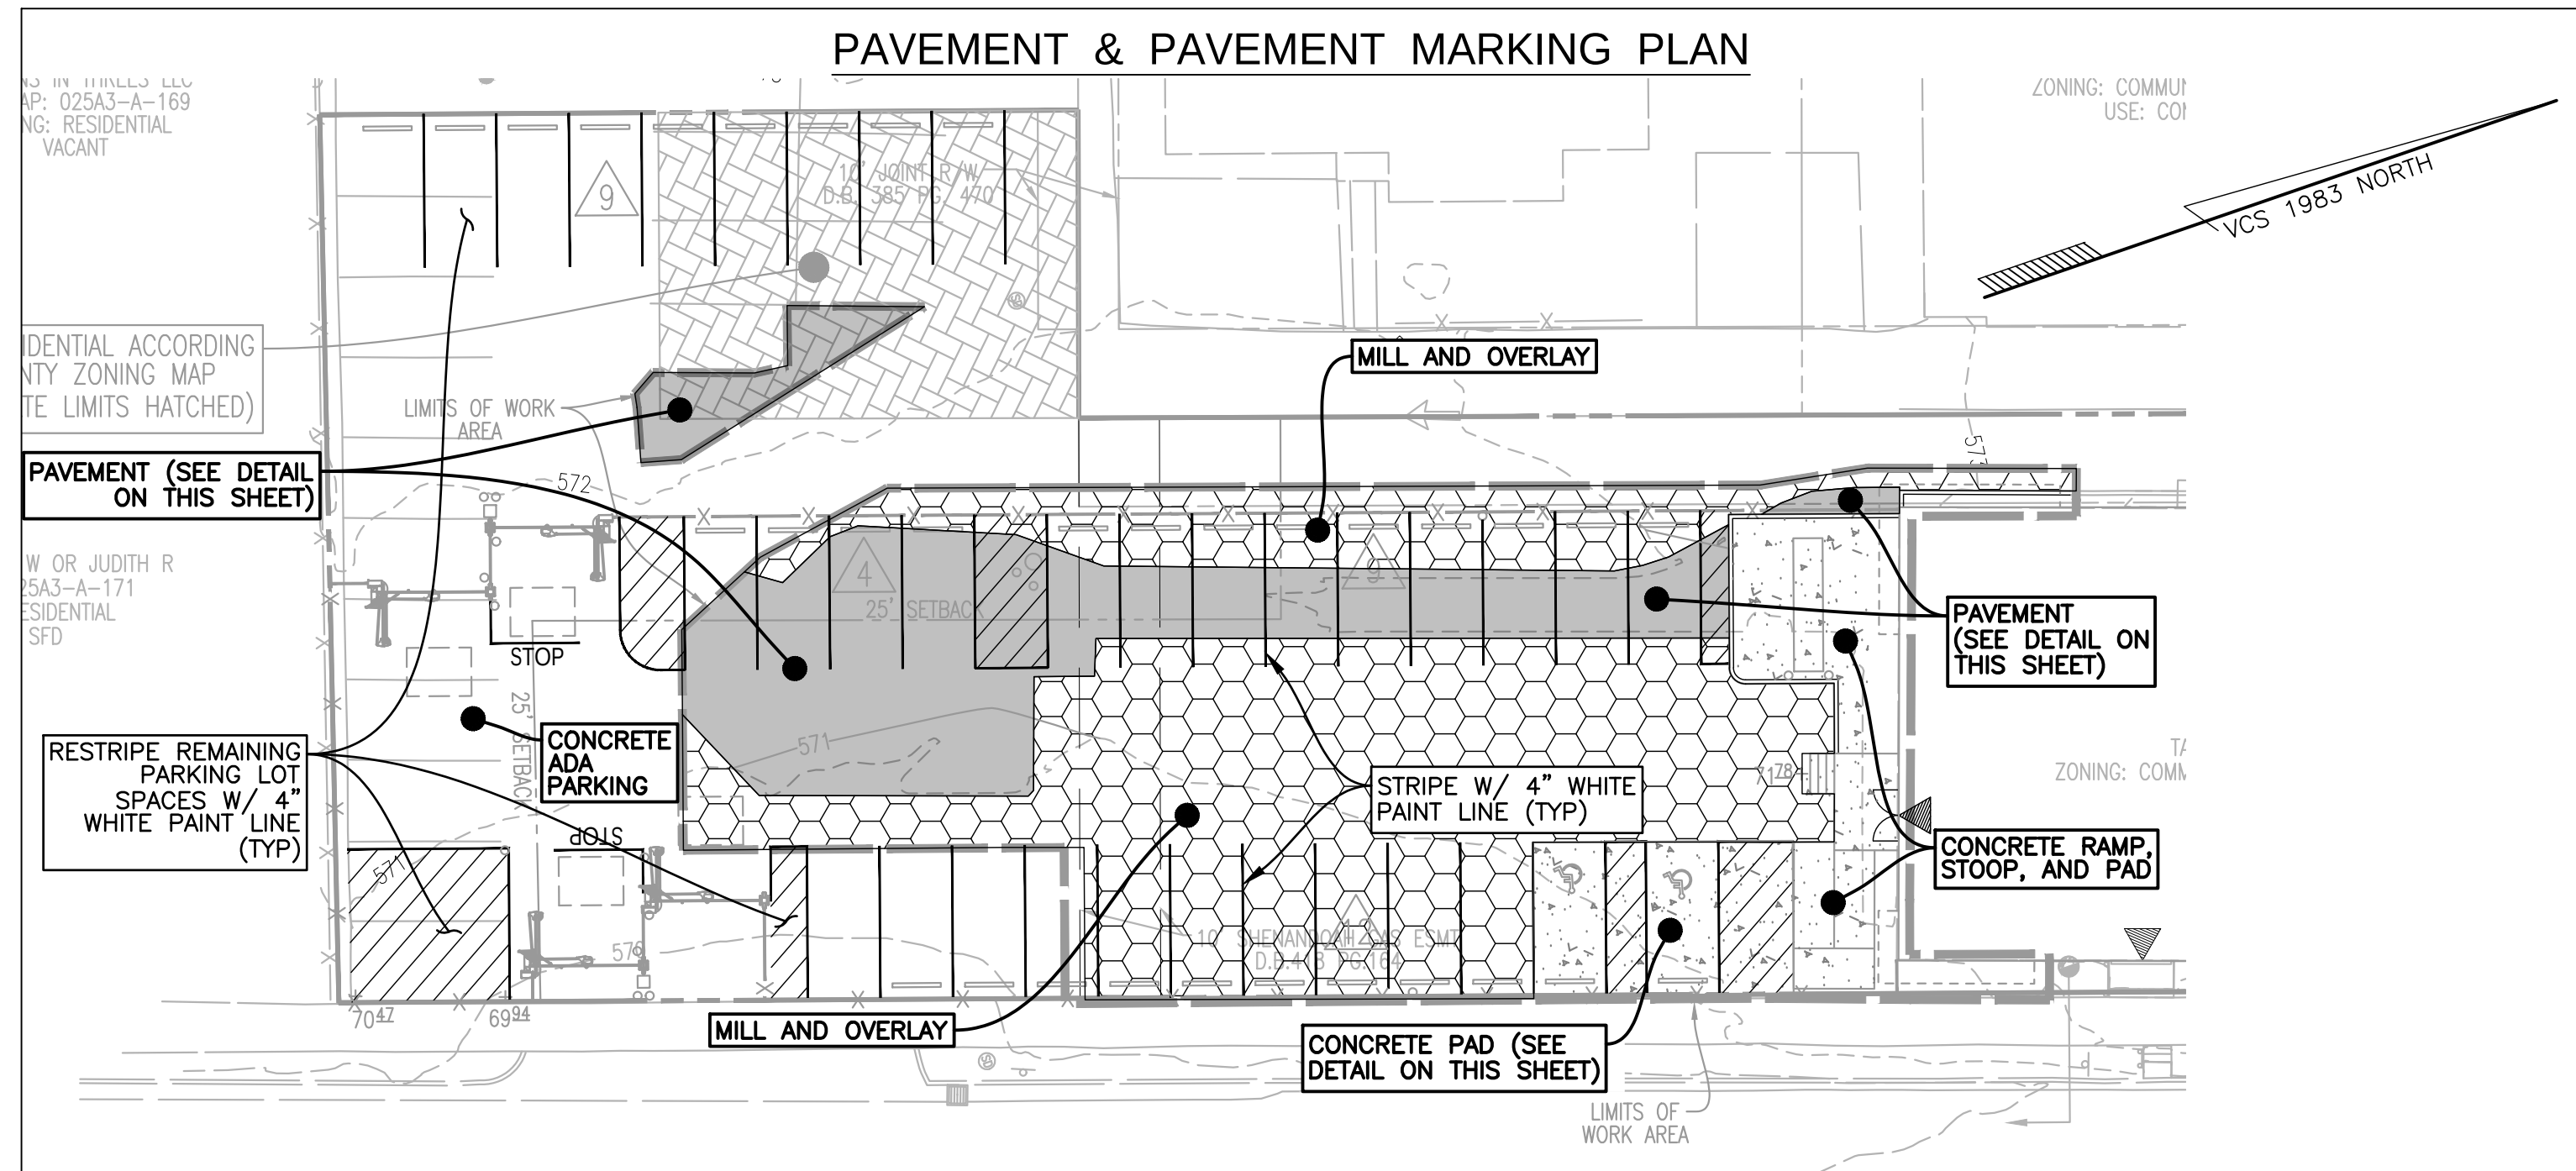

3.12 Community Commercial (CC) District

3.12.1 Purpose

Generally, this district covers that portion of the community intended for the conduct of general business to which the public requires direct and frequent access, but which is not characterized either by constant heavy trucking other than stocking and delivery of light retail goods, or by any nuisance factors other than occasioned by incidental light and noise of or congregation of people and passenger vehicles. It is intended for retail trade and convenience services providing neighborhood shopping accommodations. Businesses which generate traffic in volumes beyond local traffic capacity are generally not included in this district. Lots within this district are generally located on major streets near intersections. Residential uses are generally not included in this district, but may be if designed as a coordinated mixed use development.

3.12.2 Density, Intensity and Dimensional Standards

A. CC District Lot Development Standards

Development Element	Standard
Lot Size, Commercial Use (minimum)	none
Front Yard Setback (minimum, from right-of-way)	none
Side Yard Setback (minimum, from lot line, if adjacent to residential district)	25'
Side Yard Setback (minimum, from right-of-way)	none
Rear Yard Setback (minimum, from lot line, if adjacent to residential district)	25'
Frontage (minimum)	none
Building Height (maximum)	45'
Lot Coverage (maximum)	none

Adopted -- July 15, 2014 | Updated -- December 8, 2015

153

Dewberry
1515 WEST HOLLIDAY STREET
SUITE 130
STRASBURG, VA 22657
PHONE: 703.468.2211
FAX: 703.468.2212
Dewberry
Engineers Inc.

SITE PLAN

STRASBURG POLICE STATION
Town of Strasburg, Virginia

Plan Number
Drawn By CW
Designed By CW
Checked By
Date 08/19/2025
Scale 1" = 20'
Sheet
C-003
File Number
SP-787



NO.	DATE	DESCRIPTION	BY
1	08.26.2025	ISSUE FOR BID	
1	07.01.2025	REVISED PARKING LAYOUT & FENCE LINE	
REVISIONS			

F

E

D

C

B

A

STRUCTURAL ABBREVIATION LIST

#	NUMBER	J.B.	JOIST BEARING
A.F.F.	ABOVE FINISHED FLOOR	KSI	KIPS PER SQUARE INCH
A.H.U.	AIR HANDLING UNIT	LLH	LONG LEG HORIZONTAL
ARCH.	ARCHITECTURAL	LLV	LONG LEG VERTICAL
B.S.	BOTH SIDES	MAX.	MAXIMUM
BOT.	BOTTOM	MECH.	MECHANICAL
C=	CAMBER	MIN.	MINIMUM
CF	CUBIC FOOT	MPH	MILES PER HOUR
CLR.	CLEAR	N.T.S.	NOT TO SCALE
COL.	COLUMN	NO.	NUMBER
CONC.	CONCRETE	O.C.	ON CENTER
CONC.	CONCRETE	PSF	POUNDS PER SQUARE FOOT
DET.	DETAIL	STRU.	STRUCTURAL
DIA.	DIAMETER	R	RADIUS
DIM.	DIMENSION	REINF.	REINFORCING
EA.	EACH	REQ'D	REQUIRED
ELEV.	ELEVATION	S.S.	STAINLESS STEEL
EQ.	EQUAL	SIM	SIMILAR
EQUIP.	EQUIPMENT	STD.	STANDARD
EXIST.	EXISTING	STRU.	STRUCTURAL
EXP.	EXPANSION	T.O.S.	TOP OF STEEL
EXT.	EXTERIOR	TS	TUBE STEEL
FIN.	FINISH	TYP.	TYPICAL
FTG.	FOOTING	U.N.O.	UNLESS NOTED OTHERWISE
GA.	GAUGE	V.I.F.	VERIFY IN FIELD
GALV.	GALVANIZED	VERT.	VERTICAL
HORIZ.	HORIZONTAL	W.P.	WORK POINT
HSS	HOLLOW STRUCTURAL SECTION	W.W.F.	WELDED WIRE FABRIC
INT.	INTERIOR		

LINTEL SCHEDULE


- UNLESS OTHERWISE NOTED ON THE DRAWINGS, USE THE FOLLOWING SCHEDULE FOR LINTELS AND HEADERS IN NEW MASONRY CONSTRUCTION.
- OPENINGS FOR ROUND DUCTS, PIPING, AND ELEC. CONDUIT ARE NOT SHOWN. SLEEVE OPENINGS BETWEEN 4 AND 12 INCHES IN DIAMETER WITH SCHEDULE 40 STEEL PIPE PER THE COORDINATION SECTION OF THE GENERAL NOTES.
 - MINIMUM BEARING FOR MASONRY LINTELS IS 8". FILL CMU CELLS BELOW BEARING WITH 3,000 PSI GROUT AND REINFORCE PER CMU WALL SCHEDULE.
 - REINFORCE JAMB BELOW CMU BOND BEAM LINTEL BEARING WITH TYPICAL REQUIRED WALL REINFORCING.
 - MINIMUM BEARING FOR SINGLE BENT PLATE LINTELS IS 8".
 - STEEL ANGLE LOOSE LINTELS IN EXTERIOR MASONRY WALLS SHALL BE HOT-DIPPED GALVANIZED.
 - SEE DETAIL FOR LINTELS IN EXISTING EXTERIOR WALLS.

4" BRICK LOOSE LINTELS

- FOR CLEAR SPANS LESS THAN OR EQUAL TO 4'-0", USE 3/8" x 7-1/4" x 4" BENT PLATE (LLH).
- FOR CLEAR SPANS GREATER THAN 4'-0" AND LESS THAN 8'-0", USE 3/8" x 7-1/4" x 6" BENT PLATE (LLH).

8" CMU WALLS

- FOR CLEAR SPANS LESS THAN OR EQUAL TO 4'-0", PROVIDE AN 8" DEEP BOND BEAM LINTEL WITH (2) #4 BARS TOP AND BOTTOM.
- FOR CLEAR SPANS GREATER THAN 4'-0" AND LESS THAN 8'-0", PROVIDE A 16" DEEP BOND BEAM LINTEL WITH (2) #5 BARS TOP AND BOTTOM.
- FOR CLEAR SPANS GREATER THAN 8'-0" AND LESS THAN 12'-0", PROVIDE A 24" DEEP BOND BEAM LINTEL WITH (2) #6 BARS TOP AND BOTTOM.

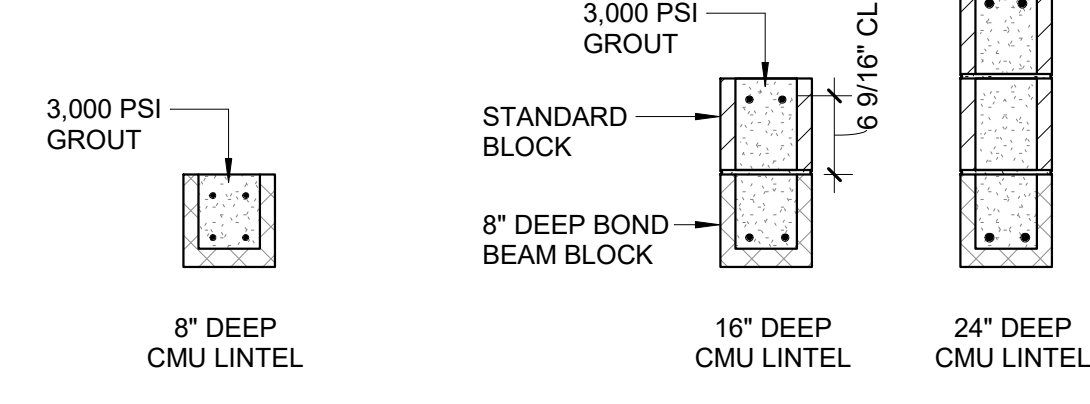

REBAR SPLICE AND HOOK SCHEDULE

REBAR SPLICE AND HOOK DIMENSIONS IN REINF. CONCRETE F _c = 3,000 PSI						REBAR SPLICE AND HOOK DIMENSIONS IN REINF. CONCRETE F _c = 4,000 PSI					
ASTM BAR SIZE	LD	CLASS B LAP	TOP BAR LAP	LDH		ASTM BAR SIZE	LD	CLASS B LAP	TOP BAR LAP	LDH	
#3	12"	13"	17"	9"		#3	12"	12"	16"	8"	
#4	14"	18"	24"	11"		#4	12"	15"	20"	10"	
#5	17"	22"	29"	14"		#5	15"	19"	25"	12"	
#6	20"	26"	34"	17"		#6	18"	23"	30"	15"	
#7	32"	41"	54"	20"		#7	28"	36"	47"	17"	
#8	42"	54"	71"	22"		#8	36"	47"	62"	19"	

REBAR SPLICE AND HOOK DIMENSIONS IN REINF. CMU WALLS AND BOND BEAMS			
ASTM BAR SIZE	LD	LAP	LDH
#3	13-1/2"	19"	4-1/2"
#4	18"	25"	6"
#5	22-1/2"	31"	7-1/2"
#6	27"	54"	8-1/2"

NOTES:

TOP BAR - DEFINED AS A BAR LOCATED SUCH THAT 12" OF MORE OF FRESH CONCRETE IS CAST IN THE MEMBER BELOW THE SPLICE.

MINIMUM OUTSIDE RADIUS OF BEND, R, SHALL BE 4 db.

LD - STANDARD DEVELOPMENT LENGTH OF BAR (CLASS "B" LAP AND TOP BAR LAP)

LDH - STANDARD DEVELOPMENT LENGTH OF HOOK

F_c - SPECIFIED COMPRESSIVE STRENGTH OF CONCRETE

db - BAR DIAMETER PER ASTM

BUILDING LOADS AND FACTORS PER 2021 VIRGINIA CONSTRUCTION CODE

DEAD LOADS			
SECOND FLOOR (ASSUMED)			30 PSF
ROOF (ASSUMED)			15 PSF
SUSPENDED COLLATERAL LOAD SECOND FLOOR			10 PSF
SUSPENDED COLLATERAL LOAD ROOF			10 PSF
LIVE LOADS			
GROUND FLOOR			100 PSF
SECOND FLOOR			65 PSF
ROOF			20 PSF
ROOF SNOW LOAD			
GROUND SNOW (P _g) (COUNTY WEBSITE)			100 PSF
FLAT ROOF SNOW (P _f)			84.0 PSF
EXPOSURE FACTOR (E _s)			1.0
SNOW IMPORTANCE FACTOR (I)			1.2
THERMAL FACTOR (C _t)			1.0
WIND LOAD DESIGN DATA			
BASIC WIND SPEED (3 SEC. GUST)			123 MPH
RISK FACTOR			IV
WIND EXPOSURE			B
INTERNAL PRESSURE COEFFICIENT			+/- 0.18
WIND COMPONENT AND CLADDING PRESSURES			
BUILDING COMPONENT	SURFACE	EFFECTIVE AREA (SF)	MAXIMUM PRESSURE (PSF)
WALL	4	10	-28.1
		500	-21.5
	5	10	-34.7
ROOF		500	-21.5
	1	10	-25.9
		100	-23.7
		10	-43.4
	2	100	-28.1
		10	-65.4
	3	100	-28.1

SEISMIC LOAD DESIGN DATA	
SEISMIC IMPORTANCE FACTOR	1.5
MAPPED SPECTRAL RESPONSE ACCELERATION (S _s)	0.150 g
(S ₁)	0.051 g
SITE CLASS (ASSUMED)	DEFAULT PER ASCE 7-22
SPECTRAL RESPONSE COEFFICIENT (S _{ds})	0.120 g
(S _{d1})	0.072 g
SEISMIC DESIGN CATEGORY	C
BASIC SEISMIC-FORCE RESISTING SYSTEM: STEEL SYSTEM NOT SPECIFICALLY DETAILED FOR SEISMIC RESISTANCE	3.0
DESIGN BASE SHEAR (N-S)	0.06 W
DESIGN BASE SHEAR (E-W)	0.06 W
ANALYSIS PROCEDURE: EQUIVALENT LATERAL FORCE PROCEDURE	
TORNADO LOAD DESIGN DATA	
RISK CATEGORY	IV
A _e	4,000 FT ²
V _r	50 MPH
V _r = 60 MPH, THEREFORE DESIGN FOR TORNADO LOADS IS NOT REQUIRED PER ASCE 7-22, SECTION 32.5.2	

GENERAL:

- THE GENERAL STRUCTURAL NOTES ARE INTENDED TO AUGMENT THE DRAWINGS AND SPECIFICATIONS. SEE DRAWINGS AND SPECIFICATIONS FOR REQUIREMENTS IN ADDITION TO GENERAL NOTES. SHOULD CONFLICTS EXIST BETWEEN THE DRAWINGS, SPECIFICATIONS, AND GENERAL STRUCTURAL NOTES, THE STRICTEST PROVISION SHALL GOVERN.
- UNLESS NOTED OTHERWISE, CONSTRUCTION MEANS AND METHODS SHALL BE SOLELY THE RESPONSIBILITY OF THE CONTRACTOR.
- THE STRUCTURE, OR STRUCTURES, DEFINED BY THESE DRAWINGS CONFORM TO THE 2021 VIRGINIA EXISTING BUILDING CODE AND HAVE BEEN DESIGNED AS COMPLETE STRUCTURES TO RESIST THE LOADS LISTED IN "BUILDING LOADS AND FACTORS PER 2021 VIRGINIA CONSTRUCTION CODE" BOX ON THIS SHEET. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONSTRUCTION LOADS AND OTHER LOADS IMPOSED ON THE PARTIALLY COMPLETED STRUCTURE(S). THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN OF SHORING, BRACING, FORMWORK, ERECTION AIDS, AND OTHER NON-PERMANENT SUPPORTING ELEMENTS UTILIZED FOR CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE TEMPORARY BRACING IN ALL DIRECTIONS UNTIL ALL PERMANENT CONNECTIONS ARE MADE.
- THE CONTRACTOR SHALL NOT SCALE DIMENSIONS FROM THE DRAWINGS.
- ALL DETAILS AND SECTIONS SHOWN ON THE STRUCTURAL DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL BE CONSTRUED TO APPLY TO SIMILAR CONDITIONS ELSEWHERE.
- THE STRUCTURE HAS BEEN DESIGNED FOR THE IN-SERVICE LOADS ONLY. THE METHODS, PROCEDURES, AND SEQUENCES OF CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO MAINTAIN AND ENSURE INTEGRITY OF THE STRUCTURE AT ALL STAGES OF CONSTRUCTION.
- ALL PRODUCTS AND MATERIALS REQUIRED FOR THE WORK SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S WRITTEN INSTRUCTIONS AND RECOMMENDATIONS FOR INSTALLATION IN APPLICATIONS INDICATED, INCLUDING ALL ACCESSORIES, ATTACHMENTS, AND THE LIKE.
- ALL WORK SHALL BE IN ACCORDANCE WITH REQUIREMENTS OF THE 2021 VIRGINIA BUILDING CODE, AS WELL AS REQUIREMENTS OF THE TOWN OF STRASBURG AND ALL OTHER AUTHORITIES HAVING JURISDICTION.

COORDINATION:

- STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH AND COORDINATED WITH CIVIL, MECHANICAL, ELECTRICAL, PLUMBING, ARCHITECTURAL, AND OTHER CONTRACT DOCUMENTS.
- OPENINGS IN SLABS, WALLS, ROOFS, ETC. SHOWN ON THE STRUCTURAL DRAWINGS ARE FOR REFERENCE ONLY AND ARE NOT INTENDED TO DEFINE THE EXACT LOCATION, SIZE, ELEVATIONS, FIRE RATING, OR ANY OTHER PROPERTY OF THE OPENING UNLESS OTHERWISE NOTED. THE STRUCTURAL DRAWINGS ARE NOT INTENDED TO SHOW ALL OPENINGS AND PENETRATIONS WITHIN OR THROUGH THE STRUCTURE. THE CONTRACTOR SHALL COORDINATE ALL OPENINGS AND PENETRATIONS WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS.
- COORDINATE THE EXACT SIZE AND LOCATION OF ALL SLEEVES AND OPENINGS THROUGH CONCRETE SLABS AND CONCRETE WALLS WITH CIVIL, MECHANICAL, PLUMBING, AND ELECTRICAL DRAWINGS. SLEEVES SHALL BE ASTM A 53 SCHEDULE 40 STEEL WITH A DIAMETER NOT GREATER THAN 12 INCHES AND SHALL BE GALVANIZED AFTER CUTTING.
- THE CONTRACTOR SHALL FIELD CHECK AND VERIFY ALL EXISTING CONDITIONS INCLUDING ANY EXISTING CONSTRUCTION AND REPORT ANY DISCREPANCIES WITH THE CONSTRUCTION DOCUMENTS BEFORE PROCEEDING WITH THE WORK.

EXISTING STRUCTURES:

- CONTRACTOR IS RESPONSIBLE FOR DOCUMENTING ALL EXISTING CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION. IF AN ITEM IN QUESTION IS BELIEVED TO HAVE BEEN DAMAGED DURING CONSTRUCTION AND THERE IS NO PHOTOGRAPHIC PROOF OF ITS DATE PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING OR REPLACING TO THE SATISFACTION OF THE ARCHITECT AND OWNER AT THE SOLE EXPENSE OF THE CONTRACTOR AND/OR HIS SUB-CONTRACTORS.
- SIZES, ELEVATIONS, AND DIMENSIONS OF EXISTING STRUCTURAL AND ARCHITECTURAL ELEMENTS ARE BASED ON EXISTING DRAWINGS PROVIDED BY THE OWNER AND/OR FIELD MEASUREMENTS AND ARE FOR GENERAL REFERENCE ONLY. THE CONTRACTOR SHALL VERIFY ACTUAL CONDITIONS AND REPORT ANY DISCREPANCIES TO THE ENGINEER BEFORE STARTING WORK.
- IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE AND MAINTAIN ANY AND ALL WORK NECESSARY TO PROTECT EXISTING FACILITIES AND UTILITIES THAT INCLUDES, BUT IS NOT LIMITED TO, BUILDINGS, UNDERGROUND UTILITIES, PIPING, POWER, CONDUIT, COMMUNICATION LINES, PAVEMENT, SIDEWALKS, DRAINAGE STRUCTURES, TREES, AND PLANTED AREAS. ANY DAMAGE TO EXISTING FACILITIES SHALL BE REPAIRED TO THE SATISFACTION OF THE ARCHITECT AND OWNER AT THE SOLE EXPENSE OF THE CONTRACTOR.
- THE CONTRACTOR SHALL VERIFY ANY CONFLICTS WITH EXISTING UTILITIES. IF A CONFLICT IS ENCOUNTERED, CONTRACTOR SHALL IMMEDIATELY NOTIFY ARCHITECT AND OWNER AND A RESOLUTION SHALL BE REACHED BEFORE WORK PROCEEDS IN THE AFFECTED AREA.
- NO STAGING OF EQUIPMENT OR VEHICLES OUTSIDE OF MARKED AREAS SHALL BE PERMITTED WITHOUT WRITTEN PERMISSION OF THE OWNER.

REINFORCED CONCRETE:

- UNLESS NOTED OTHERWISE, ALL CONCRETE WORK, DETAILING, FABRICATION, AND PLACING OF REINFORCING AND CONCRETE SHALL BE GOVERNED BY THE LATEST REVISIONS OF:
A. ACI 301, ACI 315, AND ACI 318.
B. CRSI RECOMMENDED PRACTICE OF PLACING REINFORCING BARS.
C. ACI 306 AND ACI 305 FOR COLD AND HOT WEATHER CONCRETING, RESPECTIVELY.
- ALL CONCRETE SHALL BE NORMAL WEIGHT WITH A MAXIMUM UNIT WEIGHT OF 150 POUNDS PER CUBIC FOOT. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH, AS SPECIFIED BELOW, FOR THE RESPECTIVE AREAS:
A. COLUMN FOOTINGS 3,000 PSI
B. WALL FOOTINGS 3,000 PSI
C. SUSPENDED SLABS 4,000 PSI
D. EXTERIOR SLAB/FOUNDATION 4,500 PSI
- PLACE 1/2" EXPANSION JOINT MATERIAL BETWEEN EDGES OF SLABS AND VERTICAL SURFACES U.N.O.
- REINFORCING STEEL SHALL CONFORM TO ASTM A 615, AND SHALL BE GRADE 60 U.N.O.
- REINFORCING STEEL INDICATED TO BE WELDED SHALL CONFORM TO ASTM A 706 AND SHALL BE GRADE 60.
- WELDED WIRE FABRIC SHALL BE NEW BILLET STEEL, COLD DRAWN CONFORMING TO ASTM SPECIFICATIONS A 1064 AND SHALL BE PROVIDED IN FLAT SHEETS.
- REINFORCING BAR LAP SPLICES AND HOOK DIMENSIONS SHALL BE AS REQUIRED PER THE SCHEDULE ON SHEET S-001 U.N.O.

MASONRY

- ALL MASONRY CONSTRUCTION SHALL CONFORM TO THE REQUIREMENTS OF "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" (TMS 602-16) AND "SPECIFICATION FOR MASONRY STRUCTURES" (TMS 602-16).
- CONCRETE MASONRY UNITS SHALL CONFORM TO THE REQUIREMENTS OF ASTM C 90.
- MINIMUM REQUIRED COMPRESSIVE STRENGTH OF MASONRY ASSEMBLAGE, F_m, AT 28 DAYS SHALL BE 2,000 PSI.
- MORTAR SHALL CONFORM TO THE REQUIREMENTS OF ASTM C 270 AND SHALL BE TYPE S.
- GROUT FOR HOLLOW MASONRY UNITS SHALL CONFORM TO THE REQUIREMENTS OF ASTM C 476 AND SHALL HAVE A 28 DAY COMPRESSIVE STRENGTH OF 3,000 PSI. JOB SITE MIXING OF GROUT IS NOT ALLOWED.

STEEL JOISTS

- JOISTS SHALL BE K-SERIES DESIGNED IN ACCORDANCE WITH THE LATEST STEEL JOIST INSTITUTE (SJI) SPECIFICATIONS
- PROVIDE WELDED HORIZONTAL AND DIAGONAL BRIDGING IN ACCORDANCE WITH SJI SPECIFICATIONS AND WHERE INDICATED ON PLANS.
- JOISTS SHALL BE DESIGNED BY JOIST FABRICATOR AS REQUIRED FOR NET UPLIFT PRESSURES DUE TO WIND. NET UPLIFT PRESSURE USED IN DESIGN SHALL NOT BE LESS THAN 20 POUNDS PER SQUARE FOOT. PROVIDE A SINGLE LINE OF 8-BAR CHORD BRIDGING AT THE FIRST BOTTOM CHORD PANEL. PONT AS RECOMMENDED BY SJI. WIND LOADS SHALL BE COMBINED WITH OTHER DESIGN LOADS DEFINED IN THE "DESIGN LOADS" SECTION OF THESE GENERAL NOTES AS REQUIRED BY THE APPLICABLE CODES.

STRUCTURAL SHEET LIST	
S-001	GENERAL STRUCTURAL NOTES
S-100	STRUCTURAL FOUNDATION PLAN AND DETAILS
S-110	SECOND FLOOR PLAN
S-120	ROOF FRAMING PLAN
S-200	STRUCTURAL BRACE FRAME ELEVATIONS AND DETAILS
S-201	STRUCTURAL BRACE FRAME STANDARD DETAILS
S-700	STRUCTURAL STANDARD DETAILS
S-701	STRUCTURAL STANDARD DETAILS

GENERAL STRUCTURAL NOTES

FOUNDATIONS

- FOUNDATION DESIGN IS BASED ON ASSUMED ALLOWABLE BEARING PRESSURE OF 1,500 PSF (ASSUMED PER 2021 IBC TABLE 1806.2)
- ALL COMPACTED FILL, EXCAVATION, SUBGRADES, AND BEARING SURFACES SHALL BE OBSERVED AND TESTED BY A GEOTECHNICAL ENGINEER REGISTERED IN THE COMMONWEALTH OF VIRGINIA (OR A QUALIFIED GEOTECHNICAL TECHNICIAN WORKING UNDER THE DIRECT SUPERVISION OF A REGISTERED ENGINEER) TO VERIFY SPECIFIED GEOTECHNICAL CONFORMANCE REQUIREMENT.
- THE STRUCTURAL ENGINEER OF RECORD IS NOT RESPONSIBLE FOR SUBSURFACE CONDITIONS ENCOUNTERED IN THE FIELD CONTRARY TO THOSE ASSUMED FOR DESIGN.
- GEOTECHNICAL ENGINEER OR THEIR AUTHORIZED REPRESENTATIVE SHALL CONFIRM THE PRESENCE OF SOILS SUITABLE FOR SUPPORT OF THE DESIGN BEARING PRESSURE AT COLUMN AND WALL FOOTING SUBGRADES. AT MINIMUM, THE FOUNDATION BEARING PRESSURE SHALL BE PROBED WITH A SMALL DIAMETER PROBE ROD IN ORDER TO IDENTIFY SOFT AREAS. DYNAMIC CONE PENETROMETER (DCP) TESTS SHALL BE PERFORMED IN ACCORDANCE WITH ASTM STP-309. THE DCP TESTS SHALL EXTEND FROM THE FOUNDATION BEARING ELEVATION TO A MINIMUM DEPTH OF 4 FEET OR TWO TIMES THE FOOTING WIDTH, WHICHEVER IS DEEPER. HAND AUGER BORINGS SHALL BE PERFORMED IN CONJUNCTION WITH THE TESTING TO DOCUMENT A VISUAL DESCRIPTION OF THE SOIL TYPES. THE HAND AUGER TEST BORINGS SHALL BE LOCATED AT EACH COLUMN FOOTING AND SPACED NO GREATER THAN 25 FEET ALONG CONTINUOUS WALL FOOTINGS.
- UNLESS NOTED OTHERWISE, FOUNDATION SUBGRADES REQUIRING UNDERCUT SHALL BE FILLED FROM THE ELEVATION OF UNDERCUT TO THE ORIGINAL DESIGN SUBGRADE ELEVATION WITH LEAN CONCRETE, MINIMUM 500 PSI FLOWABLE FILL AND 360-16.
- WHENEVER POSSIBLE, FOUNDATION CONCRETE SHALL BE PLACED IMMEDIATELY AFTER EXCAVATION SO THAT ACCUMULATION OF WATER IN THE EXCAVATION OR DRYING OF FOUNDATION SOILS CAN BE AVOIDED.
- CONTRACTOR SHALL CONTROL SITE GROUNDWATER AND/OR SURFACE WATER BY ALL MEANS NECESSARY TO MAINTAIN A WATER LEVEL ONE FOOT BELOW SLAB SUBGRADE SO AS TO NOT DAMAGE FOUNDATION EXCAVATIONS.
- ANY SUBGRADE SOILS WHICH HAVE BEEN WEAKENED DUE TO SATURATION OR DISTURBANCE SHALL BE RECOMPACTED OR REMOVED AND REPLACED WITH STRUCTURAL FILL AS DIRECTED BY GEOTECHNICAL ENGINEER. CONCRETE STRUCTURES SHALL BE CONSTRUCTED IN AN EXPEDIENT MANNER ONCE EXCAVATIONS ARE MADE TO AVOID.

STRUCTURAL STEEL

- UNLESS NOTED OTHERWISE, DESIGN, DETAILING, FABRICATION, AND ERECTION OF STRUCTURAL STEEL SHALL BE IN ACCORDANCE WITH AISC 360-16 AND 360-18.
- ALL STEEL WIDE FLANGE SHAPES SHALL CONFORM TO ASTM A-992 (F_y=50 KSI MIN.). ALL OTHER STRUCTURAL STEEL SHALL CONFORM TO ASTM A-36, U.N.O.
- TUBE STEEL SHALL CONFORM TO ASTM A500, GRADE C (F_y=60 KSI). TUBE STEEL SECTIONS SHALL BE ORIENTED LONG SIDE VERTICAL U.N.O.
- STEEL PIPE SHALL CONFORM TO ASTM A53, GRADE B.
- ALL WELDING SHALL BE DONE BY WELDERS CURRENTLY CERTIFIED BY THE AMERICAN WELDING SOCIETY (AWS) AS HAVING PASSED AWS QUALIFICATION TESTS FOR THE TYPE OF WELDING THEY ARE TO PERFORM. ALL WELDERS SHALL USE E70XX ELECTRODES AND SHALL CONFORM TO AWS STANDARDS.
- WHERE SLOTTED HOLES ARE INDICATED, BOLTS OR ANCHORS SHALL BE PLACED INITIALLY AT THE CENTERLINE OF THE HOLE TO ALLOW FREE MOVEMENT BOTH WAYS IN THE SLOT DIRECTION.
- ALL HSS COLUMNS AND POSTS SHALL BE CAPPED WITH A 1/4" PLATE MINIMUM, U.N.O.

STRUCTURAL STEEL CONNECTIONS:

- UNLESS NOTED OTHERWISE, STRUCTURAL STEEL CONNECTIONS SHALL BE DESIGNED BY A LICENSED PROFESSIONAL ENGINEER IN ACCORDANCE WITH OPTION (3) OF SECTION 3.1.2 OF AISC 303-16. CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES. ALL CONNECTION DESIGN AND DETAILING SHALL CONFORM TO AISC 360-16 ALLOWABLE STRESS DESIGN (ASD) UNLESS NOTED OTHERWISE.
- UNLESS NOTED OTHERWISE, STRUCTURAL STEEL CONNECTIONS SHALL BE TYPE "N" USING 3/4" DIAMETER ASTM F1932 "TWIST OFF" TYPE TENSION CONTROL, STRUCTURAL BOLT/NUT/WASHER ASSEMBLIES (MINIMUM OF 2 PER CONNECTION).
- UNLESS NOTED OTHERWISE, DETAILS INDICATED ON THE DRAWINGS DEPICT GENERAL CRITERIA FOR CONNECTION DESIGN AND DETAILING. THESE DETAILS ARE NOT INTENDED TO DESCRIBE ANY SPECIFIC ELEMENTS OF THE CONNECTIONS INCLUDING, BUT NOT LIMITED TO, CONNECTION GEOMETRY, MEMBER THICKNESS, WELD SIZE OR LENGTH, AND BOLT QUANTITY. CONNECTION WORK POINT SHALL BE THE INTERSECTION OF MEMBER CENTERLINES UNLESS NOTED OTHERWISE.
- ERECTION AIDS ARE NOT DEPICTED ON THE DRAWINGS. PROVIDE ERECTION AIDS AS REQUIRED AND REMOVE THEM AFTER WORK IS COMPLETE.
- ALL SHEAR CONNECTIONS SHALL BE BOLTED, FRAMED BEAM CONNECTIONS DESIGNED FOR THE LOADS INDICATED ON THE DRAWINGS. DEVELOP THE LARGER OF THE BEAM SHEAR REACTIONS SCHEDULED, SHOWN ON THE PLANS, OR SHOWN ON THE DETAILS.
- ALL CHORD AND COLLECTOR CONNECTIONS SHALL BE DESIGNED FOR THE AXIAL LOADS INDICATED ON THE DRAWINGS ACTING CONCURRENTLY WITH THE VERTICAL BEAM SHEAR, WHERE NO AXIAL LOAD IS INDICATED ON THE DRAWINGS. ALL BEAM CONNECTIONS SHALL BE DESIGNED FOR A MINIMUM AXIAL FORCE EQUAL TO 5% OF THE VERTICAL SHEAR REACTION ACTING CONCURRENTLY WITH THE VERTICAL BEAM SHEAR.
- ALL BEAM REACTIONS, AXIAL FORCES, AND MOMENTS ACT CONCURRENTLY UNLESS NOTED OTHERWISE. BEAM REACTIONS ACT IN THE GRAVITY DIRECTION. AXIAL FORCES AND MOMENTS SHALL BE CONSIDERED REVERSIBLE.
- ALL BOLTED MOMENT AND AXIAL CONNECTIONS SHALL EMPLOY PRETENSIONED BOLTS IN STANDARD HOLES.
- THE USE OF OVERSIZED OR SLOTTED HOLES FOR ANY CONNECTIONS IS PROHIBITED UNLESS SPECIFICALLY NOTED ON THE DRAWINGS.
- ALL COPES, BLOCKS, CUTS, CUT-OUTS, AND OTHER CUTTING OF STRUCTURAL MEMBERS SHALL HAVE ALL RE-ENTRANT CORNERS SHAPED, NOTCH-FREE, TO A RADIUS OF AT LEAST 1/2" INCH.

POST-INSTALLED ANCHORS

- ALL CONCRETE EXPANSION ANCHORS SHALL BE GALVANIZED OR ZINC PLATED.
- GROUT ALL CMU CELLS FULL WITHIN A 12" RADIUS MINIMUM WHEN CONCRETE ANCHORS ARE PLACED INTO CMU WALLS.
- UNLESS OTHERWISE INDICATED ON PLANS, POST-INSTALLED ANCHORS SHALL CONSIST OF THE FOLLOWING ANCHOR TYPES, OR APPROVED EQUAL:

ADHESIVE ANCHOR	
SOLID CONCRETE	HILTI HY 200 SAFE SET SYSTEM (ICC ESR-3187) A36 U.N.O.
	HILTI RE 500V3 SAFE SET SYSTEM (ICC ESR-3814) HAS-E ROD OR GRADE 60 REBAR U.N.O.
GROUTED MASONRY	HILTI HY 270 (ICC ESR-2682) A36 U.N.O.

- SUBSTITUTION REQUESTS FOR ALTERNATE PRODUCTS MUST BE APPROVED IN WRITING BY THE STRUCTURAL ENGINEER OF RECORD PRIOR TO USE. CONTRACTOR SHALL PROVIDE CALCULATIONS DEMONSTRATING THAT THE SUBSTITUTED PRODUCT IS CAPABLE OF ACHIEVING THE PERFORMANCE VALUES OF THE SPECIFIED PRODUCT. SUBSTITUTIONS WILL BE EVALUATED BY THEIR HAVING AN ICC ESR SHOWING COMPLIANCE WITH THE RELEVANT BUILDING CODE.
- INSTALL ANCHORS PER THE MANUFACTURER INSTRUCTIONS, AS INCLUDED IN THE ANCHOR PACKAGING.
- THE CONTRACTOR SHALL ARRANGE AN ANCHOR MANUFACTURER'S REPRESENTATIVE TO PROVIDE ONSITE INSTALLATION TRAINING FOR ALL OF THEIR ANCHORING PRODUCTS SPECIFIED. THE STRUCTURAL ENGINEER OF RECORD MUST RECEIVE DOCUMENTED CONFIRMATION THAT ALL OF THE CONTRACTOR'S PERSONNEL WHO INSTALL ANCHORS ARE TRAINED PRIOR TO THE COMMENCEMENT OF INSTALLING ANCHORS.
- ANCHOR CAPACITY IS DEPENDANT UPON SPACING BETWEEN ADJACENT ANCHORS AND PROXIMITY OF ANCHORS TO EDGE OF MATERIAL. INSTALL ANCHORS IN ACCORDANCE WITH SPACING AND EDGE CLEARANCES INDICATED ON THE DRAWINGS.
- EXISTING REINFORCING BARS IN THE CONCRETE STRUCTURE MAY CONFLICT WITH SPECIFIC ANCHOR LOCATIONS. UNLESS NOTED ON THE DRAWINGS THAT THE BARS CAN BE CUT, THE CONTRACTOR SHALL REVIEW THE EXISTING STRUCTURAL DRAWINGS AND SHALL UNDERTAKE TO LOCATE THE POSITION OF THE REINFORCING BARS AT THE LOCATIONS OF THE CONCRETE ANCHORS.

STRUCTURAL OBSERVATIONS

- SPECIAL INSPECTIONS ARE REQUIRED FOR THIS PROJECT. SEE THE STATEMENT OF SPECIAL INSPECTIONS IN THE PROJECT MANUAL.



Dewberry Engineers, Inc.
8401 Arlington Blvd
Falls Church, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026
TITLE _____

GENERAL STRUCTURAL NOTES

PROJECT NO. 50165756

S-001

SHEET NO.

9/25/2025 10:08:52 AM

A

B

C

D

E

F

1


2

3

4

5

6

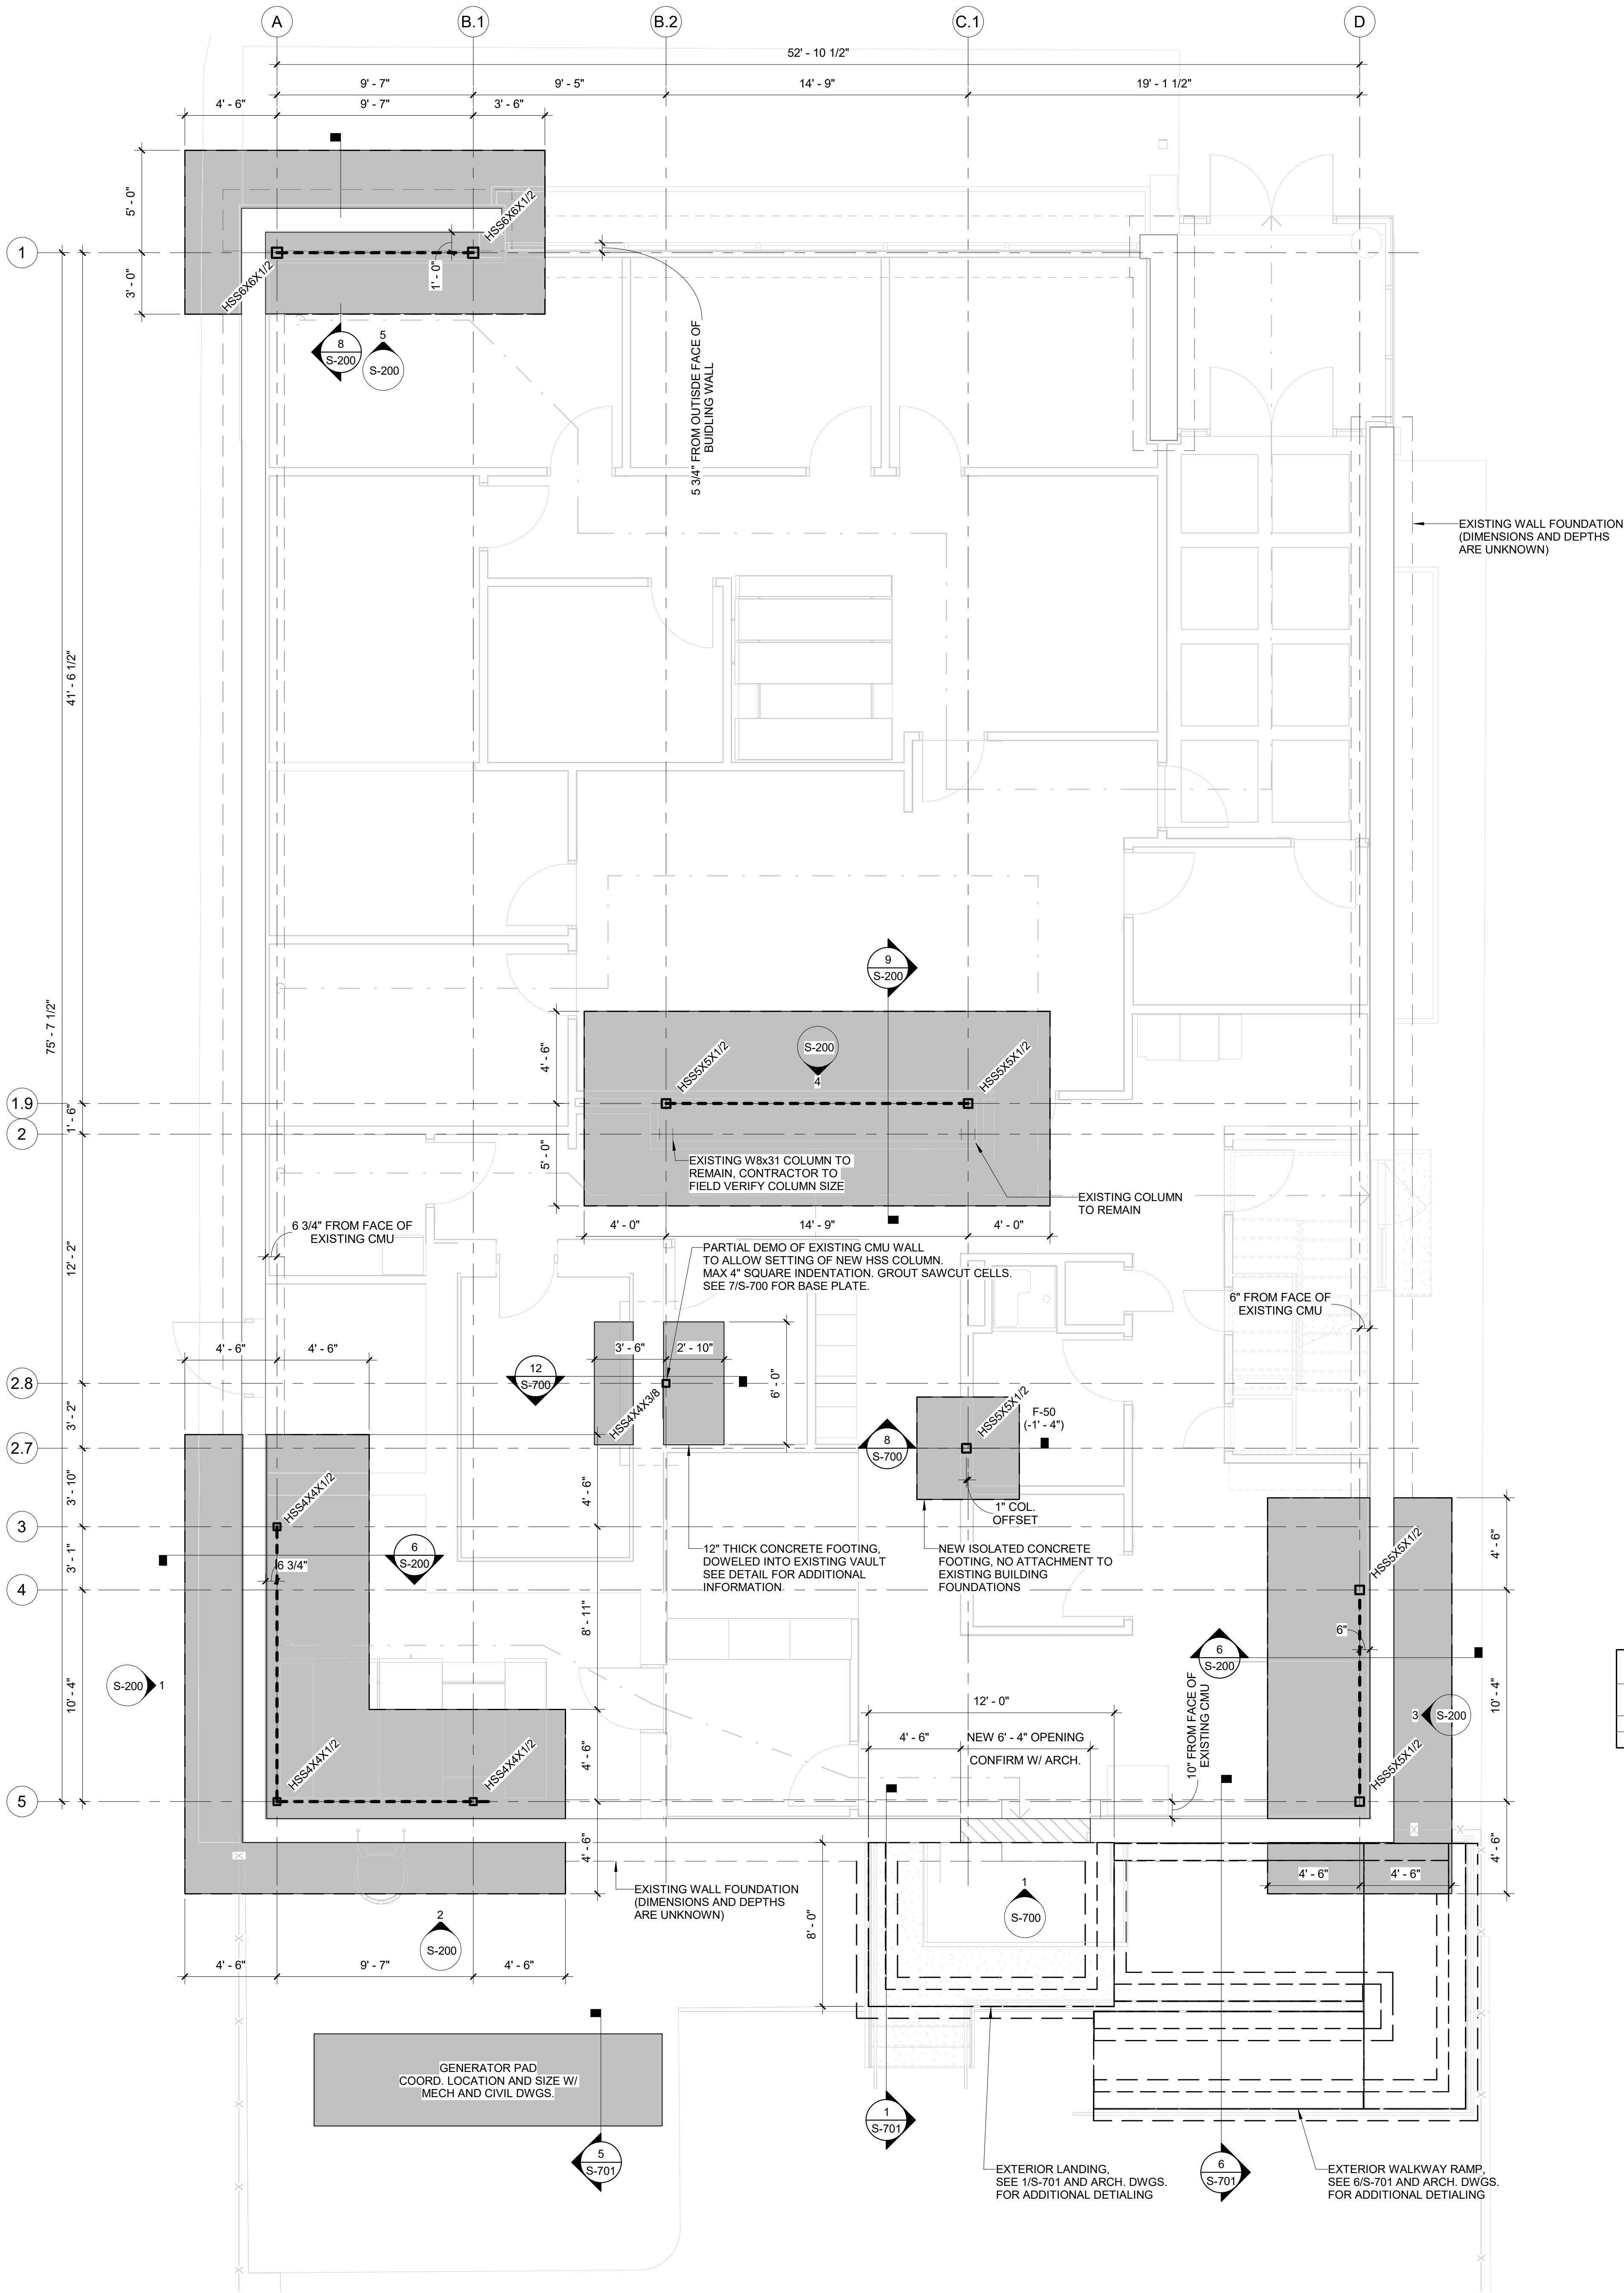


COLUMN SPREAD FOOTING SCHEDULE					
MARK	WIDTH	LENGTH	THICKNESS	REINFORCING	
				LONG.	TRANS.
F-50	5' - 0"	5' - 0"	1' - 0"	(6) #5	(6) #5

- FOUNDATION PLAN NOTES:**
1. [Symbol] DENOTES NEW CONCRETE FOOTINGS. TOP OF FOOTING ELEVATION TO BE 8" ABOVE ADJACENT EXISTING FOOTINGS. U.N.O., NEW FOOTINGS SHALL BE DOWELED INTO EXISTING FOOTINGS AT SPACING AND SIZE TO MATCH NEW FOOTING REINFORCEMENT.
 2. DEPTH AND DIMENSIONS OF EXISTING FOOTINGS IS UNKNOWN AND MUST BE VERIFIED.
 3. - - - - - DENOTES BRACED FRAME. SEE FRAMING ELEVATIONS FOR DETAILS.
 4. [Symbol] DENOTES NEW OPENING IN EXTERIOR CMU WALL FOR DOOR OPENING. CONFIRM W/ ARCH. DRAWINGS EXTENT OF OPENING.
 5. COORDINATE EXISTING SLAB DEMOLITION WITH 9 / S-700 PLUMBING DRAWINGS AND REFERENCE DETAIL FOR SLAB REPAIR.
 6. FOR GENERAL NOTES, ABBREVIATIONS, AND LOADING CRITERIA SEE S-001.



Dewberry Engineers, Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

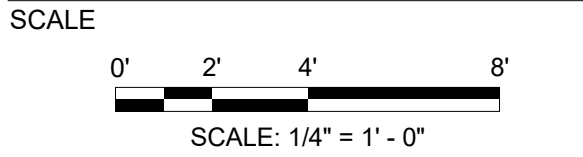

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026

TITLE
STRUCTURAL FOUNDATION PLAN AND DETAILS

PROJECT NO. 50165756

S-100

SHEET NO.

1 FOUNDATION PLAN
Scale: 1/4" = 1'-0"

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

0' 1' 2' 4'
SCALE: 1/2" = 1'-0"

0' 2' 4' 8'
SCALE: 1/4" = 1'-0"

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026

TITLE

SECOND FLOOR PLAN



PROJECT NO. 50165756

S-110



SHEET NO.

FLOOR PLAN NOTES

- CONTRACTOR TO FIELD COORDINATE ALL DIMENSIONS AND ELEVATIONS WITH EXISTING FIELD CONDITIONS AND MECHANICAL DRAWINGS, MECHANICAL EQUIPMENT, AND APPROVED SUBMITTALS.
- CONTRACTOR TO NOTIFY E.O.R. IMMEDIATELY IF MECHANICAL EQUIPMENT LOADS INDICATED ON PLAN DIFFER FROM FIELD EQUIPMENT AND AWAIT DIRECTION FROM E.O.R.
- ANY DISCREPANCIES BETWEEN DRAWINGS AND SITE CONDITIONS MUST BE REPORTED TO THE ENGINEER OF RECORD PRIOR TO STRUCTURAL DEMOLITION OR INSTALLATION.
- (E) = EXISTING JOIST TO REMAIN.
- T/STEEL = -0-0 1/2" U.N.O. FROM EXISTING STEEL. INFILL 1/2" GAP WITH NON-SHRINK GROUT.
- CONTRACTOR TO ERECT NEW SUPPORT FRAMING STEEL PRIOR TO CUTTING NEW OPENINGS IN FLOOR. VERIFY OPENING LOCATION WITH MECH. DRAWINGS PRIOR TO STEEL PLACEMENT.
- SHEAR TAB CONNECTIONS BETWEEN NEW CHANNEL BEAMS SHALL BE DESIGNED FOR MINIMUM LOAD SHOWN IN 5 / S-700.
- FOR GENERAL NOTES, ABBREVIATIONS, AND LOADING CRITERIA SEE S-001.
- NEW CHANNEL ELEVATIONS MAY BE FIELD ADJUSTED AS REQUIRED DUE TO EXISTING DRAPED CONCRETE FLOOR SLAB CONDITIONS.

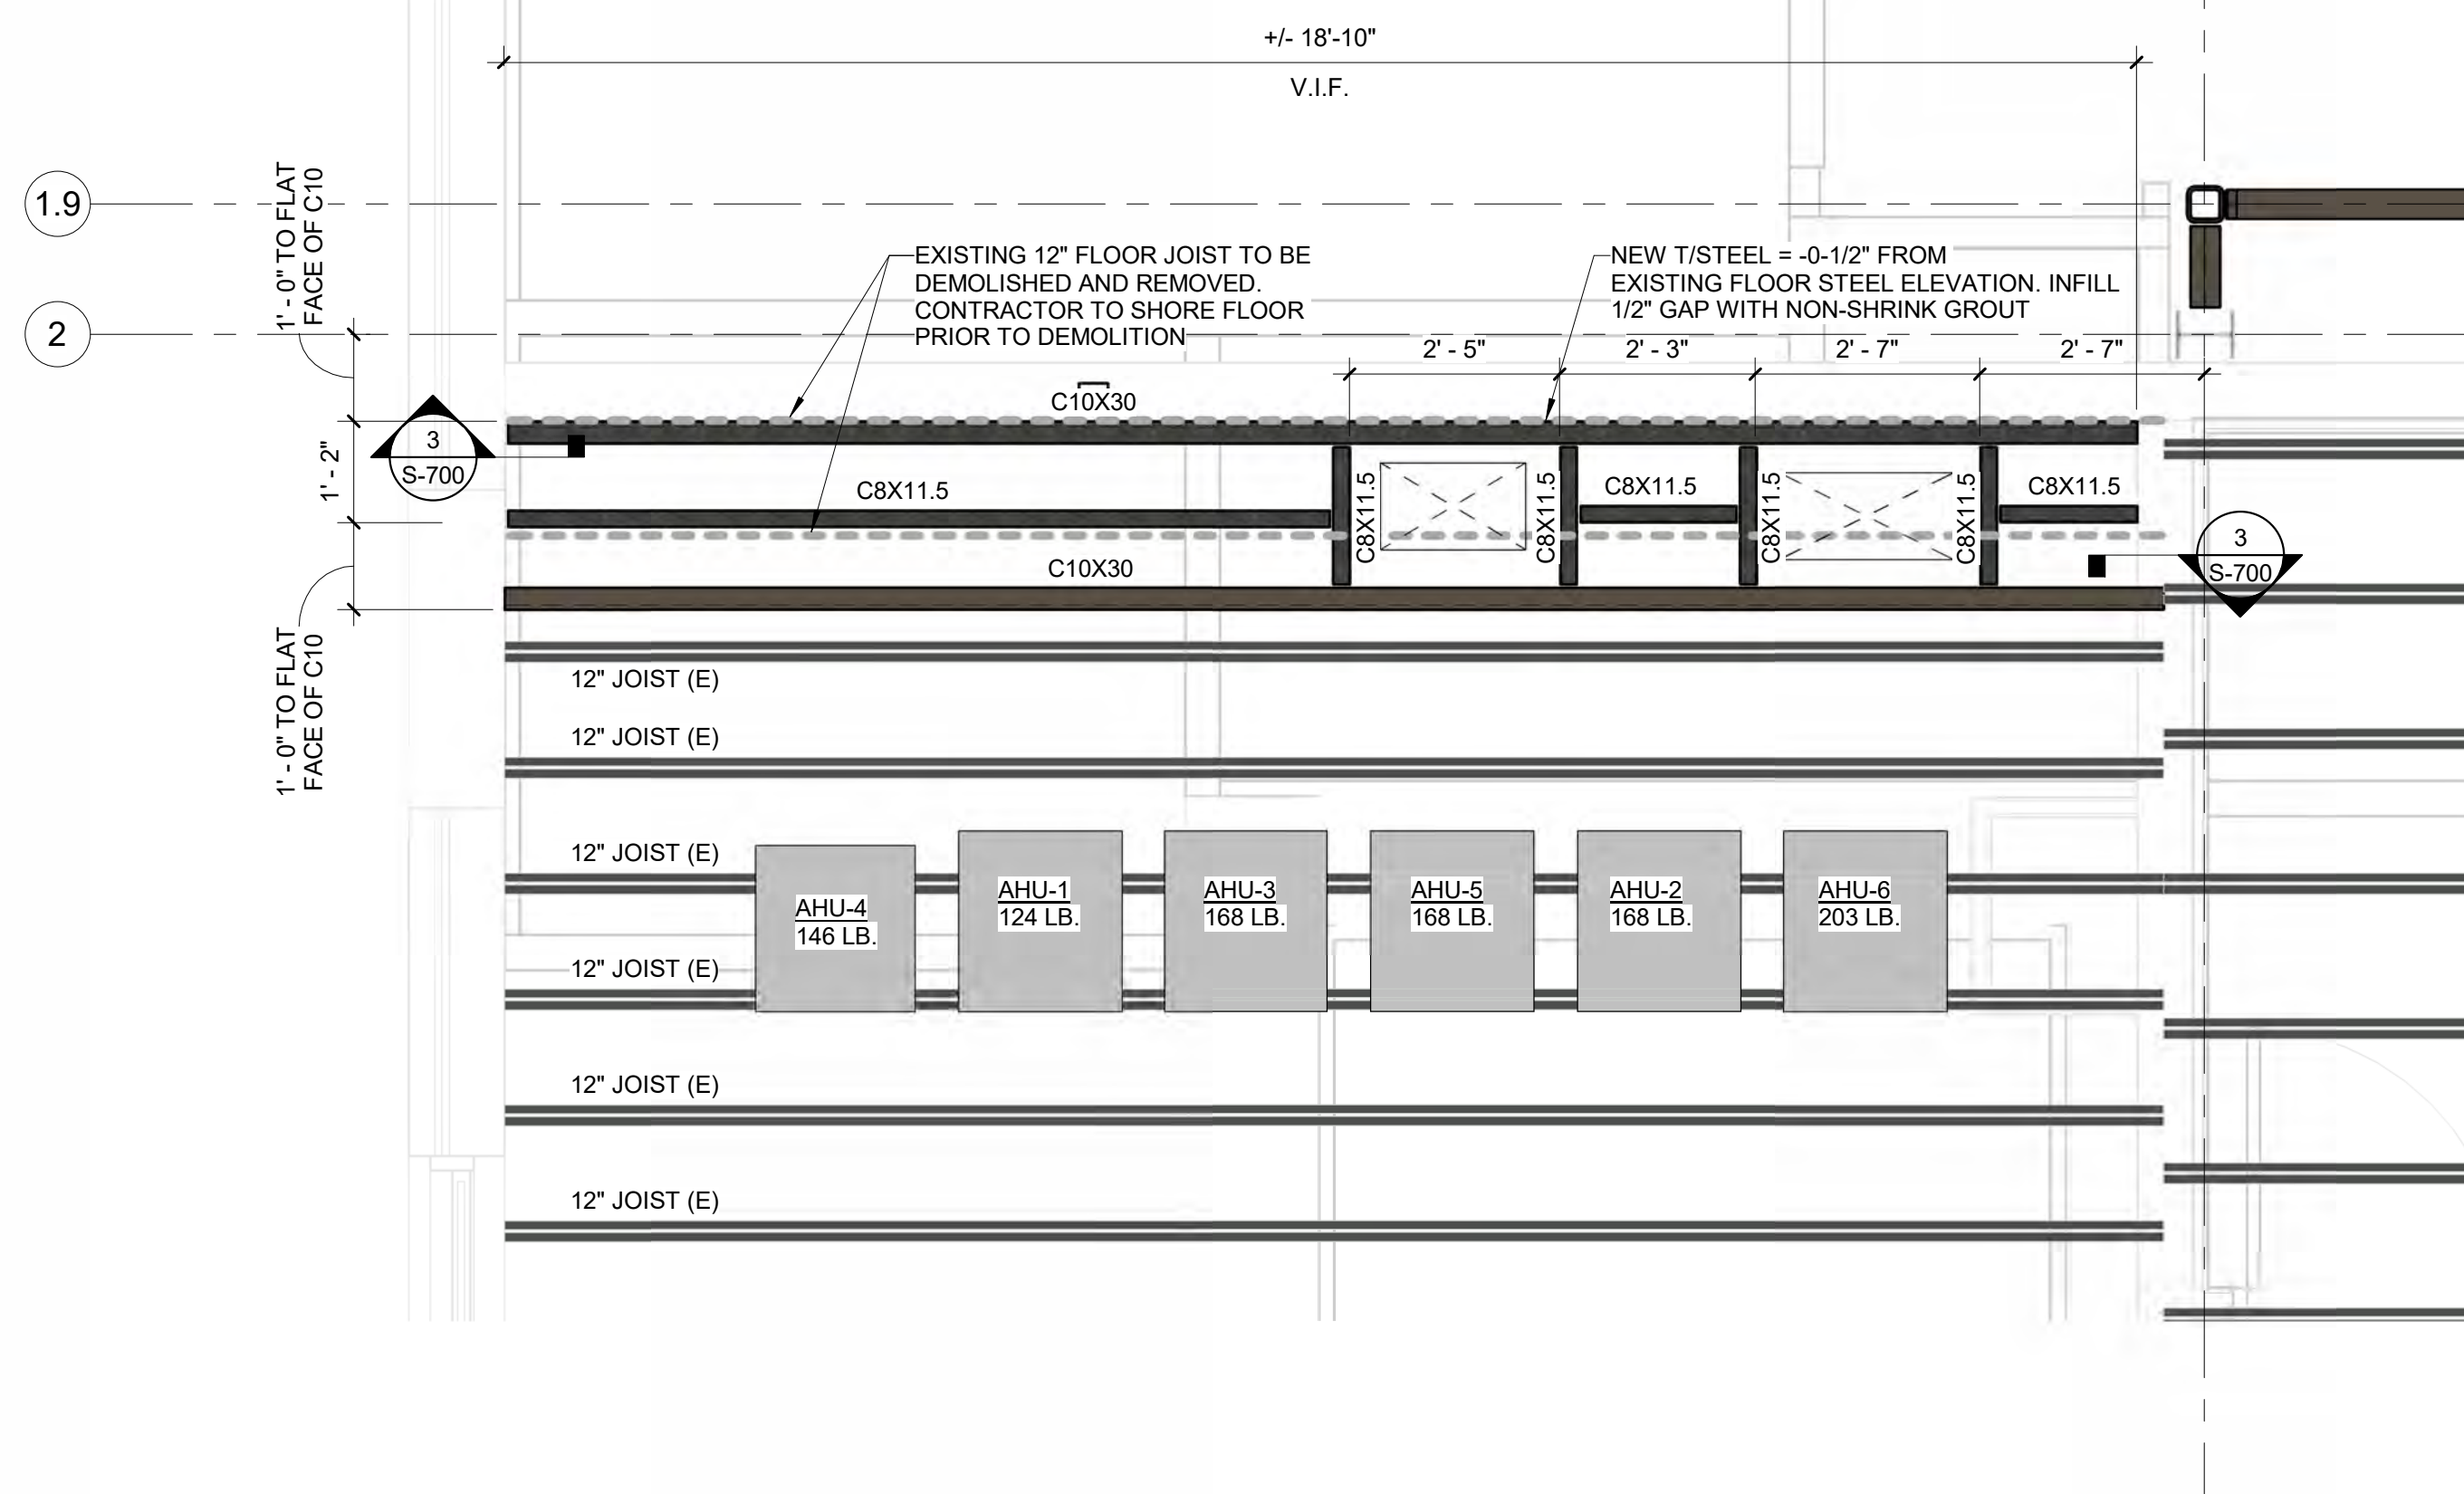

2 ENLARGED SECOND FLOOR PLAN AT FRAMING MODIFICATION
Scale: 1/2" = 1'-0"

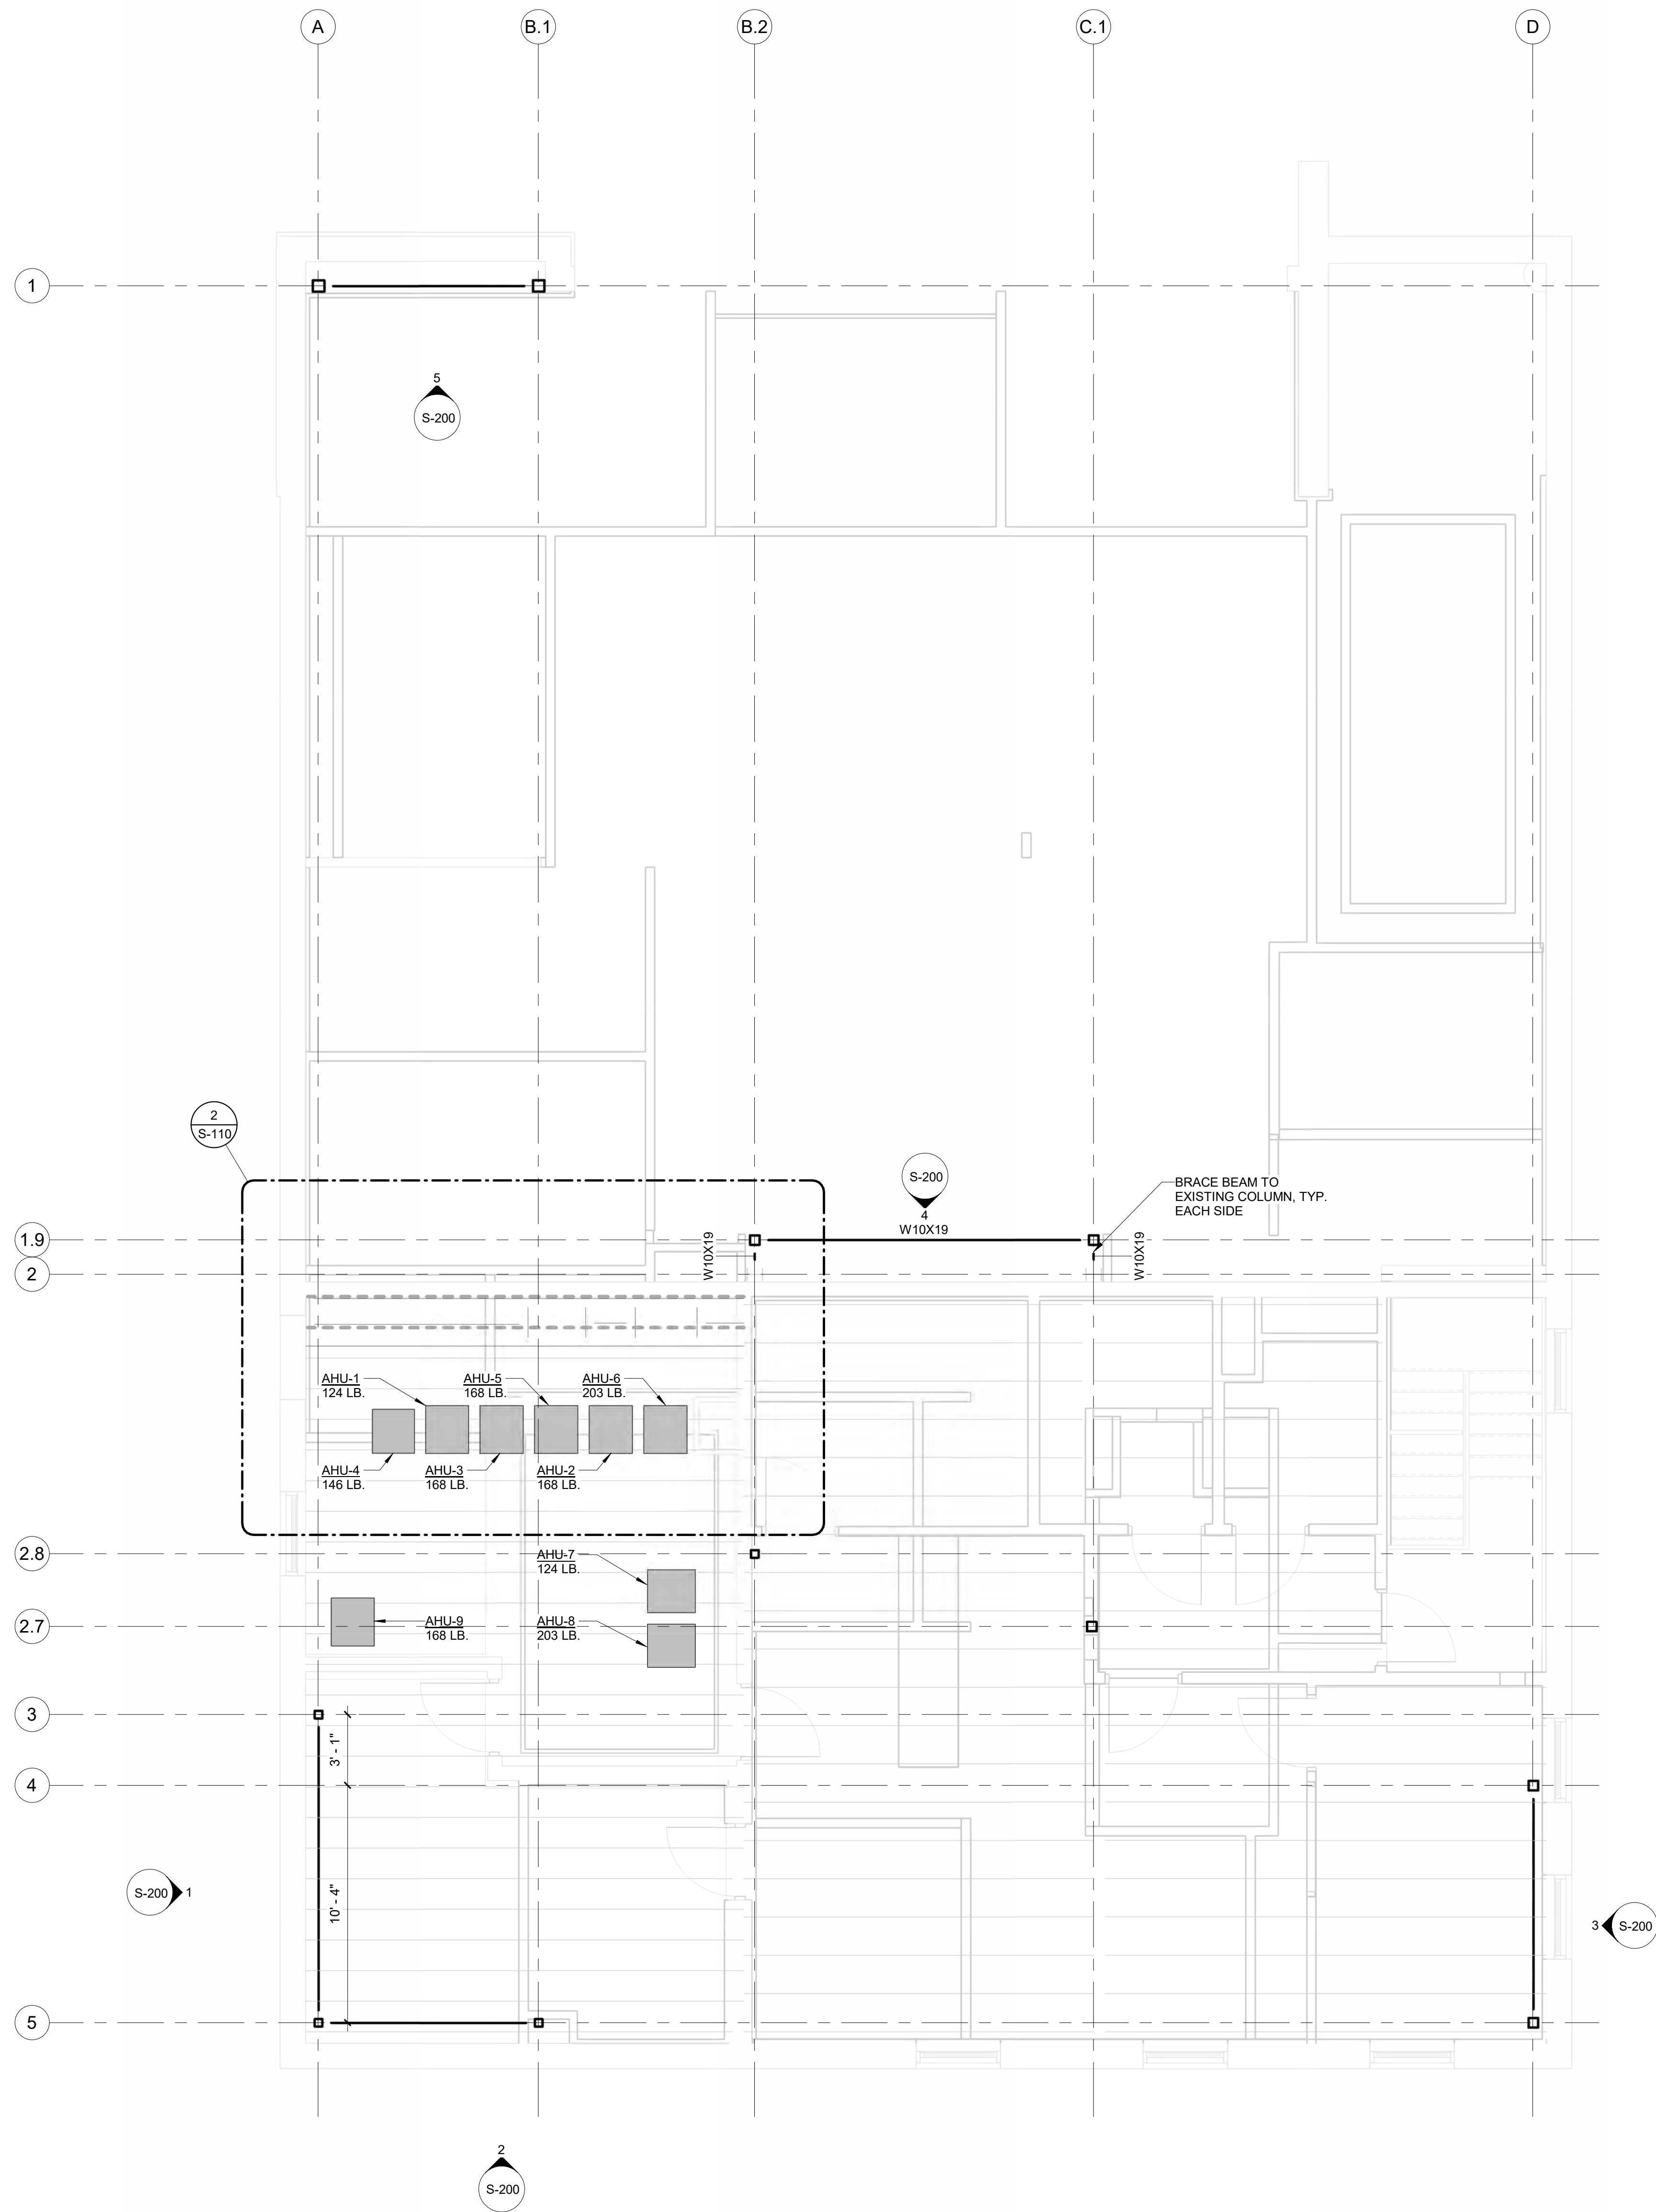

1 SECOND FLOOR PLAN
Scale: 1/4" = 1'-0"




Dewberry Engineers, Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

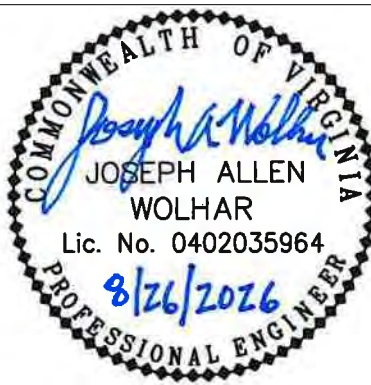

KEY PLAN

SCALE

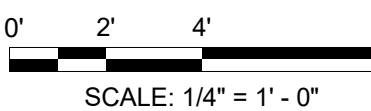

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY STAFF

APPROVED BY JAW

CHECKED BY CCB

DATE 08.26.2026



TITLE

ROOF FRAMING
PLAN

PROJECT NO. 50165756

S-120

SHEET NO.

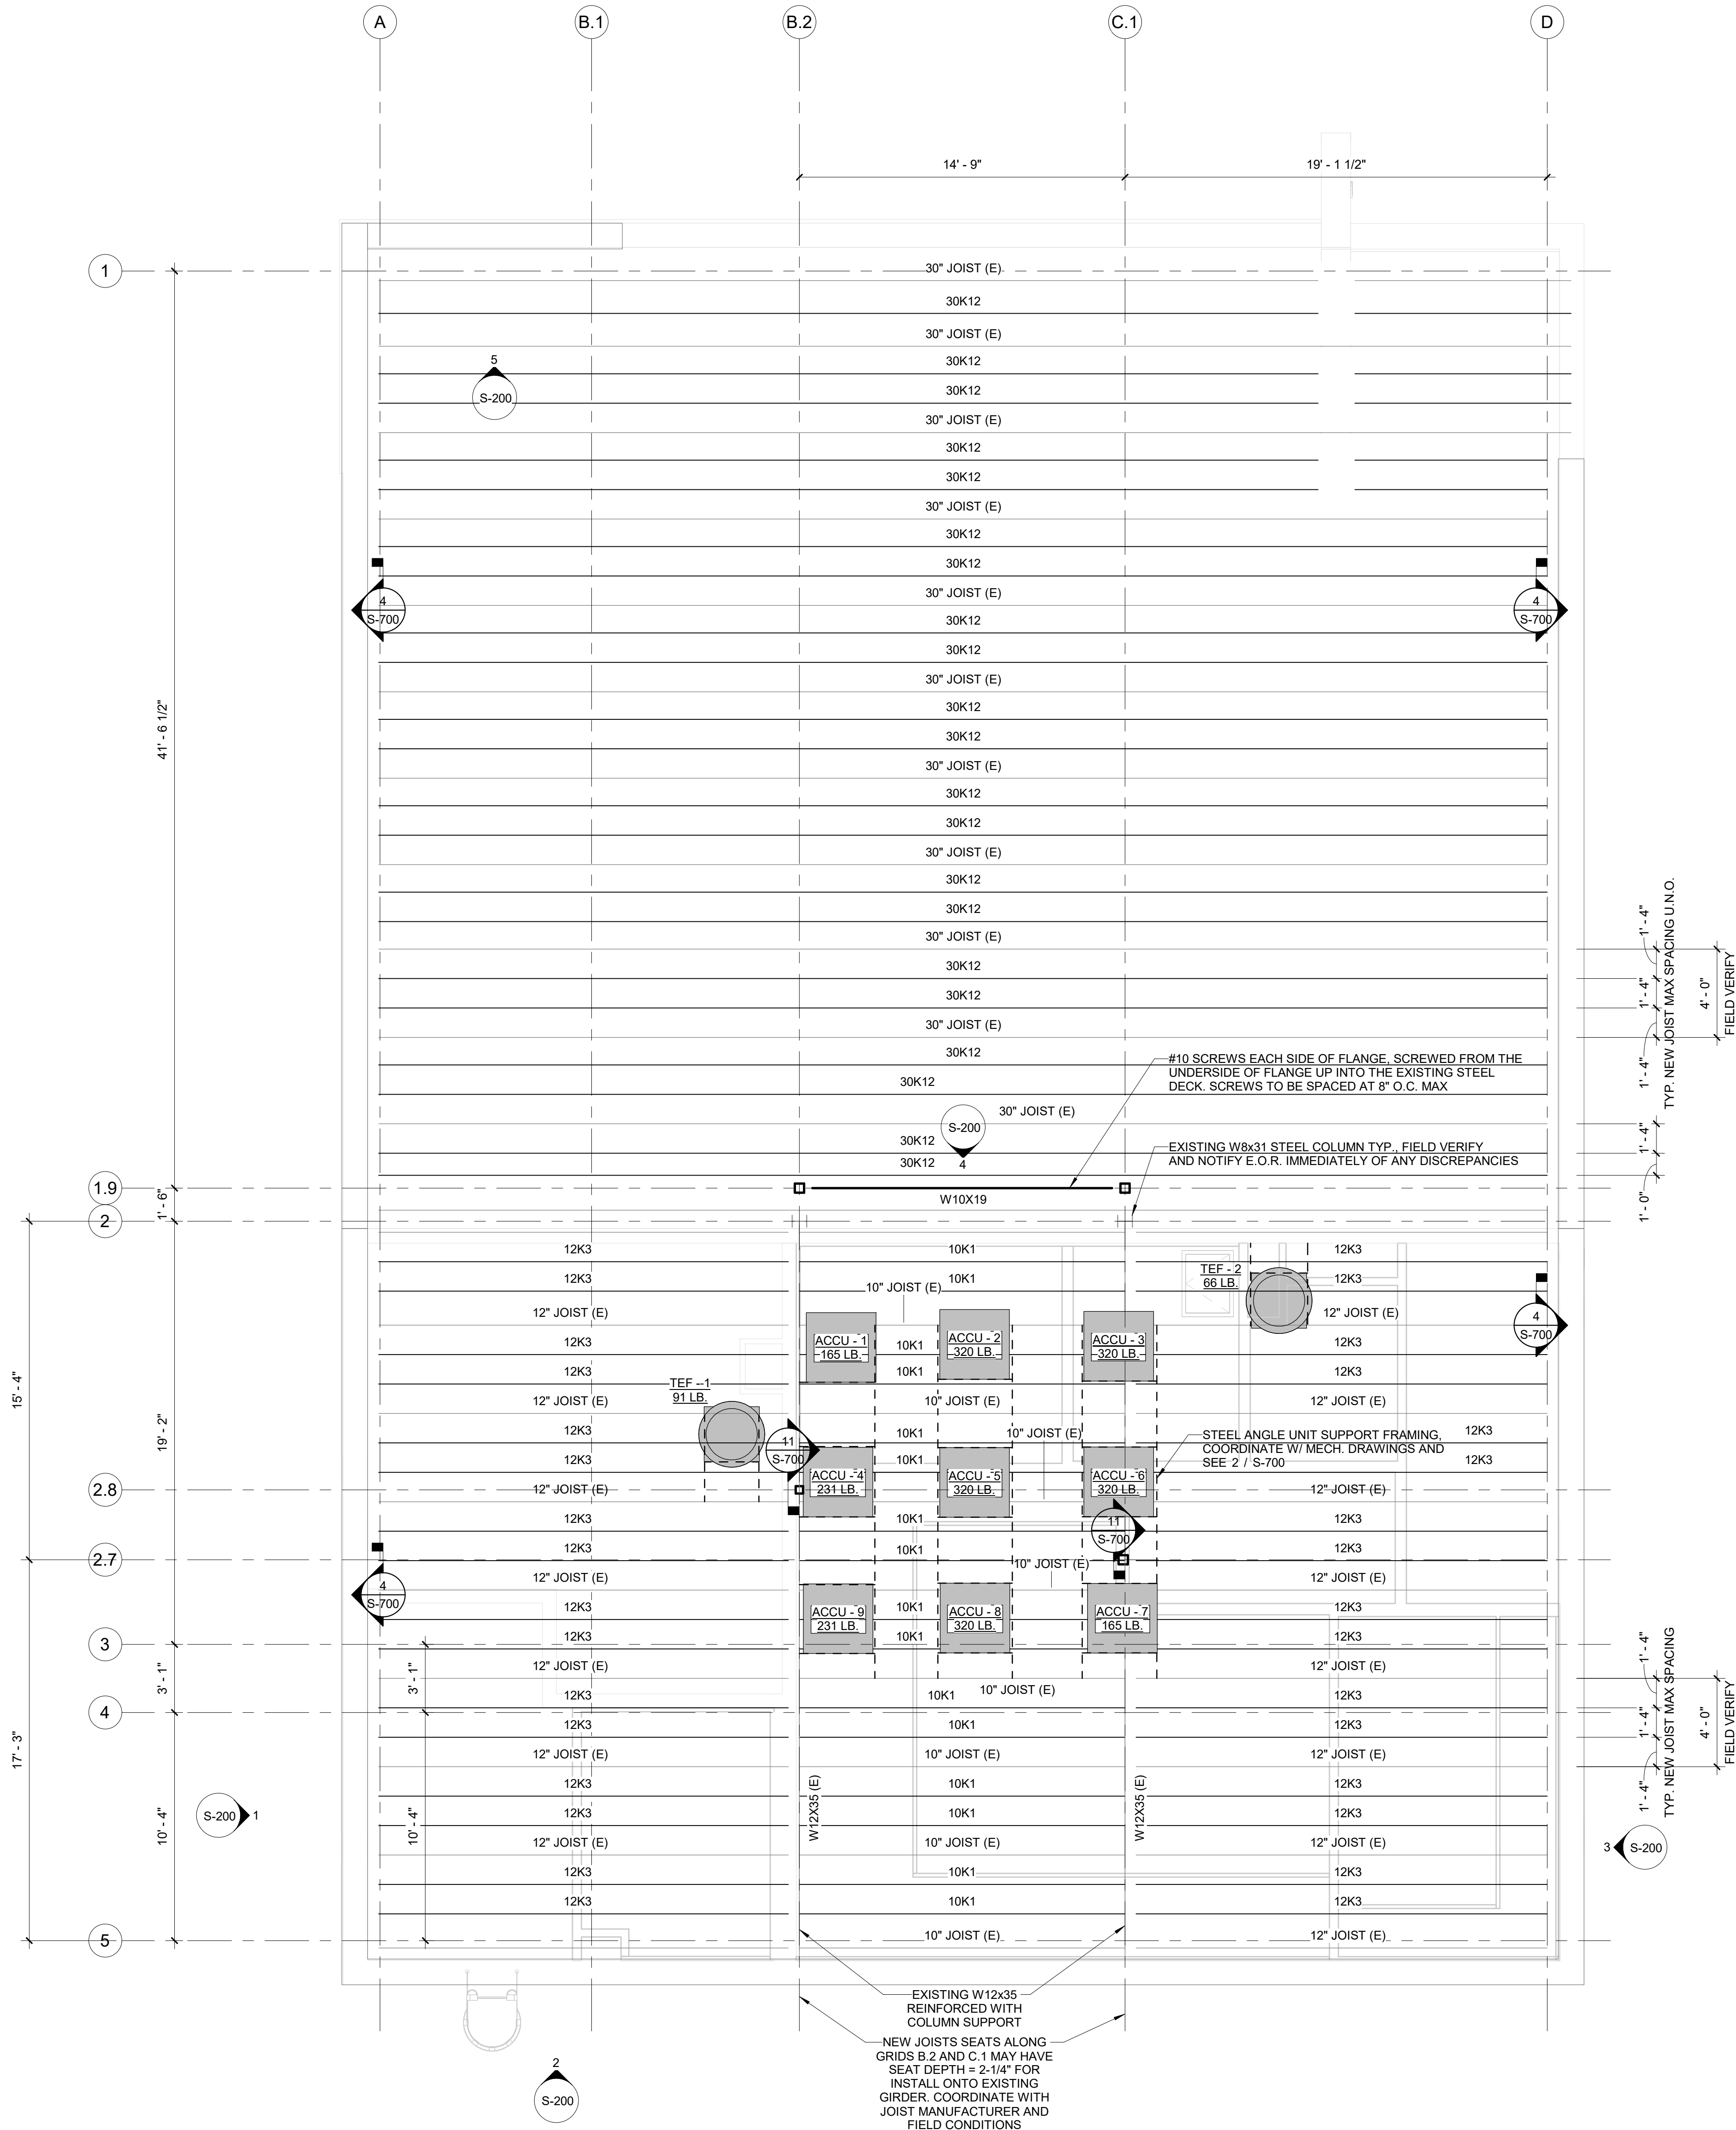


1 ROOF FRAMING PLAN


Scale: 1/4" = 1'-0"

ROOF PLAN NOTES

- CONTRACTOR TO FIELD VERIFY STEEL ELEVATIONS, PLAN DIMENSIONS, AND STRUCTURAL MEMBER SIZES.
- CONTRACTOR TO NOTIFY E.O.R. IMMEDIATELY IF MECHANICAL EQUIPMENT LOADS INDICATED ON PLAN DIFFER FROM FIELD EQUIPMENT AND AWAIT DIRECTION FROM E.O.R..
- CONTRACTOR SHALL FIELD LOCATE CURB SUPPORT STEEL AND COORDINATE PLACEMENT WITH MECHANICAL DRAWINGS.
- (E) = EXISTING JOIST TO REMAIN. REMAINDER ARE NEW FIELD BOLTED SPLICED JOISTS SET IN PLACE BENEATH THE ROOF DECK. JOIST SPLICE LOCATION TO BE DETERMINED BY JOIST MANUFACTURER AND COORDINATED WITH THE CONTRACTOR.
- WELD NEW JOISTS TO EXISTING ROOF DECK PER DETAIL 8/S-200
- JOIST CHORD BRACING LOCATION PER SJI AND JOIST MANUFACTURER DETERMINATION.
- FOR GENERAL NOTES, ABBREVIATIONS, AND LOADING CRITERIA SEE S-001.

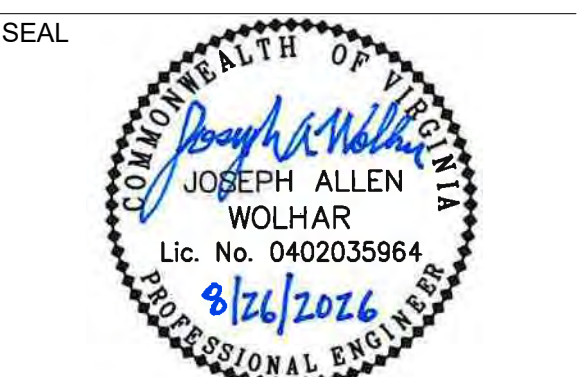

KEY PLAN

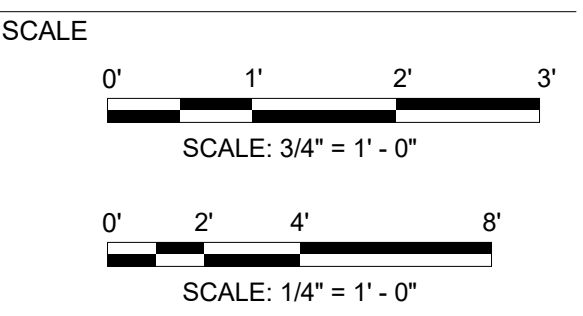

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026
TITLE

**STRUCTURAL
BRACE FRAME
ELEVATIONS AND
DETAILS**


PROJECT NO. 50165756

S-200


SHEET NO.

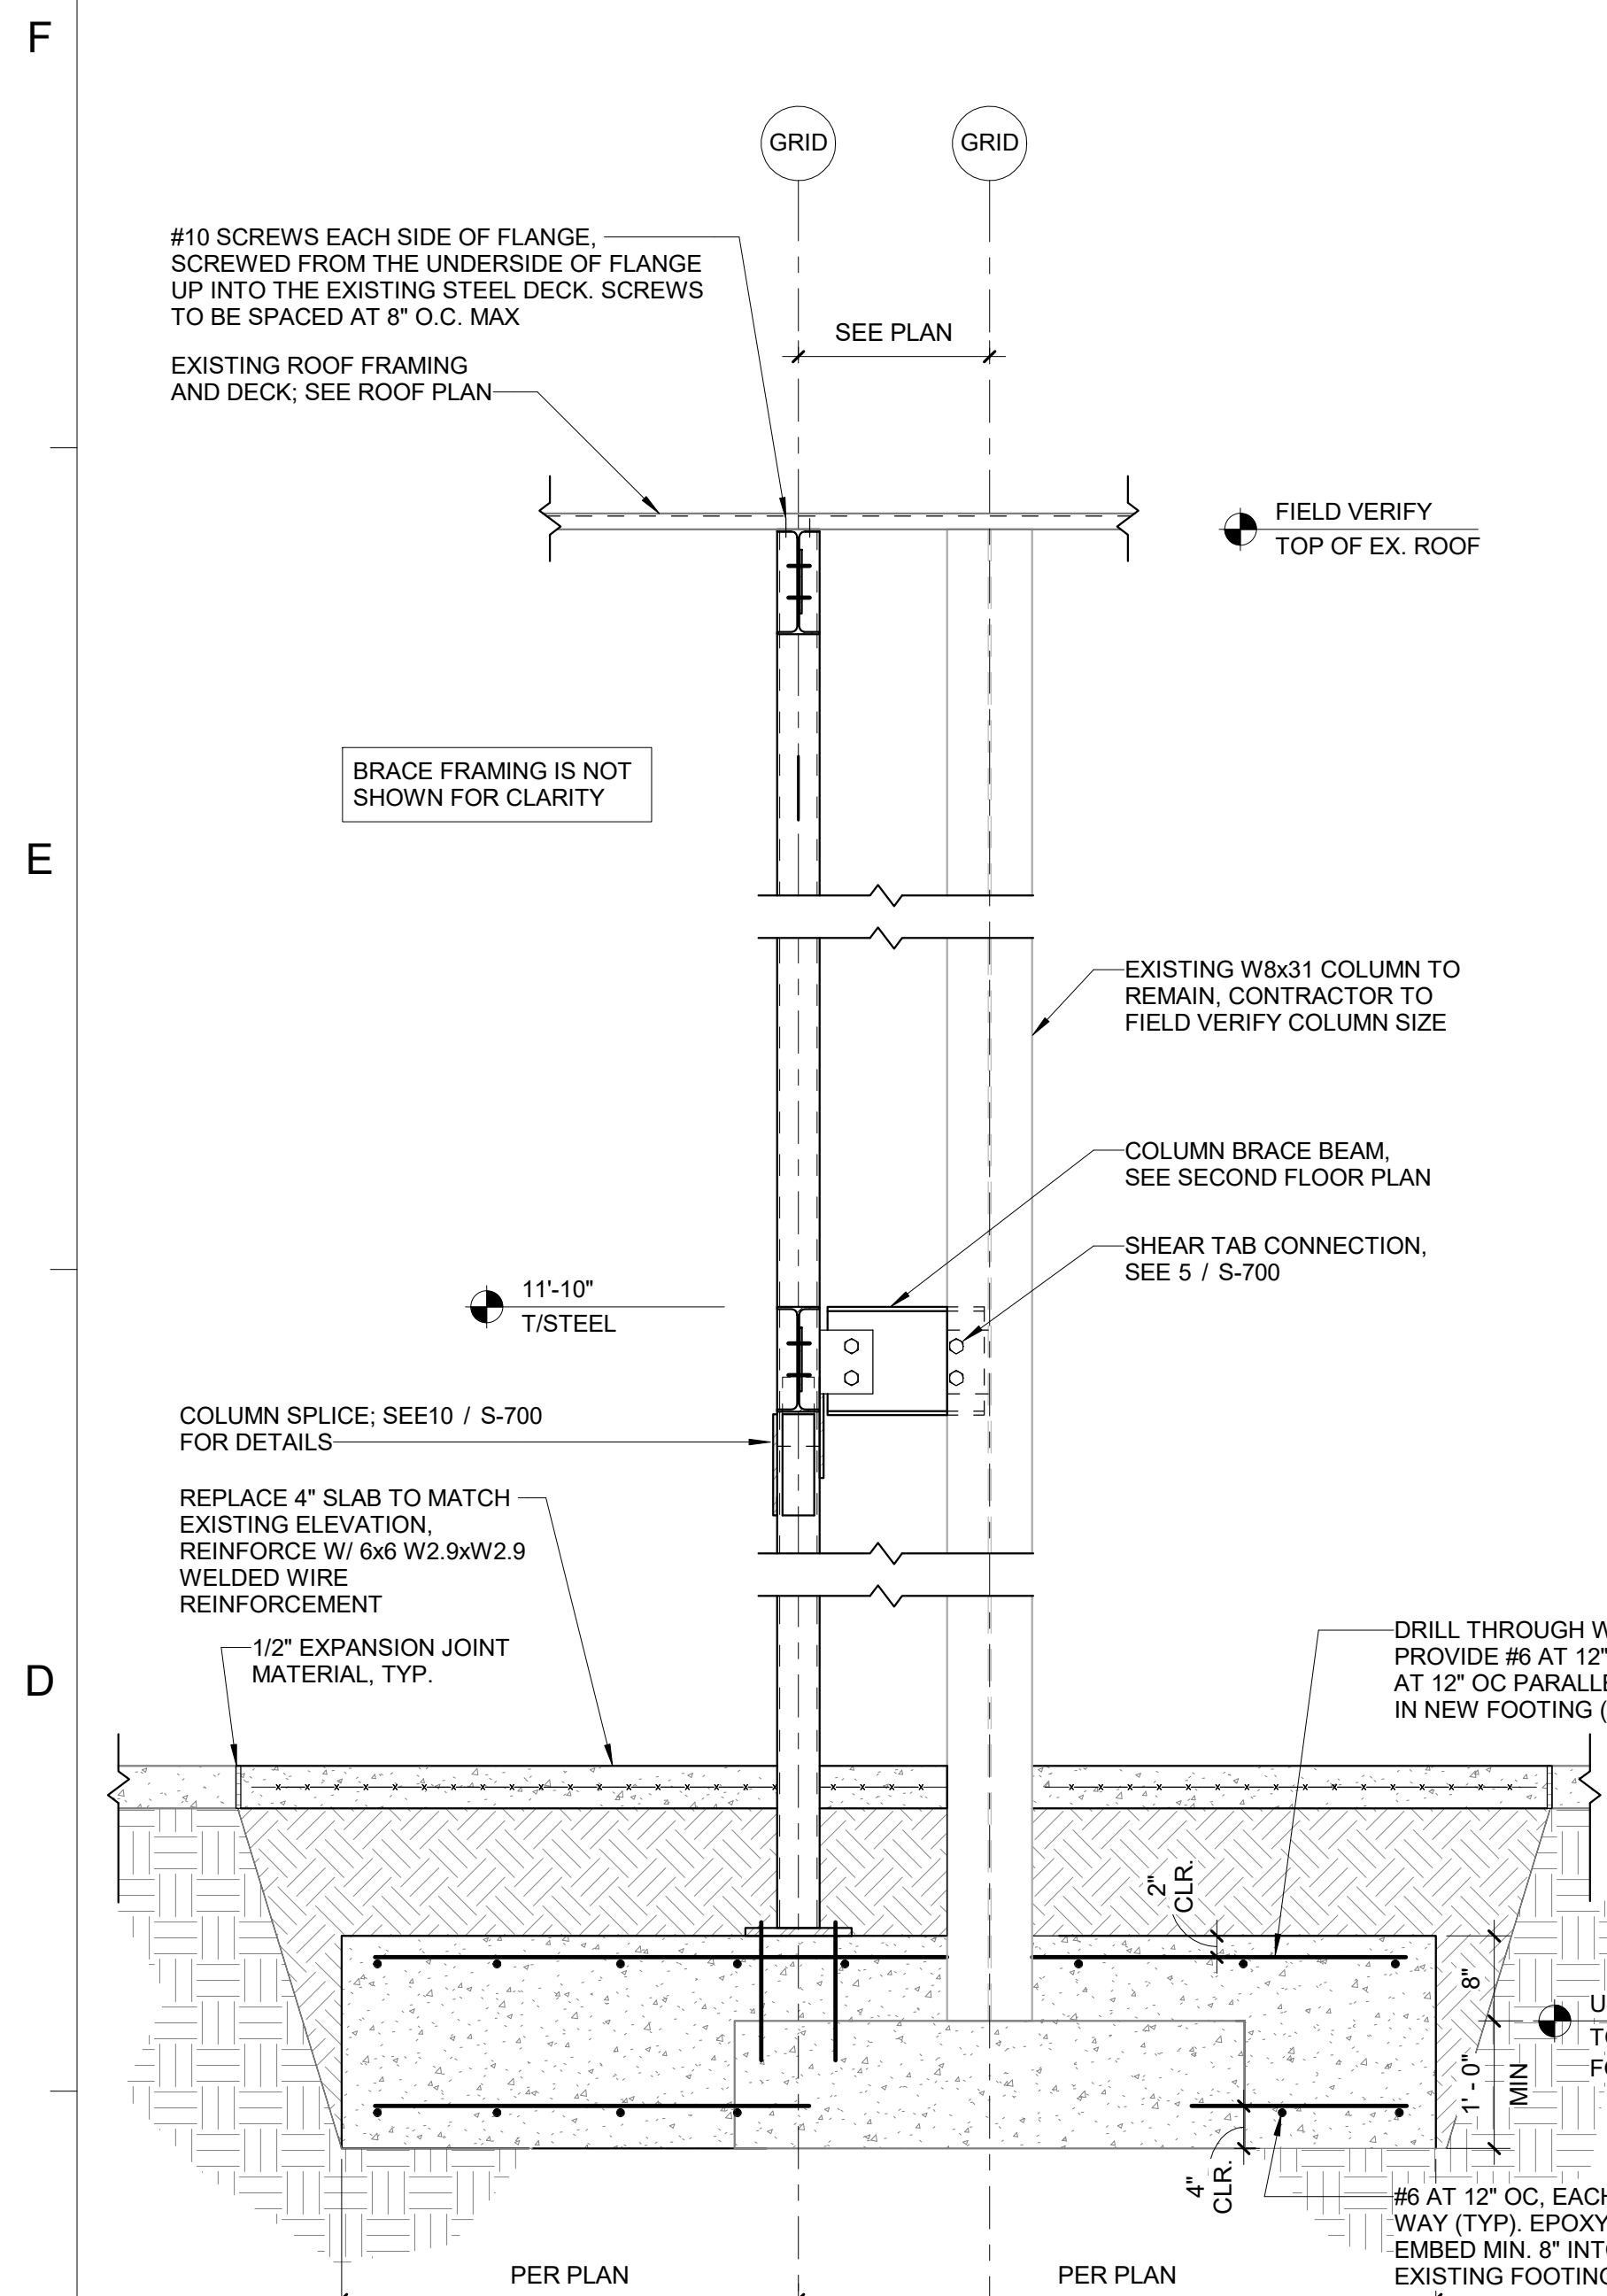


9 BRACE FRAME SECTION ALONG GRID 1.9
Scale: 3/4" = 1'-0"

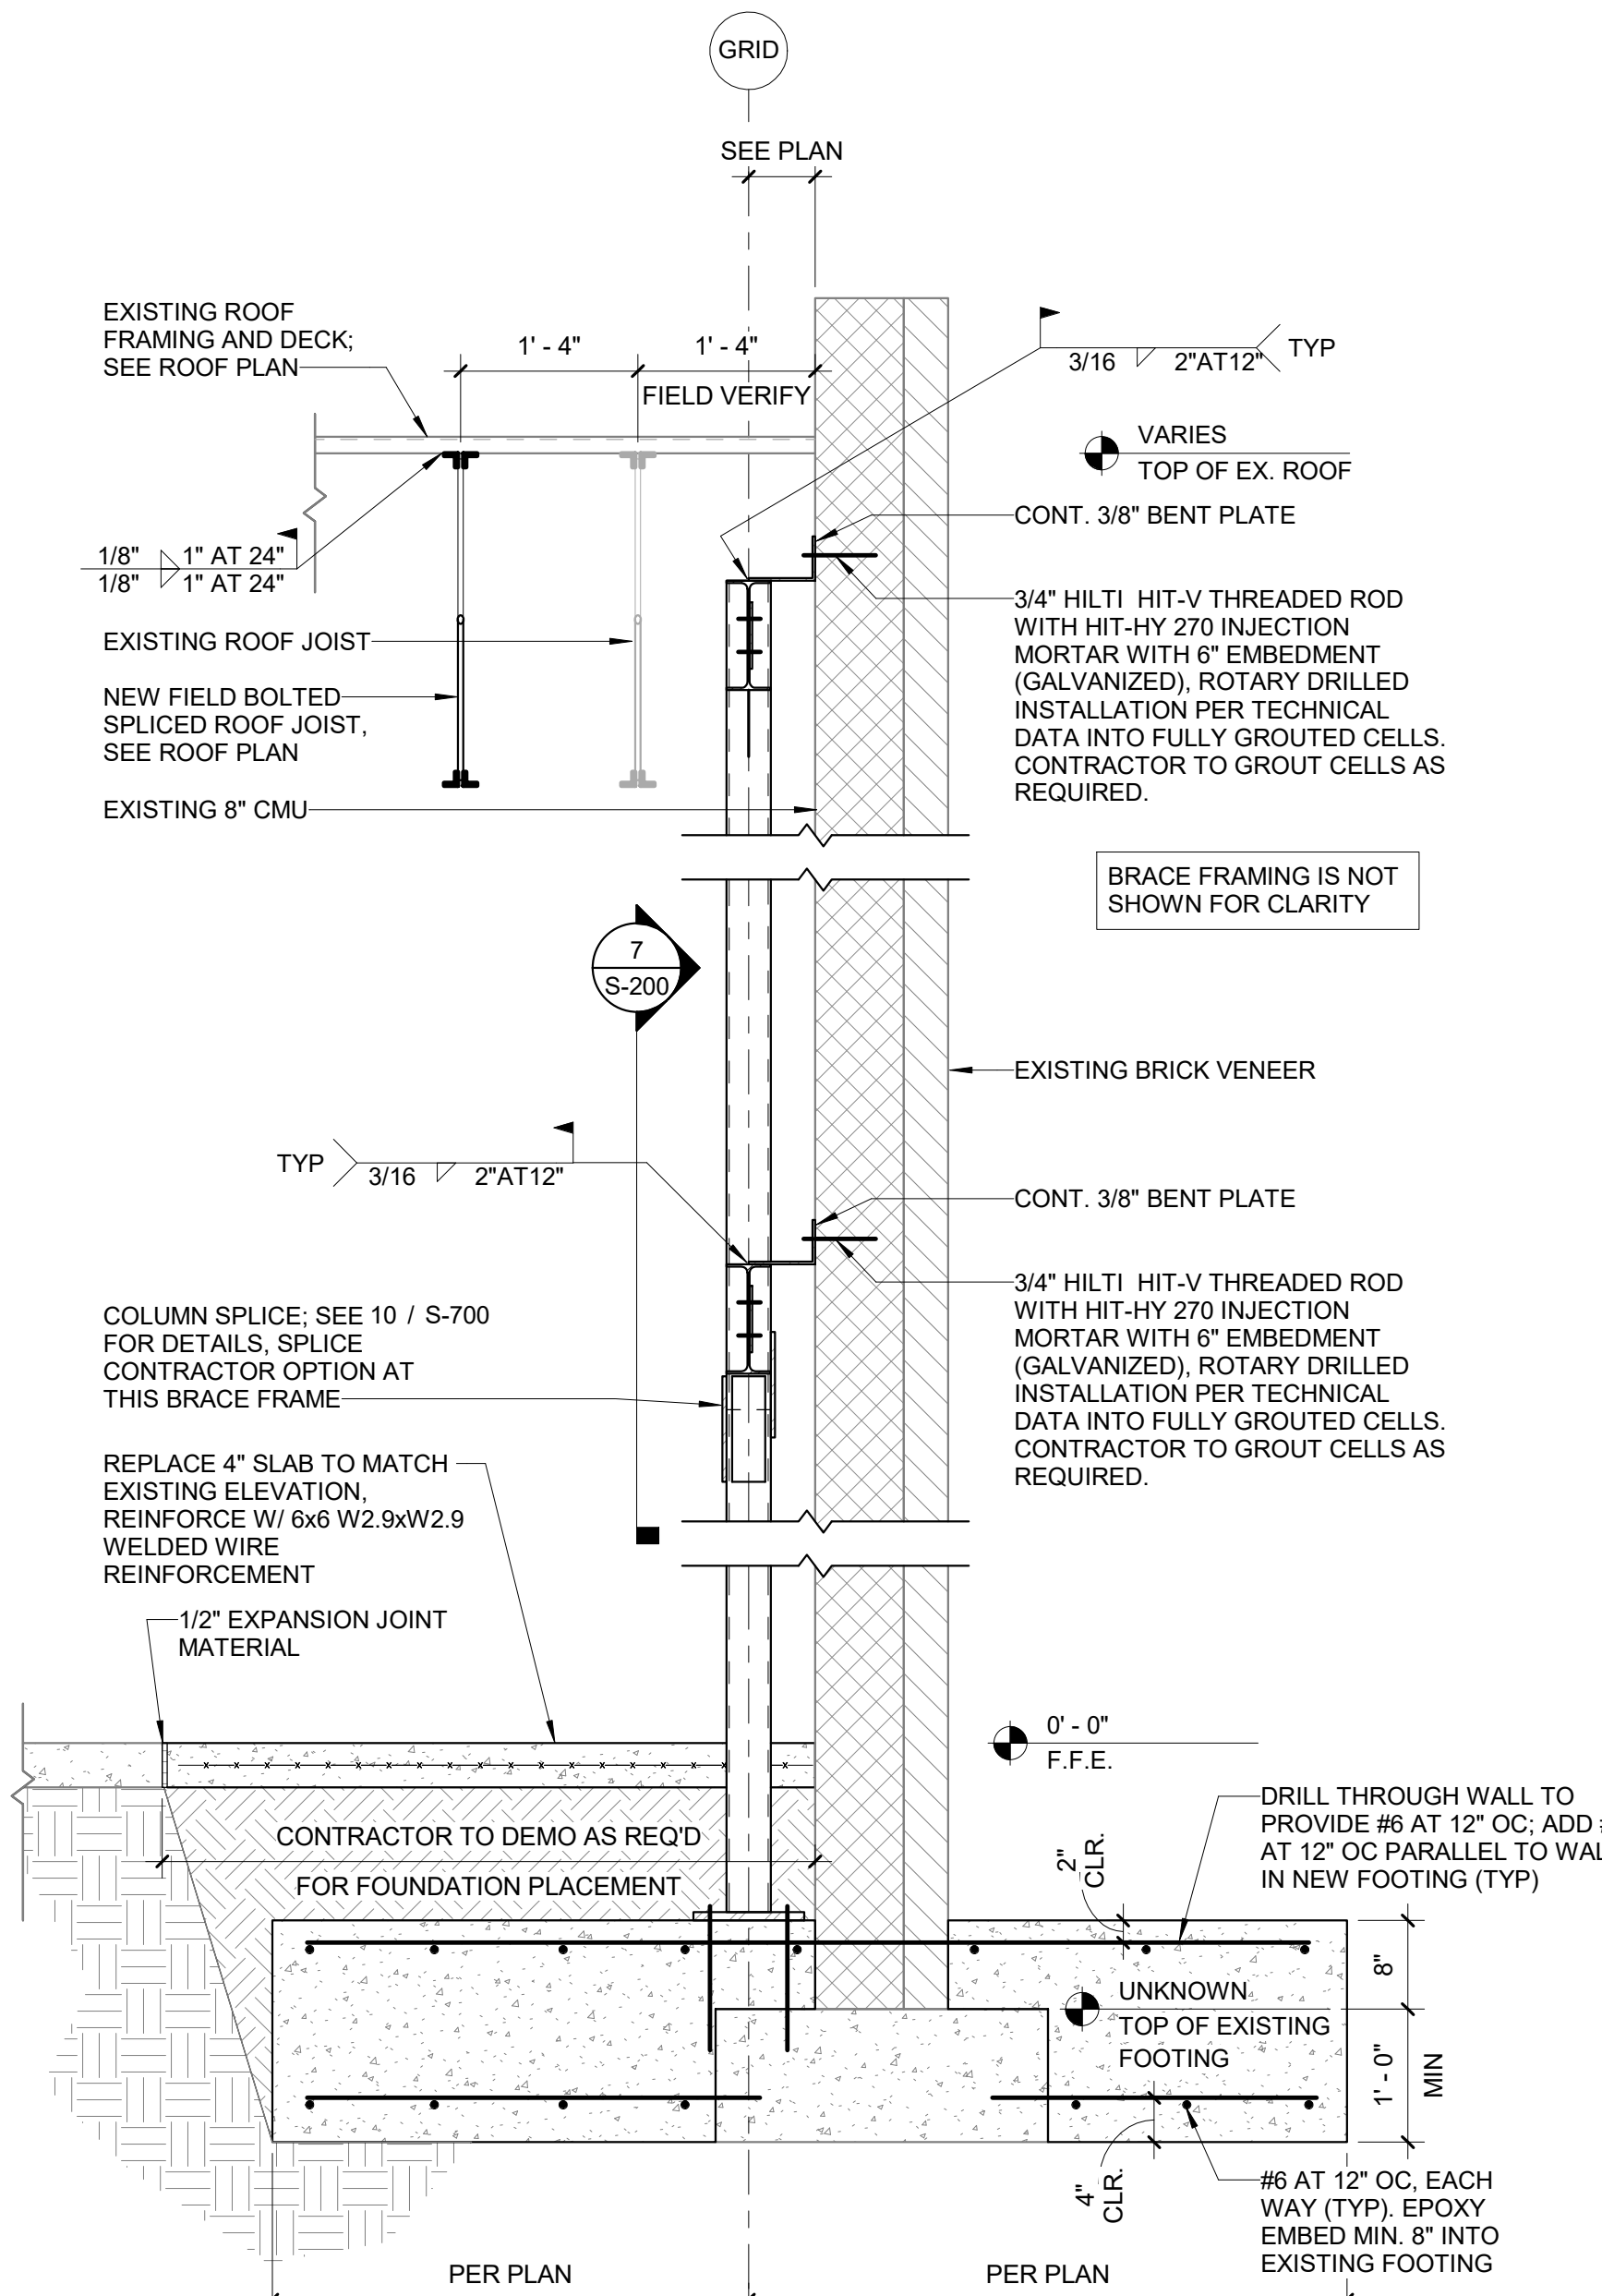


8 WALL SECTION PARALLEL TO JOISTS
Scale: 3/4" = 1'-0"

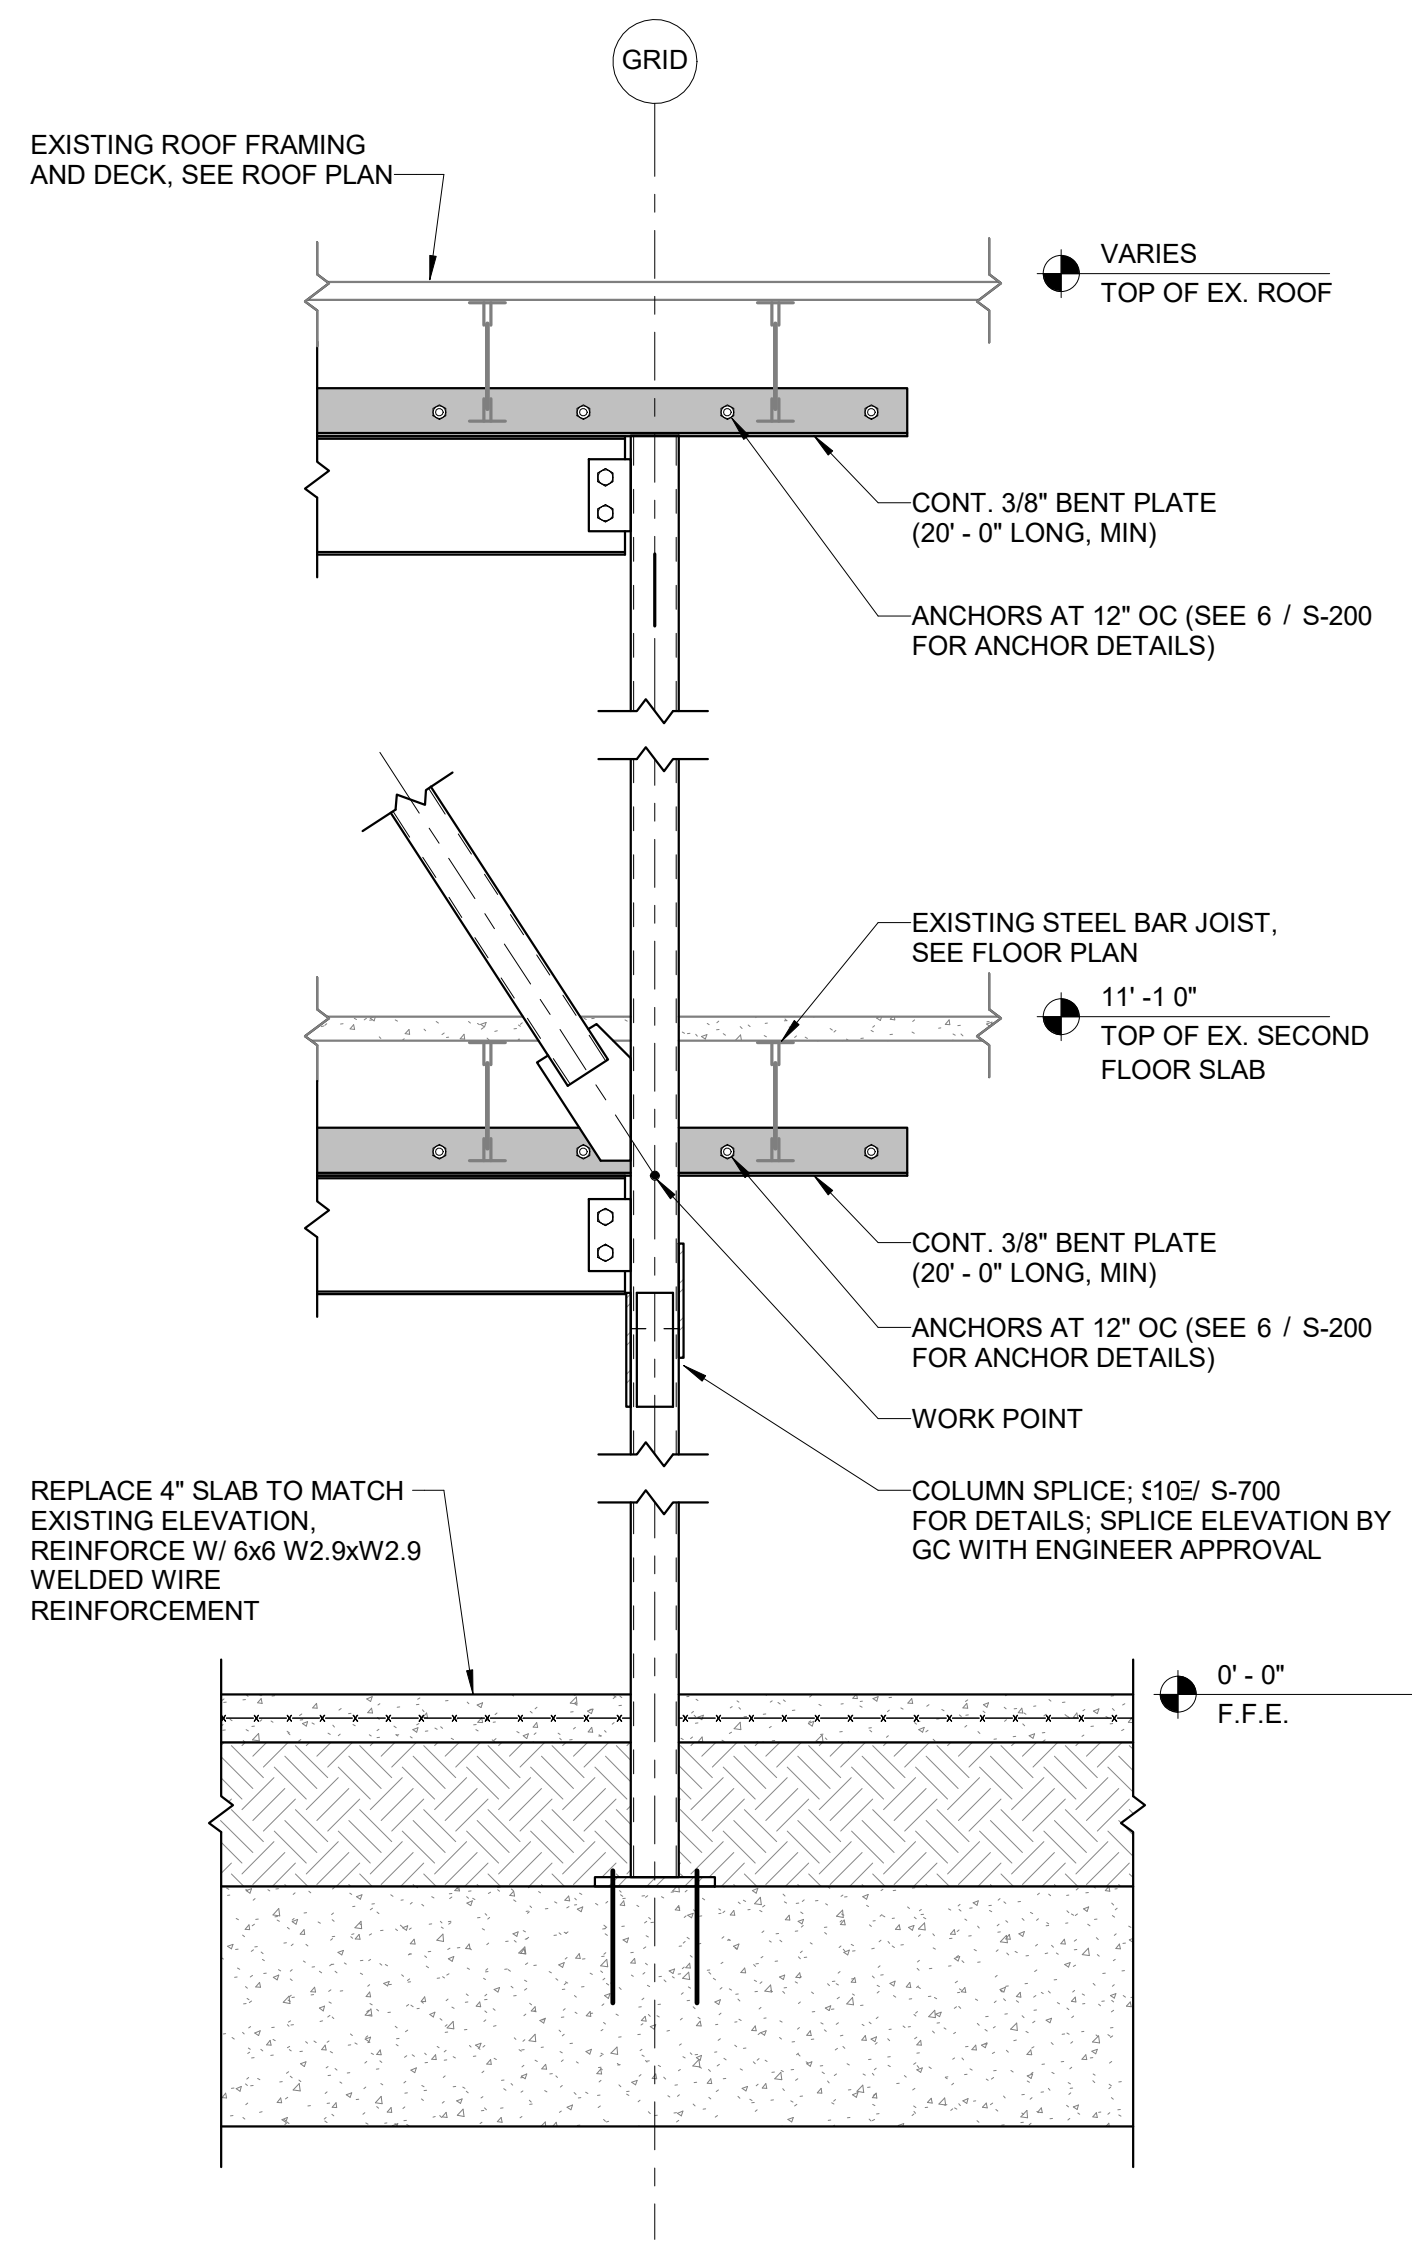


7 COLUMN SECTION NORMAL TO WALL
Scale: 3/4" = 1'-0"

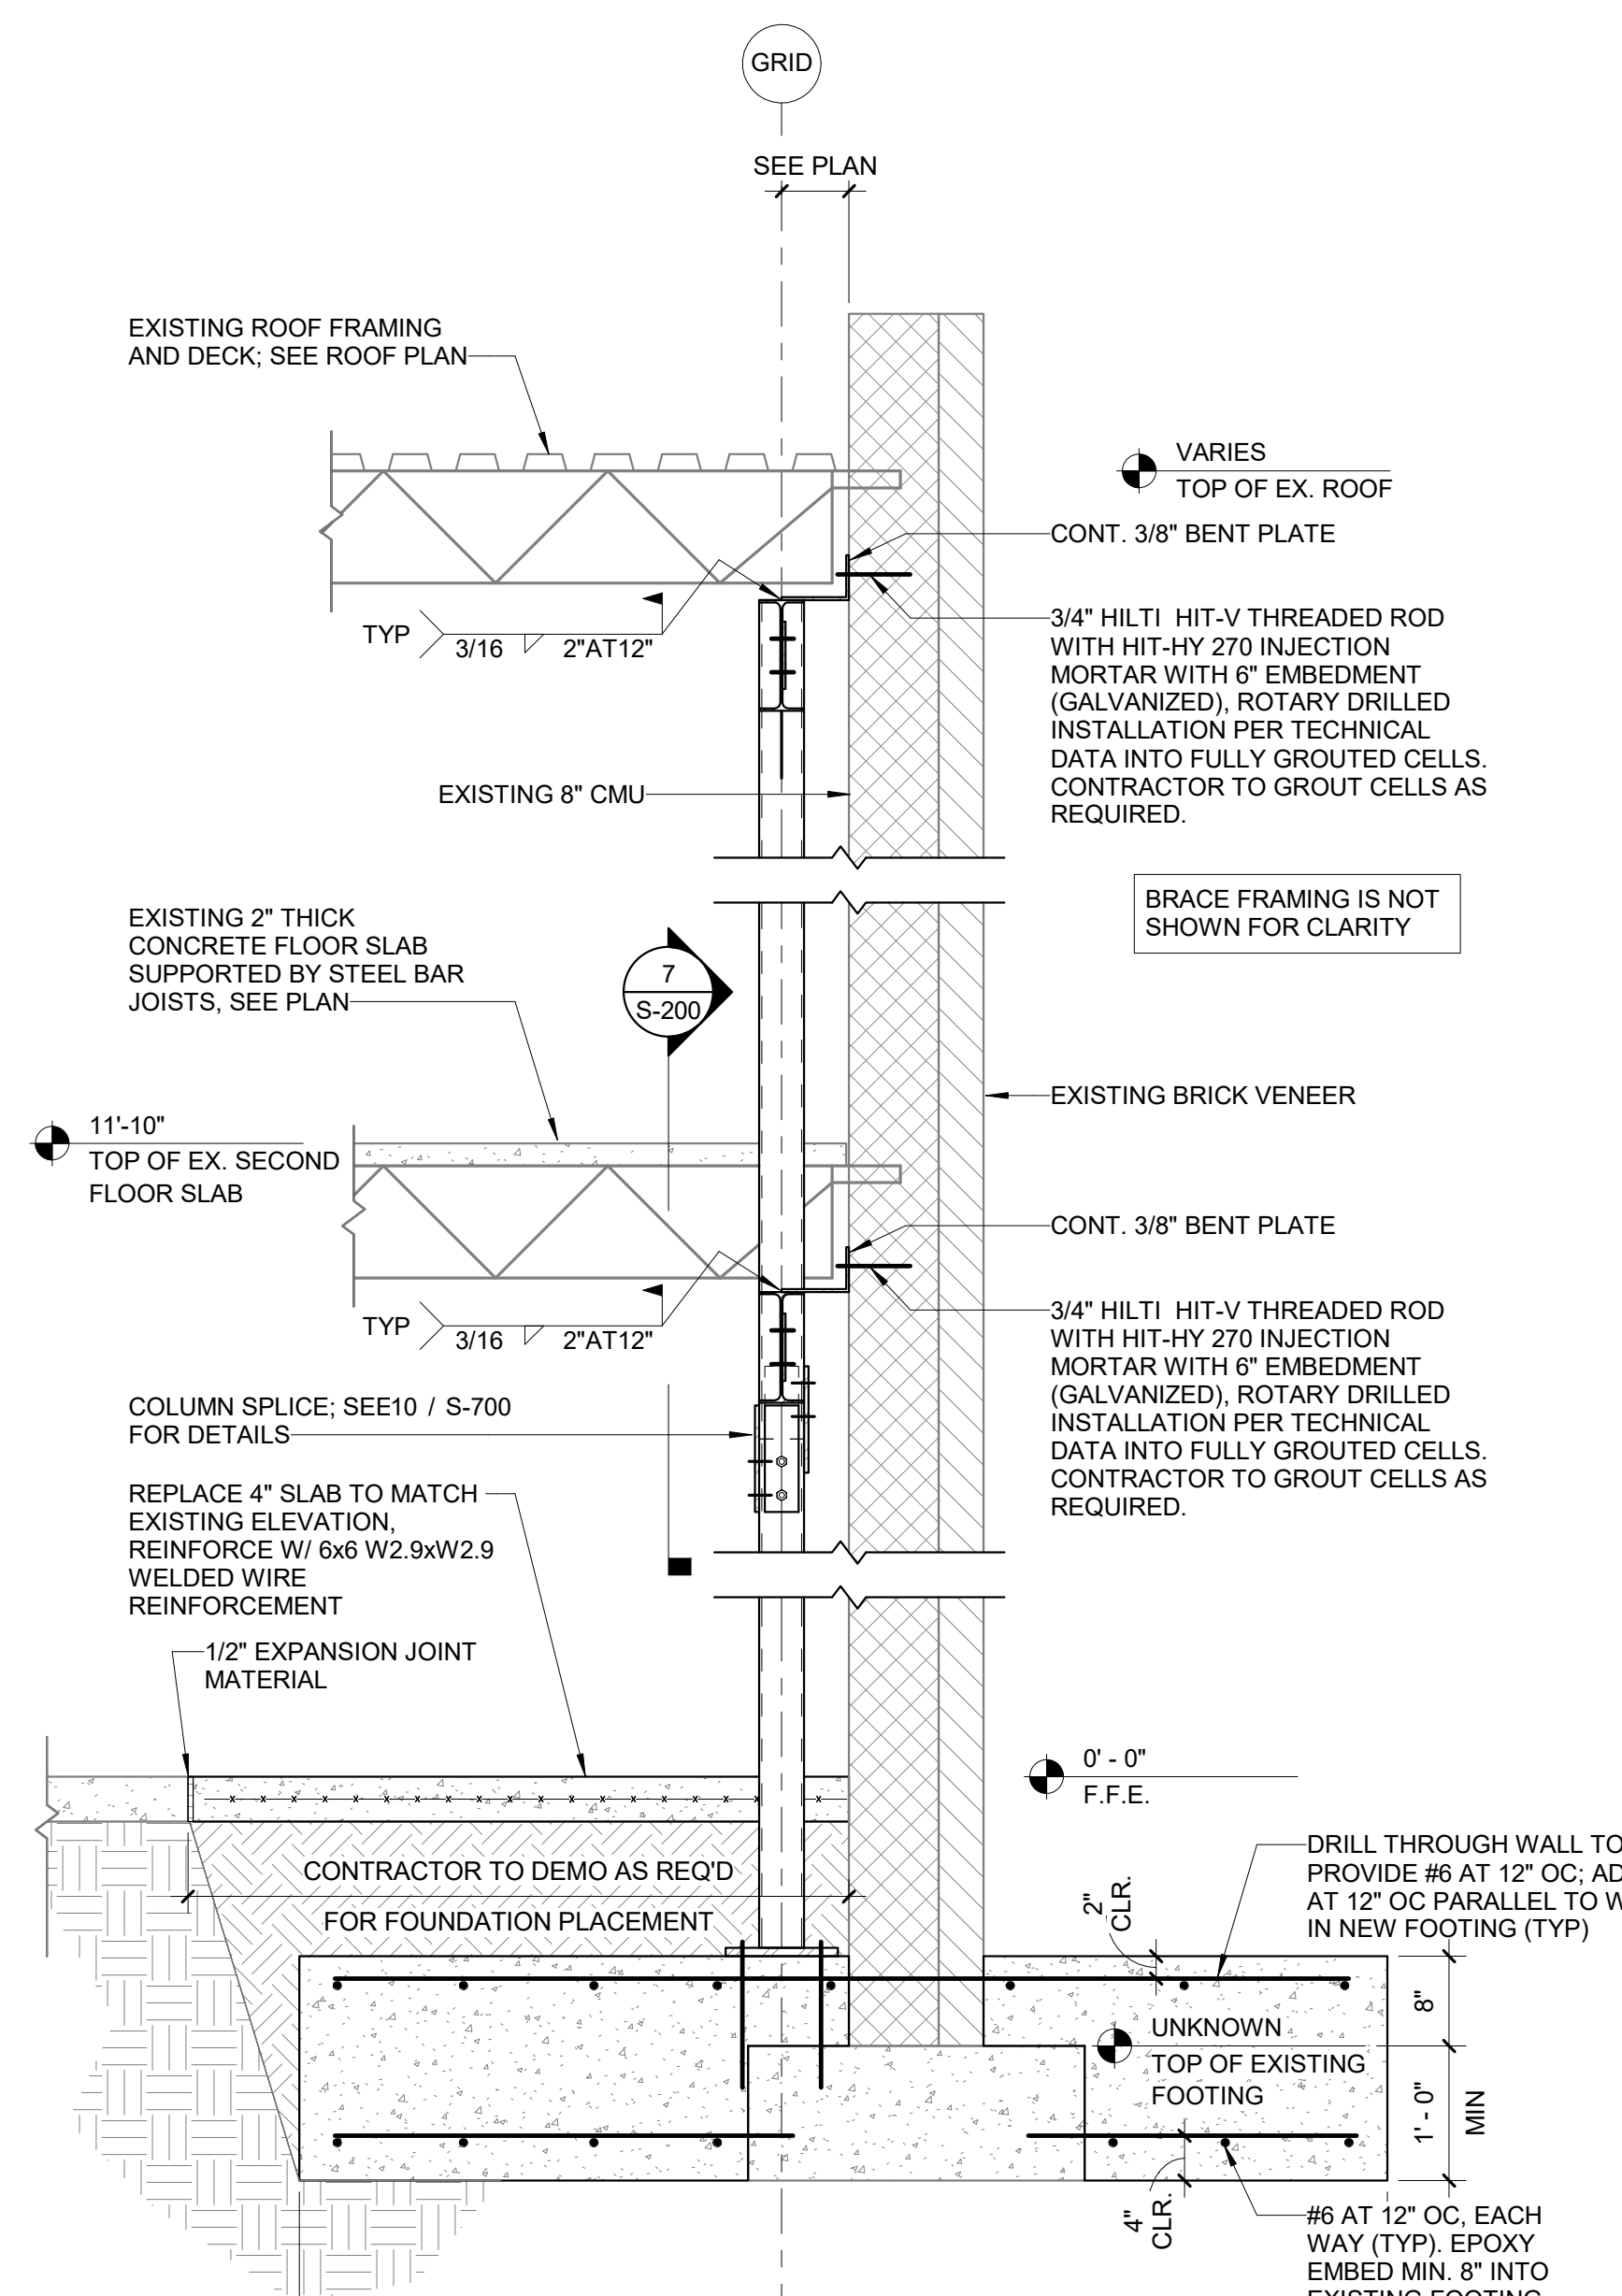


6 WALL SECTION PERPENDICULAR TO JOISTS
Scale: 3/4" = 1'-0"

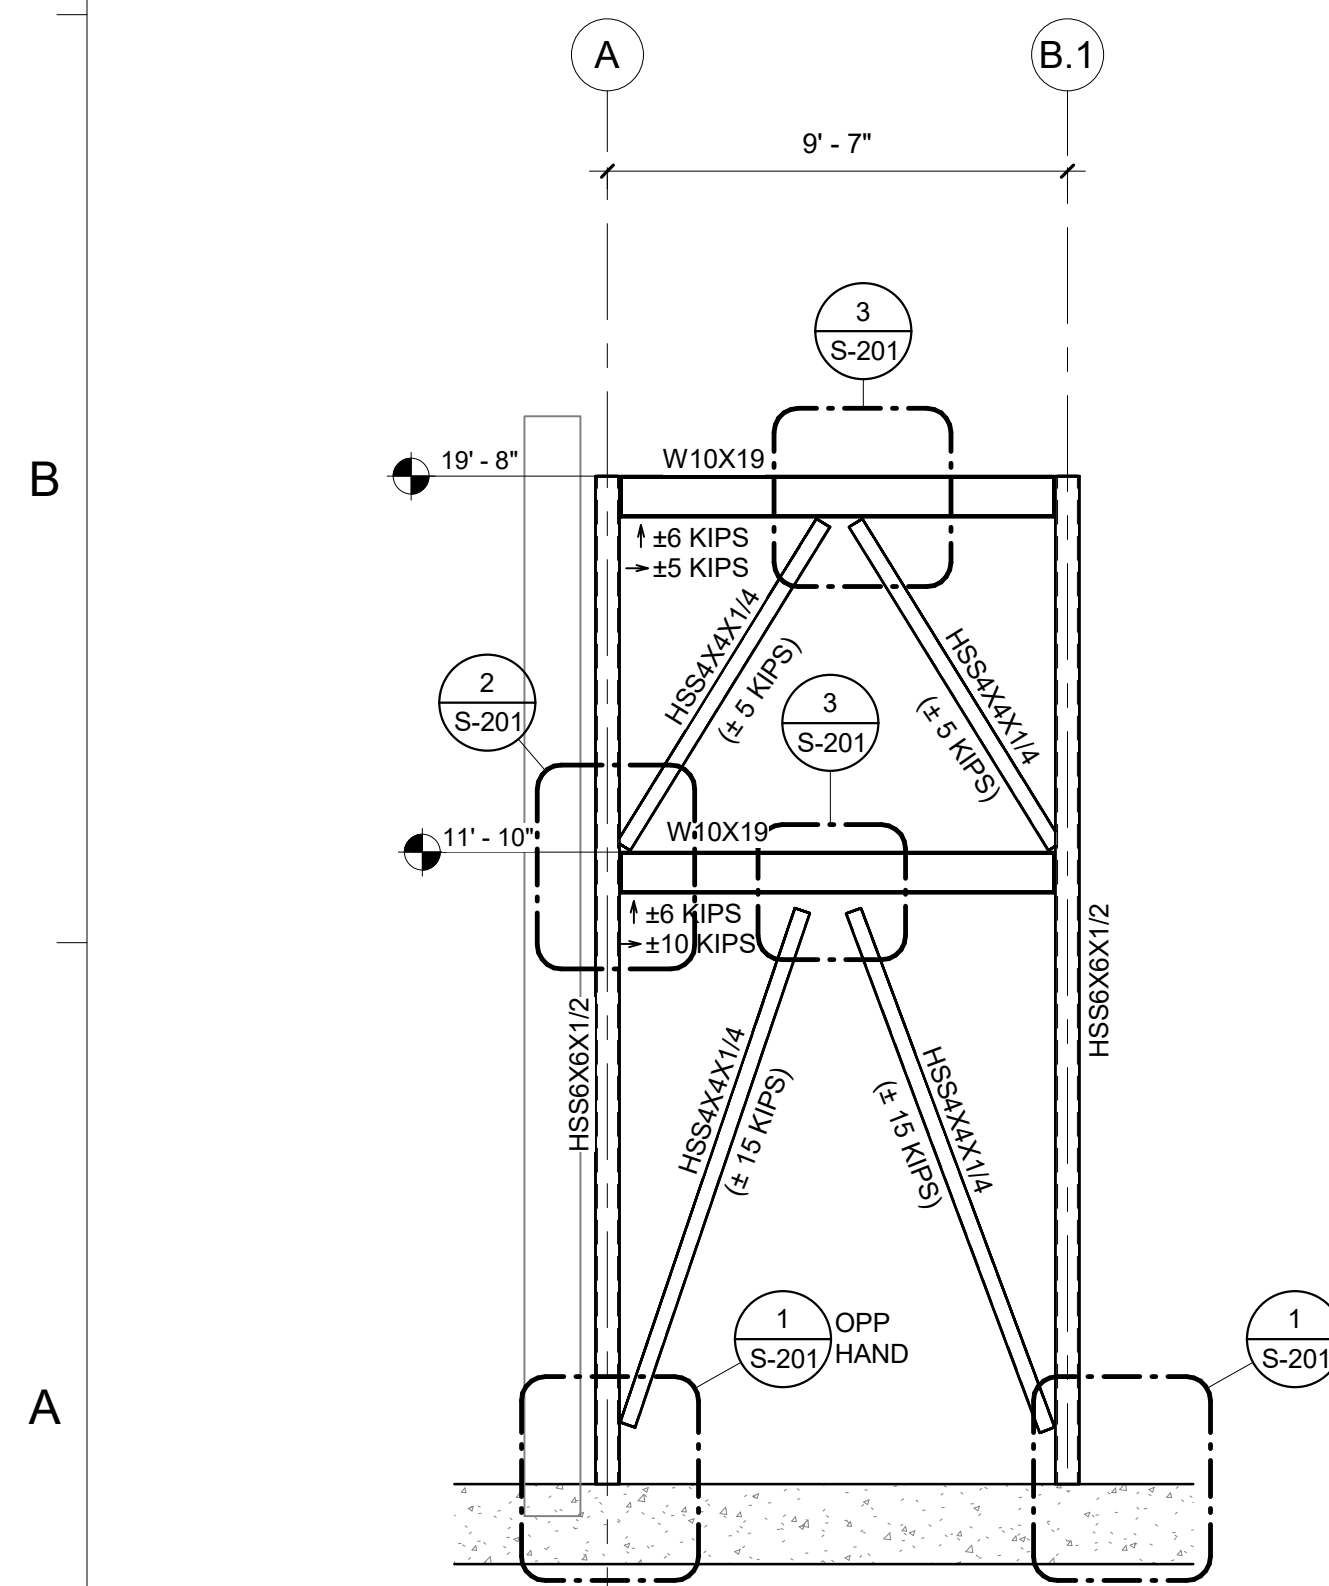


5 ELEVATION 5
Scale: 1/4" = 1'-0"

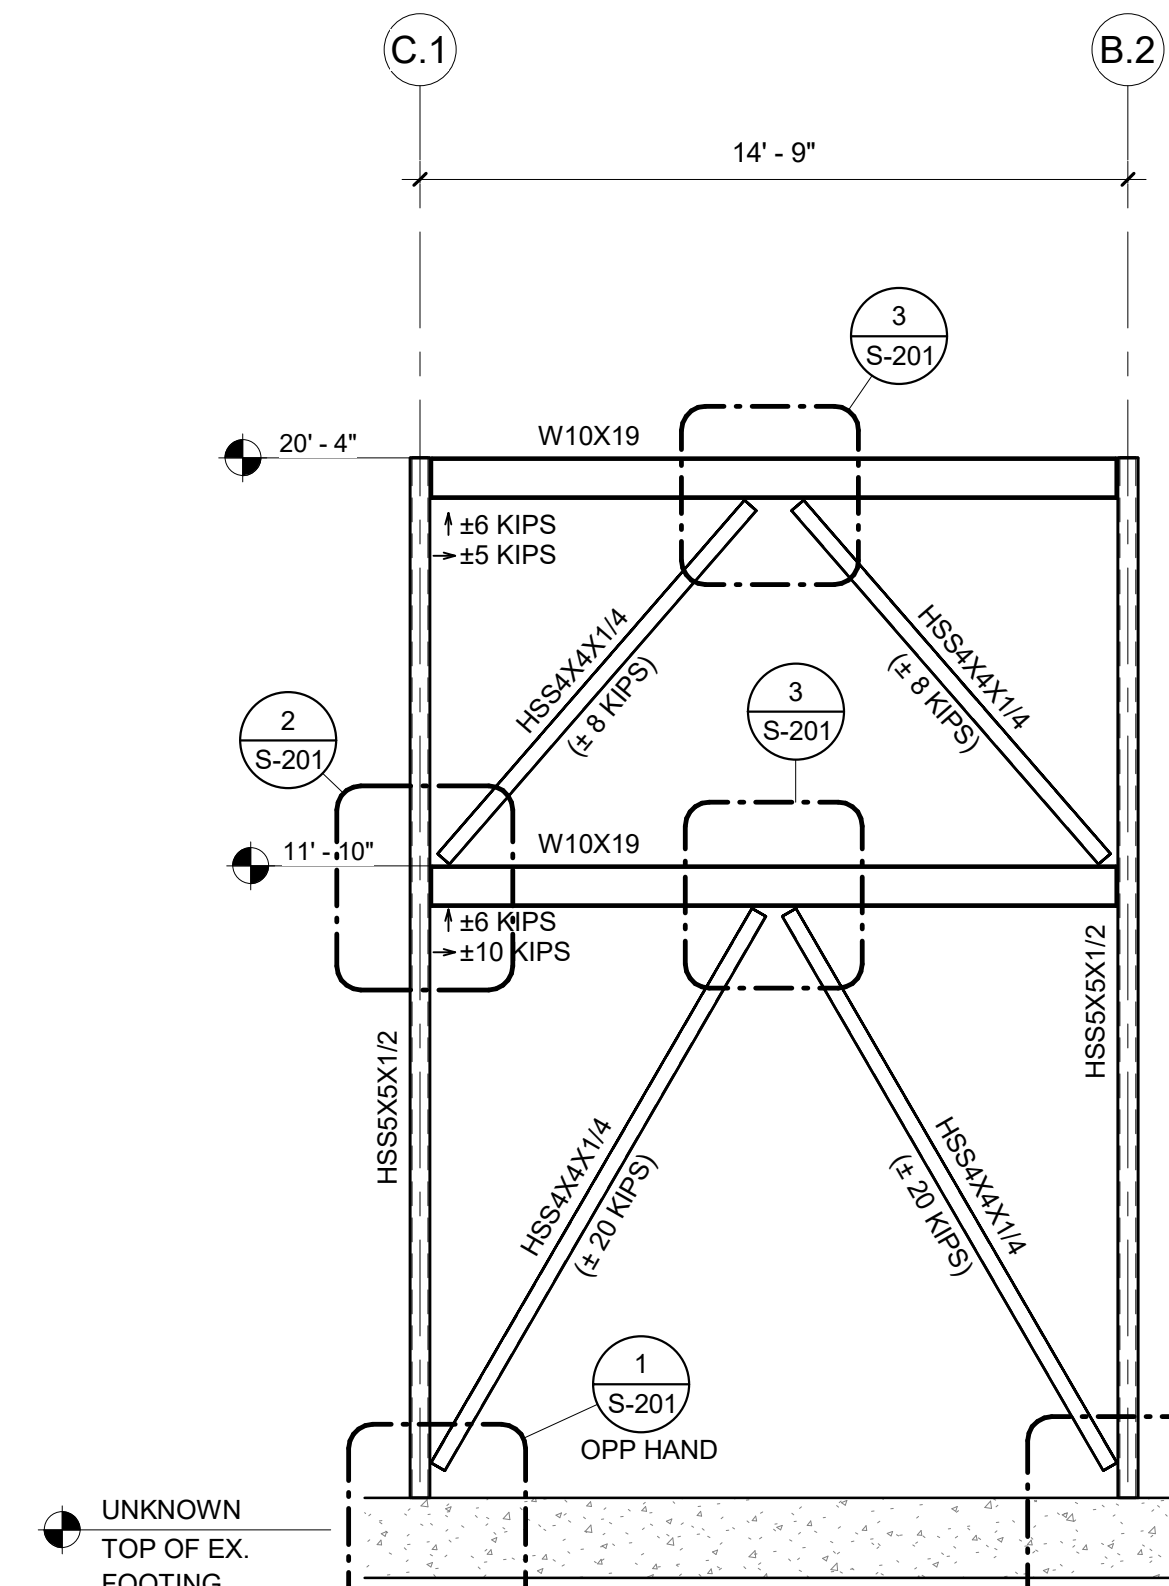


4 ELEVATION 4
Scale: 1/4" = 1'-0"

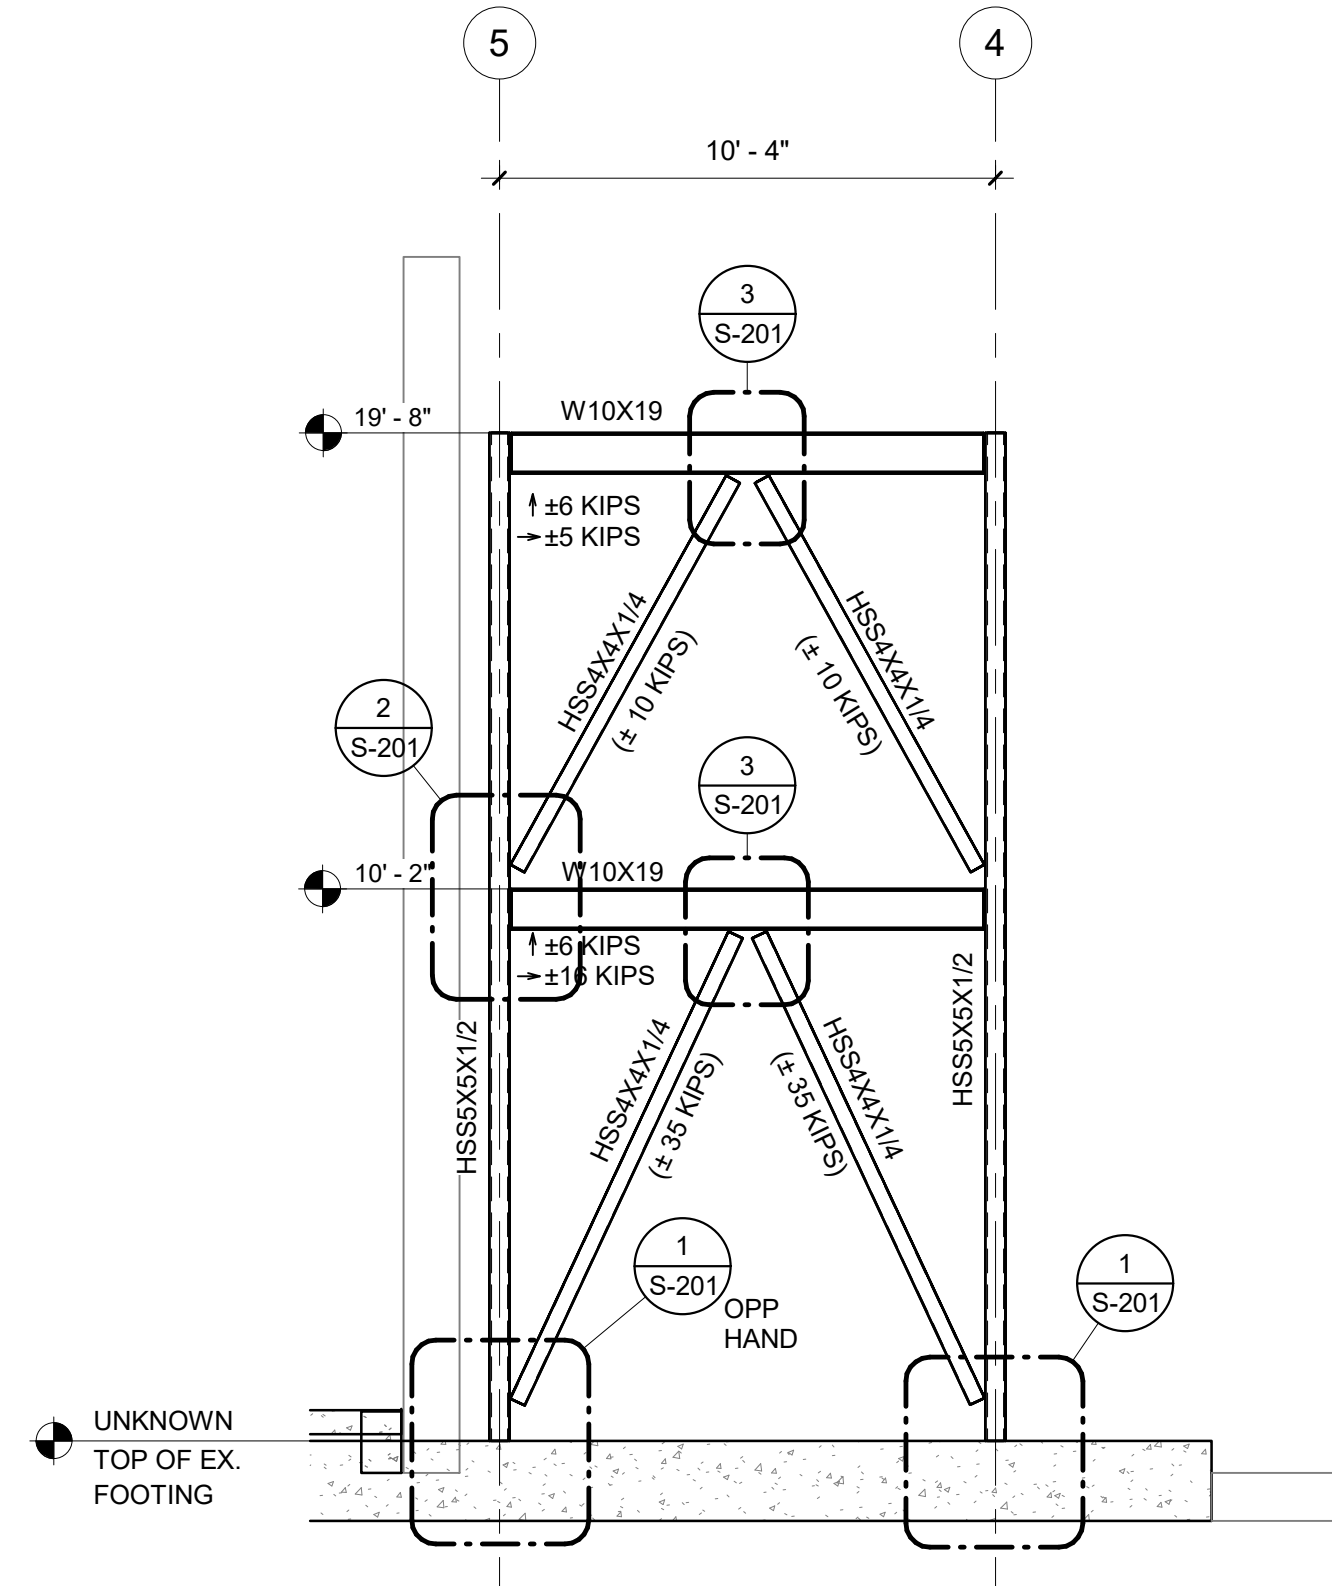

3 ELEVATION 3
Scale: 1/4" = 1'-0"

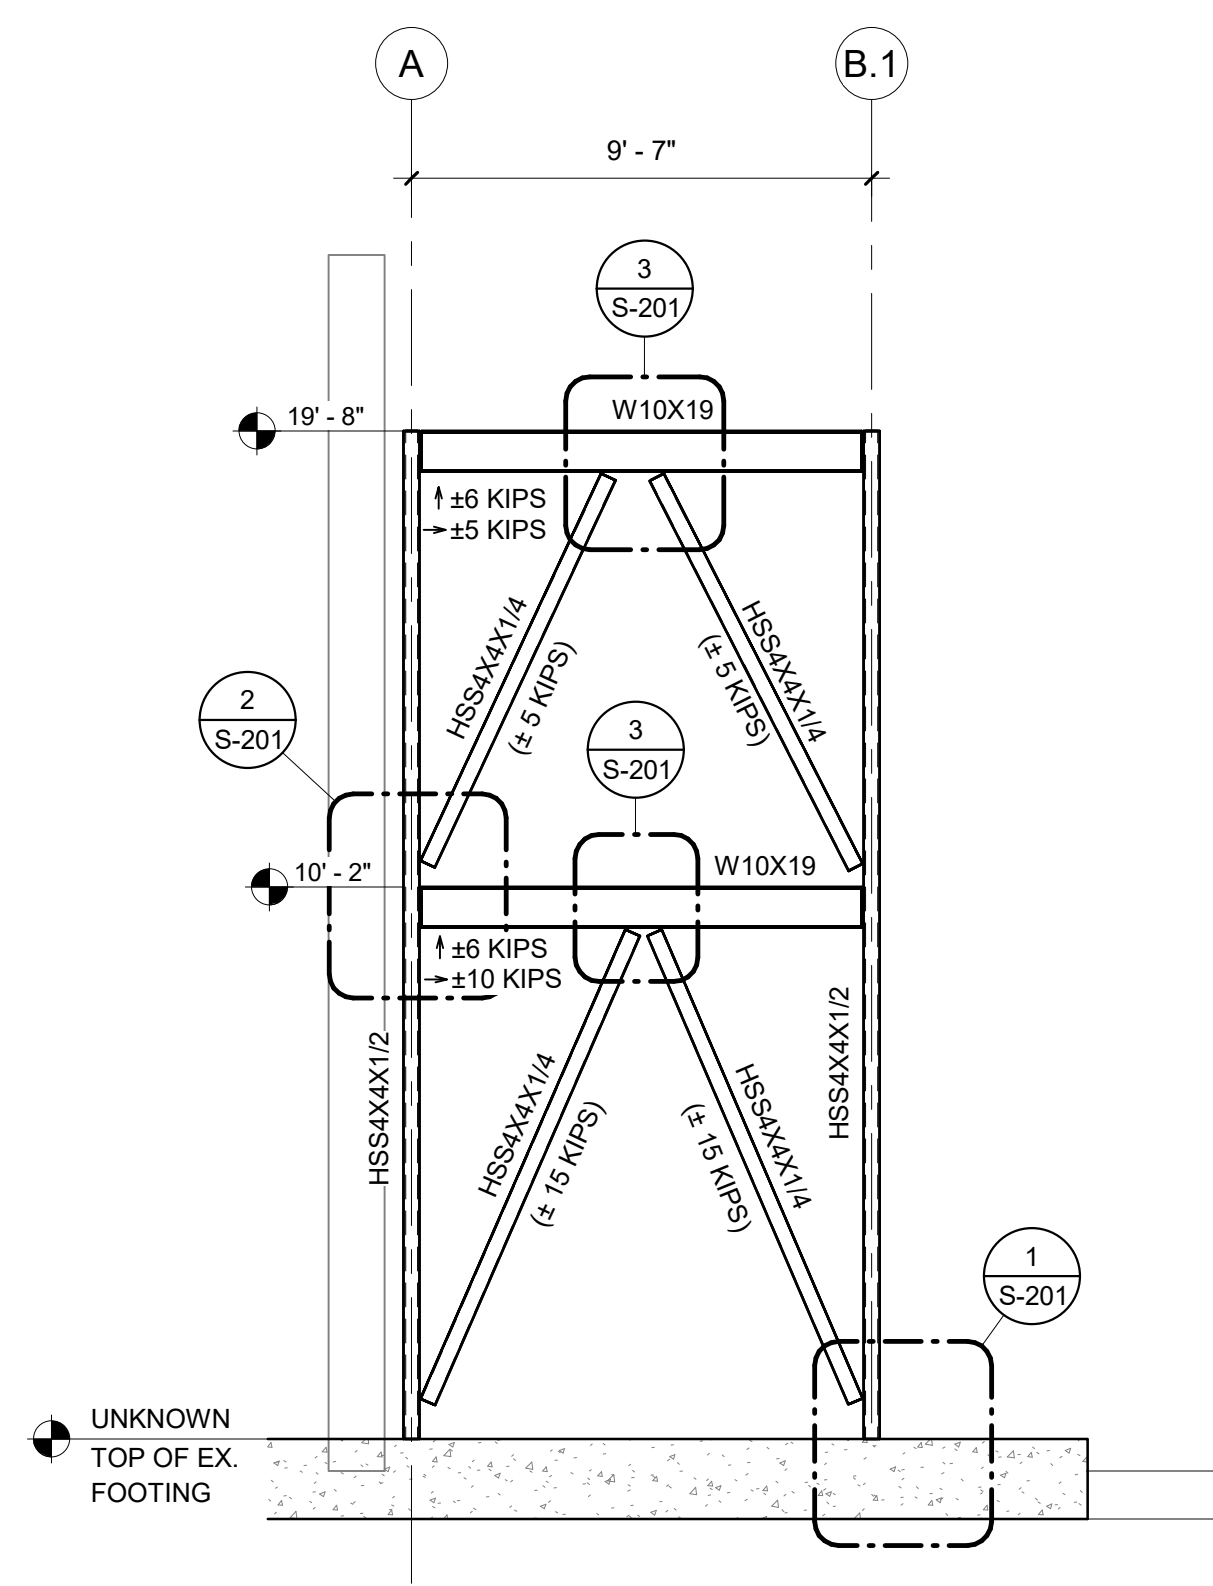

2 ELEVATION 2
Scale: 1/4" = 1'-0"

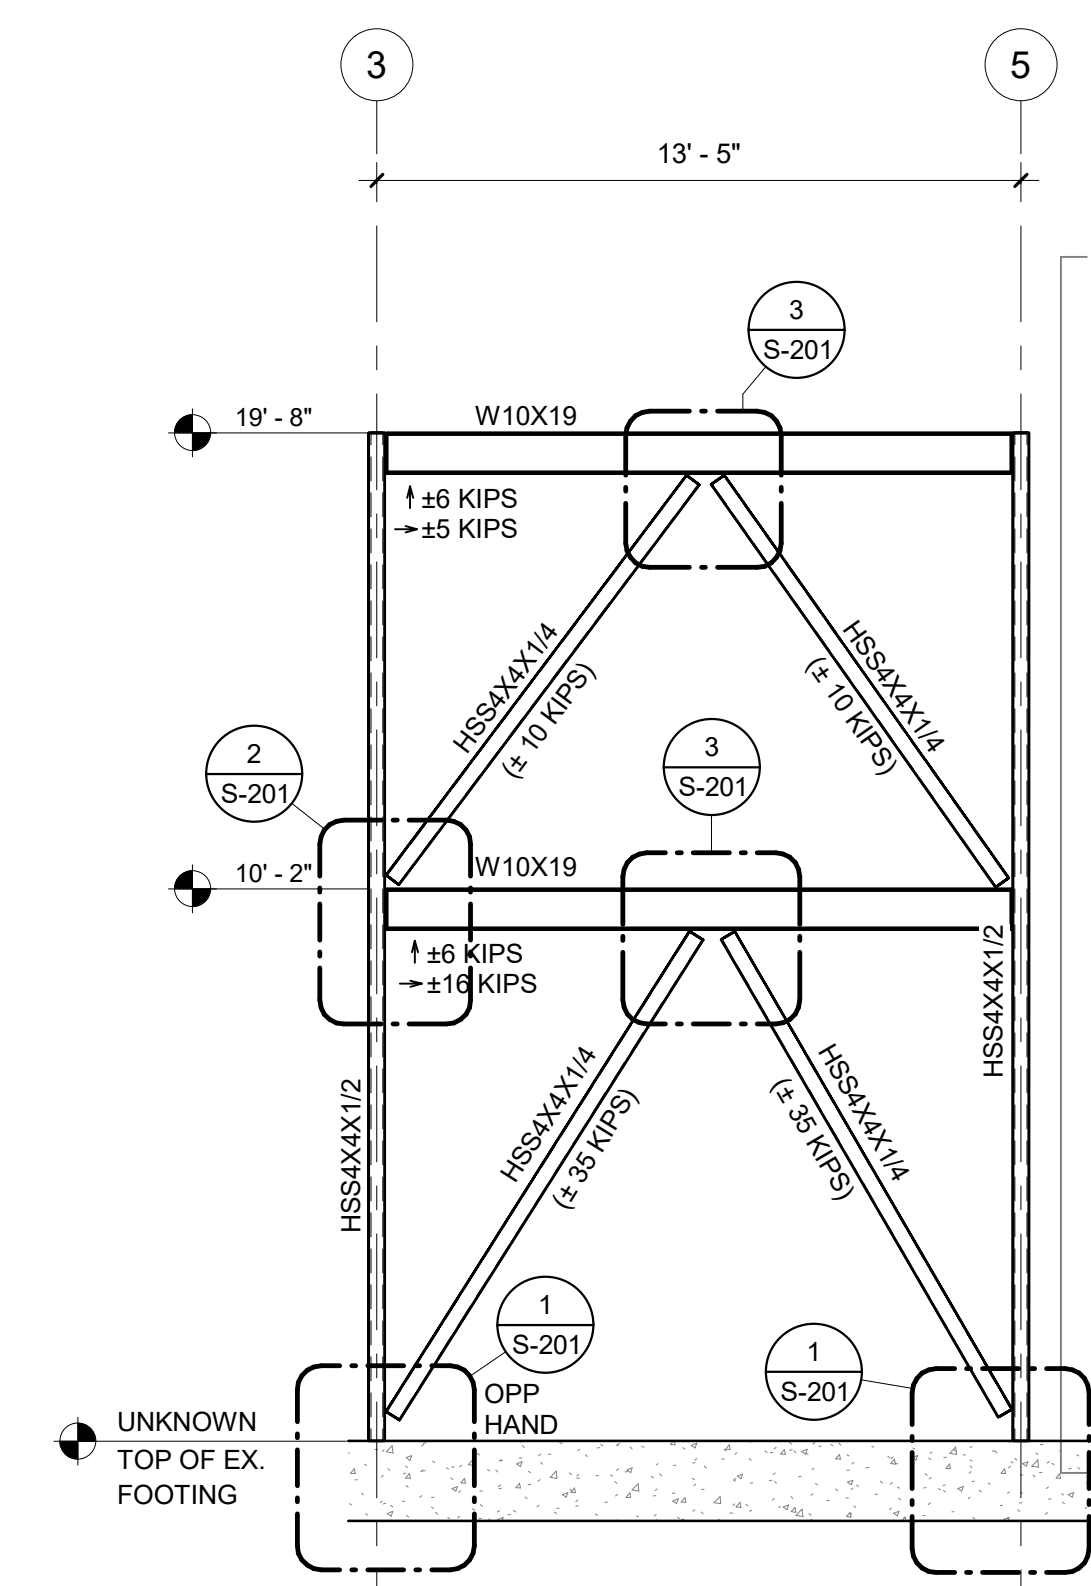

1 ELEVATION 1
Scale: 1/4" = 1'-0"

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

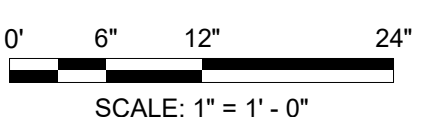

REVISIONS

[illegible]

NO.	DESCRIPTION	DATE
-----	-------------	------

DRAWN BY STAFF

APPROVED BY JAW

CHECKED BY _____ CCB

DATE 08.26.2026


TITLE

STRUCTURAL BRACE FRAME STANDARD DETAILS

PROJECT NO. 50165756

S-201

SHEET NO.

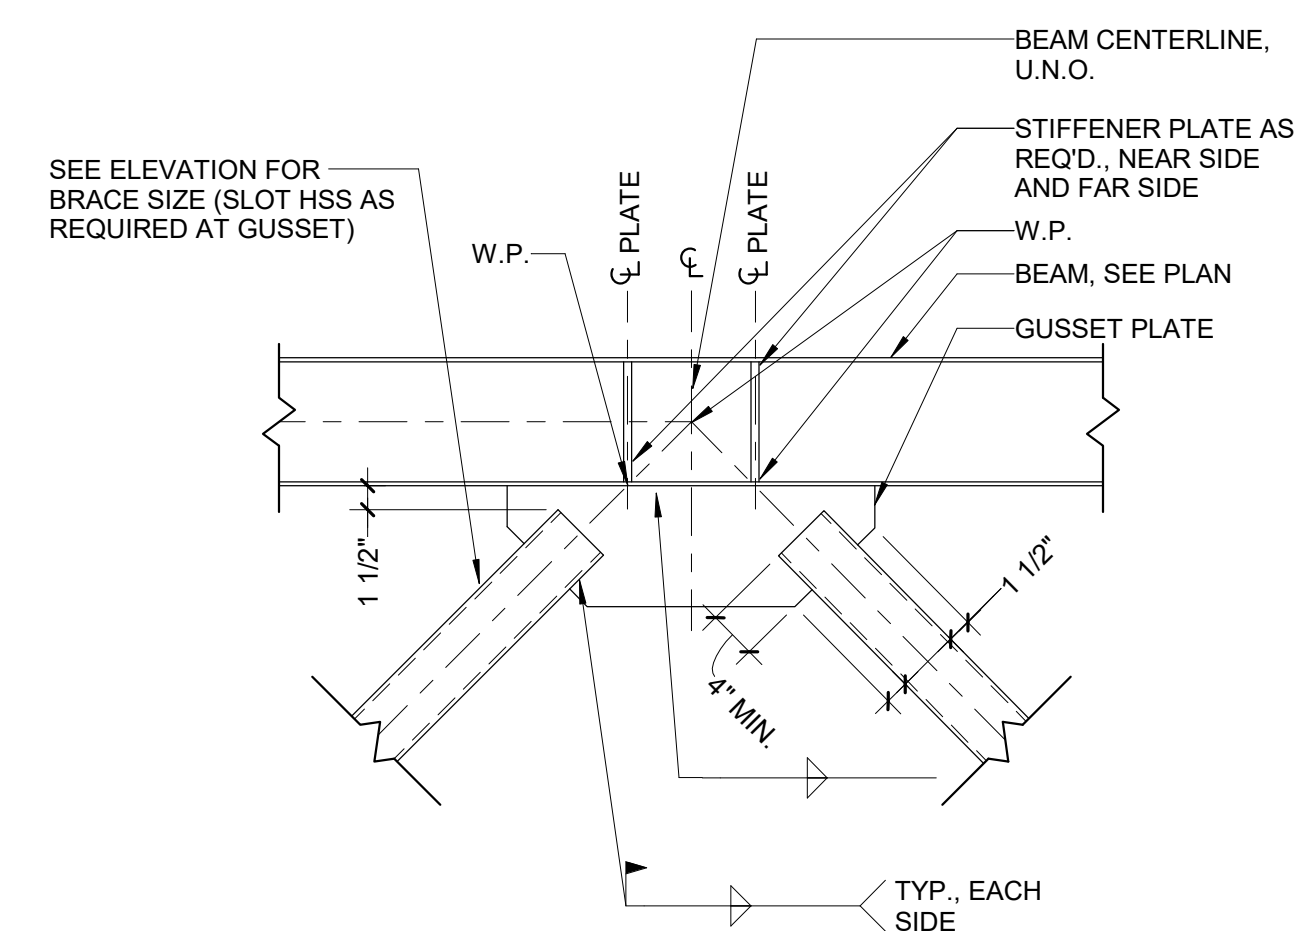


NOTES:

1. FABRICATOR SHALL DESIGN ALL BEAM TO COLUMN CONNECTIONS, GUSSET PLATES, AND WELDS WITHIN VERTICAL FRAME TO SUPPORT THE HORIZONTAL AND VERTICAL COMPONENTS OF THE FACTORED DESIGN BRACE FORCE SHOWN ON THE ELEVATION.

3 BRACED FRAME BEAM

Scale: 1" = 1'-0"

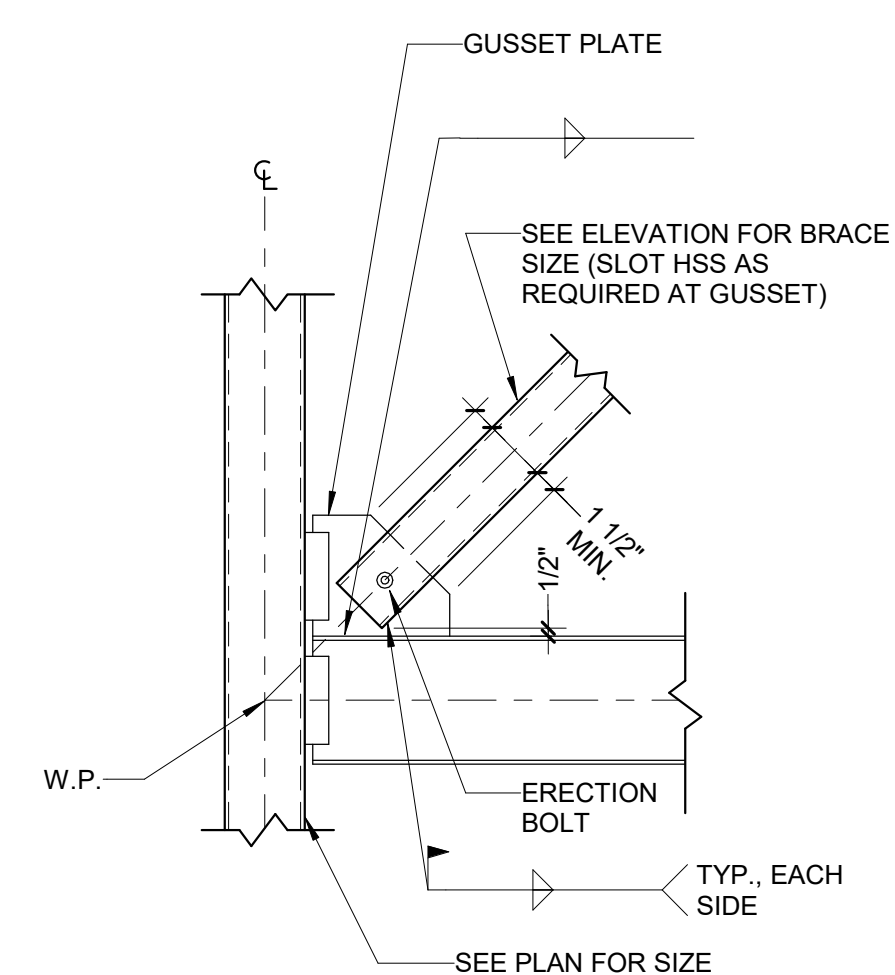

NOTES:

1. FABRICATOR SHALL DESIGN ALL BEAM TO COLUMN CONNECTIONS, GUSSET PLATES, AND WELDS WITHIN VERTICAL FRAME TO SUPPORT THE HORIZONTAL AND VERTICAL COMPONENTS OF THE FACTORED DESIGN BRACE FORCE SHOWN ON THE ELEVATION.

2 TYPICAL BRACED FRAME CONNECTION

Scale: 1" = 1'-0"

BRACED FRAME ELEVATION NOTES:


1. ALL BEAM TO COLUMN CONNECTIONS AT BRACED FRAMES SHALL BE DESIGNED BY THE STEEL FABRICATOR FOR THE ULTIMATE SHEAR AND AXIAL LOADS SHOWN ON FRAMING ELEVATIONS. THE MOST STRINGENT LOAD COMBINATIONS SHALL CONTROL THE DESIGN.

2. WELDS CONNECTING DIAGONAL TUBE BRACES TO CONNECTION PLATES SHALL BE DESIGNED BY THE STEEL FABRICATOR FOR THE ULTIMATE TENSION/COMPRESSION FORCE SHOWN ON BRACED FRAME ELEVATION DETAILS. AN INCREASE IN ALLOWABLE STRESSES MAY NOT BE USED IN CONJUNCTION WITH THESE LOADS.

3. ALL BOLTED SHEAR CONNECTIONS IN BRACED FRAMES SHALL BE DESIGNED AND DETAILED AS SLIP CRITICAL.

4. ALL CONNECTION DESIGN AND DETAILING SHALL CONFORM TO AISC 360-16 SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS, U.N.O.

5. STEEL FABRICATOR SHALL SUBMIT BRACED FRAME CONNECTION DETAILS AND DESIGN CALCULATIONS, SIGNED AND SEALED BY A LICENSED PROFESSIONAL ENGINEER RESPONSIBLE FOR THEIR DESIGN, TO STRUCTURAL ENGINEER OF RECORD FOR REVIEW AND APPROVAL.

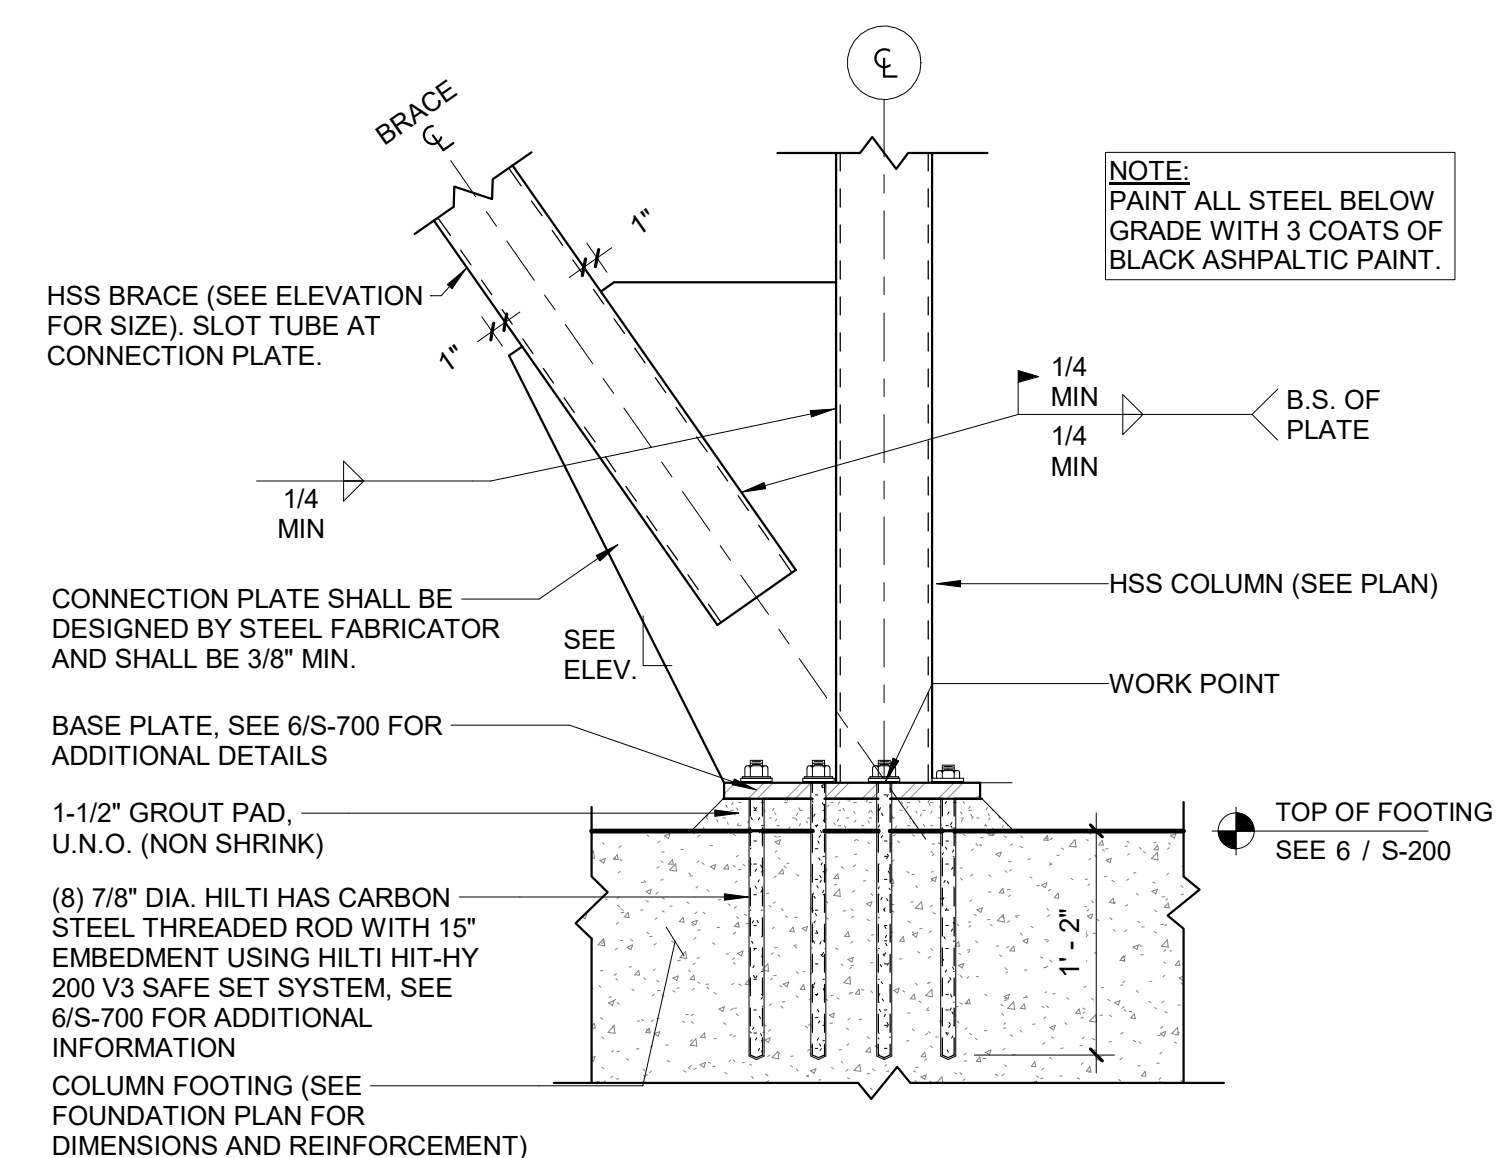


1 BRACED FRAME ANCHORAGE DETAIL

Scale: 1" = 1'-0"



KEY PLAN

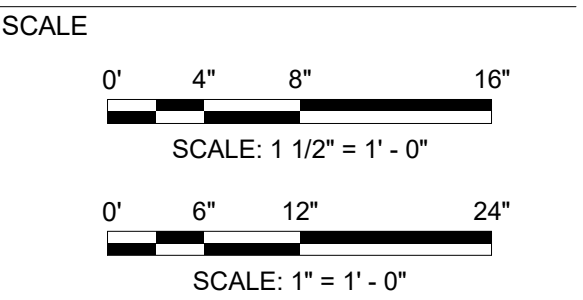

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026
TITLE _____

STRUCTURAL STANDARD DETAILS


PROJECT NO. 50165756

S-700


SHEET NO.

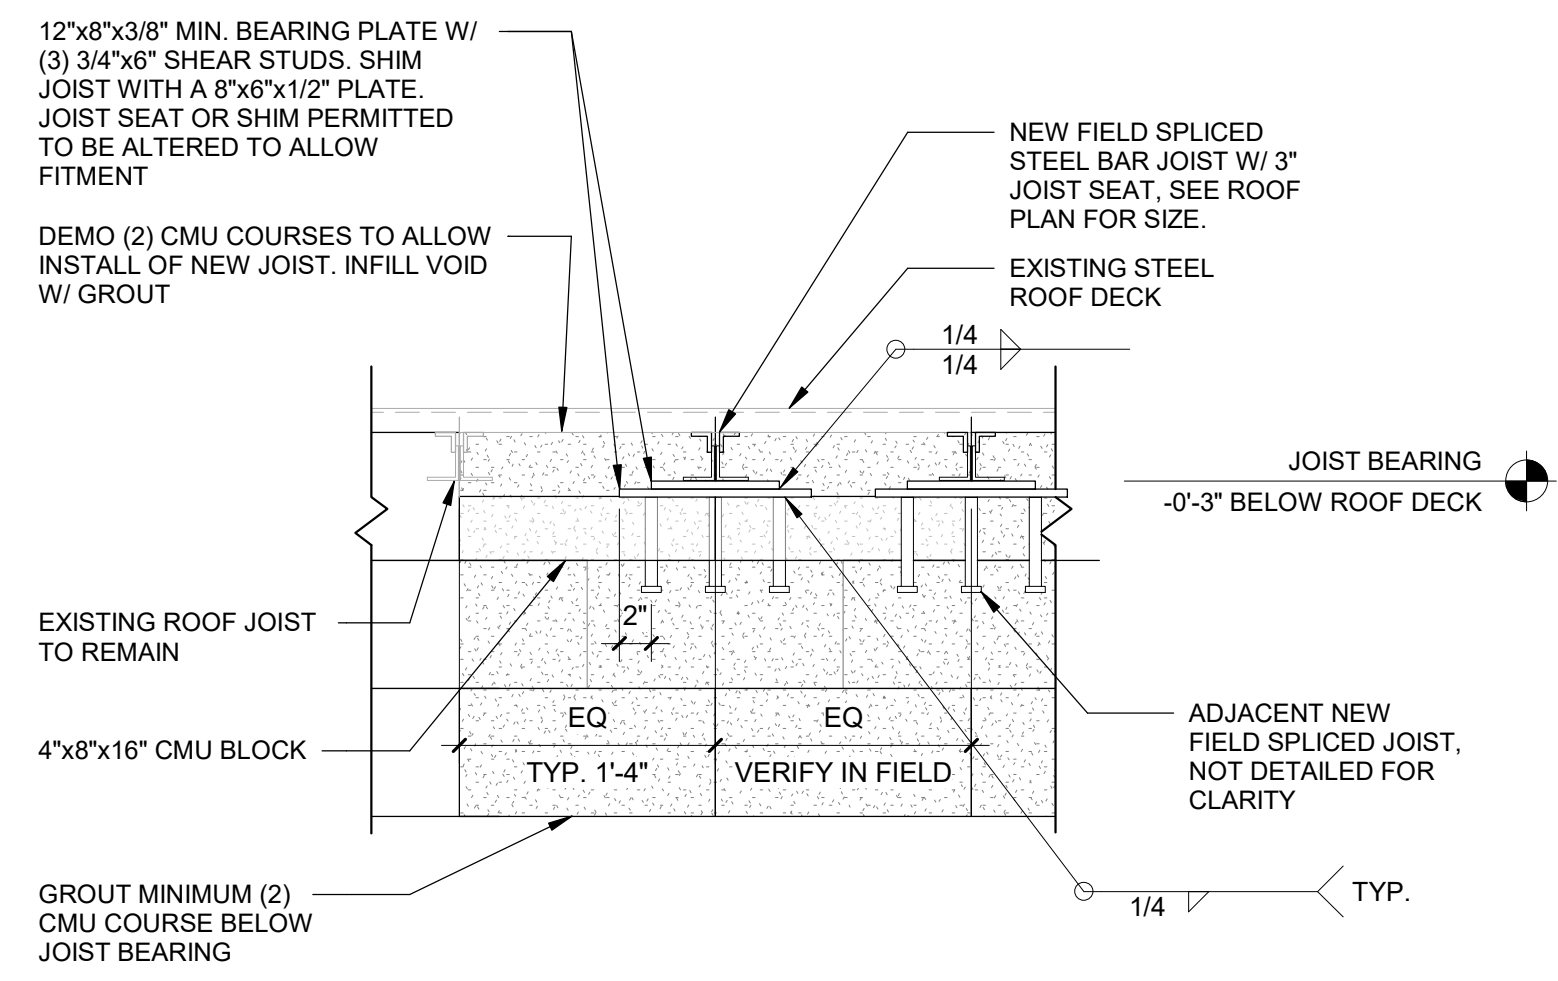


4 NEW JOIST AT ROOF
Scale: 1" = 1'-0"

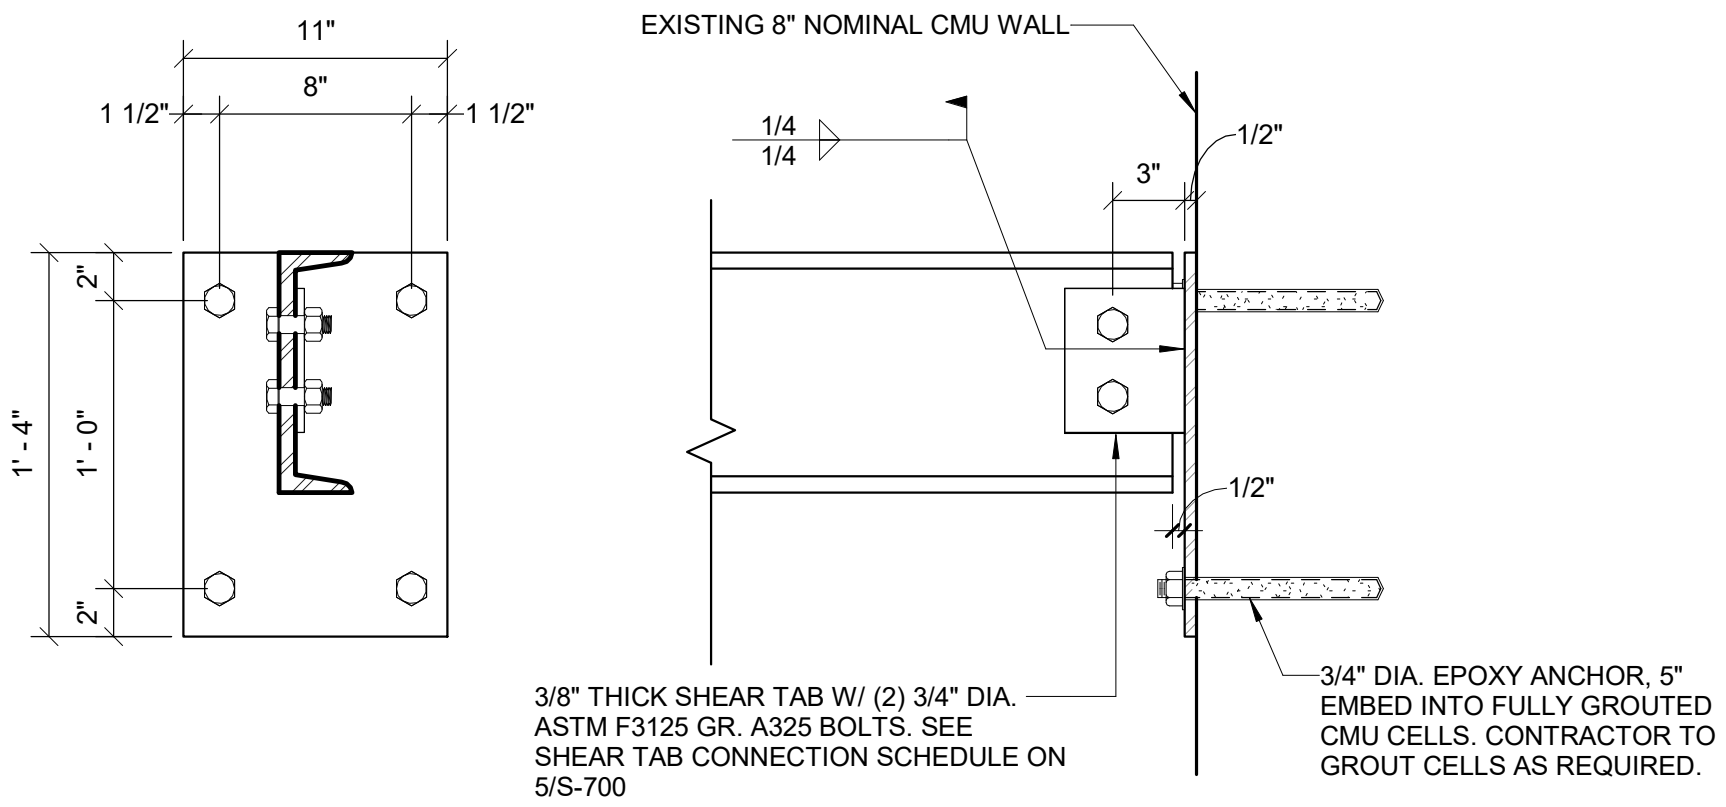


3 C10 EPOXY ANCHORAGE DETAIL
Scale: 1 1/2" = 1'-0"

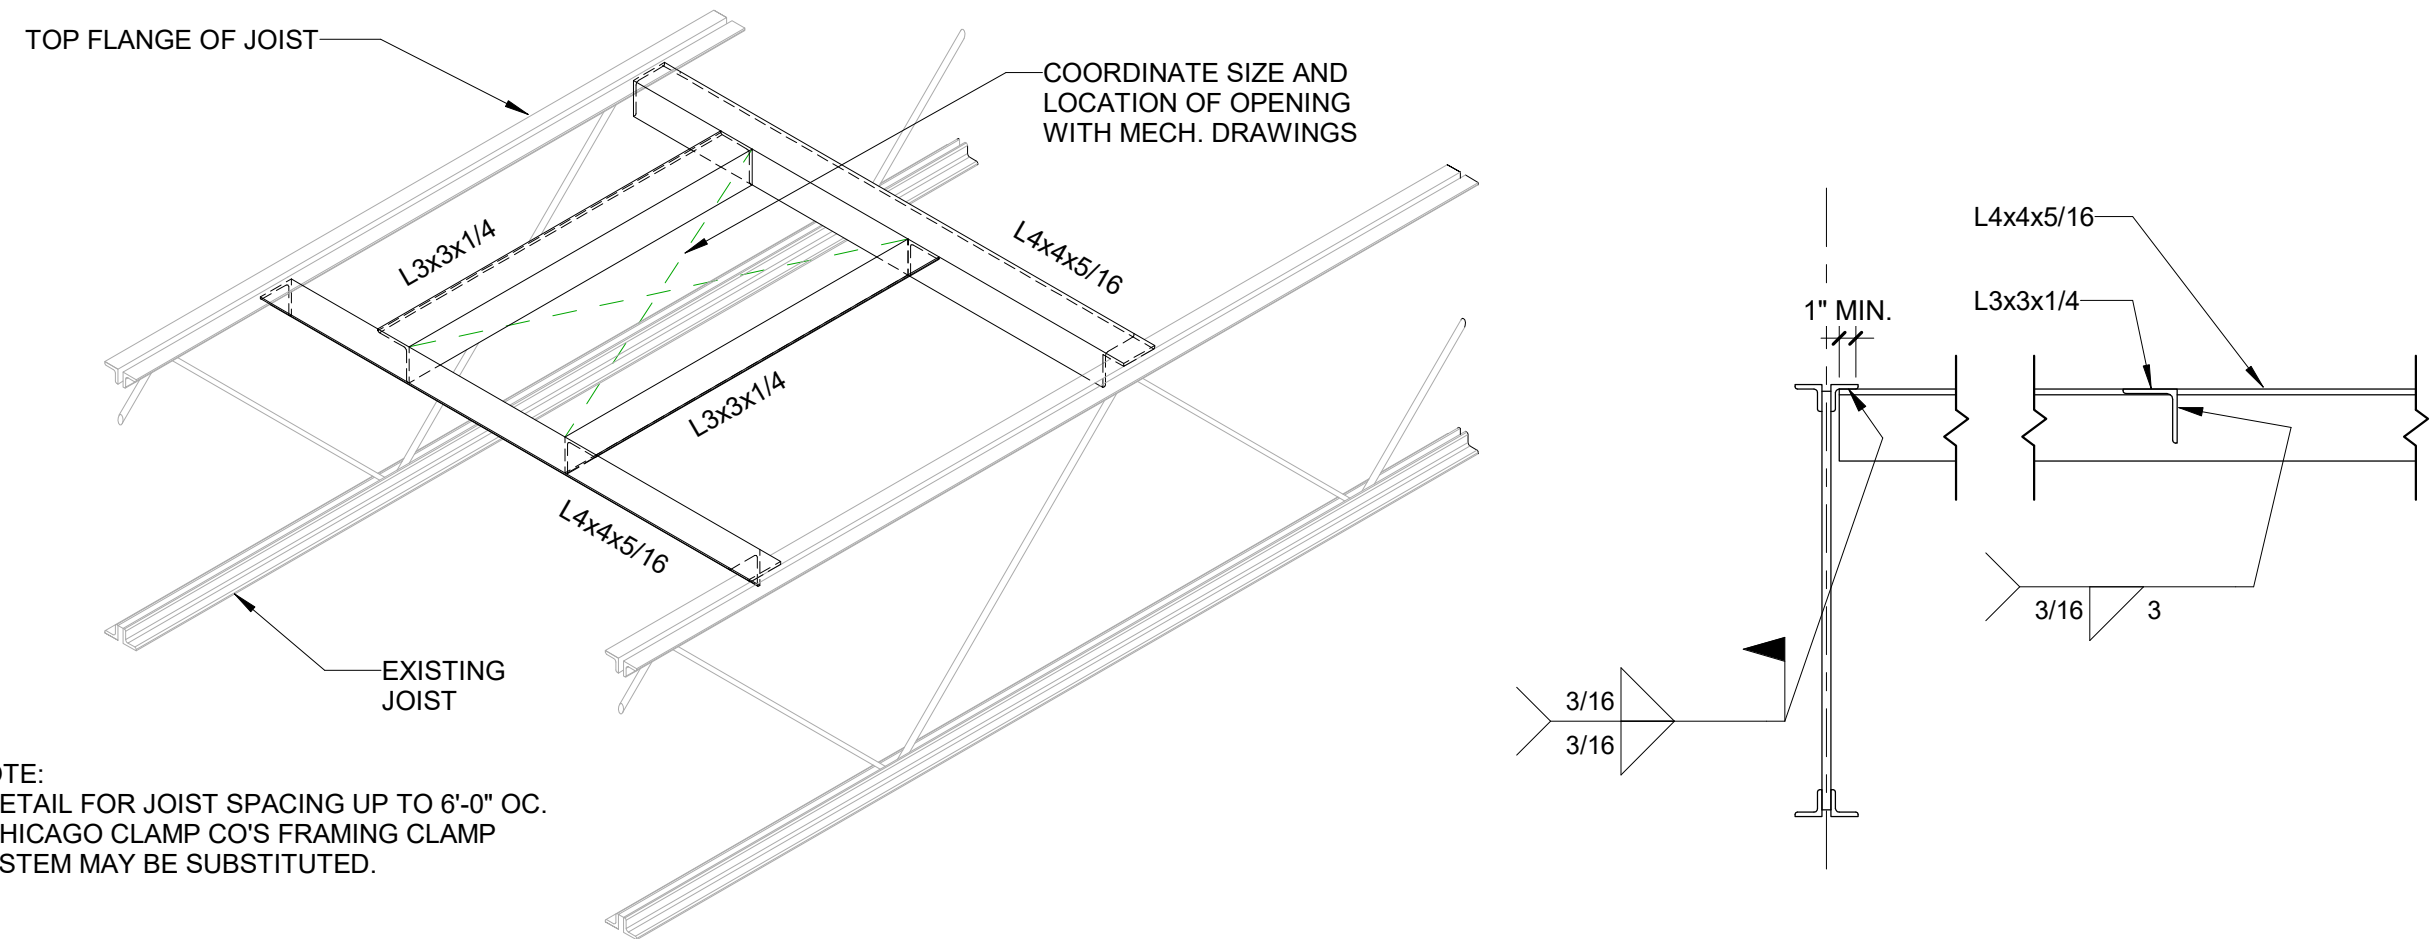



2 TYPICAL WELDED ANGLE FRAME AT STEEL JOISTS
Scale: N.T.S.

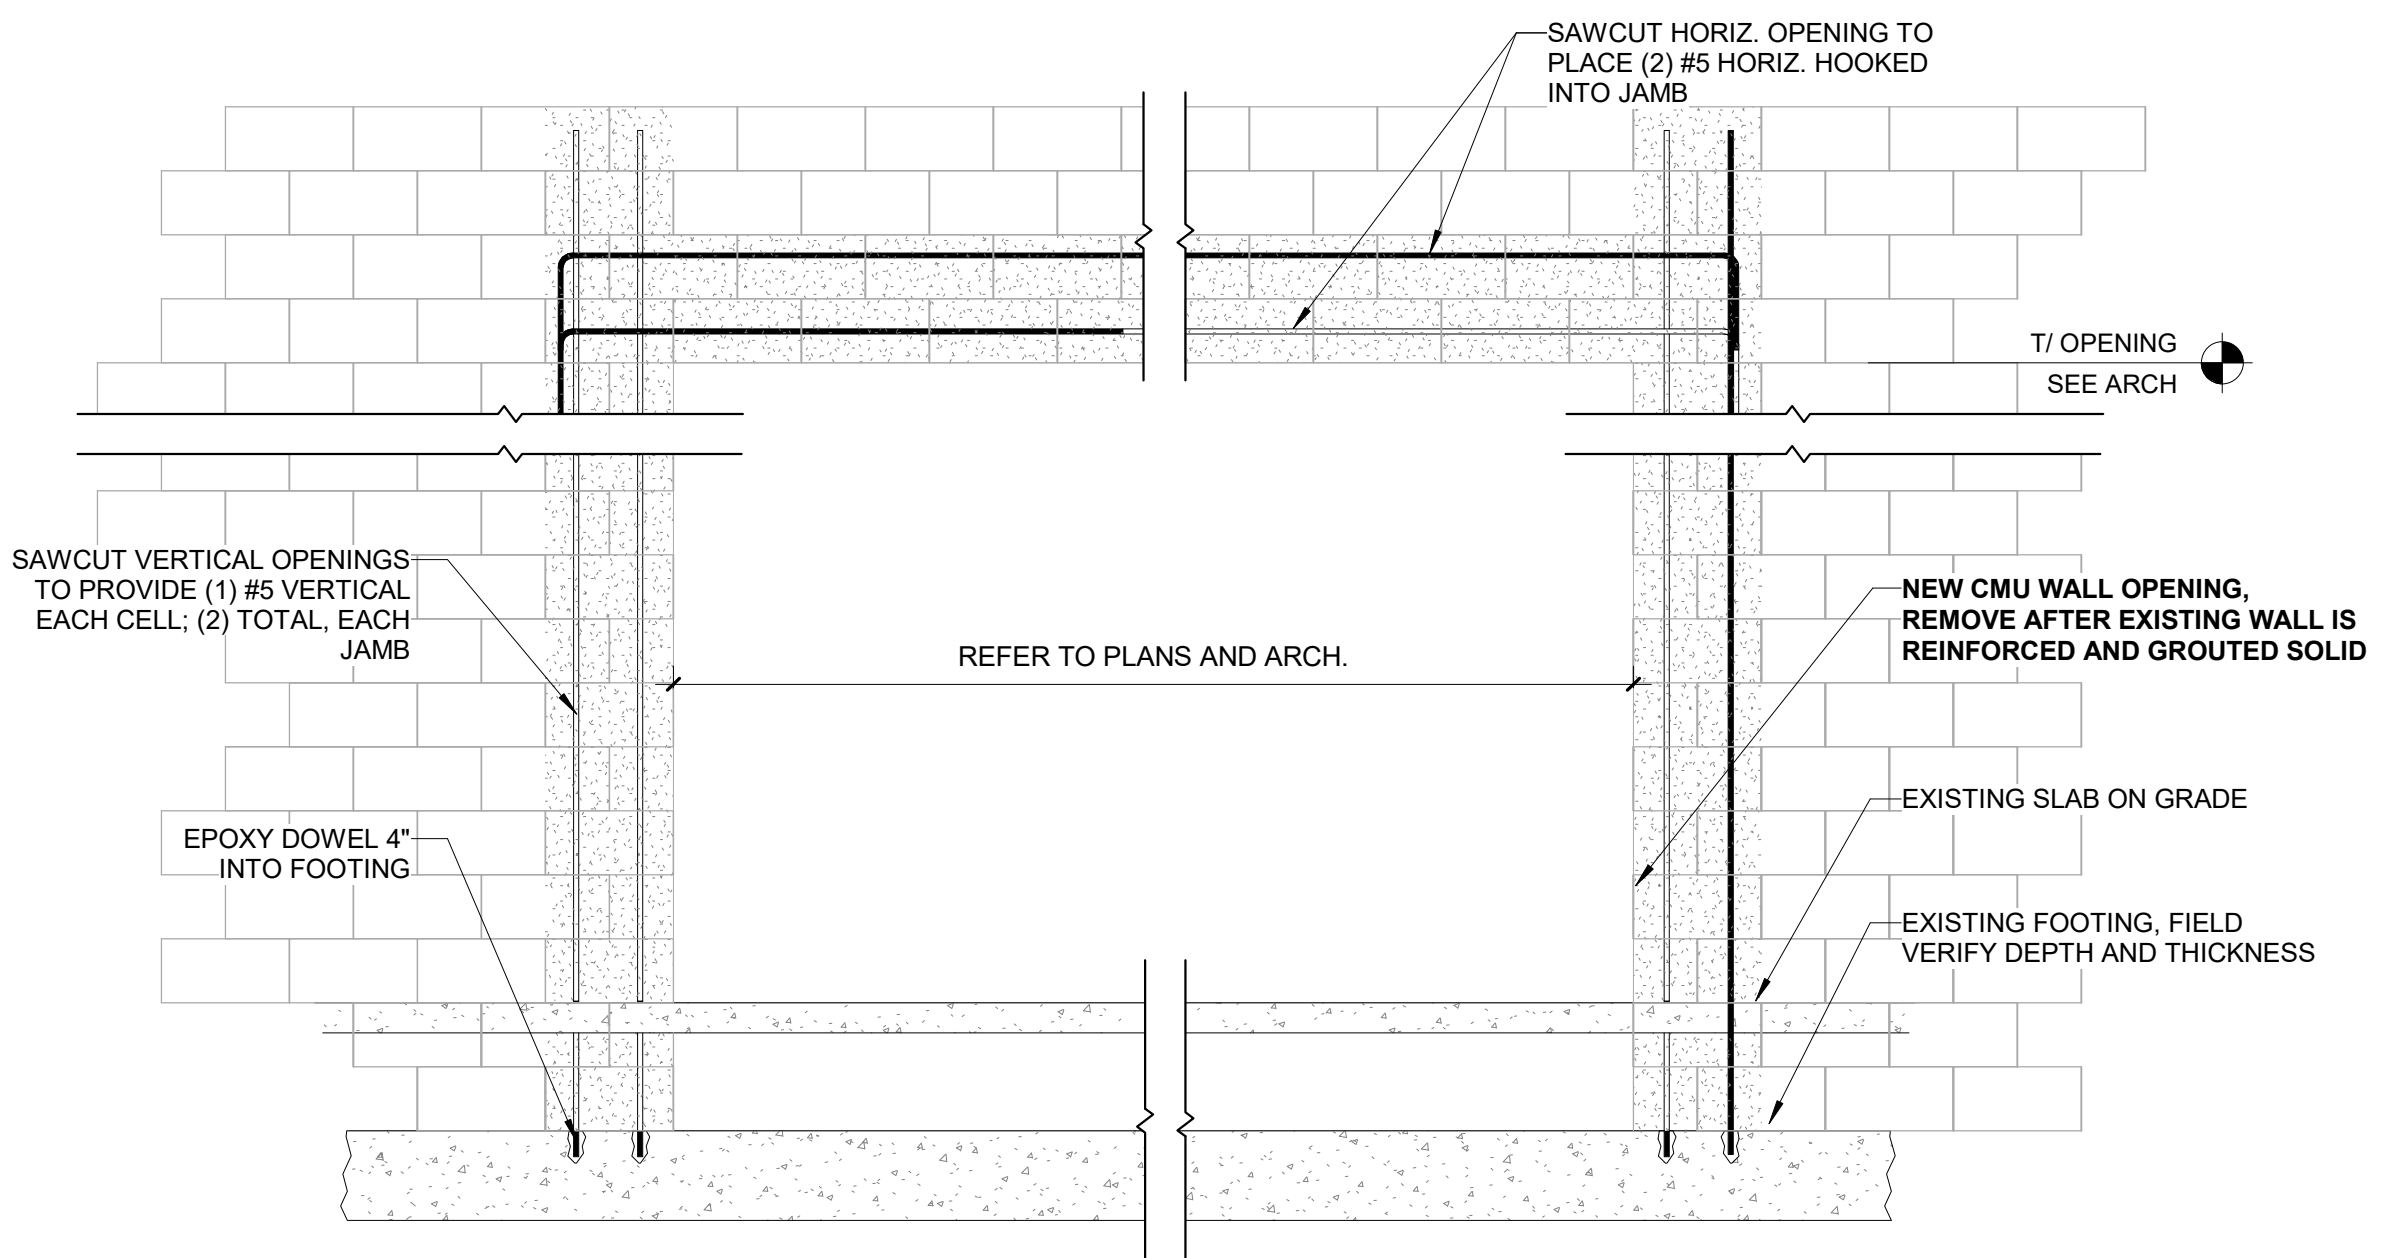



1 NEW CMU WALL OPENING
Scale: N.T.S.

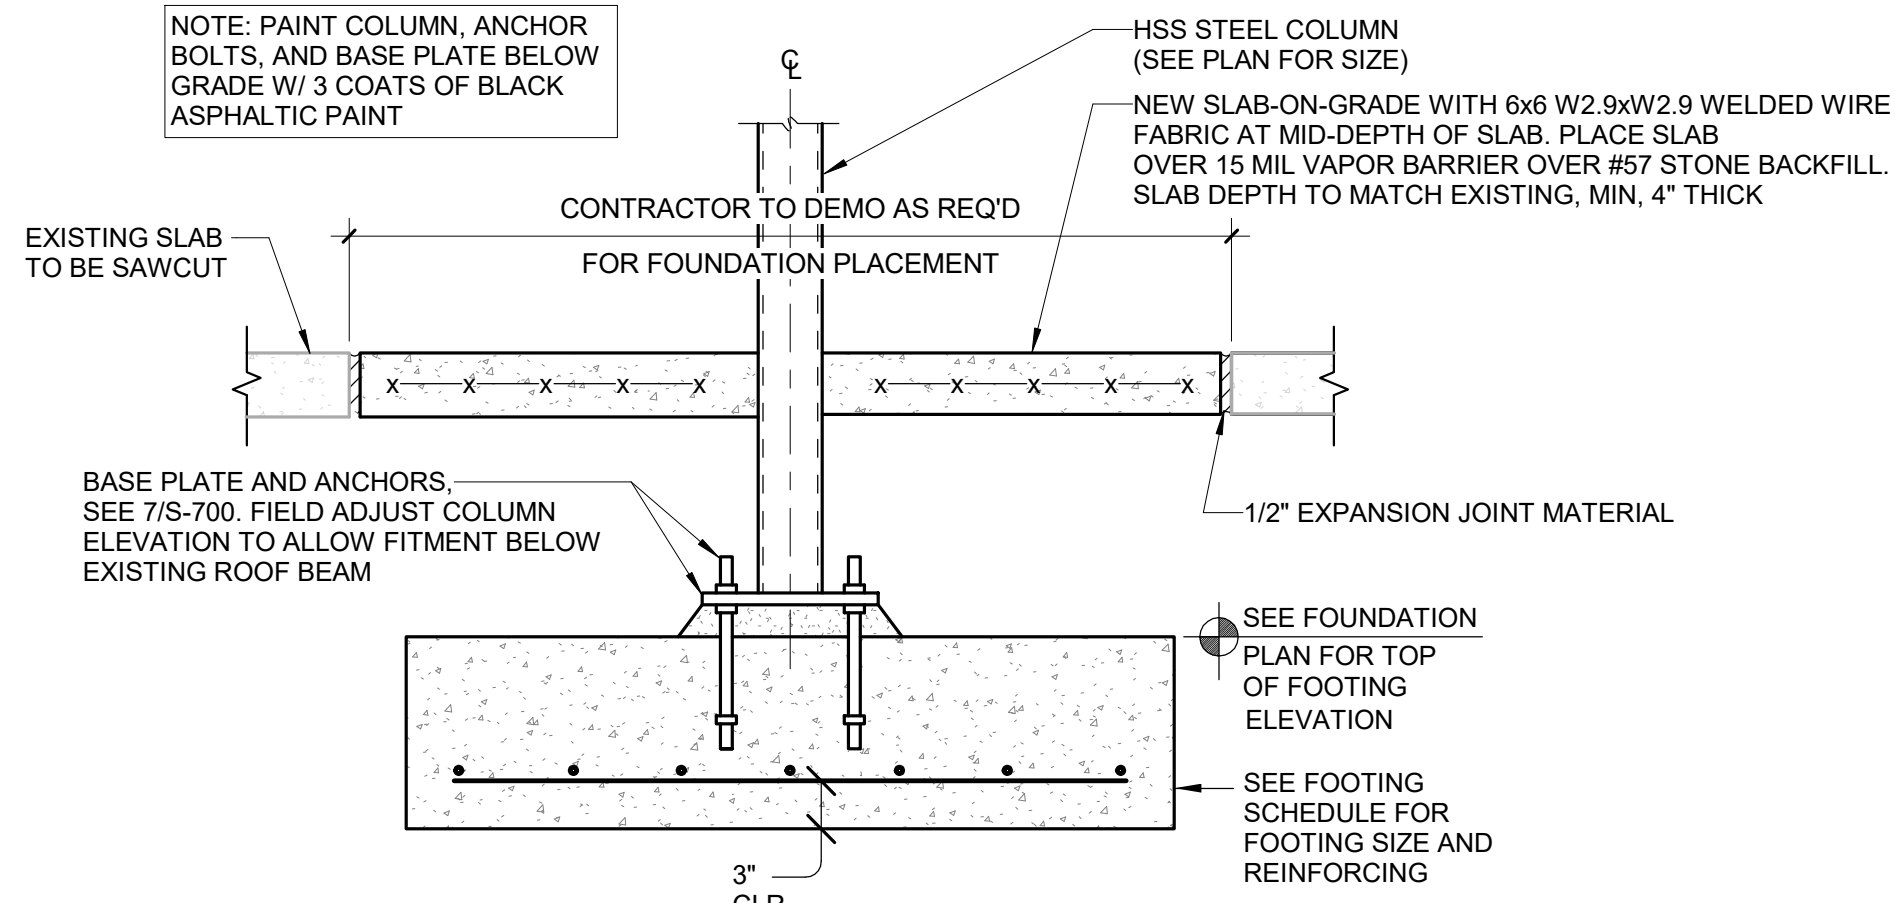

8 GRAVITY COLUMN FOUNDATION
Scale: 1" = 1'-0"

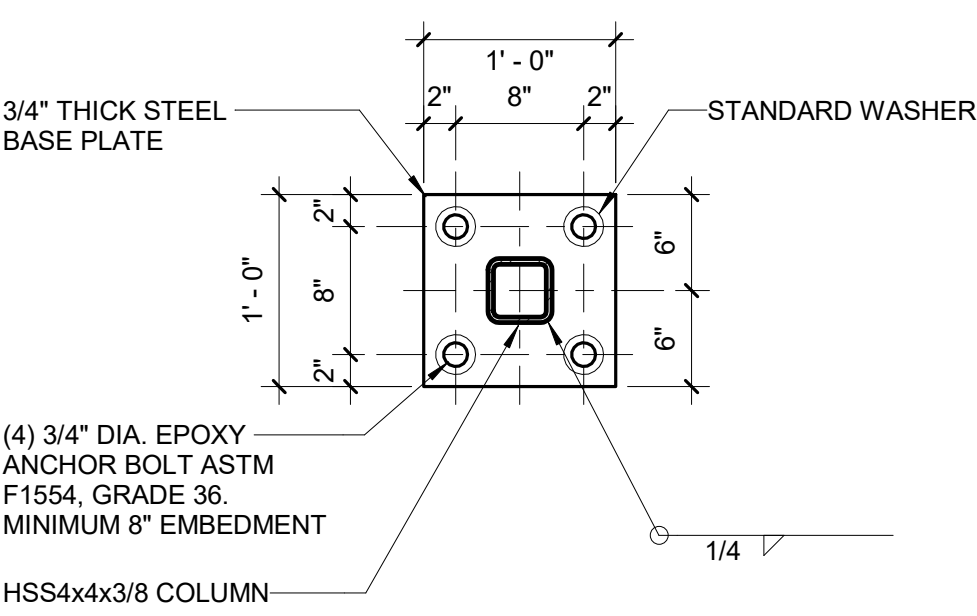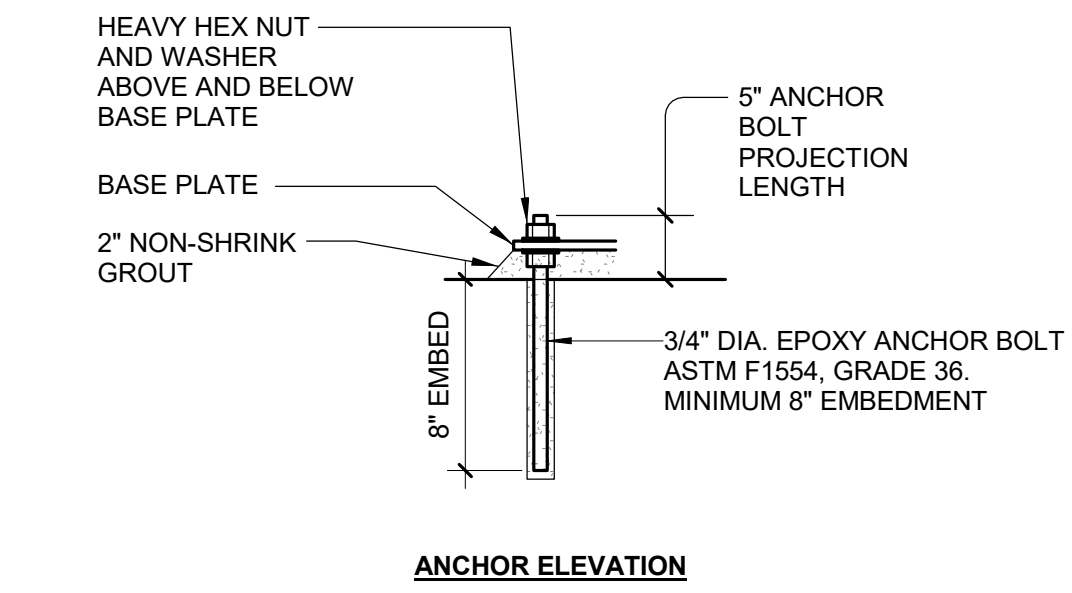

7 TYPICAL GRAVITY BASE PLATE DETAIL
Scale: 1" = 1'-0"

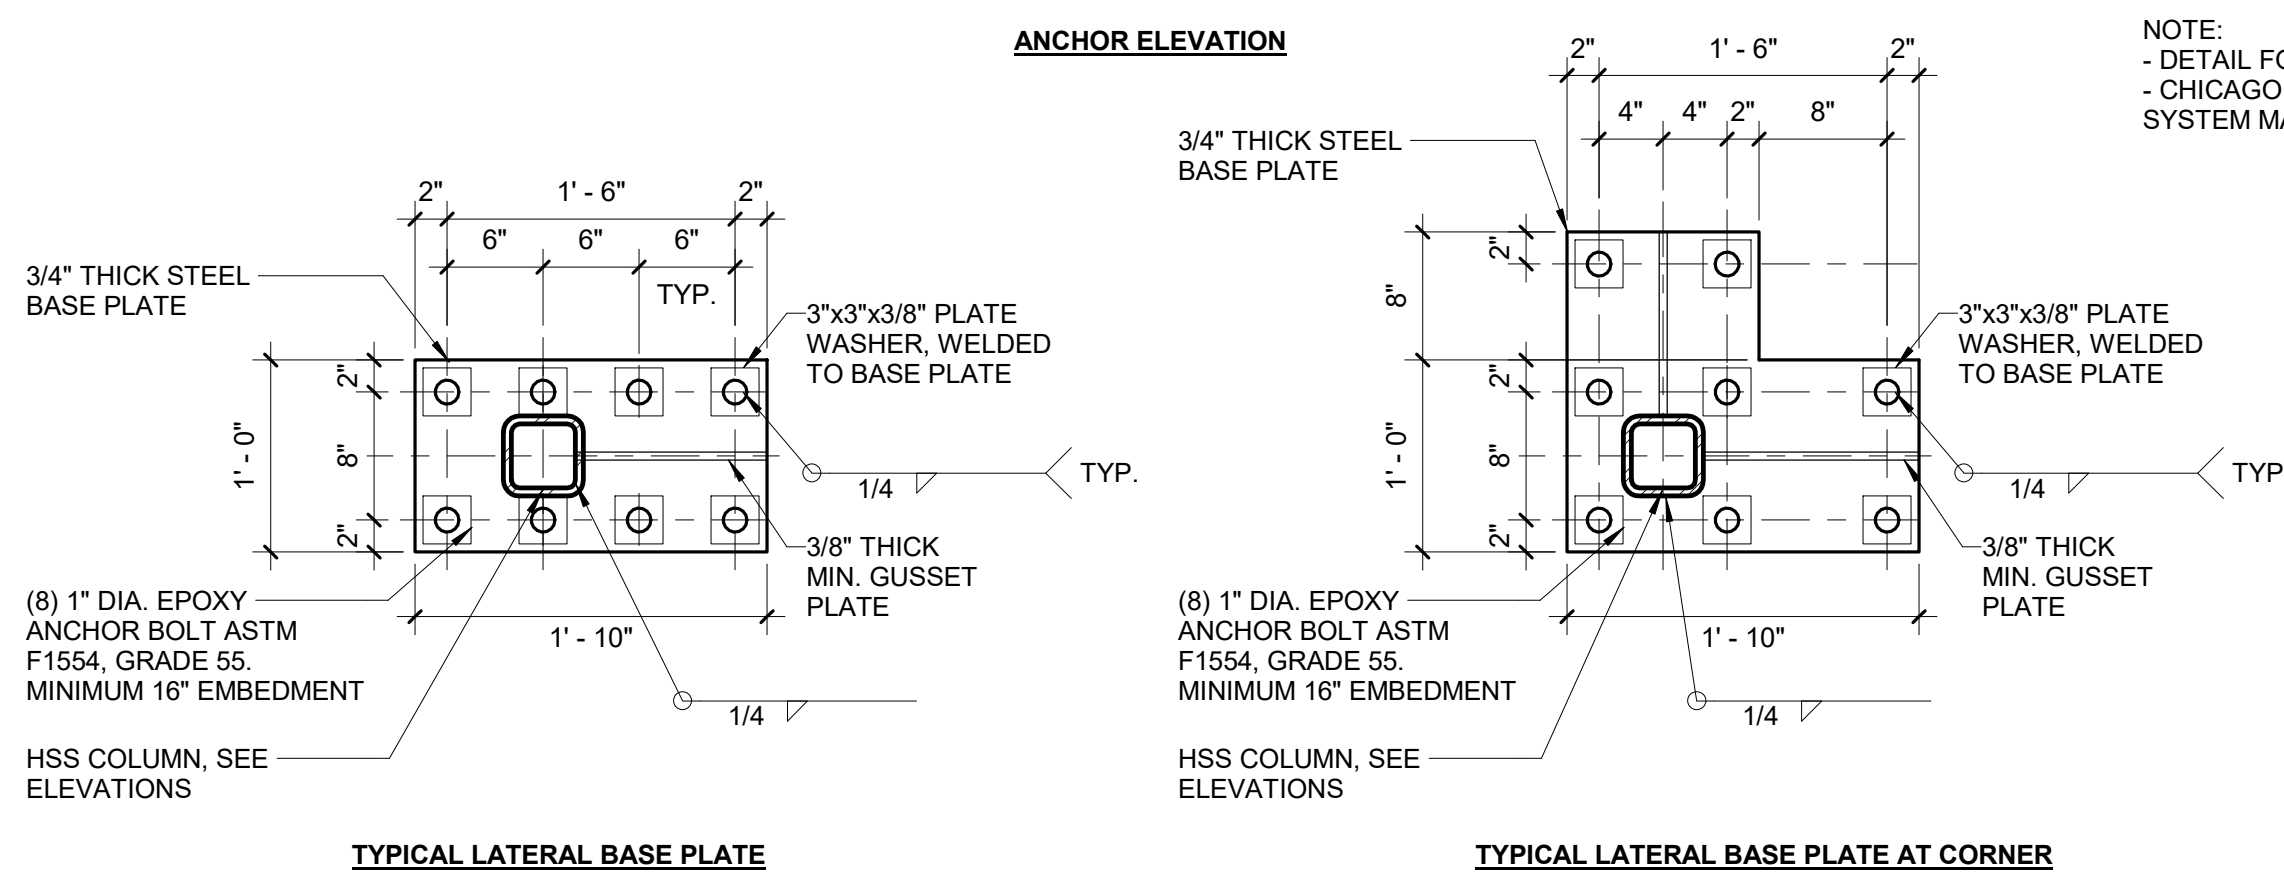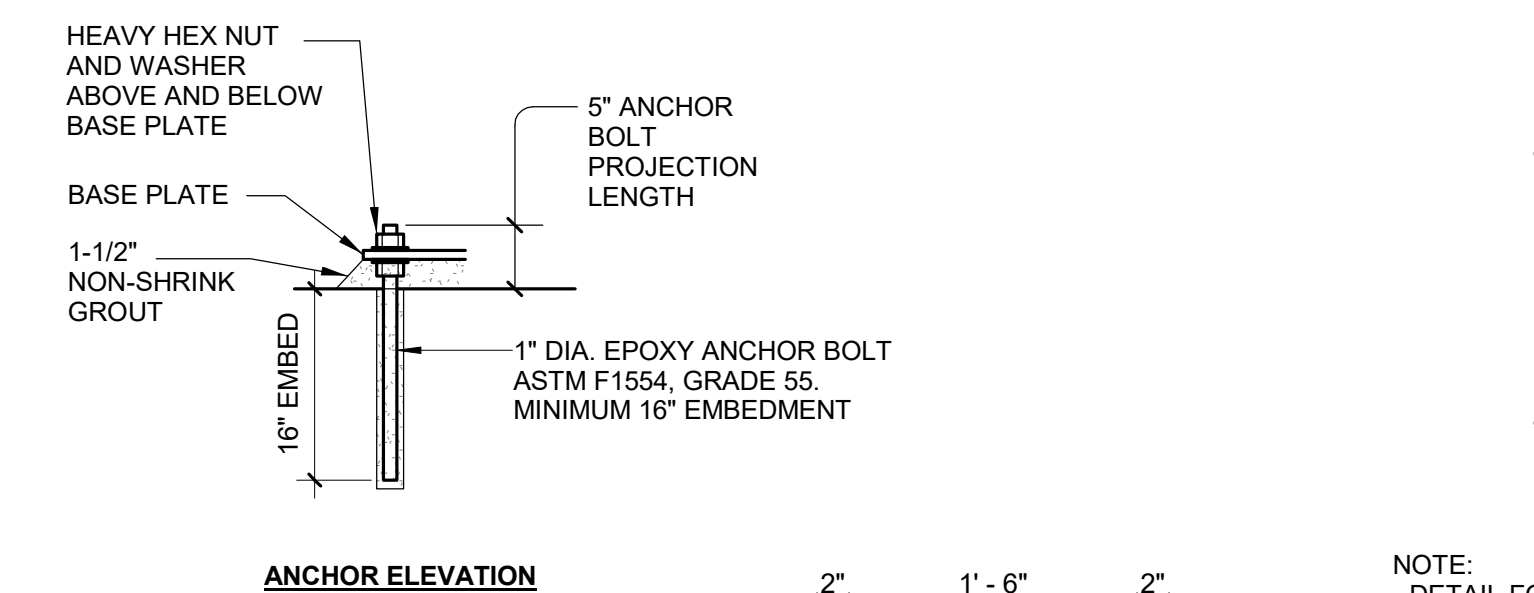


6 TYPICAL LATERAL BASE PLATE DETAIL
Scale: 1" = 1'-0"


BEAM SIZE	NO. OF BOLTS	PLATE THICKNESS	SIZE OF FILLET WELD W"	CONNECTION STRENGTH (LFRD)
C8	2	3/8	1/4	18K
W10/C10	2	3/8	1/4	18K
W12	3	3/8	1/4	49K

- NOTES:
- BOLTS SHALL BE 3/4"Ø A325-N.
 - PLATES ARE ASTM A-36 STEEL, UNO. PLATES ARE TO HAVE SSL HOLES.
 - DISTANCE 'W' SHALL BE AT LEAST 2 1/2", BUT NOT GREATER THAN 3 1/2".
 - HORIZONTAL END DISTANCE LEH2
 - VERTICAL EDGE DISTANCE LEV SHALL BE 1 1/2" FOR 7/8"Ø BOLTS.
 - BOLT SPACING 'S' SHALL BE 3".
 - CONNECTIONS IN ABOVE SCHEDULE VALID ONLY FOR BEAMS FRAMING INTO GIRDERS OF EQUAL OR GREATER DEPTH.
 - SHEAR TAB PLATE TO BE CENTERED ON BEAM.
 - DETAILED TO ENSURE CAPACITY OF CONNECTION SCHEDULED MEETS OR EXCEEDS MEMBER REACTION SHOWN ON TABLE ABOVE.


5 SHEAR TAB CONNECTION SCHEDULE
Scale: N.T.S.

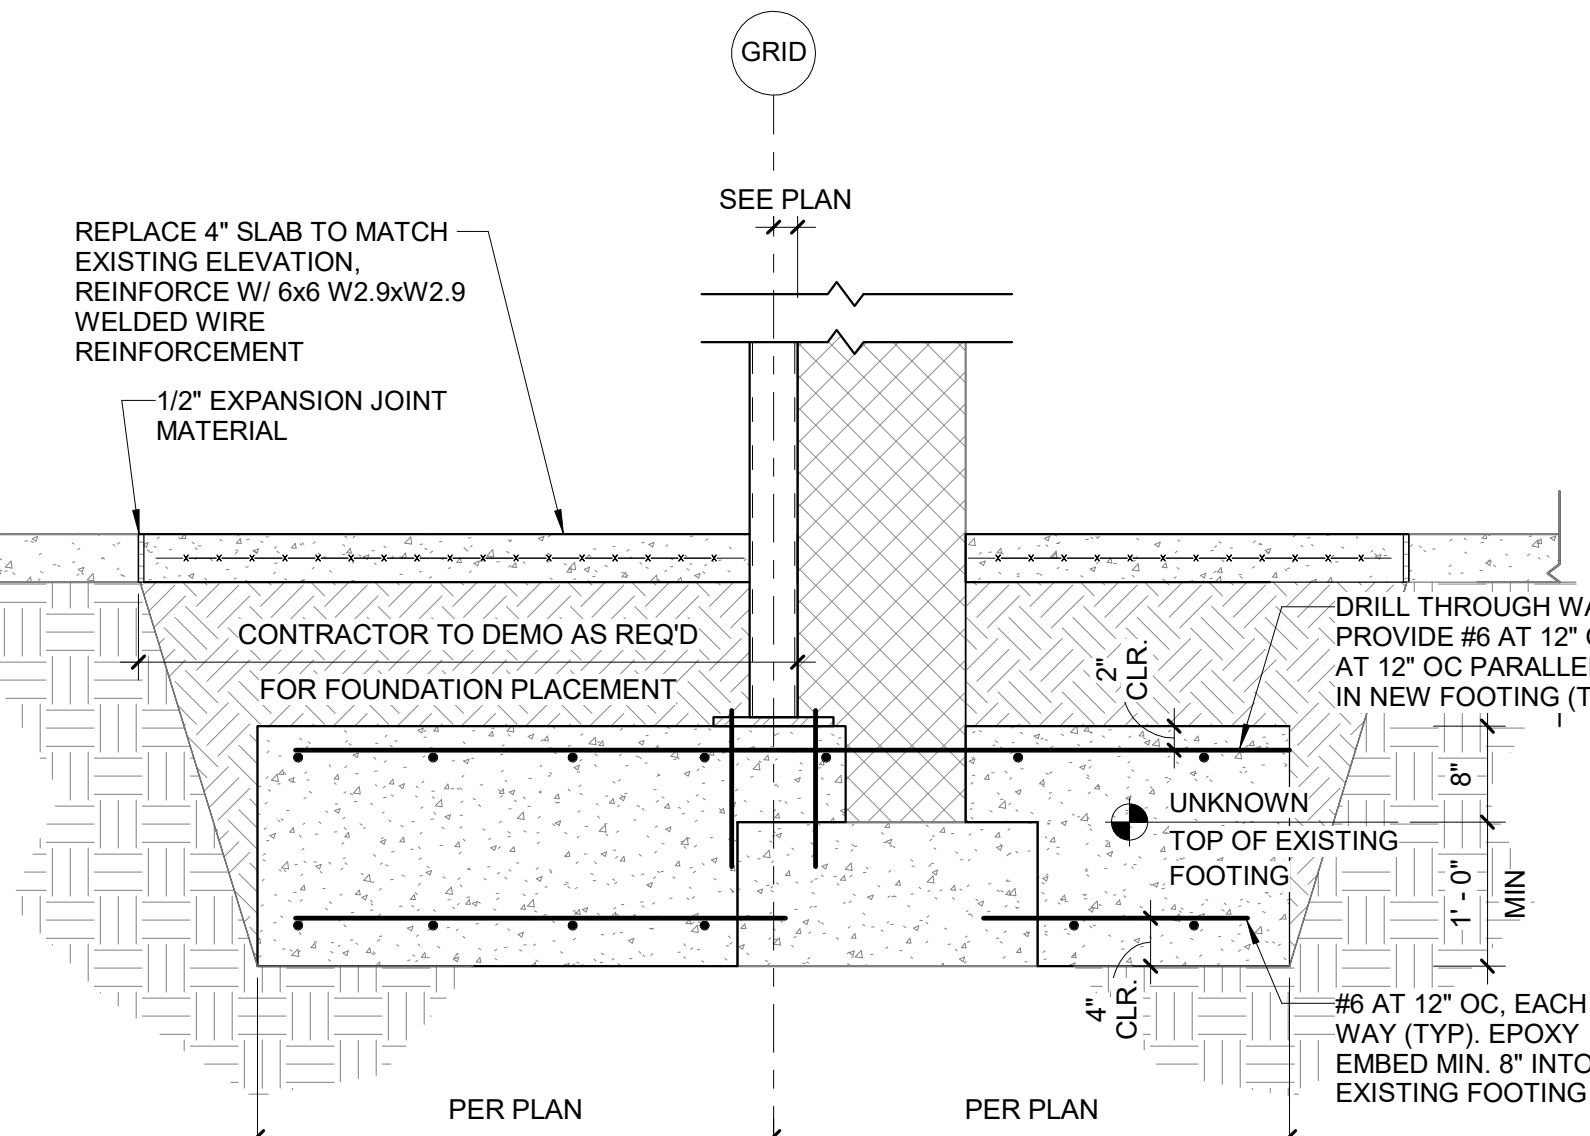


12 WALL SECTION AT VAULT WALL FOUNDATION
Scale: 3/4" = 1'-0"

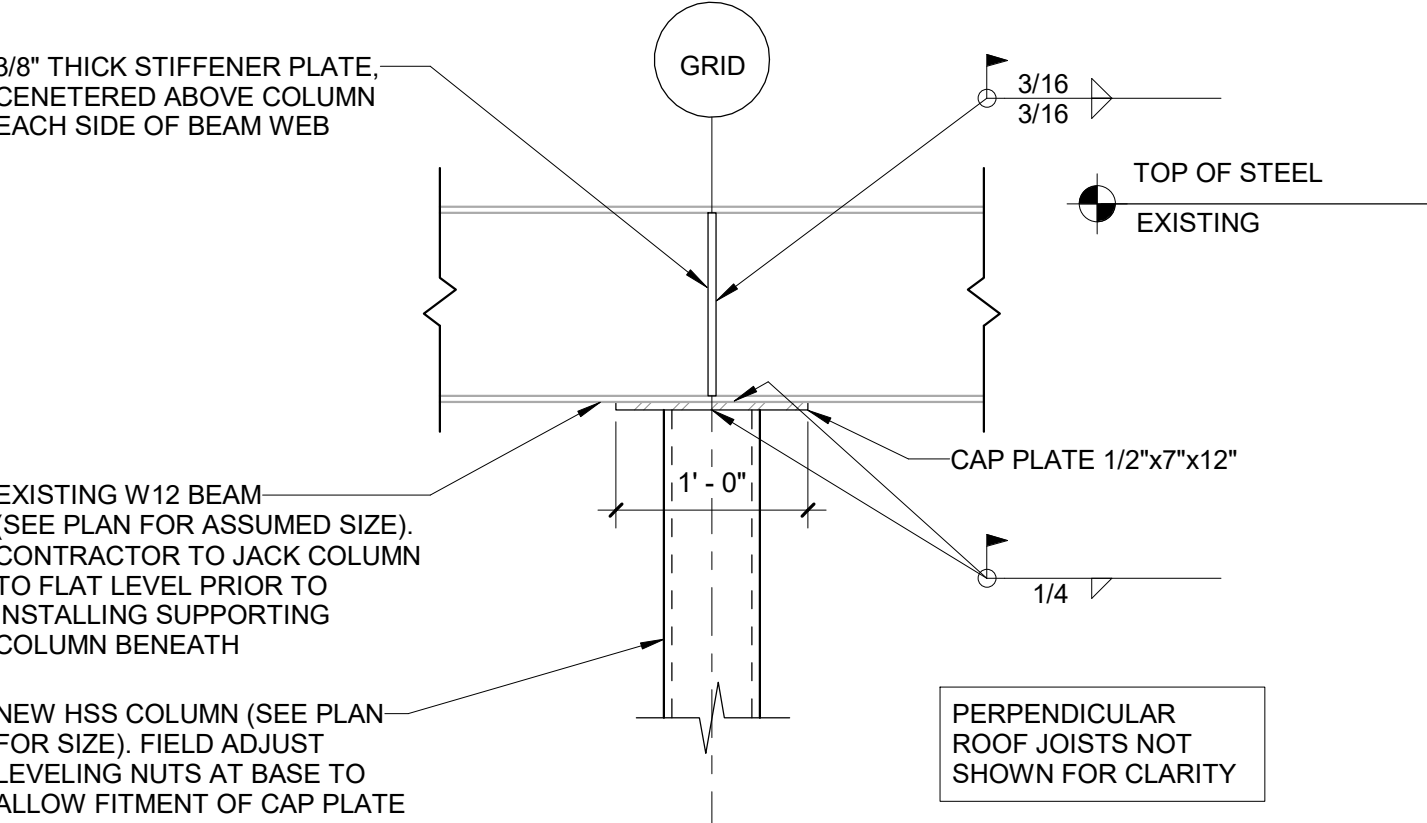

11 SUPPORT COLUMN UNDER EXISTING BEAM
Scale: 1" = 1'-0"

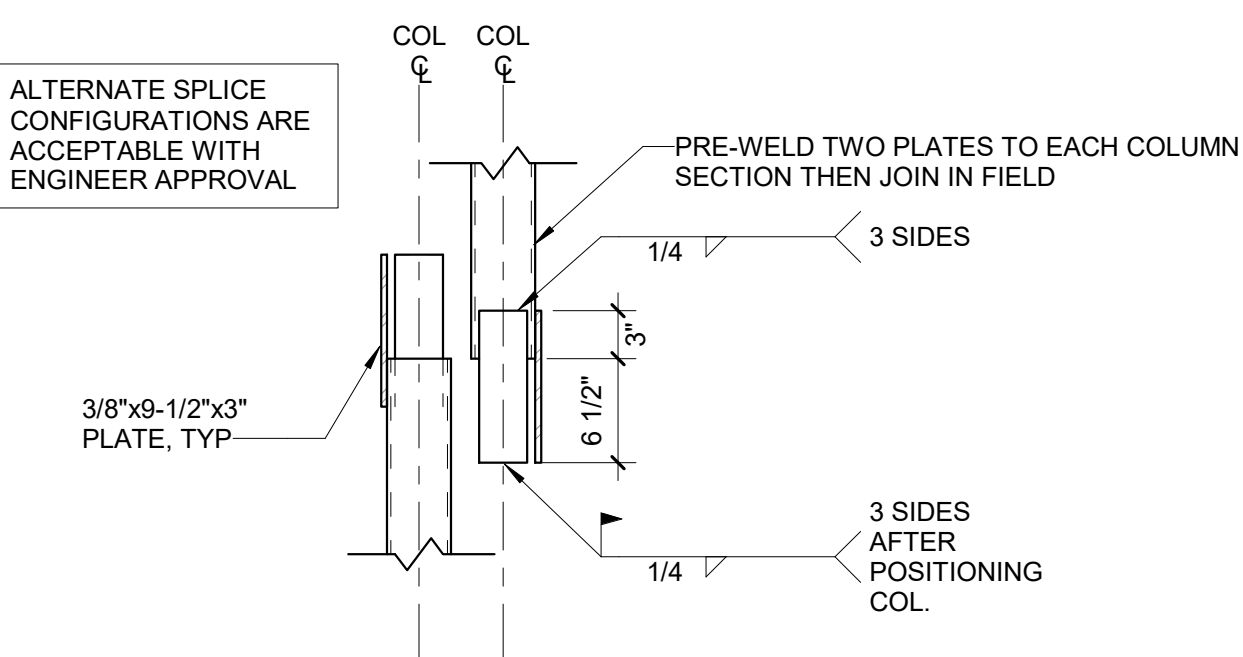

10 TYPICAL COLUMN SPLICE
Scale: 1" = 1'-0"

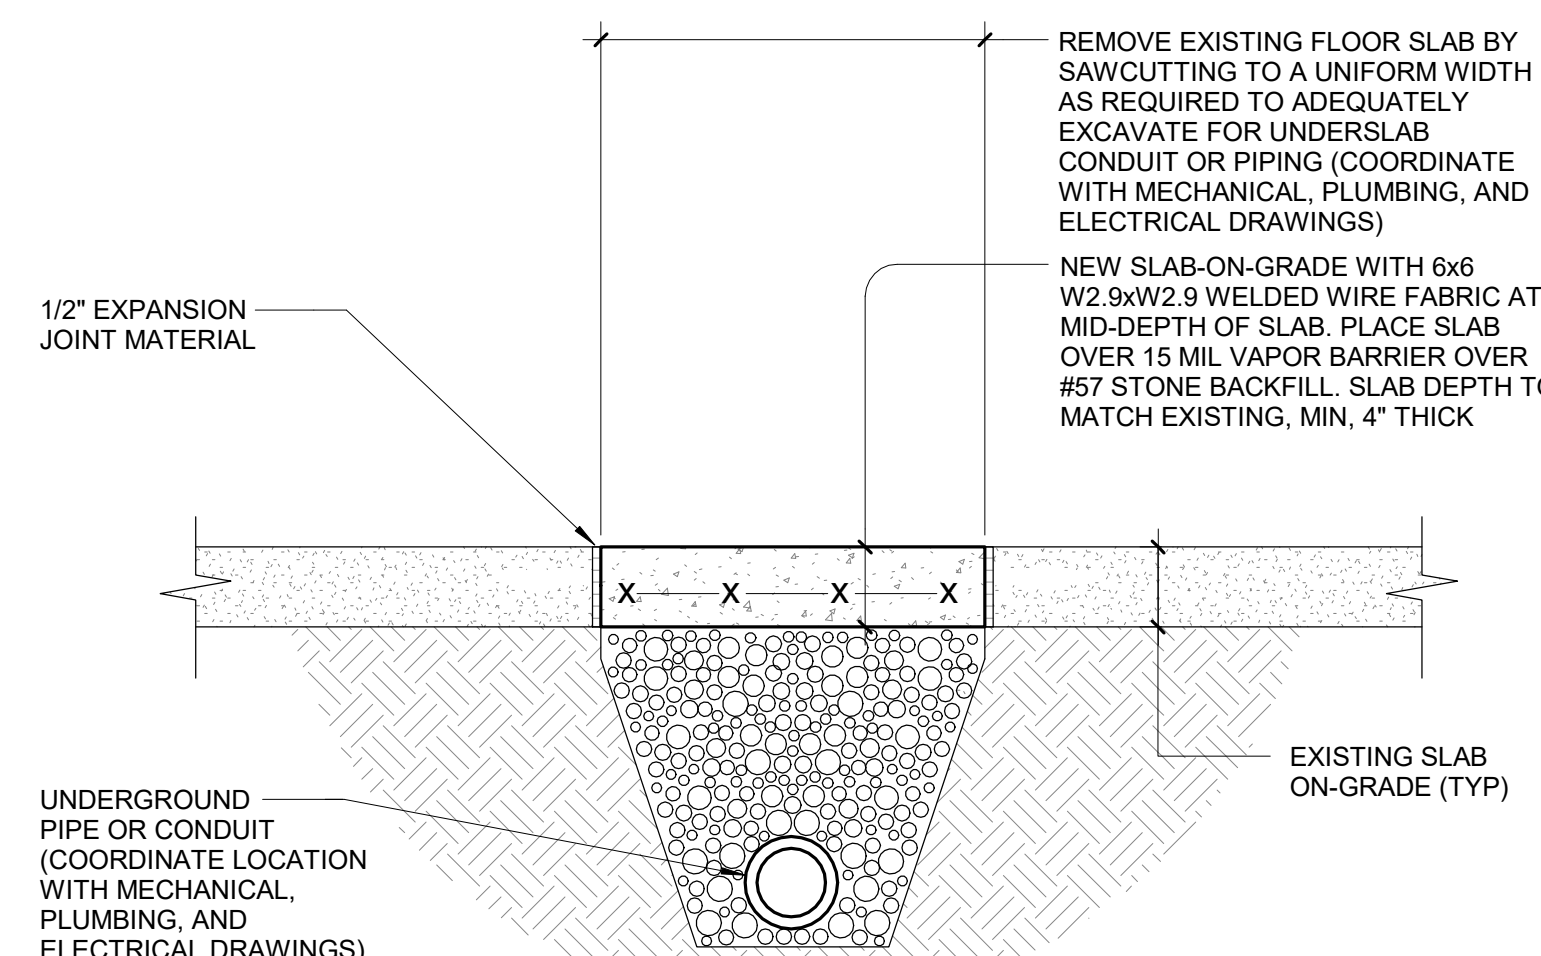

9 TYPICAL SLAB REPAIR
Scale: 1" = 1'-0"

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ STAFF
APPROVED BY _____ JAW
CHECKED BY _____ CCB
DATE _____ 08.26.2026
TITLE

STRUCTURAL
STANDARD
DETAILS

PROJECT NO. 50165756


S-701

SHEET NO.

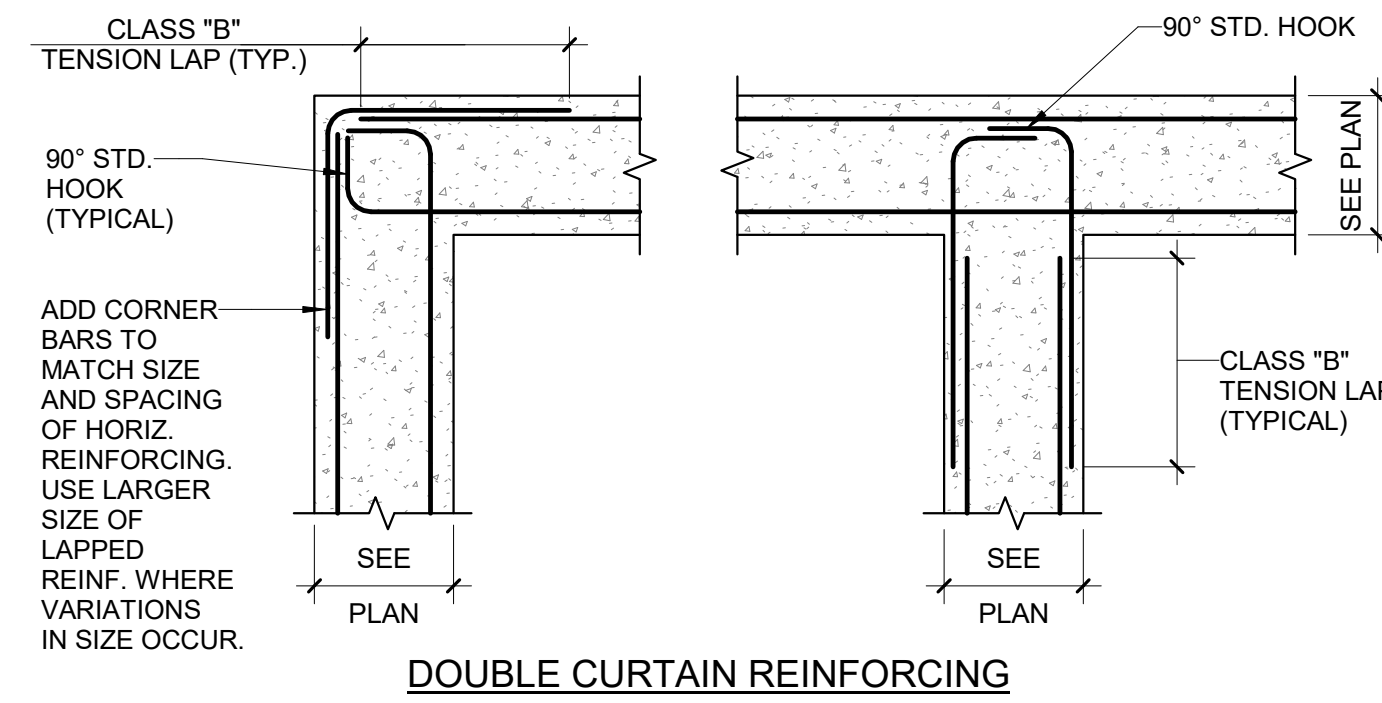


NOTES:
1. VERTICAL REINFORCING BARS NOT SHOWN FOR CLARITY.


3 WALL CORNER REINFORCEMENT
Scale: 1" = 1'-0"

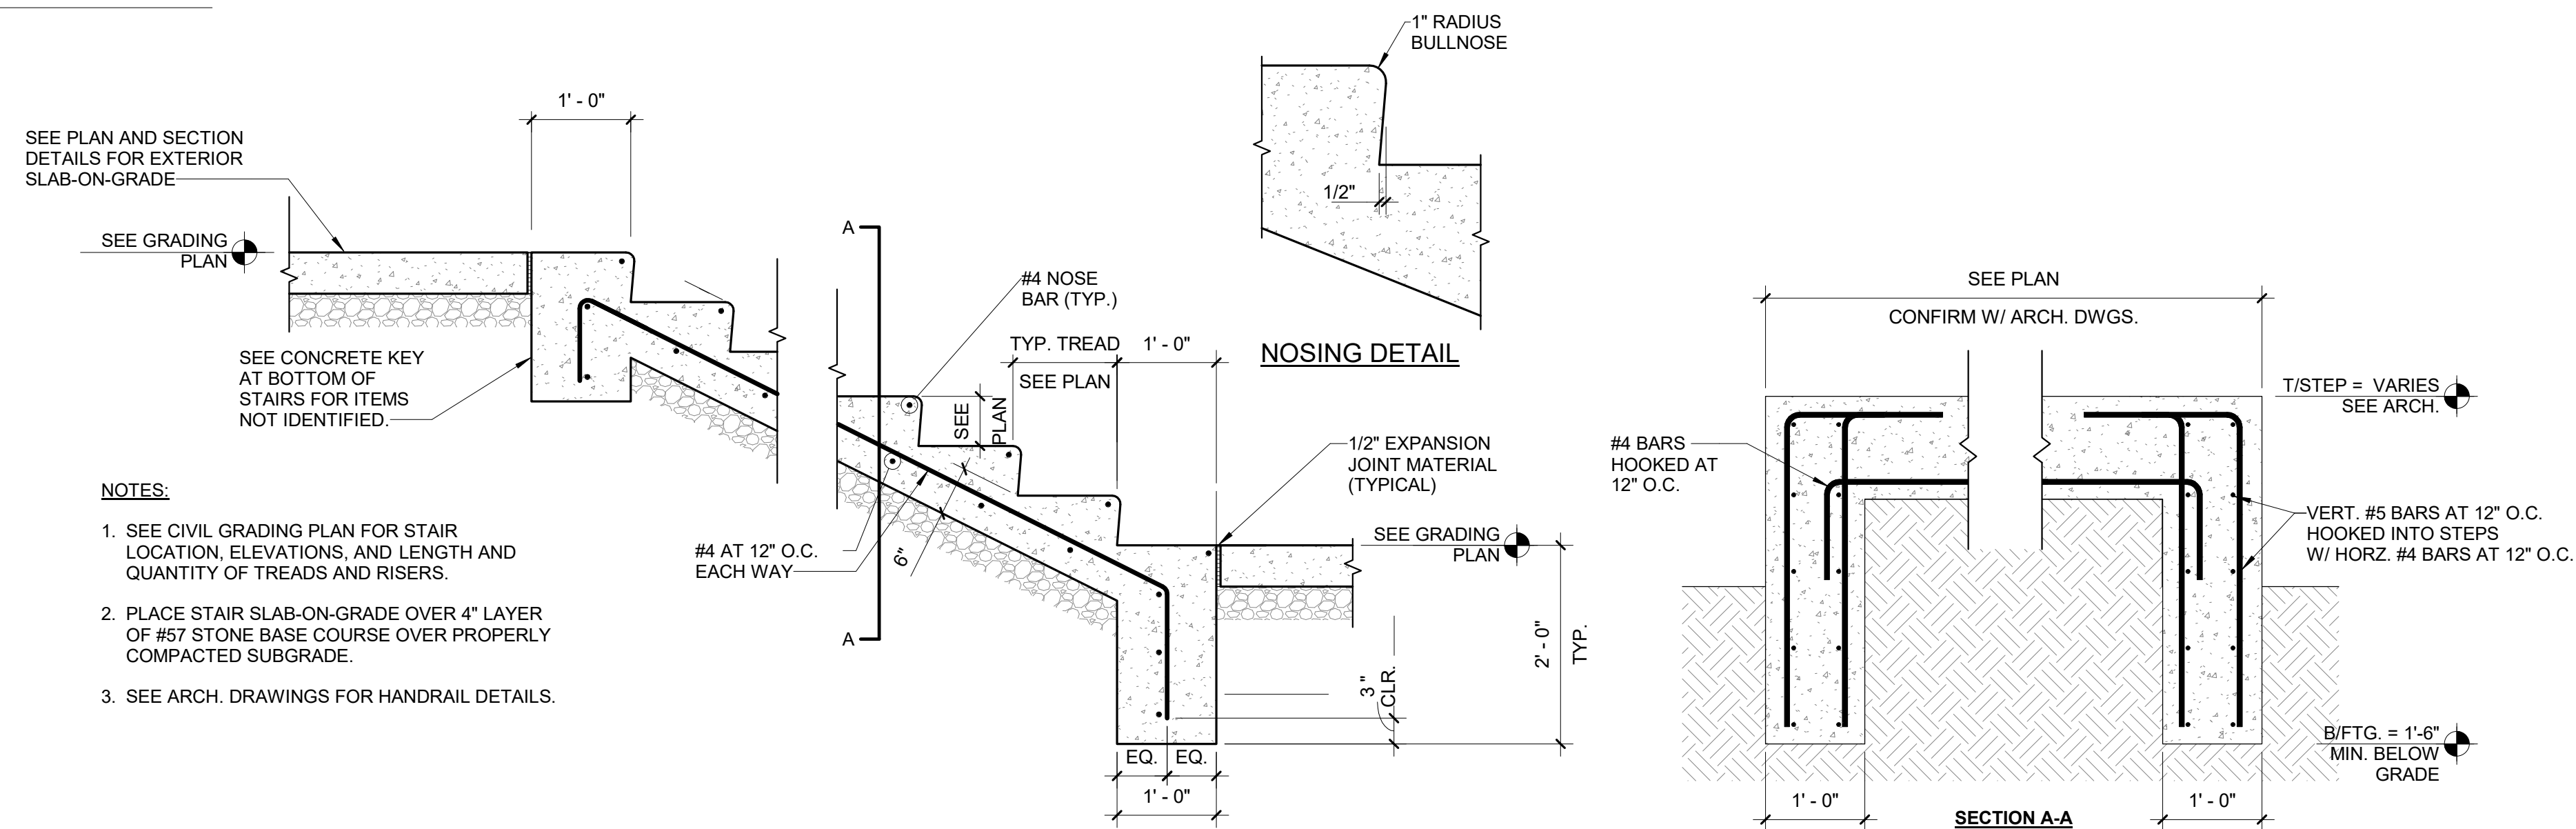


2 EXTERIOR CONCRETE STAIR
Scale: 3/4" = 1'-0"

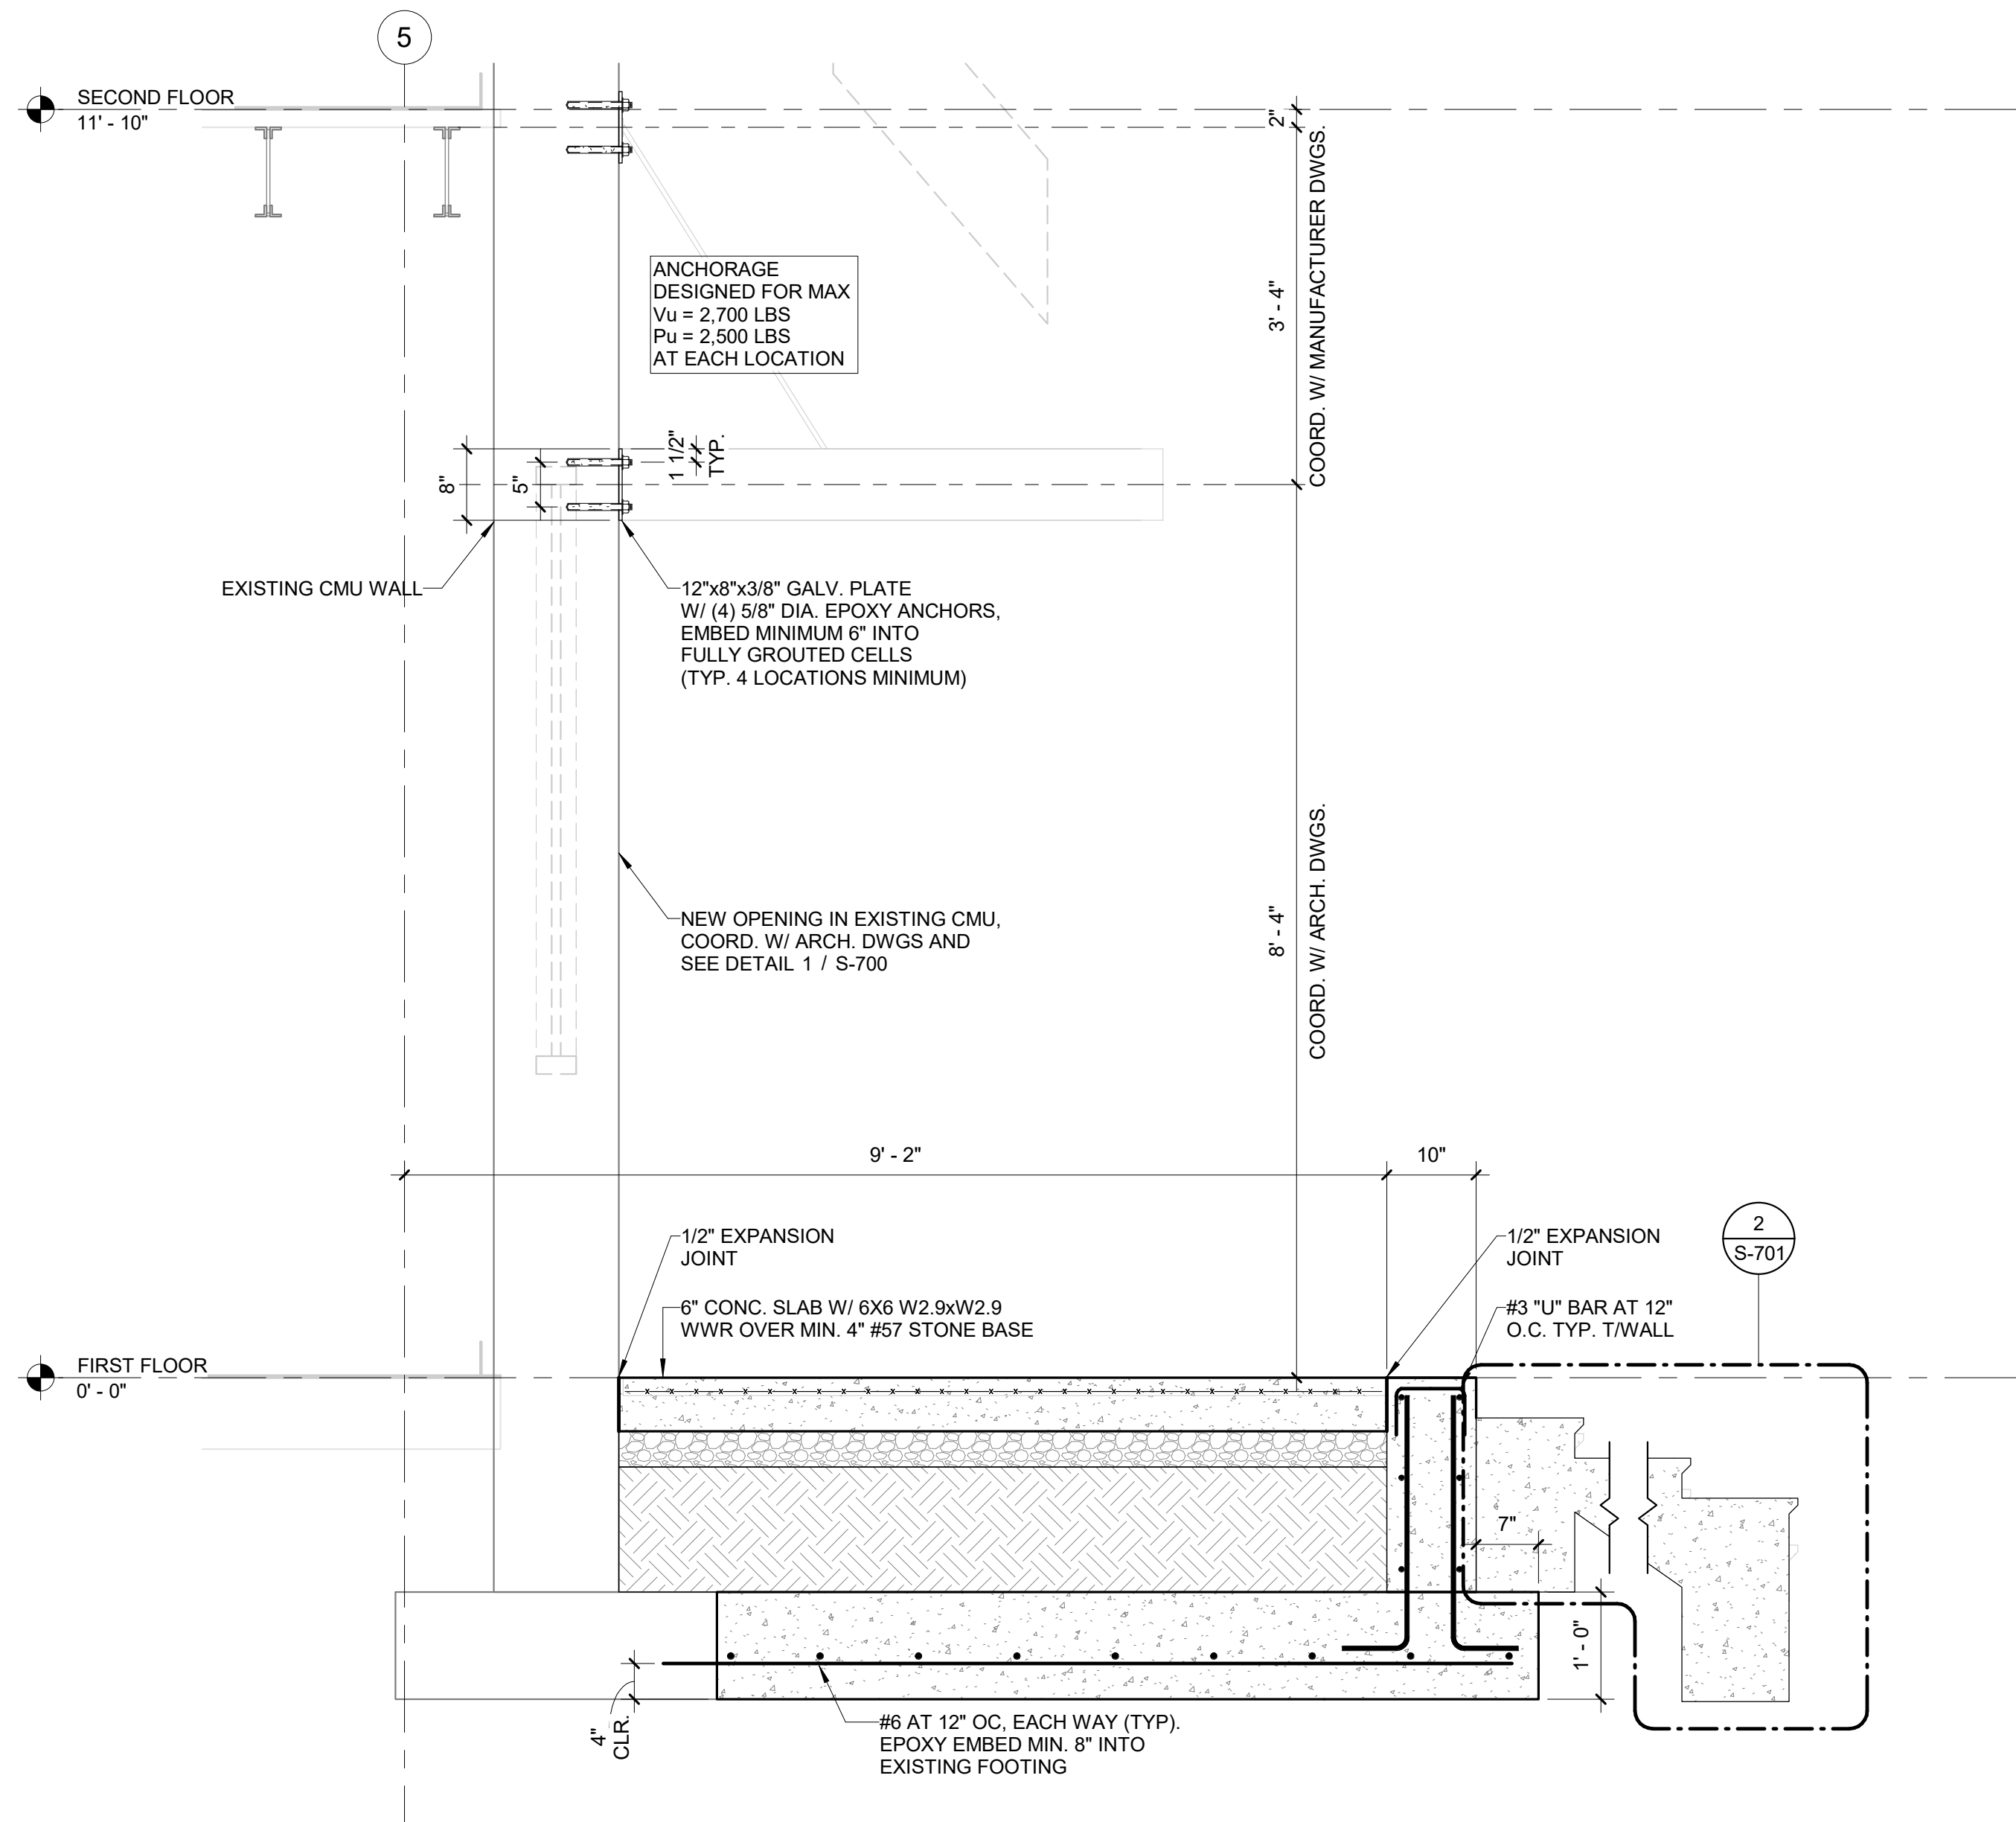


1 WALL SECTION AT EXTERIOR CANOPY
Scale: 3/4" = 1'-0"

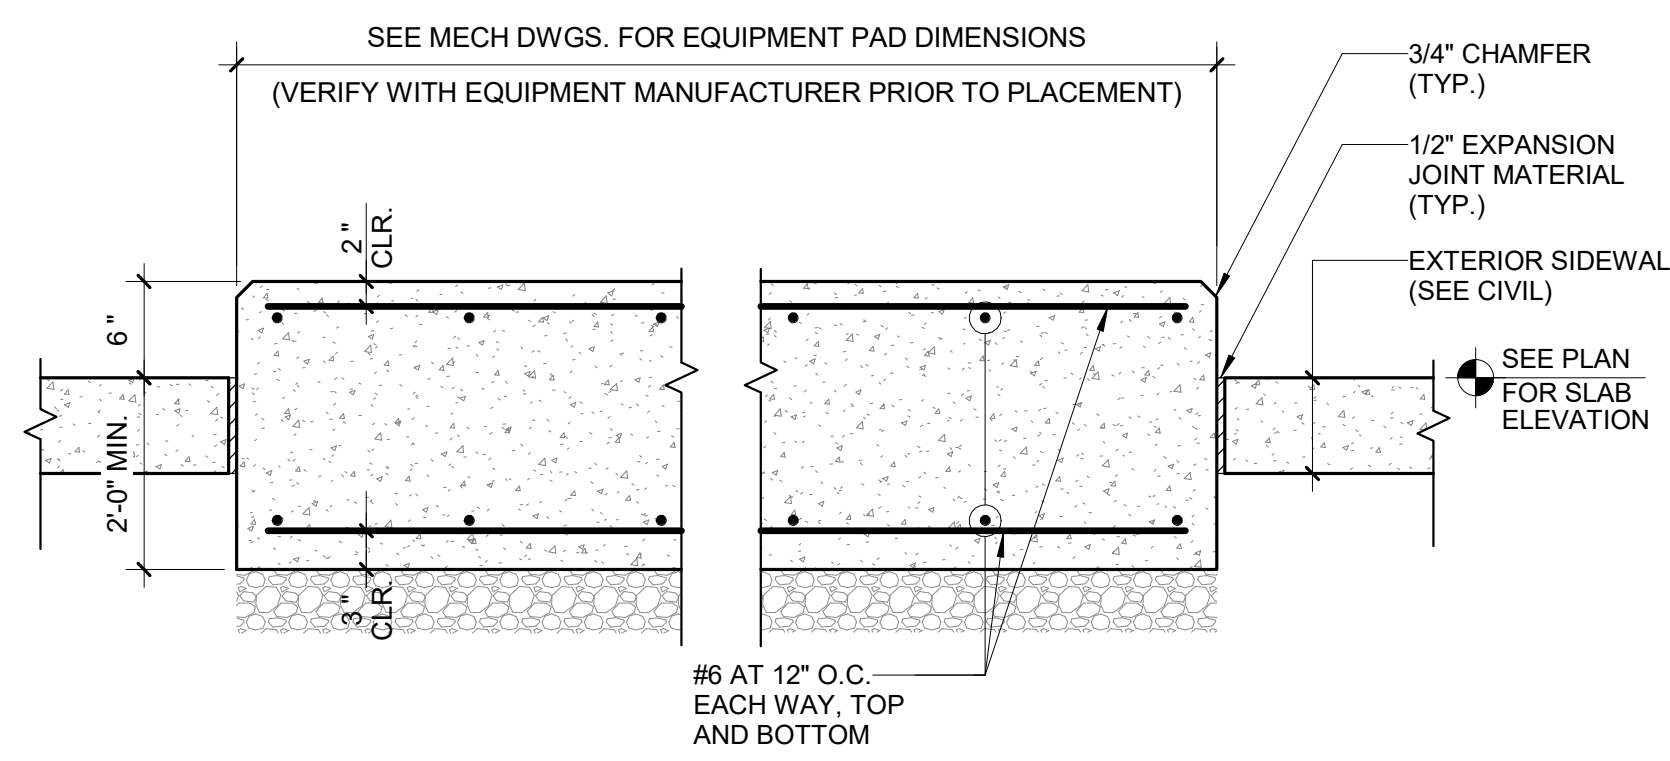

5 GENERATOR PAD
Scale: 1" = 1'-0"

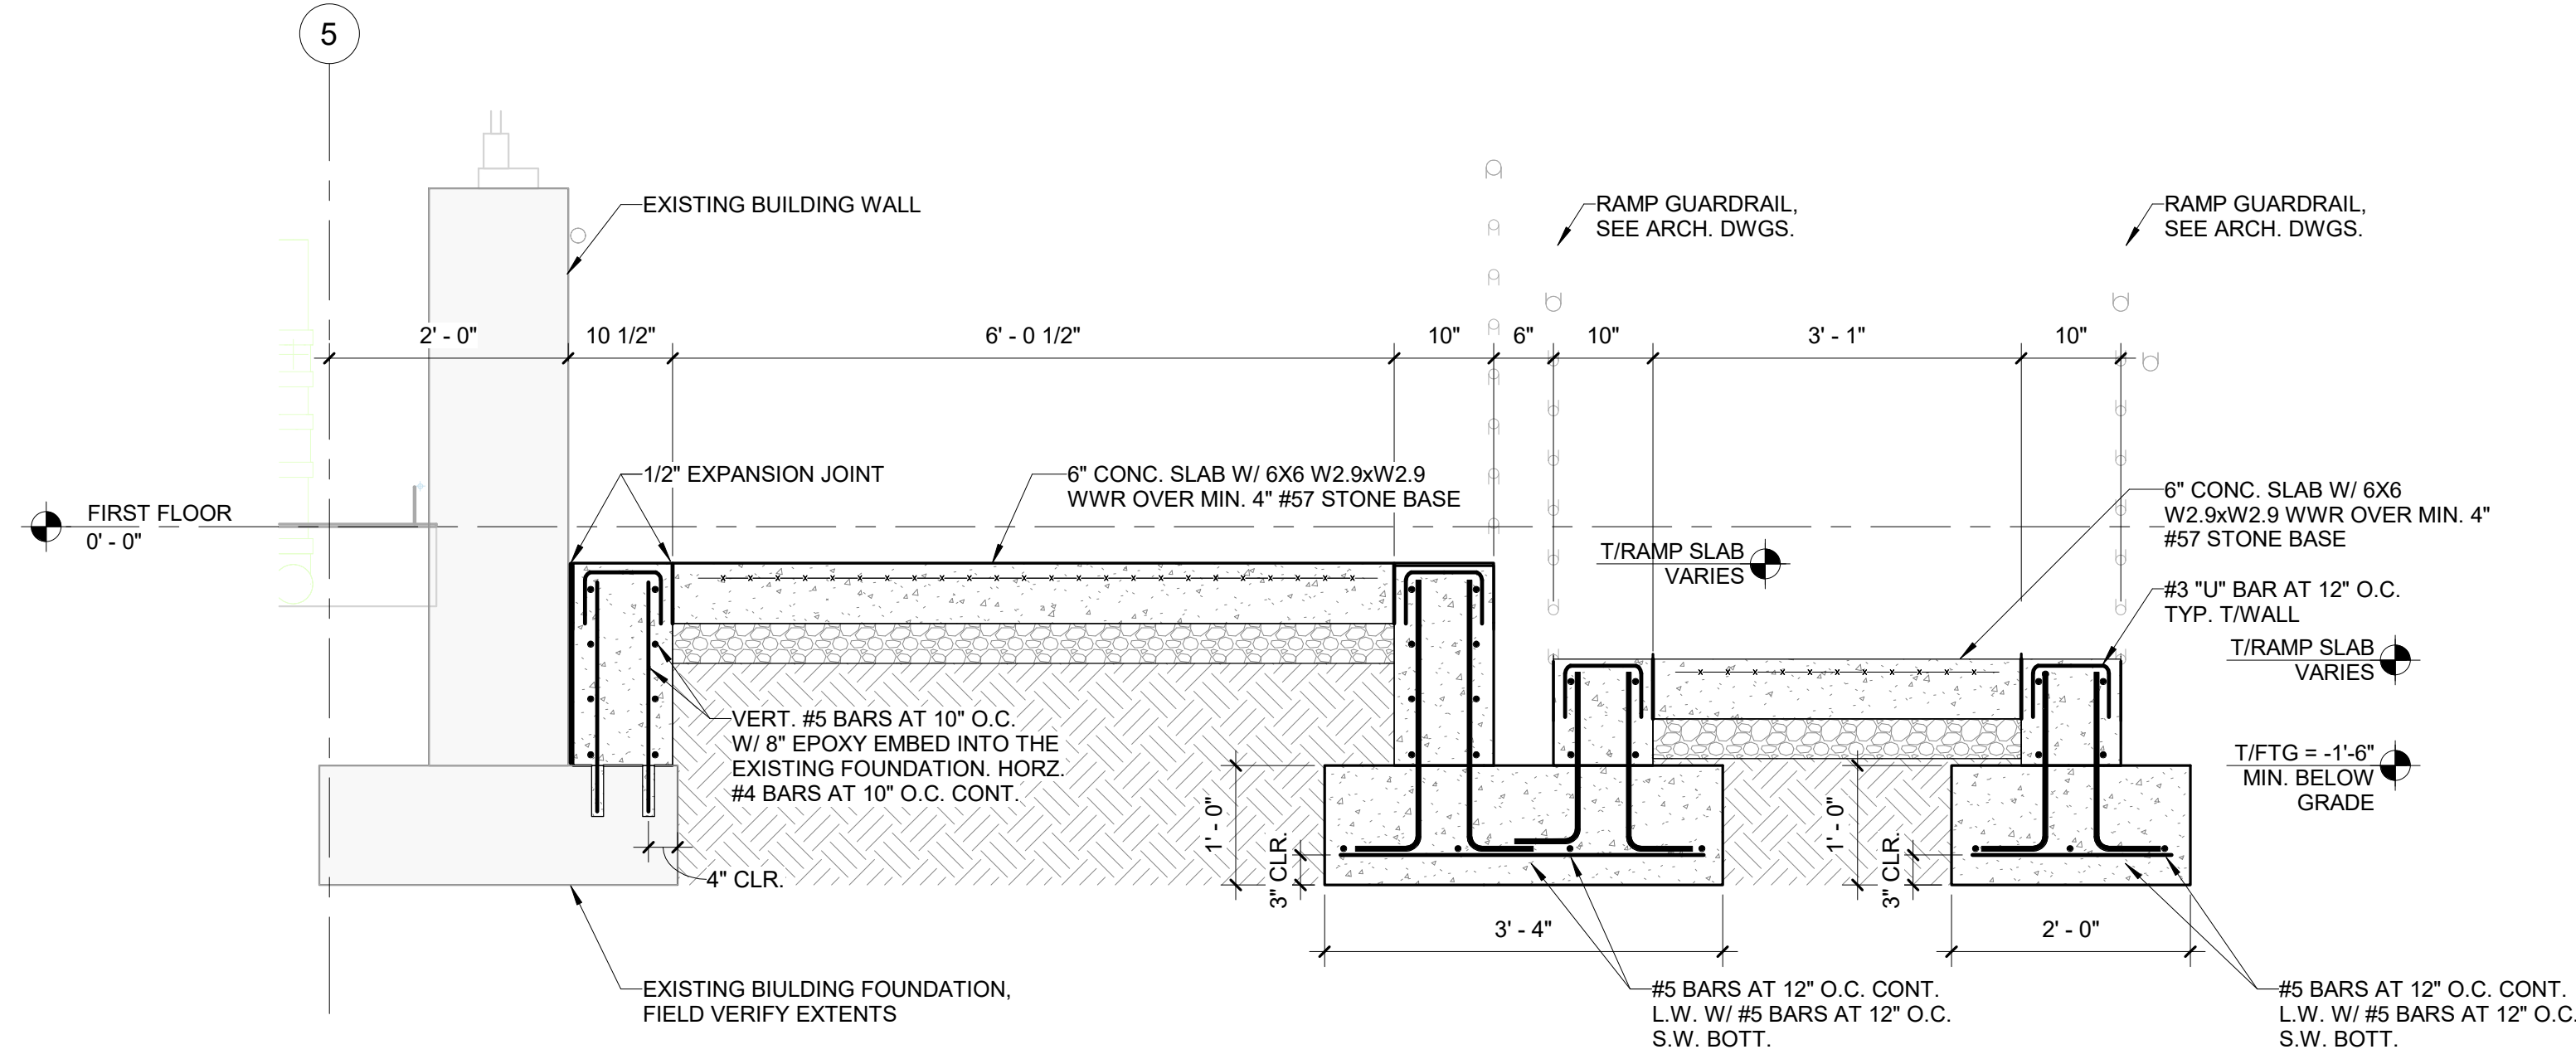

6 SECTION AT EXTERIOR RAMP
Scale: 3/4" = 1'-0"

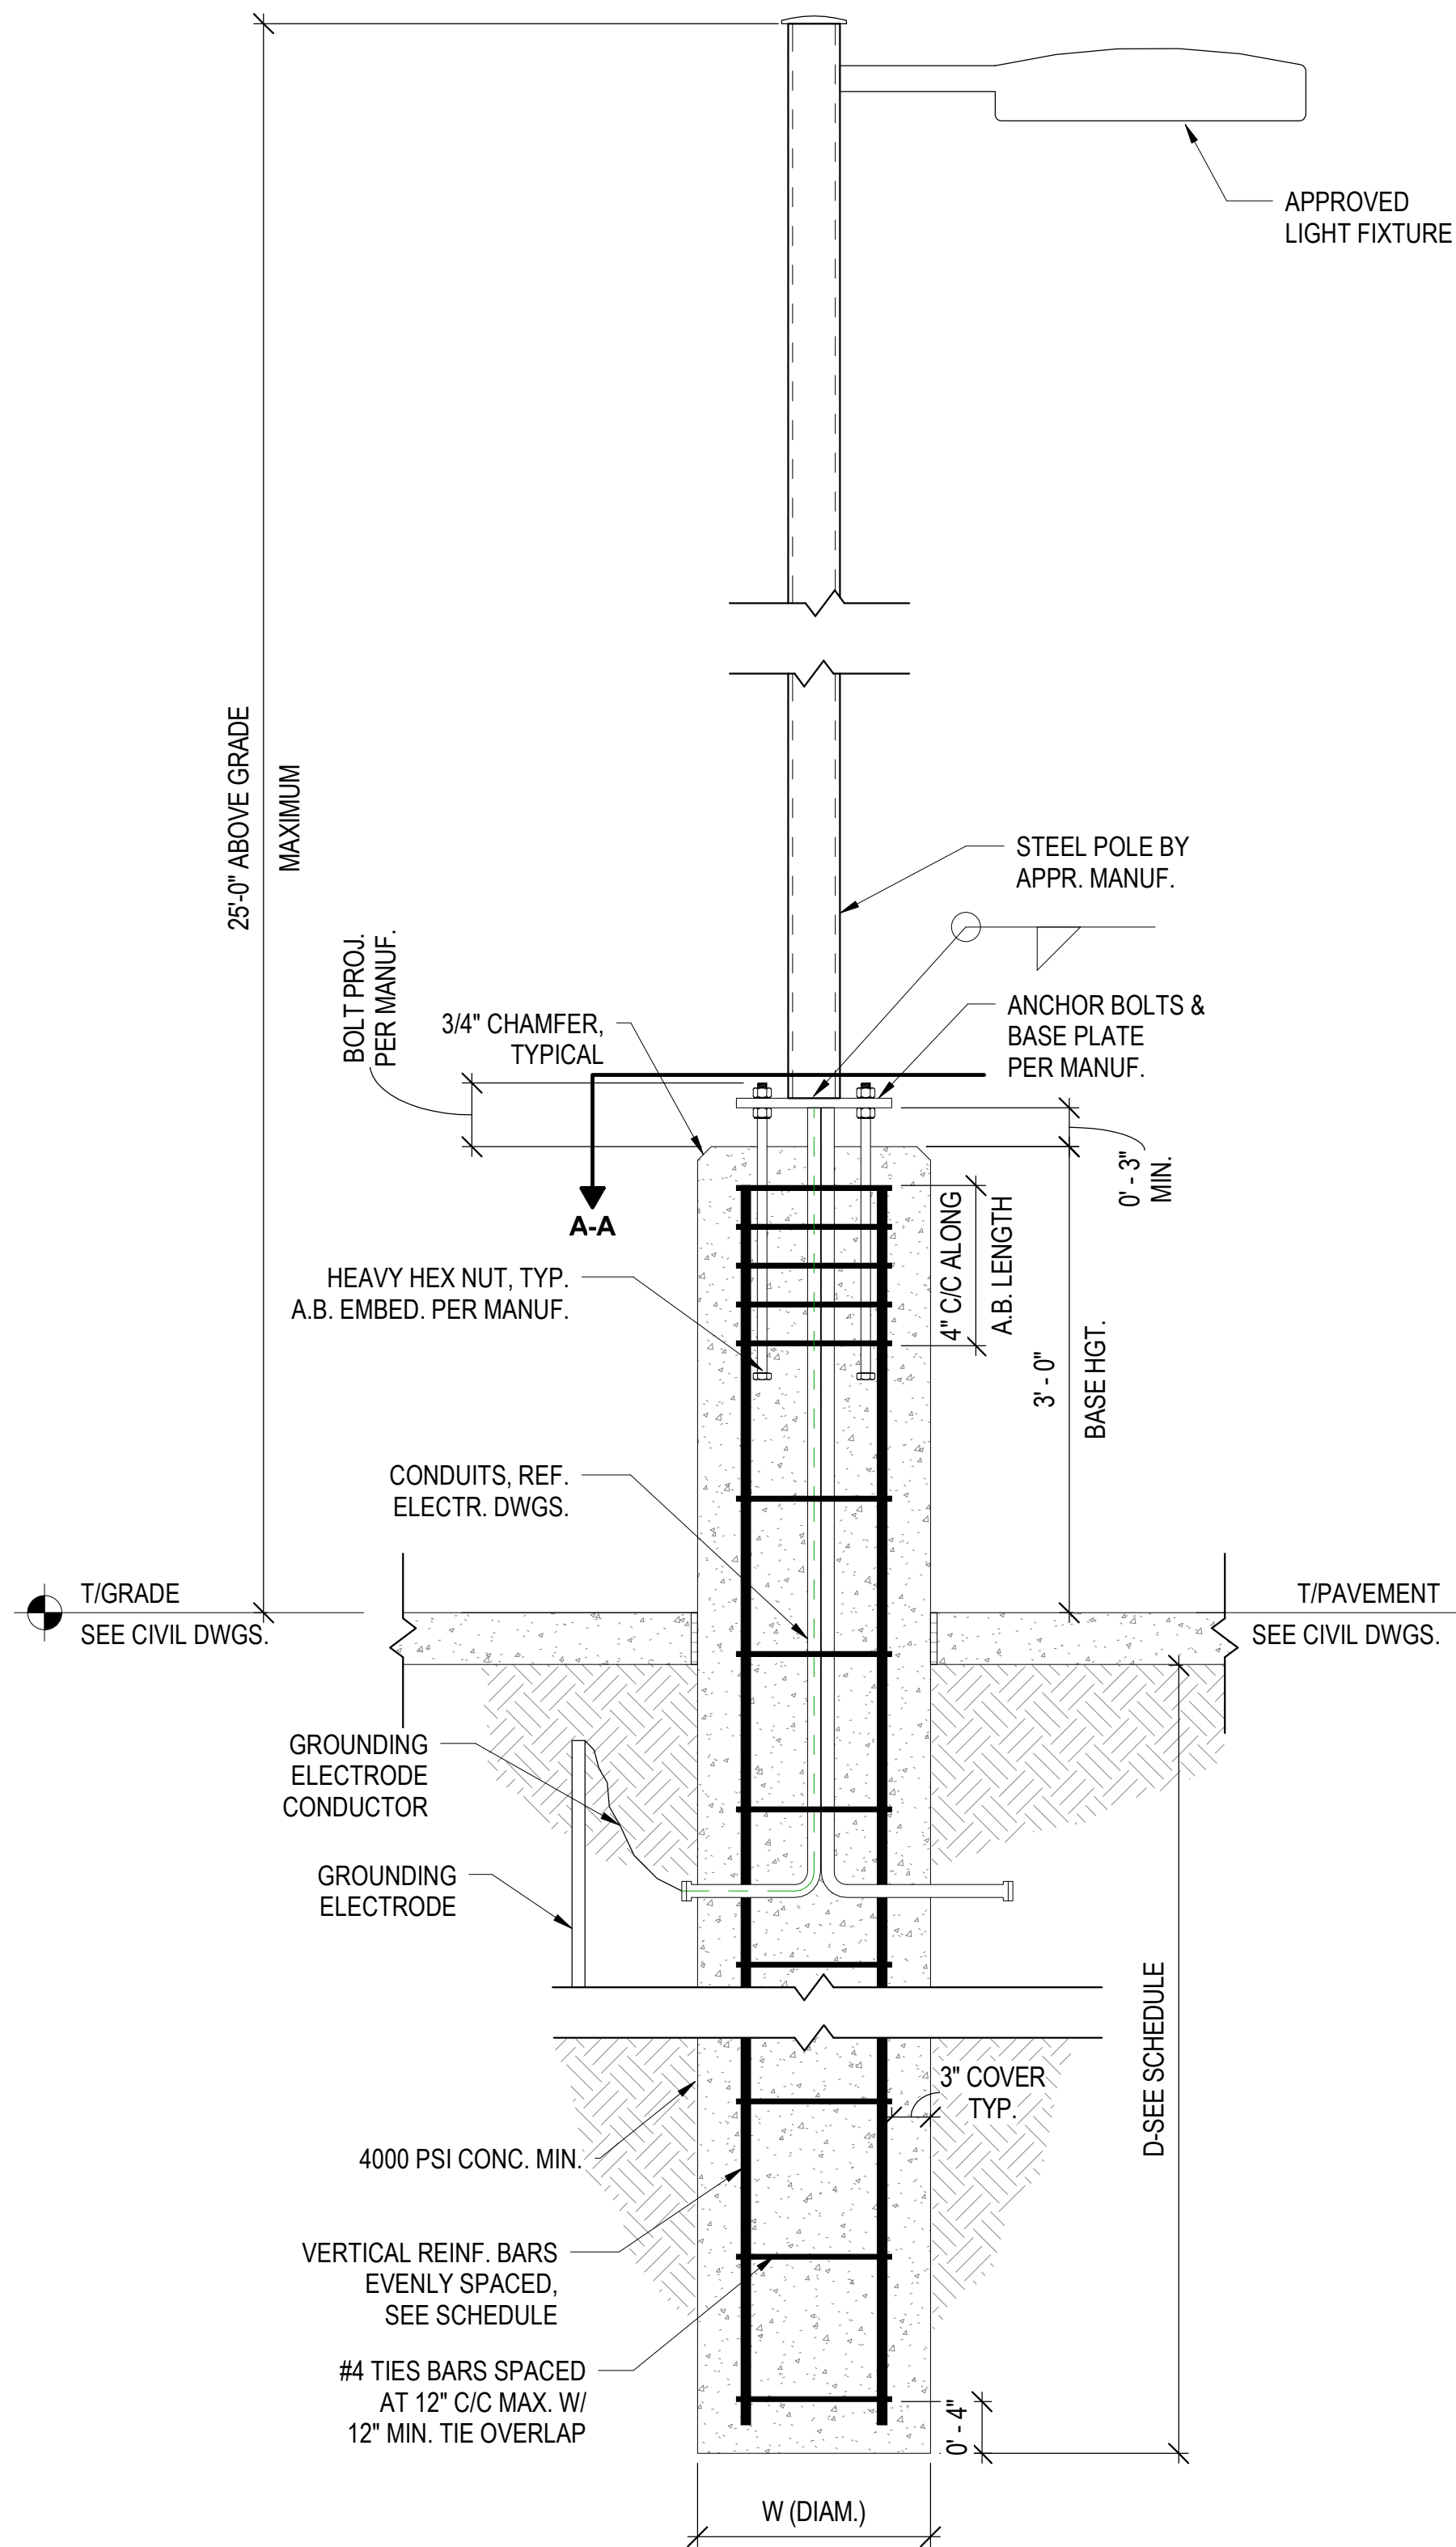

4 LIGHT POLE FOUNDATION
Scale: 1" = 1'-0"

FOUNDATION SCHEDULE			
TYPE	W	D	VERTICAL BARS
A	2'-0"	6'-6"	8-#7

NOTES:
1. CONTRACTOR TO CONFIRM "W" (DIAMETER) SHOWN ABOVE WITH LIGHT POLE MANUF. A.B. LAYOUT. INCREASE SIZE AS REQUIRED TO ENSURE ADEQUATE CONCRETE COVER REQUIREMENTS PER FOUNDATION DETAIL.

1

2

3

4

5

6

F


E

D

C

B

A

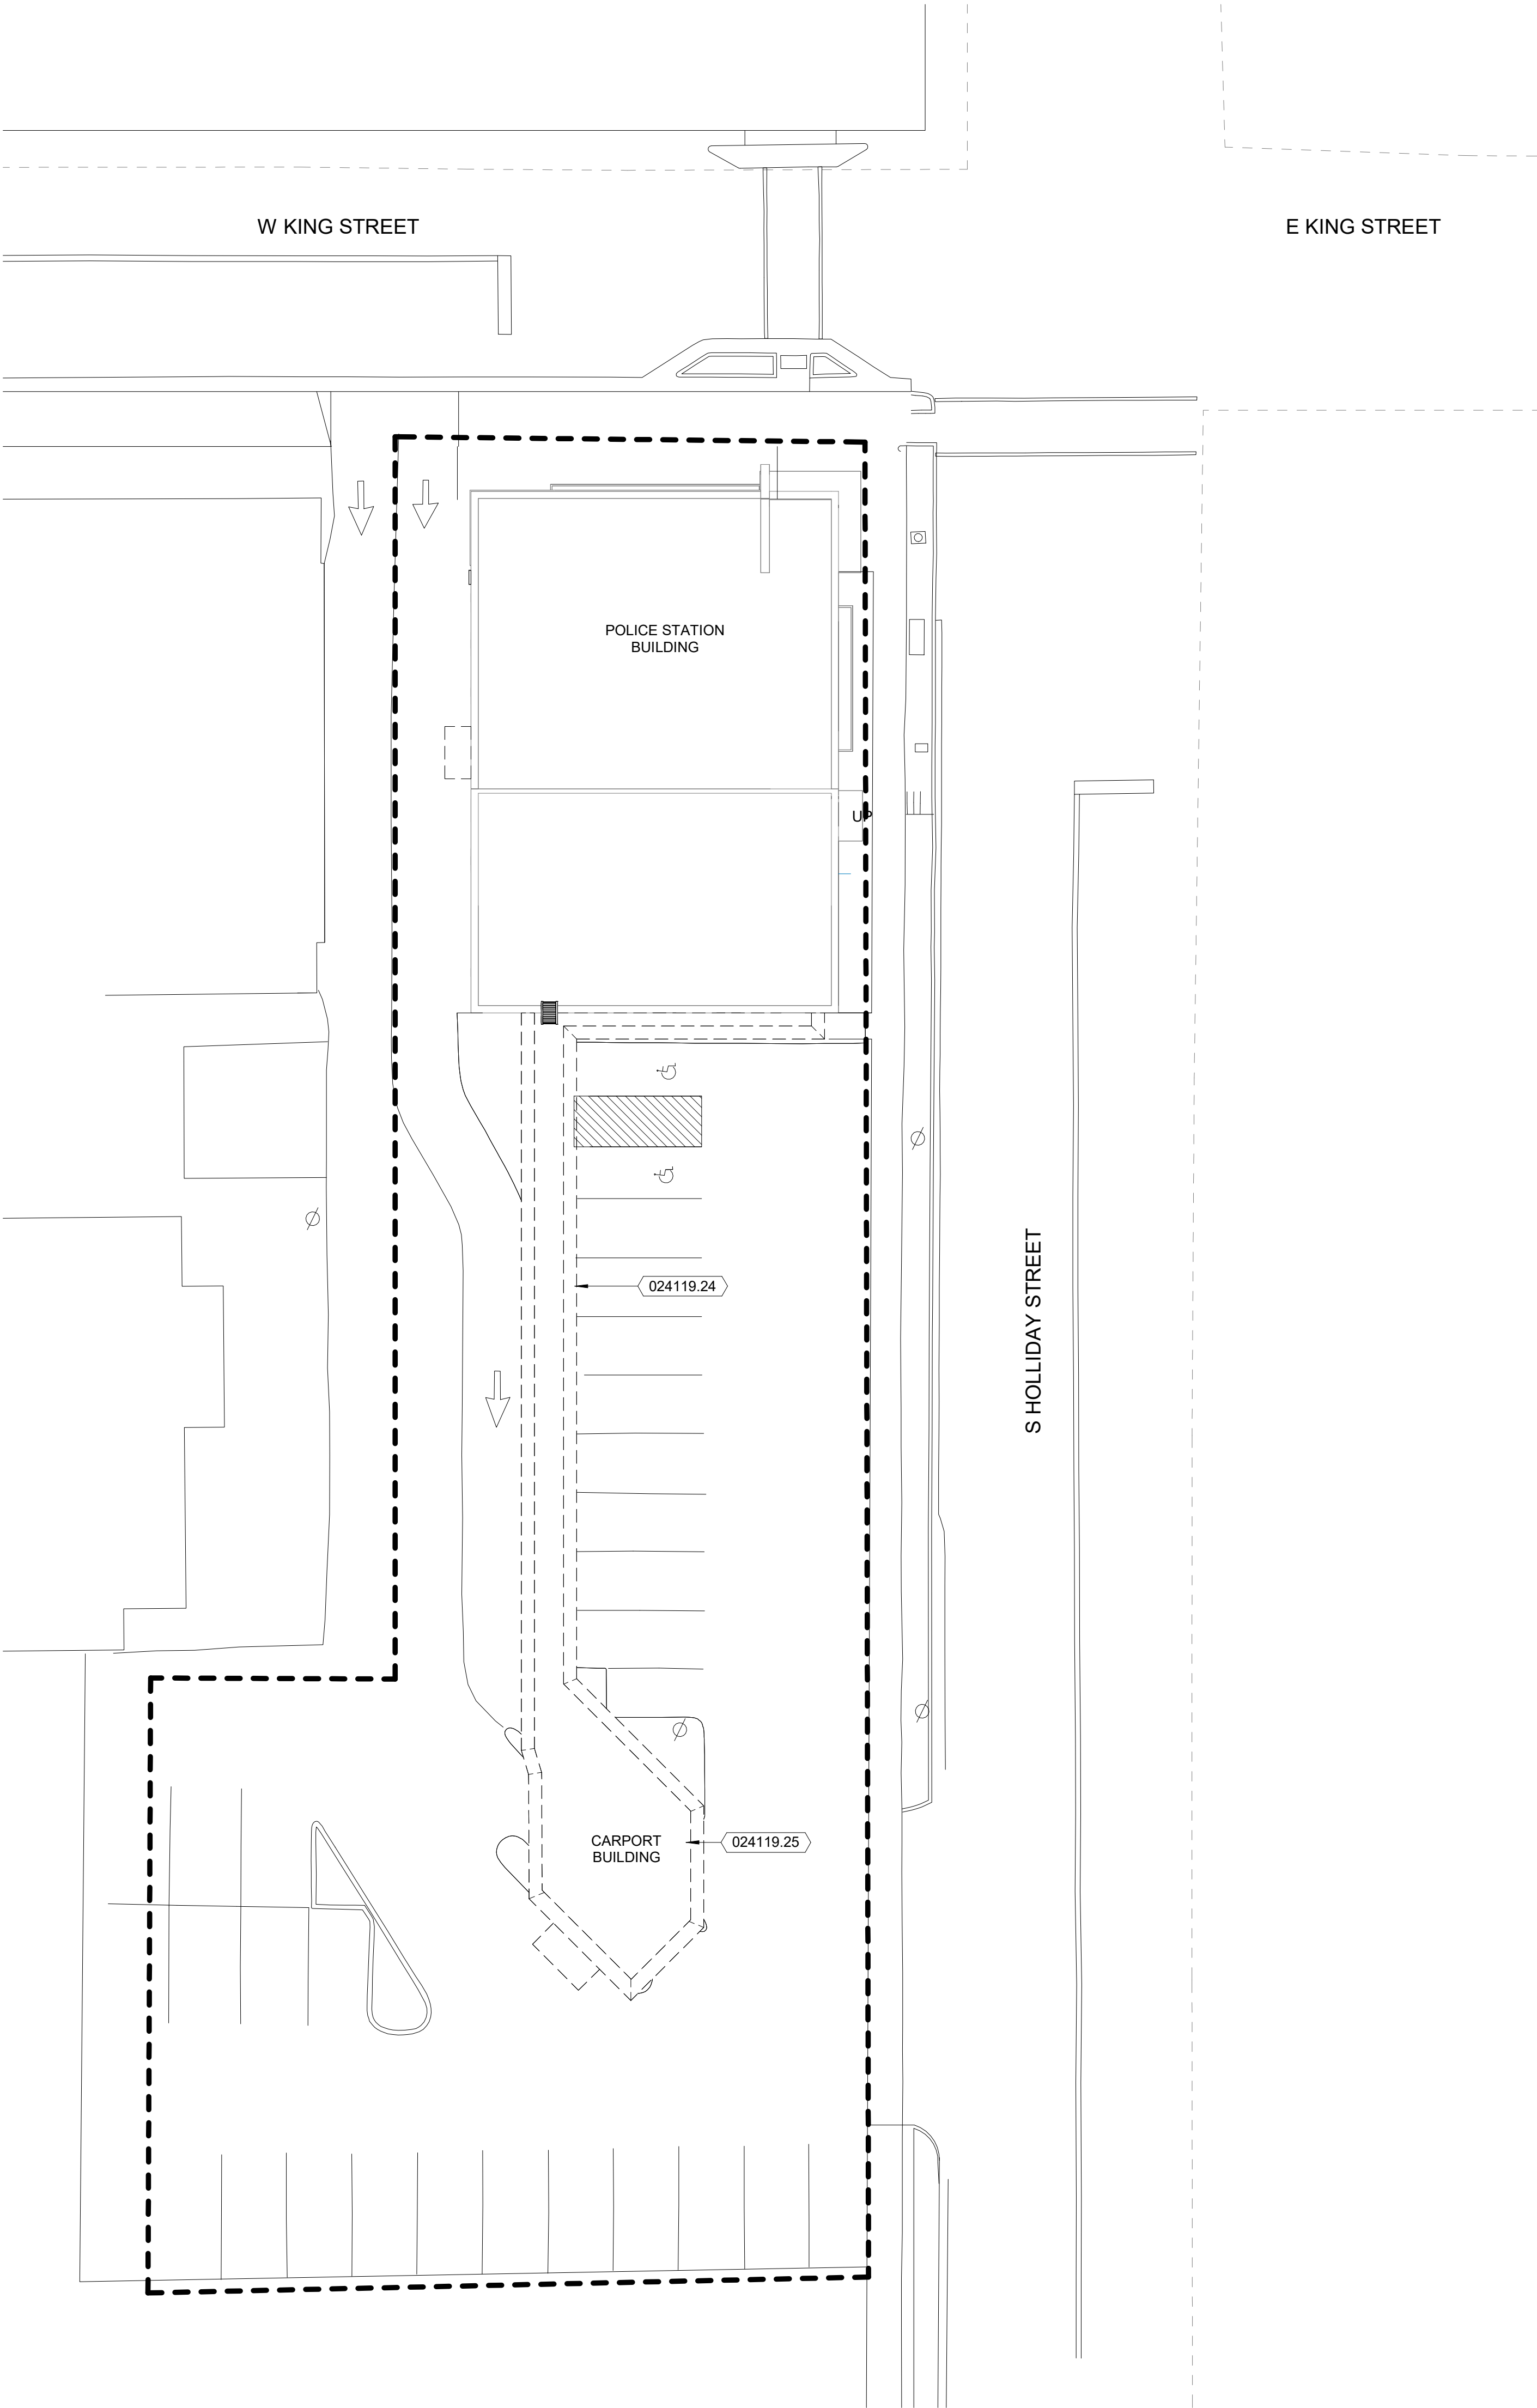

1 ARCHITECTURAL DEMO SITE PLAN
Scale: 1/16" = 1'-0"


KEYNOTES PER SHEET	
NOTE	DESCRIPTION
024119.24	DEMOLISH EXISTING COVERED WALKWAY AND ASSOCIATED STRUCTURE. SEE PICTURE 1. PATCH AND REPAIR EXISTING EXTERIOR WALL WHERE WALKWAY WAS DEMOLISHED.
024119.25	DEMOLISH EXISTING CARPORT BUILDING AND ASSOCIATED STRUCTURE. SEE PICTURE 2.



DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

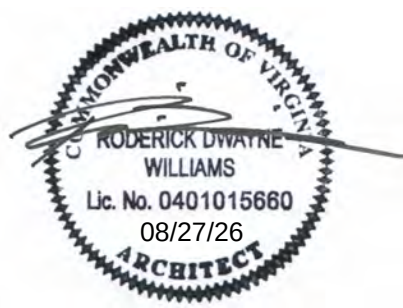

KEY PLAN

SCALE

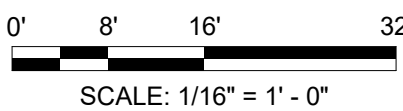

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE

**ARCHITECTURAL
DEMOLITION SITE
PLAN**

PROJECT NO. 50165756

ASD-101

SHEET NO.




1




2

123456


F
E
D
C
B
A

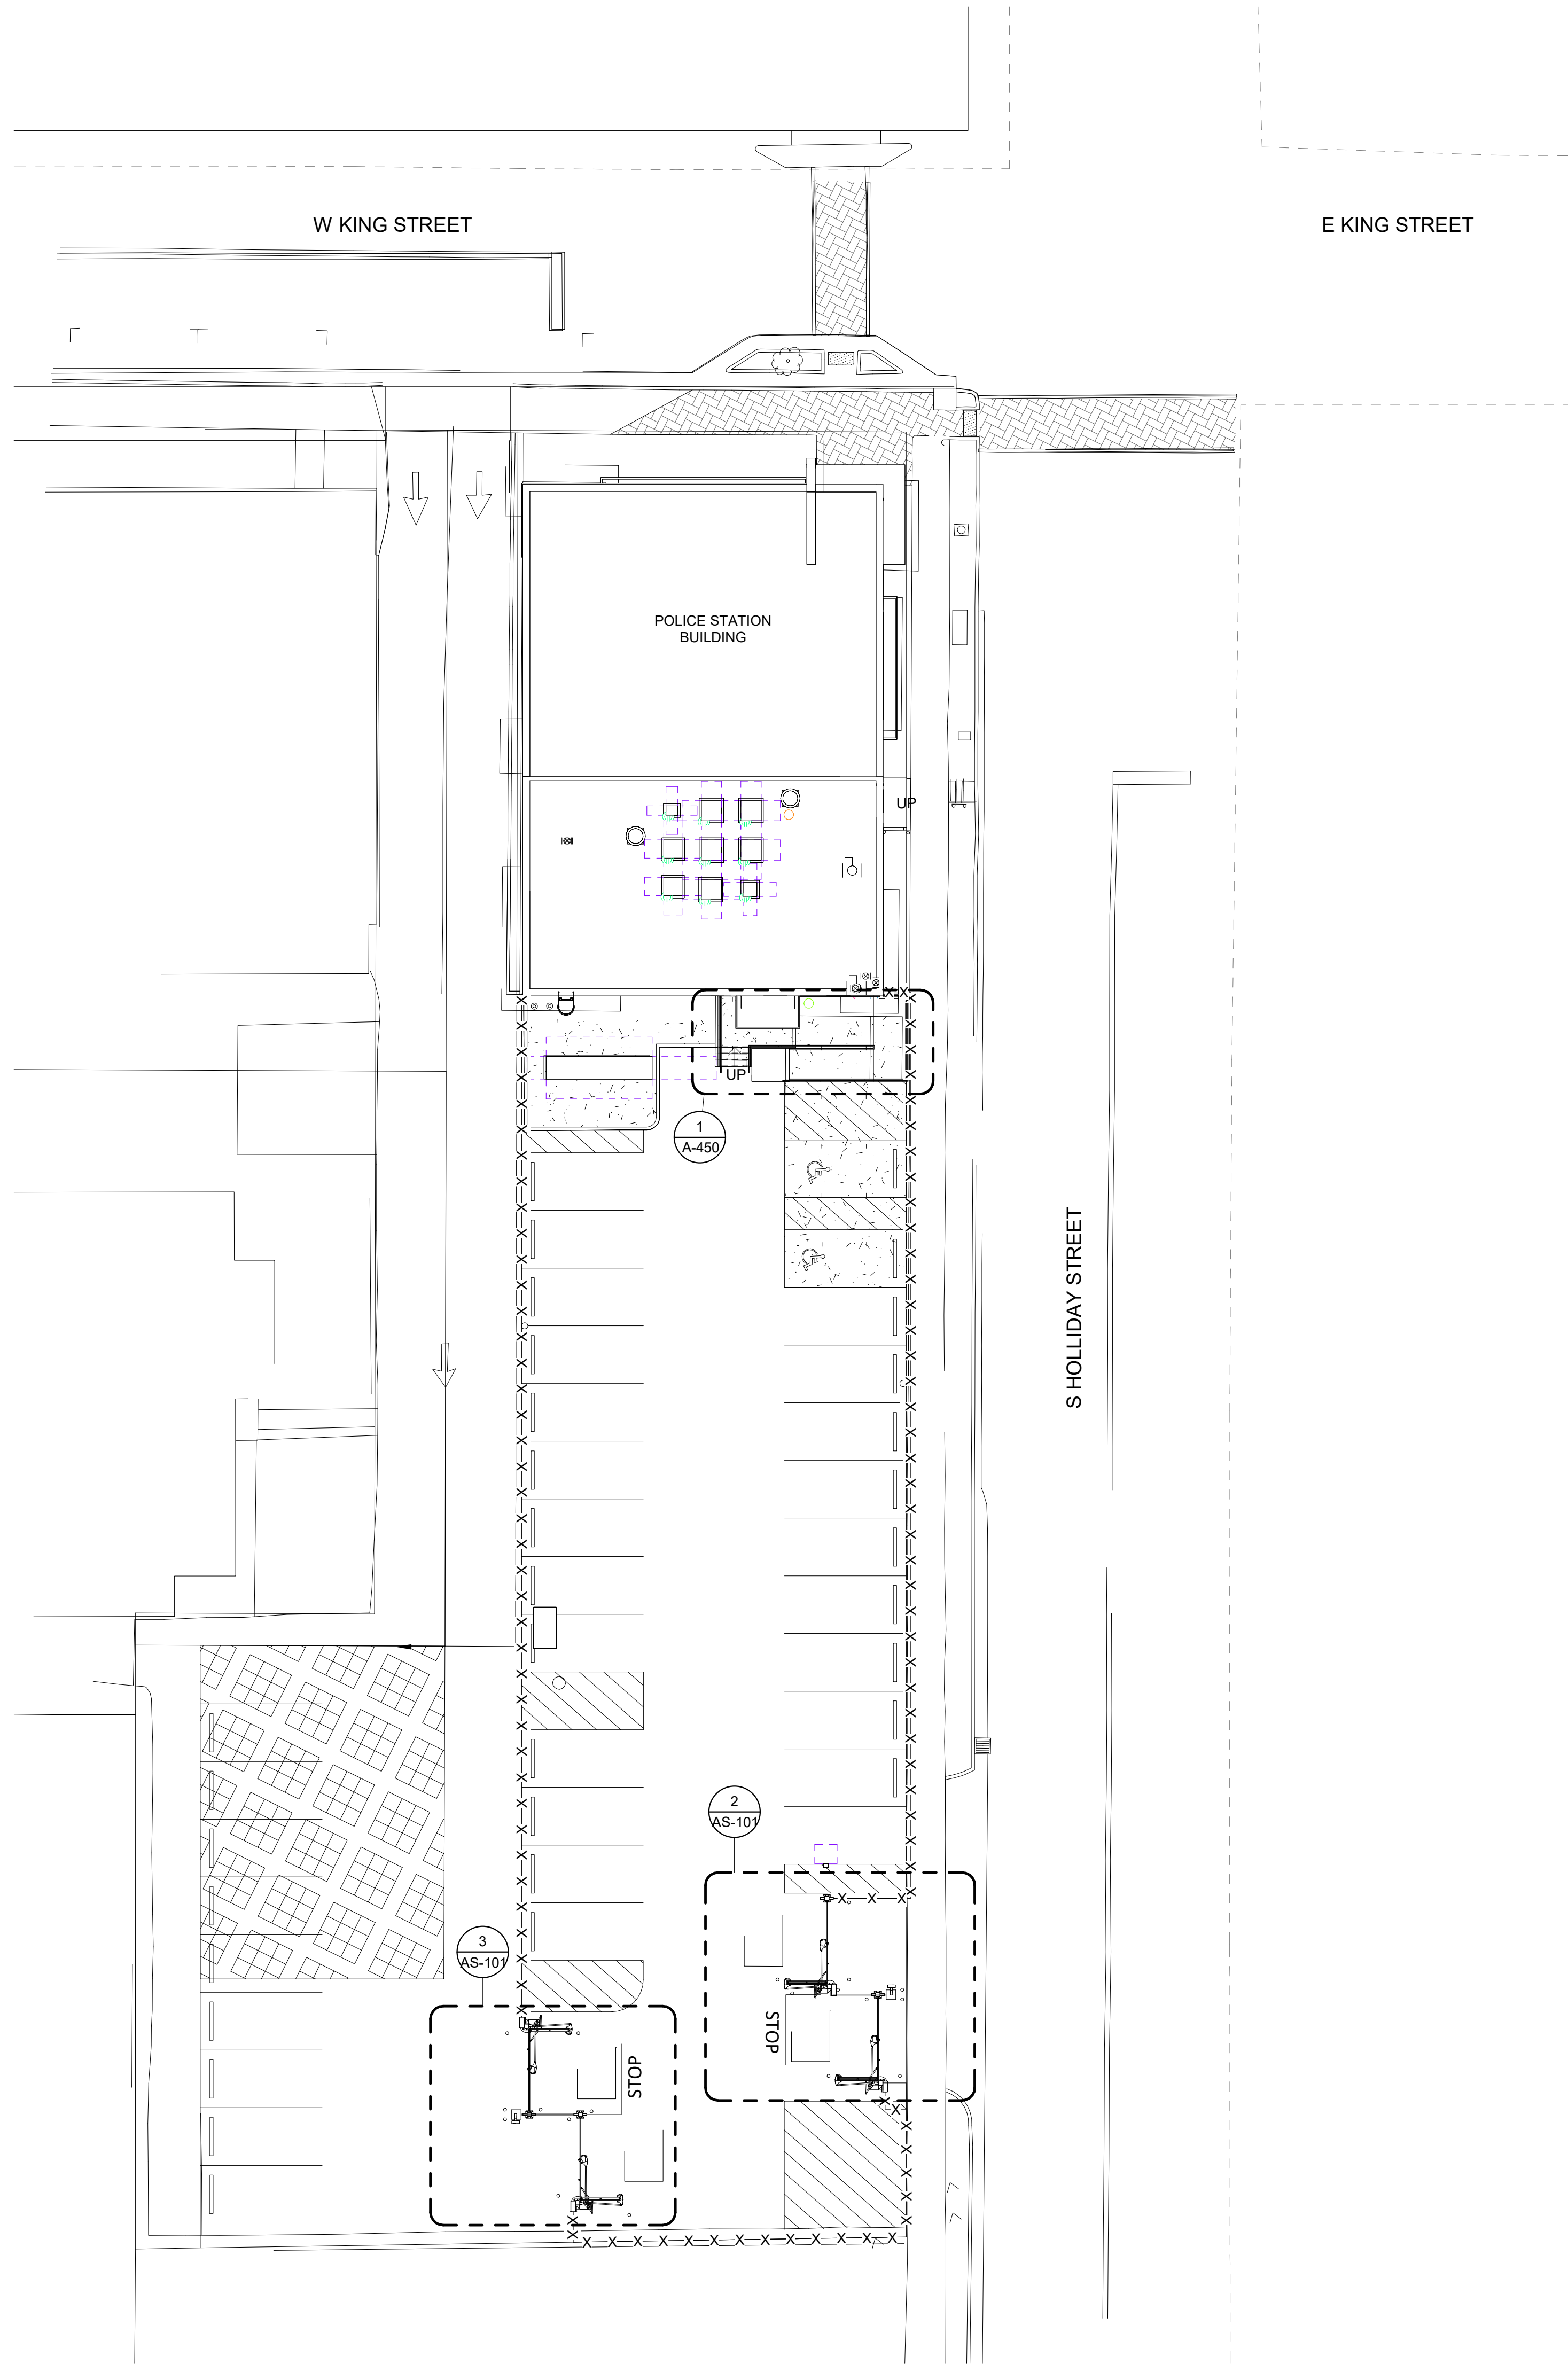


1 ARCHITECTURAL SITE PLAN
Scale: 1/16" = 1'-0"

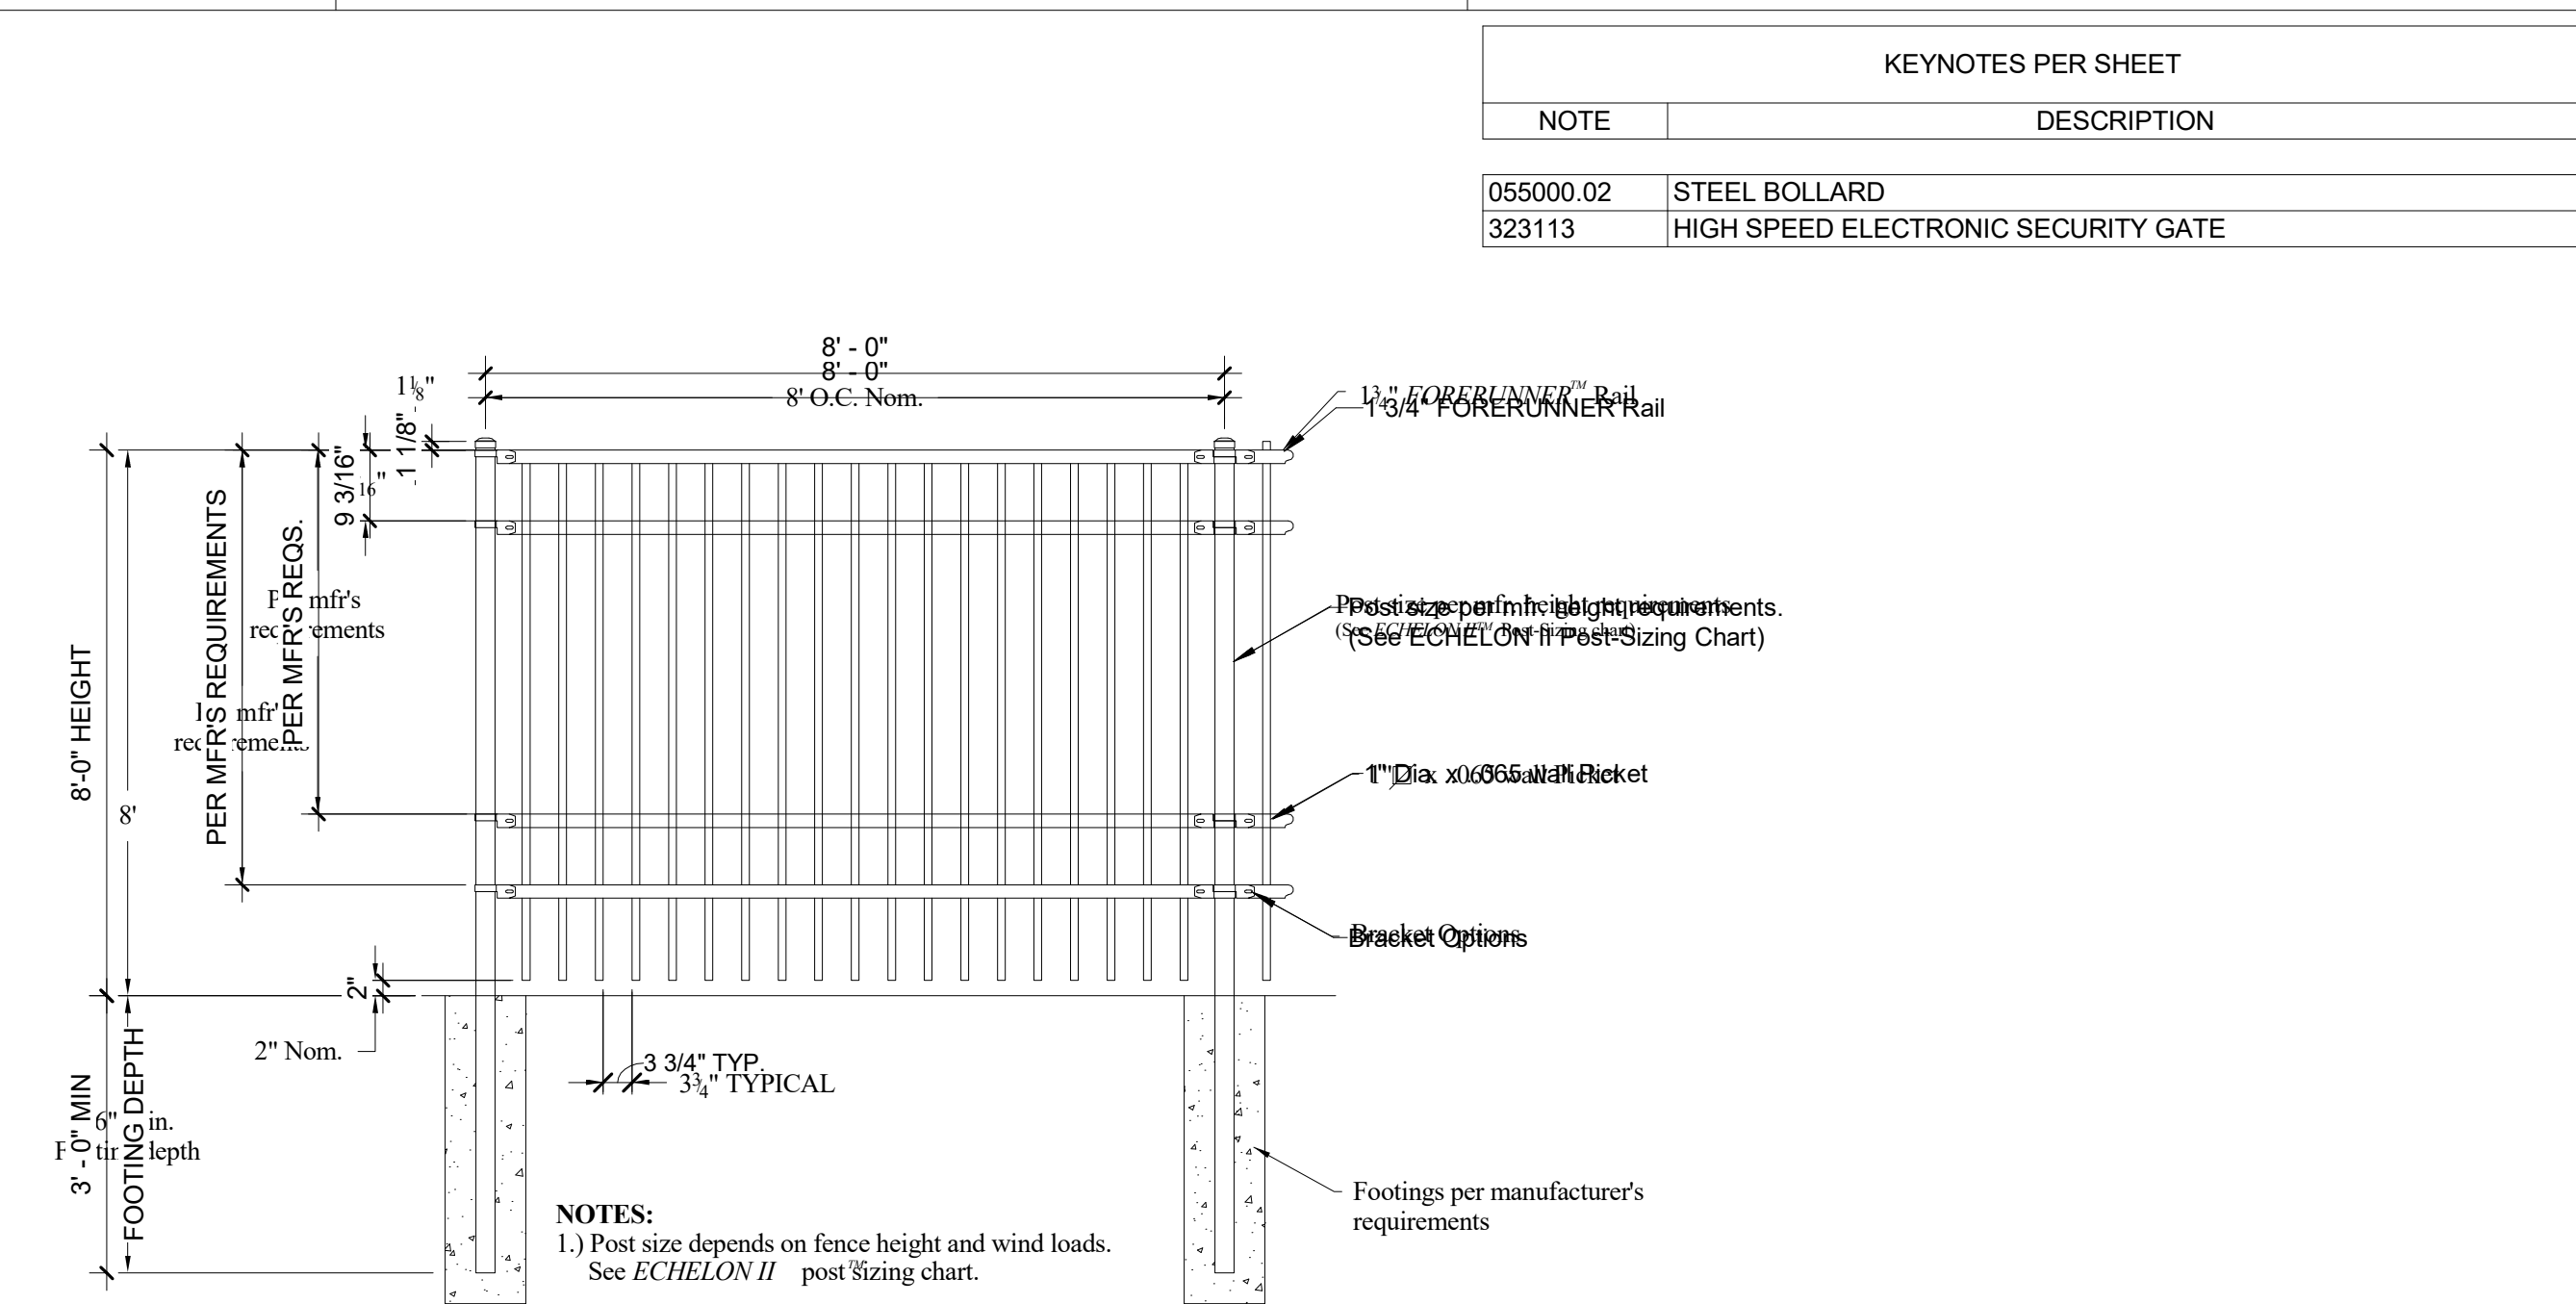

4 FENCE ELEVATION
Scale: 1/2" = 1'-0"

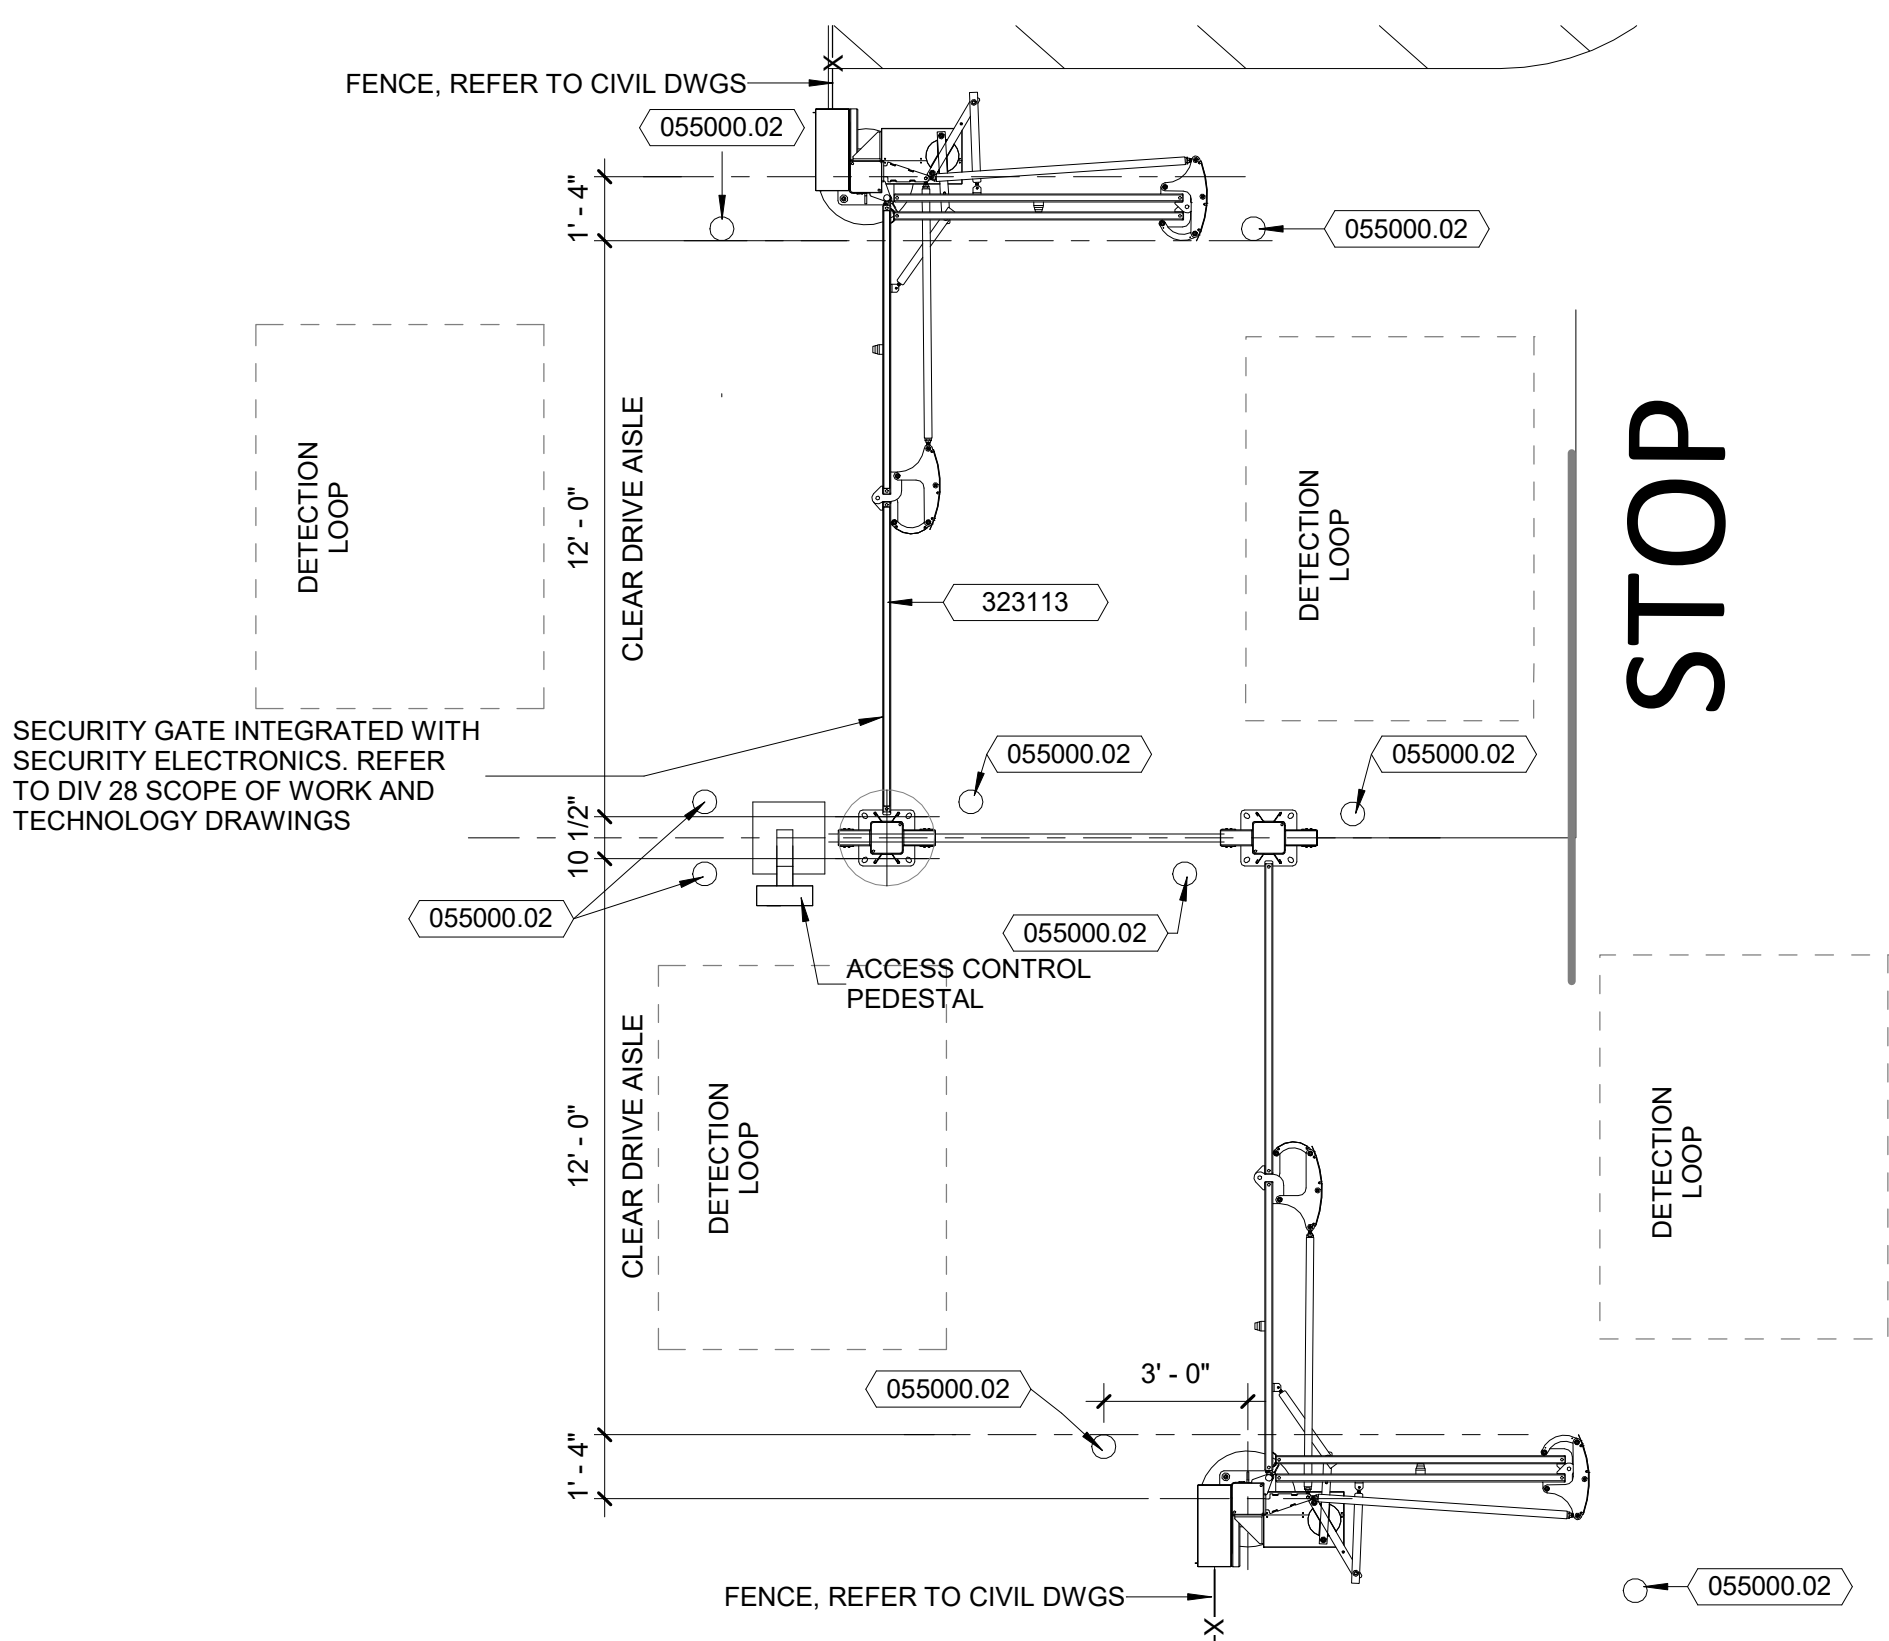

3 ARCHITECTURAL SITE PLAN - SECONDARY SECURITY GATE
Scale: 1/4" = 1'-0"

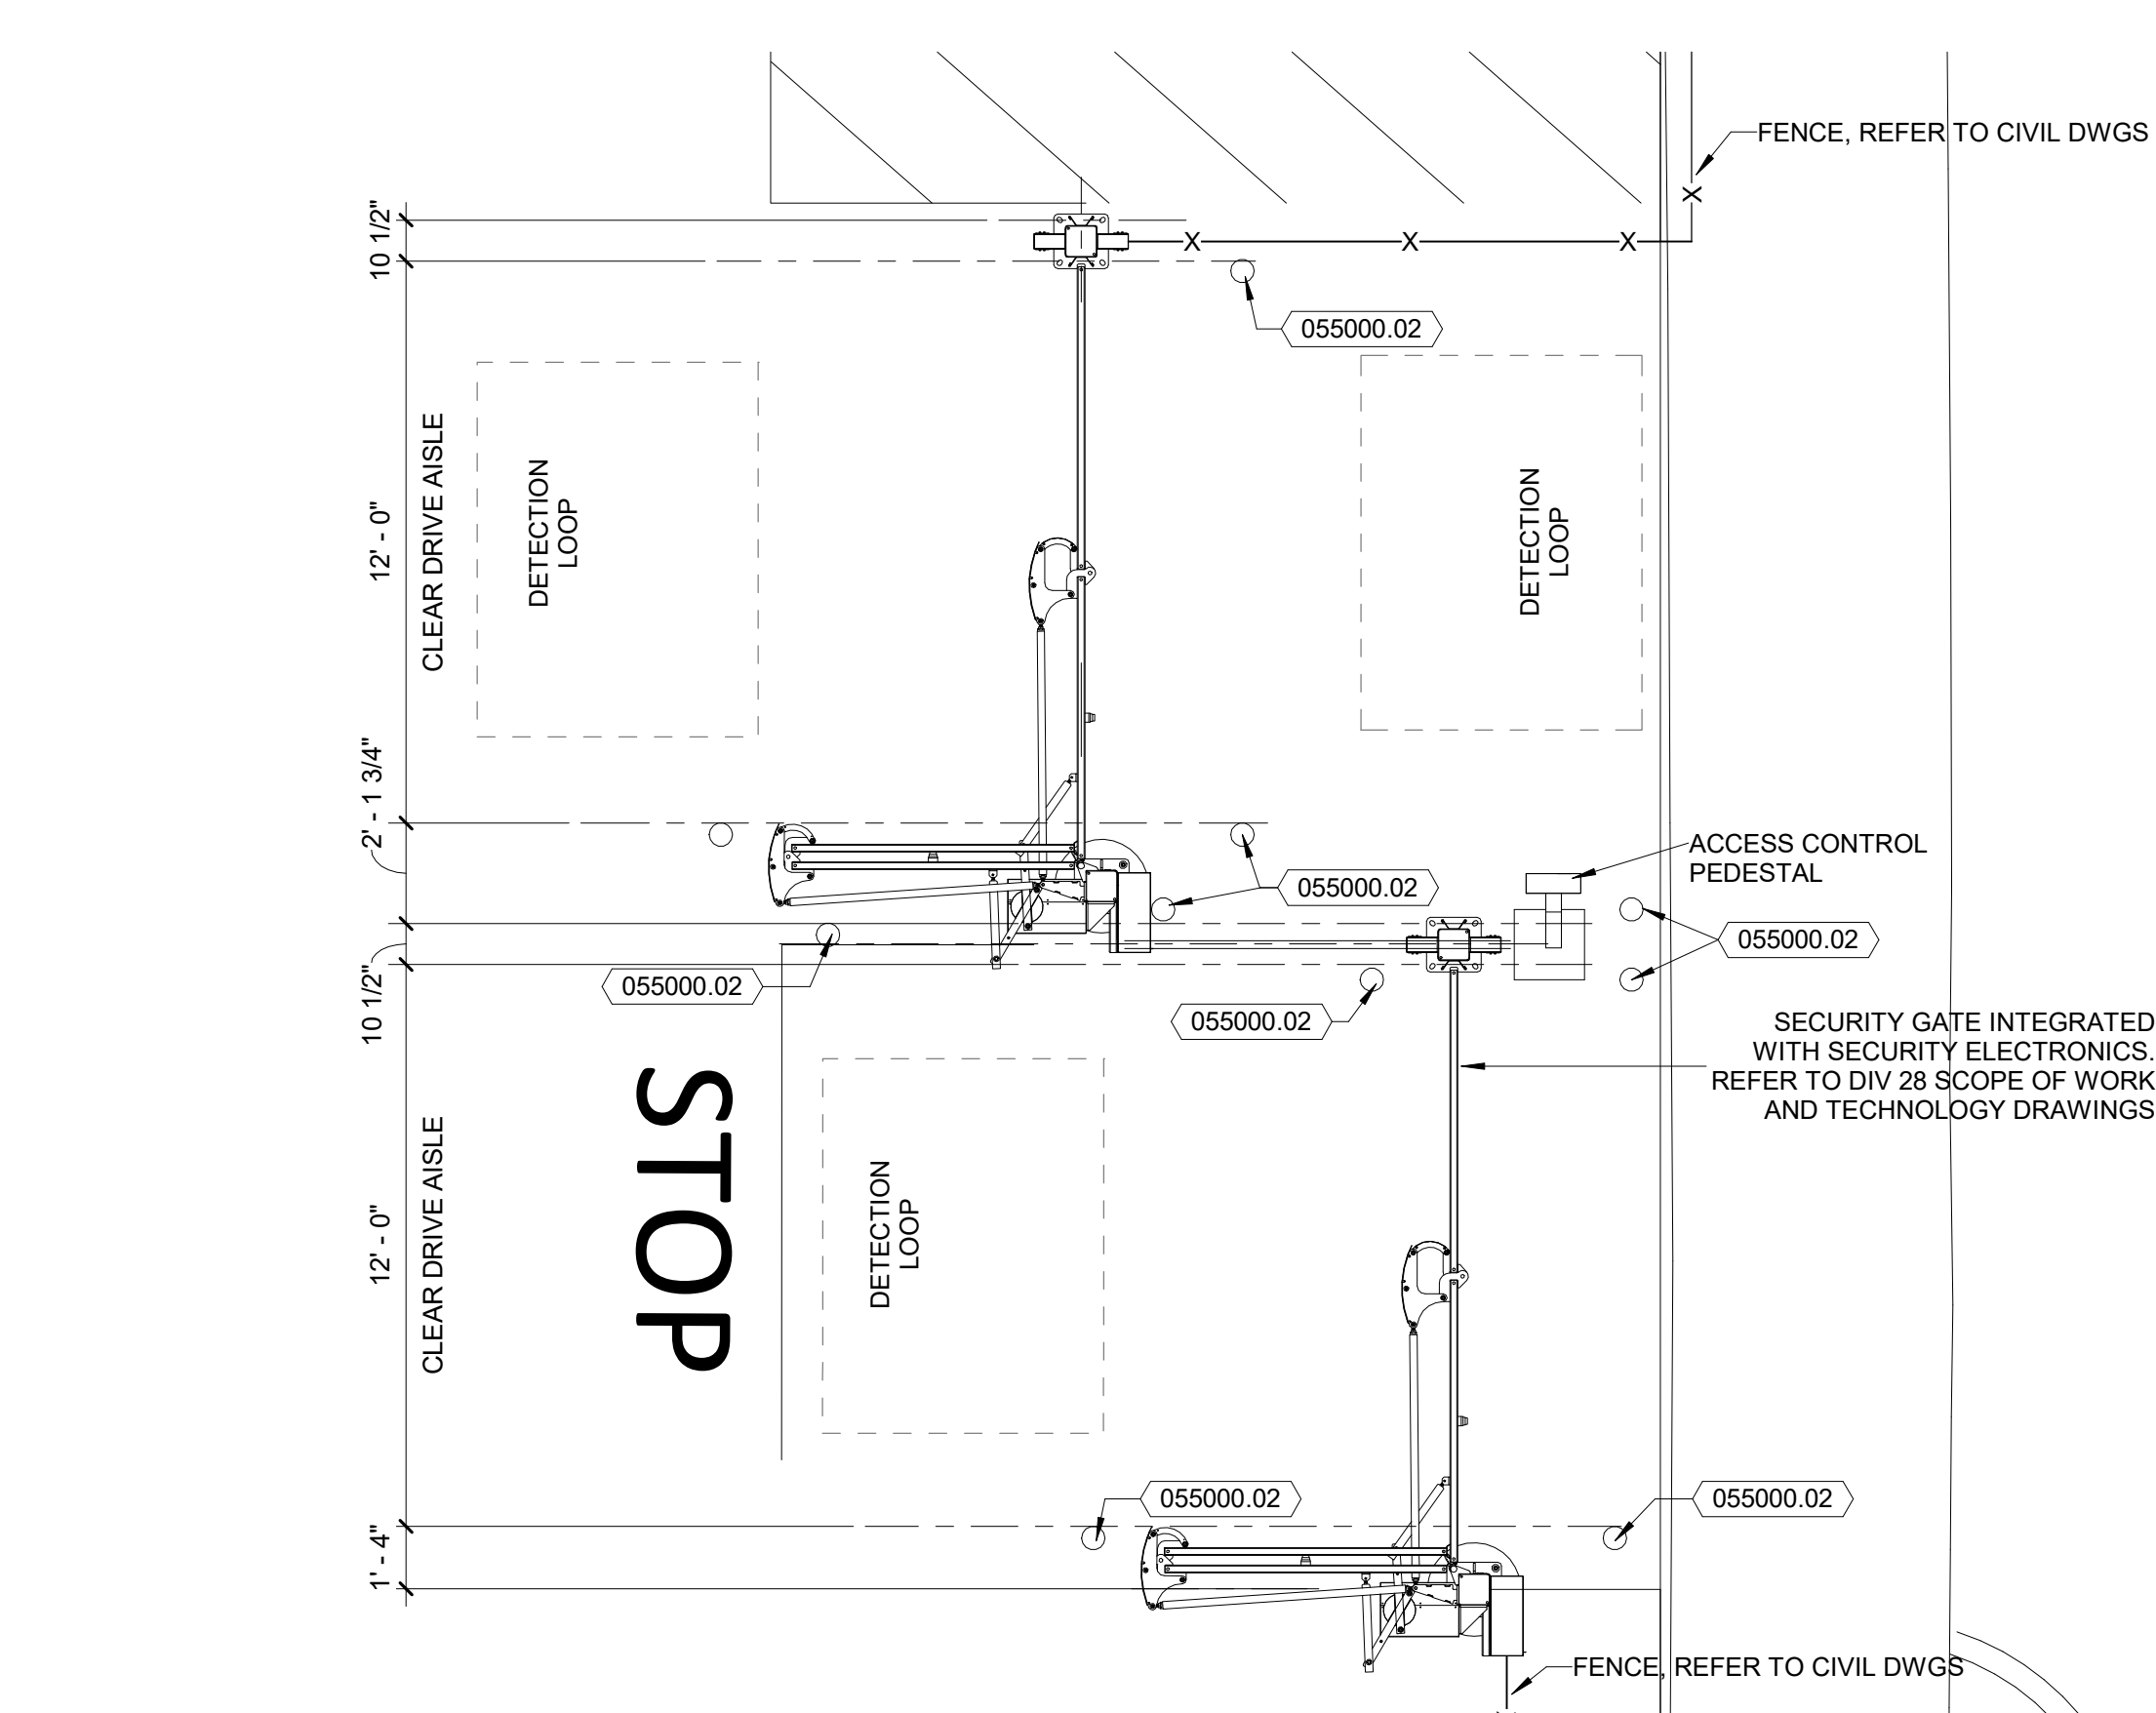


2 ARCHITECTURAL SITE PLAN - SECURITY GATE
Scale: 1/4" = 1'-0"

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
055000.02	STEEL BOLLARD
323113	HIGH SPEED ELECTRONIC SECURITY GATE




DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

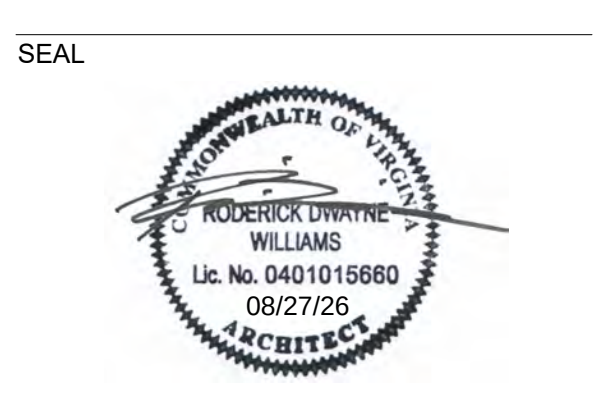

KEY PLAN

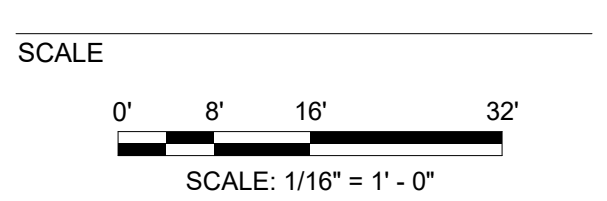

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ RW
DATE _____ 08.26.2026

TITLE
**ARCHITECTURAL
SITE PLAN**

PROJECT NO. _____ 50165756

AS-101

SHEET NO. _____

8/24/2026 11:57:54 AM

A

B

C

D

E

F

1

FIRST FLOOR DEMOLITION PLAN

Scale: 1/4" = 1'-0"

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367


368

369

370

371

372

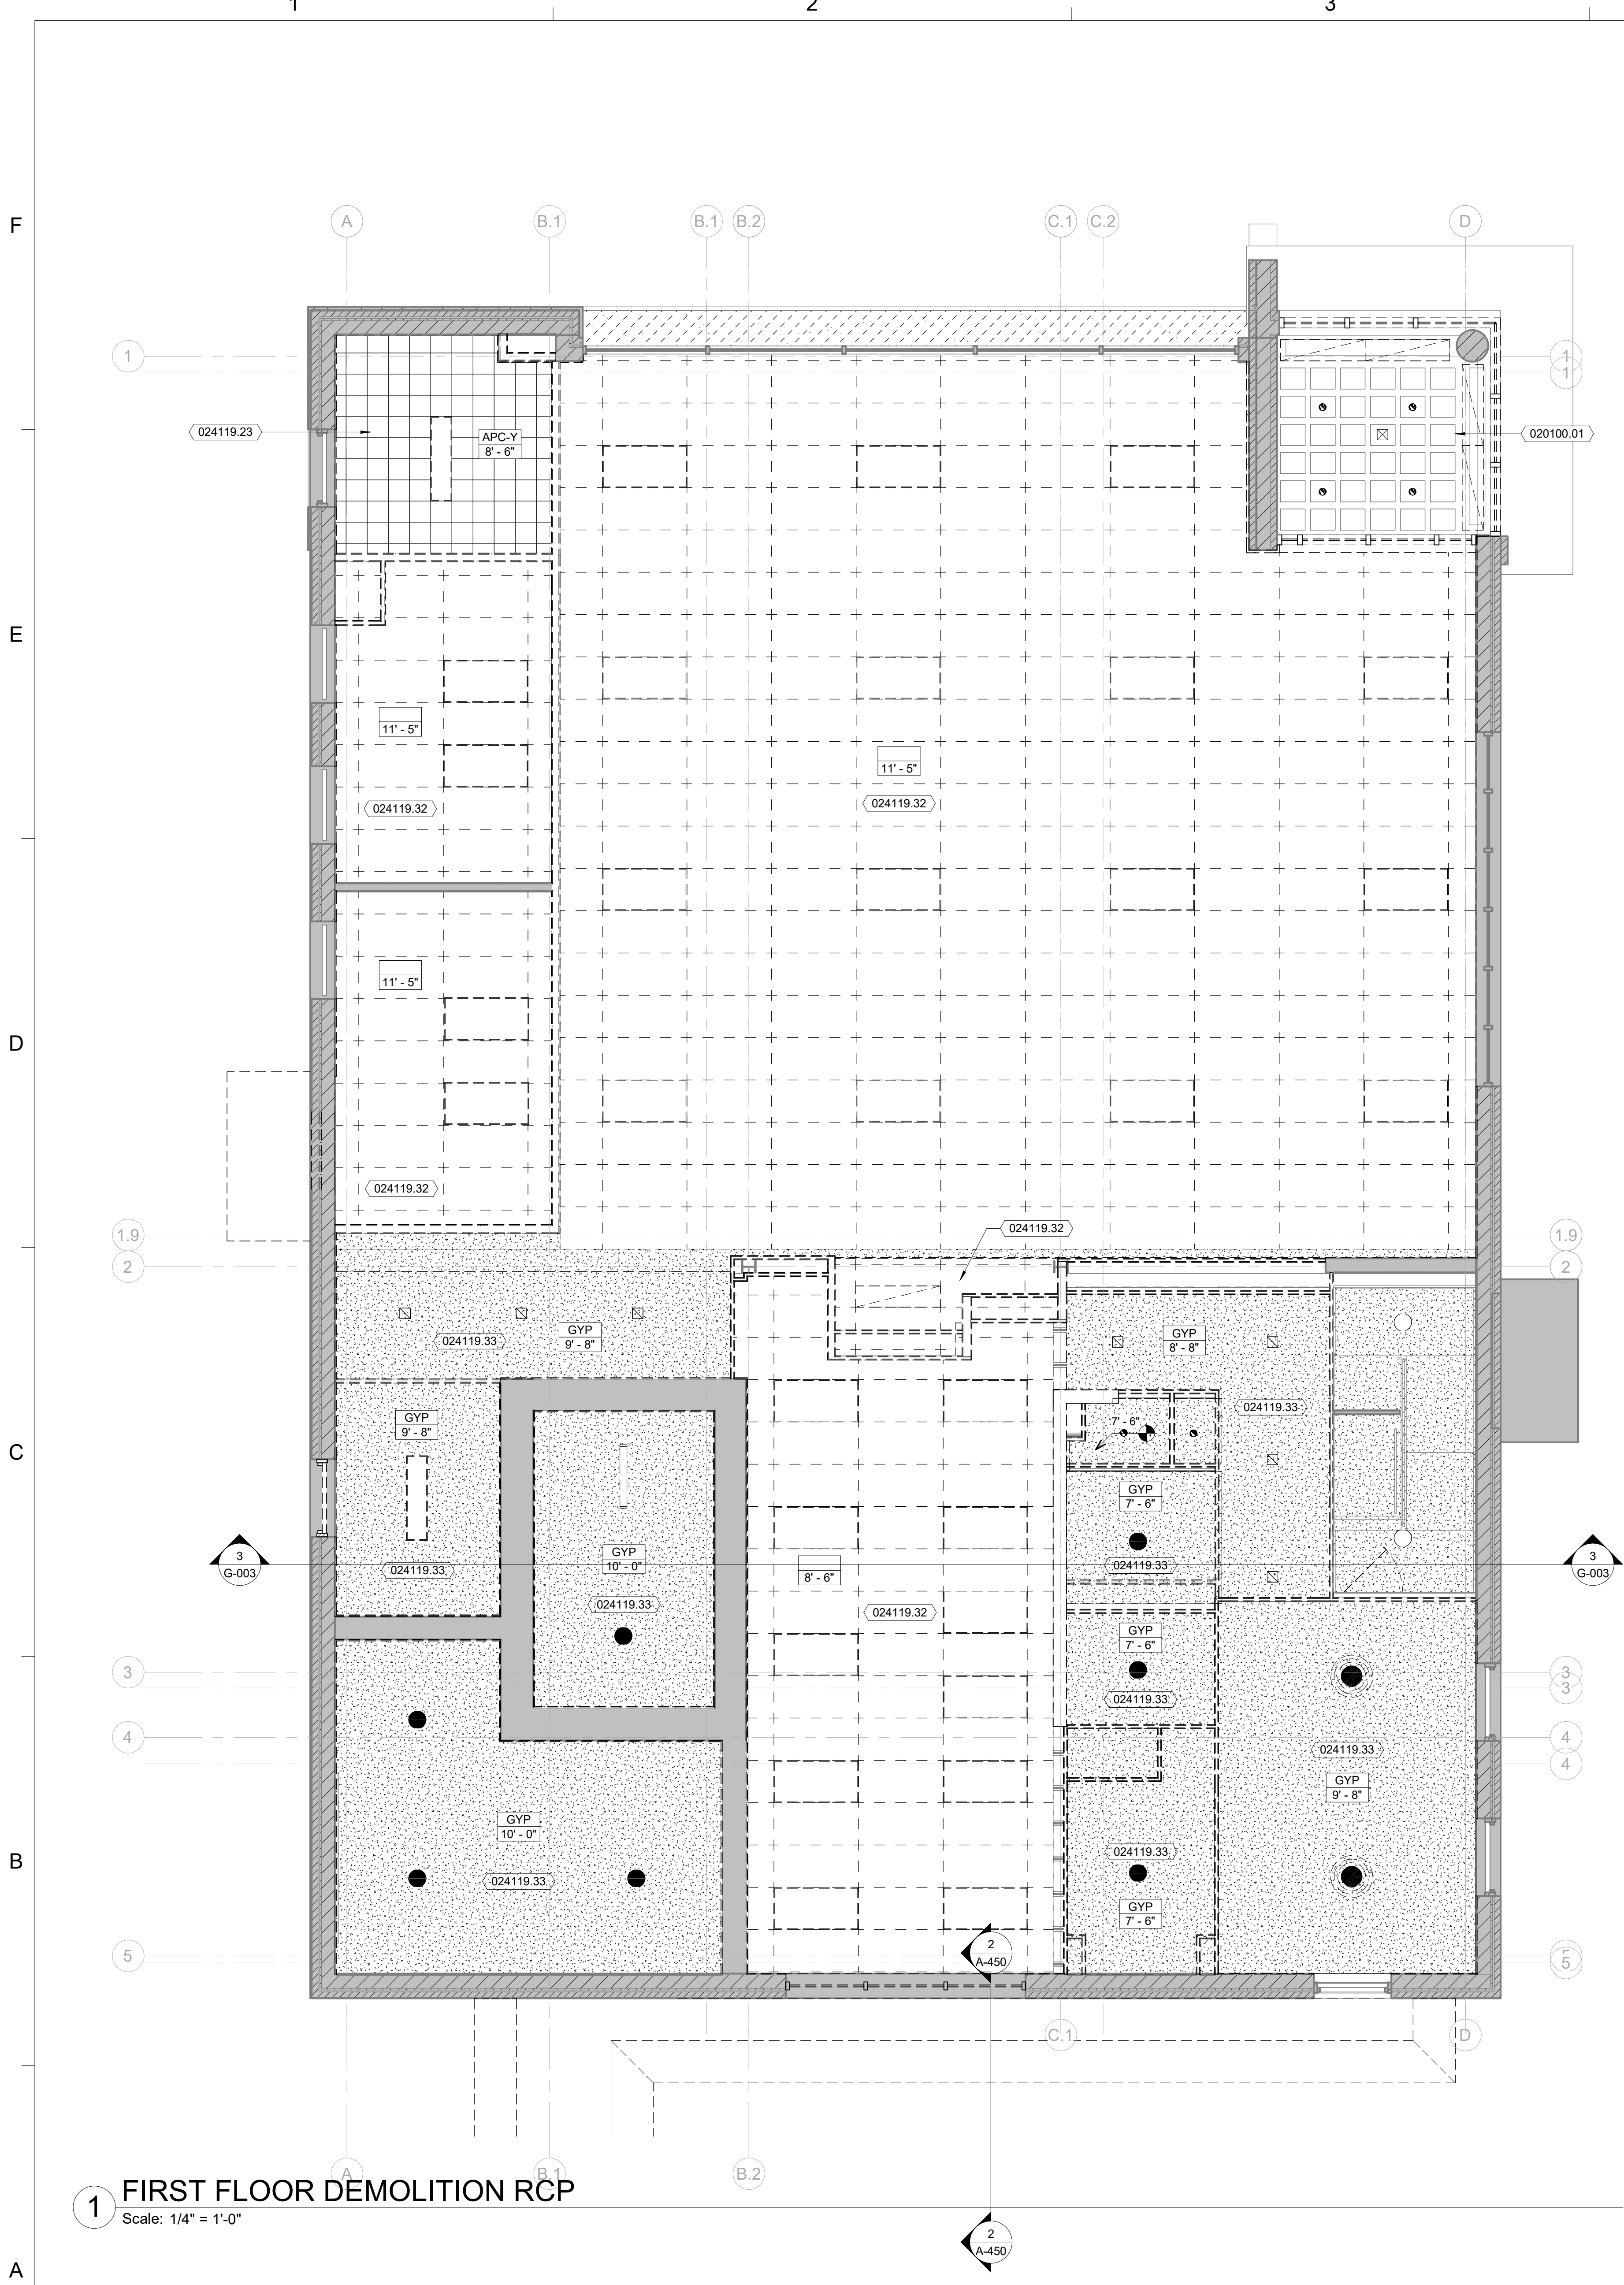

- DEMOLITION PLAN GENERAL NOTES**
- VISIT SITE AND VERIFY EXISTING CONDITIONS PRIOR TO BID SUBMISSION. DISCREPANCIES BETWEEN CONSTRUCTION INDICATED ON DRAWINGS AND ACTUAL SITE CONDITIONS SHALL BE BROUGHT TO ARCHITECT'S ATTENTION IMMEDIATELY IN WRITING.
 - DEMOLISHED ITEMS NOT INDICATED TO BE "DELIVERED TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED FROM SITE AS SOON AS POSSIBLE UNLESS THEY ARE TO BE USED FOR REQUIRED PATCHINGS AND INFILLING OF EXISTING CONSTRUCTION THAT IS TO REMAIN. NO OTHER DEMOLISHED ITEMS SHALL BE STORED ON SITE.
 - DEMOLISHED ITEMS NOTED AS "DELIVER TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED OR DISASSEMBLED IN SUCH A MANNER THAT WILL NOT DAMAGE THE ITEM AND PREVENT IT FROM BEING RELOCATED. REPAIR OR REPLACE SUCH ITEMS IF DAMAGED. NOTIFY OWNER'S REPRESENTATIVE IMMEDIATELY IF DAMAGE HAS OCCURRED, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
 - TEMPORARILY STORE ITEMS INDICATED AS "DELIVER TO THE OWNER" IN ONSITE LOCATION, DESIGNATED BY THE OWNER. OWNER SHALL MOVE ITEM(S), AS NECESSARY, TO NOT HINDER OR DELAY PERFORMANCE OF WORK IN AREA.
 - TEMPORARILY STORE ITEMS INDICATED AS "TO BE RELOCATED" IN LOCATION ONSITE AND PROTECT ITEMS FROM DAMAGE PRIOR TO INSTALLATION IN NEW LOCATION.
 - ITEMS INDICATED "TO REMAIN" THAT ARE DAMAGED DURING THE PERFORMANCE OF THE DEMOLITION WORK, SUCH DAMAGE SHALL BE REPORTED TO OWNER'S REPRESENTATIVE IMMEDIATELY, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
 - COORDINATE DEMOLITION WORK WITH NEW CONSTRUCTION WORK IN EACH AREA OF DEMOLITION. EXISTING CONSTRUCTION IN AREAS ADJACENT TO DEMOLITION WORK SHALL BE PATCHED AND REPAIRED TO MATCH ORIGINAL EXISTING CONDITION AS REQUIRED TO PROVIDE FOR NEW CONSTRUCTION WORK IN AREA OF DEMOLITION.
 - ITEMS INDICATED TO BE REMOVED BY OWNER SHALL BE COMPLETED PRIOR TO COMMENCEMENT OF WORK.
 - AT LOCATIONS WHERE A PORTION OF EXISTING CONSTRUCTION IS TO BE REMOVED AND PREPARED FOR NEW INFILL CONSTRUCTION, OR AN OPENING IN A WALL, ROOF, OR FLOOR IS CREATED BY DEMOLITION WORK, CONSTRUCT INFILL WITH SAME MATERIALS AND METHOD OF CONSTRUCTION AS EXISTING ADJACENT CONSTRUCTION, UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR INFILL CONSTRUCTION. INFILL CONSTRUCTION SHALL SMOOTHLY BUTT ADJACENT SURFACES AND MATCH THE FINISH, U.N.O.
 - AT LOCATIONS WHERE AN ITEM IS TO BE REMOVED FROM A SURFACE THAT IS TO REMAIN, PATCH AND REPAIR EXISTING SURFACE TO MATCH EXISTING ADJACENT SURFACE, UNLESS INDICATED OTHERWISE.
 - EXISTING ITEMS ANCHORED TO CONSTRUCTION THAT IS INDICATED TO BE DEMOLISHED SHALL BE CONSIDERED A PART OF DEMOLISHED CONSTRUCTION AND SHALL BE DEMOLISHED WITH THE INDICATED CONSTRUCTION, UNLESS NOTED OTHERWISE.
 - IN CONDITIONS WHERE A WALL OR FLOOR FINISH IS DEMOLISHED CREATING A DISSIMILAR ELEVATION IN ADJACENT FLOOR FINISHES, INSTALL AN APPROVED LEVELING MATERIAL TO BRING LOWER FLOOR FINISH ELEVATION UP TO AN ELEVATION FLUSH WITH ADJACENT FLOOR.
 - CONSTRUCT TEMPORARY DUST PARTITIONS TO CONTAIN DEMOLITION WORK AND PREVENT CONSTRUCTION DUST FROM ENTERING ADJACENT EXISTING CONSTRUCTION. SUBMIT LOCATIONS OF THESE PARTITIONS FOR APPROVAL BY OWNER'S REPRESENTATIVE. PARTITION LOCATIONS SHALL NOT IMPEDE OR HINDER EMERGENCY EGRESS FROM BUILDING. REFER TO SPECIFICATIONS FOR CONSTRUCTION OF DUST PARTITIONS.
 - RETAIN DEMOLISHED MATERIALS AS NEEDED FOR INFILLING OPENINGS IN EXISTING CONSTRUCTION SO THAT FINISH MATERIALS WILL PROPERLY ALIGN WITH EXISTING AND MATCH THE EXISTING FINISH. IF DEMOLISHED MATERIALS ARE NOT SALVAGEABLE, NOTIFY OWNER'S REPRESENTATIVE, SO THAT ALTERNATE SOLUTIONS MAY BE DETERMINED.
 - IF EXISTING CONSTRUCTION IS REVEALED NOT CONSTRUCTED OR FINISHED IN A MANNER THAT MATCHES ADJACENT SURFACES, PATCH AREA AS NECESSARY WITH APPROPRIATE MATERIALS AND METHODS OF CONSTRUCTION TO MATCH EXISTING ADJACENT FINISH, OR PREPARE SURFACE FOR INSTALLATION OF NEW FINISH. CONTACT OWNER'S REPRESENTATIVE AS SOON AS POSSIBLE SO THAT CONCEALED CONSTRUCTION MAY BE IDENTIFIED AND SCOPE OF POSSIBLE ADDITIONAL WORK DETERMINED.
 - WHEN EXISTING SURFACE IS INDICATED TO BE "PATCHED AND REPAIRED" OR "PREPARED" TO RECEIVE NEW FINISH MATERIAL, PROVIDE A CONSTRUCTION SURFACE THAT IS CAPABLE OF RECEIVING NEW FINISH MATERIAL.
 - WHEN THE TERM "ENTIRETY" IS DIRECTED TO A SPECIFIC ITEM OR ASSEMBLY, DEMOLISH AND REMOVE IDENTIFIED ITEM AND ASSOCIATED CONSTRUCTION PERTINENT TO THE ITEM, INCLUDING, BUT NOT LIMITED TO UNDERGROUND AND CONCEALED CONSTRUCTION, SUCH AS FOOTINGS AND FOUNDATIONS, SEWER, PLUMBING, AND ELECTRICAL WORK. THIS DEMOLITION WORK SHALL BE COORDINATED WITH THE CIVIL, STRUCTURAL, PLUMBING, MECHANICAL, ELECTRICAL, AND TECHNOLOGY DRAWINGS.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
020100.01	EXISTING CONCRETE COFFERED CEILING TO REMAIN. SEE PICTURE 2.
024119.23	DEMOLISH EXISTING PERFORATED WOOD PANEL CEILING AND LIGHT FIXTURES. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR OTHER CEILING MOUNTED DEVICES. SEE PICTURE 1.
024119.32	DEMOLISH EXISTING CEILING GRID AND LIGHTS. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR OTHER CEILING MOUNTED DEVICES.
024119.33	DEMOLISH EXISTING GYPSUM CEILING AND LIGHTS. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR OTHER CEILING MOUNTED DEVICES.

DEMOLITION REFLECTED CEILING PLAN LEGEND			
	EXISTING APC TO BE DEMOLISHED		EXISTING APC TO REMAIN
	EXISTING GYPSUM CEILING TO BE DEMOLISHED		EXISTING GYPSUM CEILING TO REMAIN
	EXISTING LIGHT FIXTURE TO BE DEMOLISHED		EXISTING LIGHT FIXTURE TO REMAIN
	EXISTING DOWNLIGHT TO BE DEMOLISHED		AREA OF CONSTRUCTION
	EXISTING PENDANT TO BE DEMOLISHED		AREA TO REMAIN OCCUPIED DURING CONSTRUCTION
	EXISTING SURFACE MTD FIXTURE TO BE DEMOD		EXISTING SURFACE MTD FIXTURE TO BE DEMOD

DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

KEY PLAN

SCALE

0' 2' 4' 8'

SCALE: 1/4" = 1'-0"

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF

APPROVED BY _____ RW

CHECKED BY _____ Checker

DATE _____ 08.26.2026

TITLE


FIRST FLOOR DEMOLITION RCP

PROJECT NO. _____ 50165756

AD-102

SHEET NO.



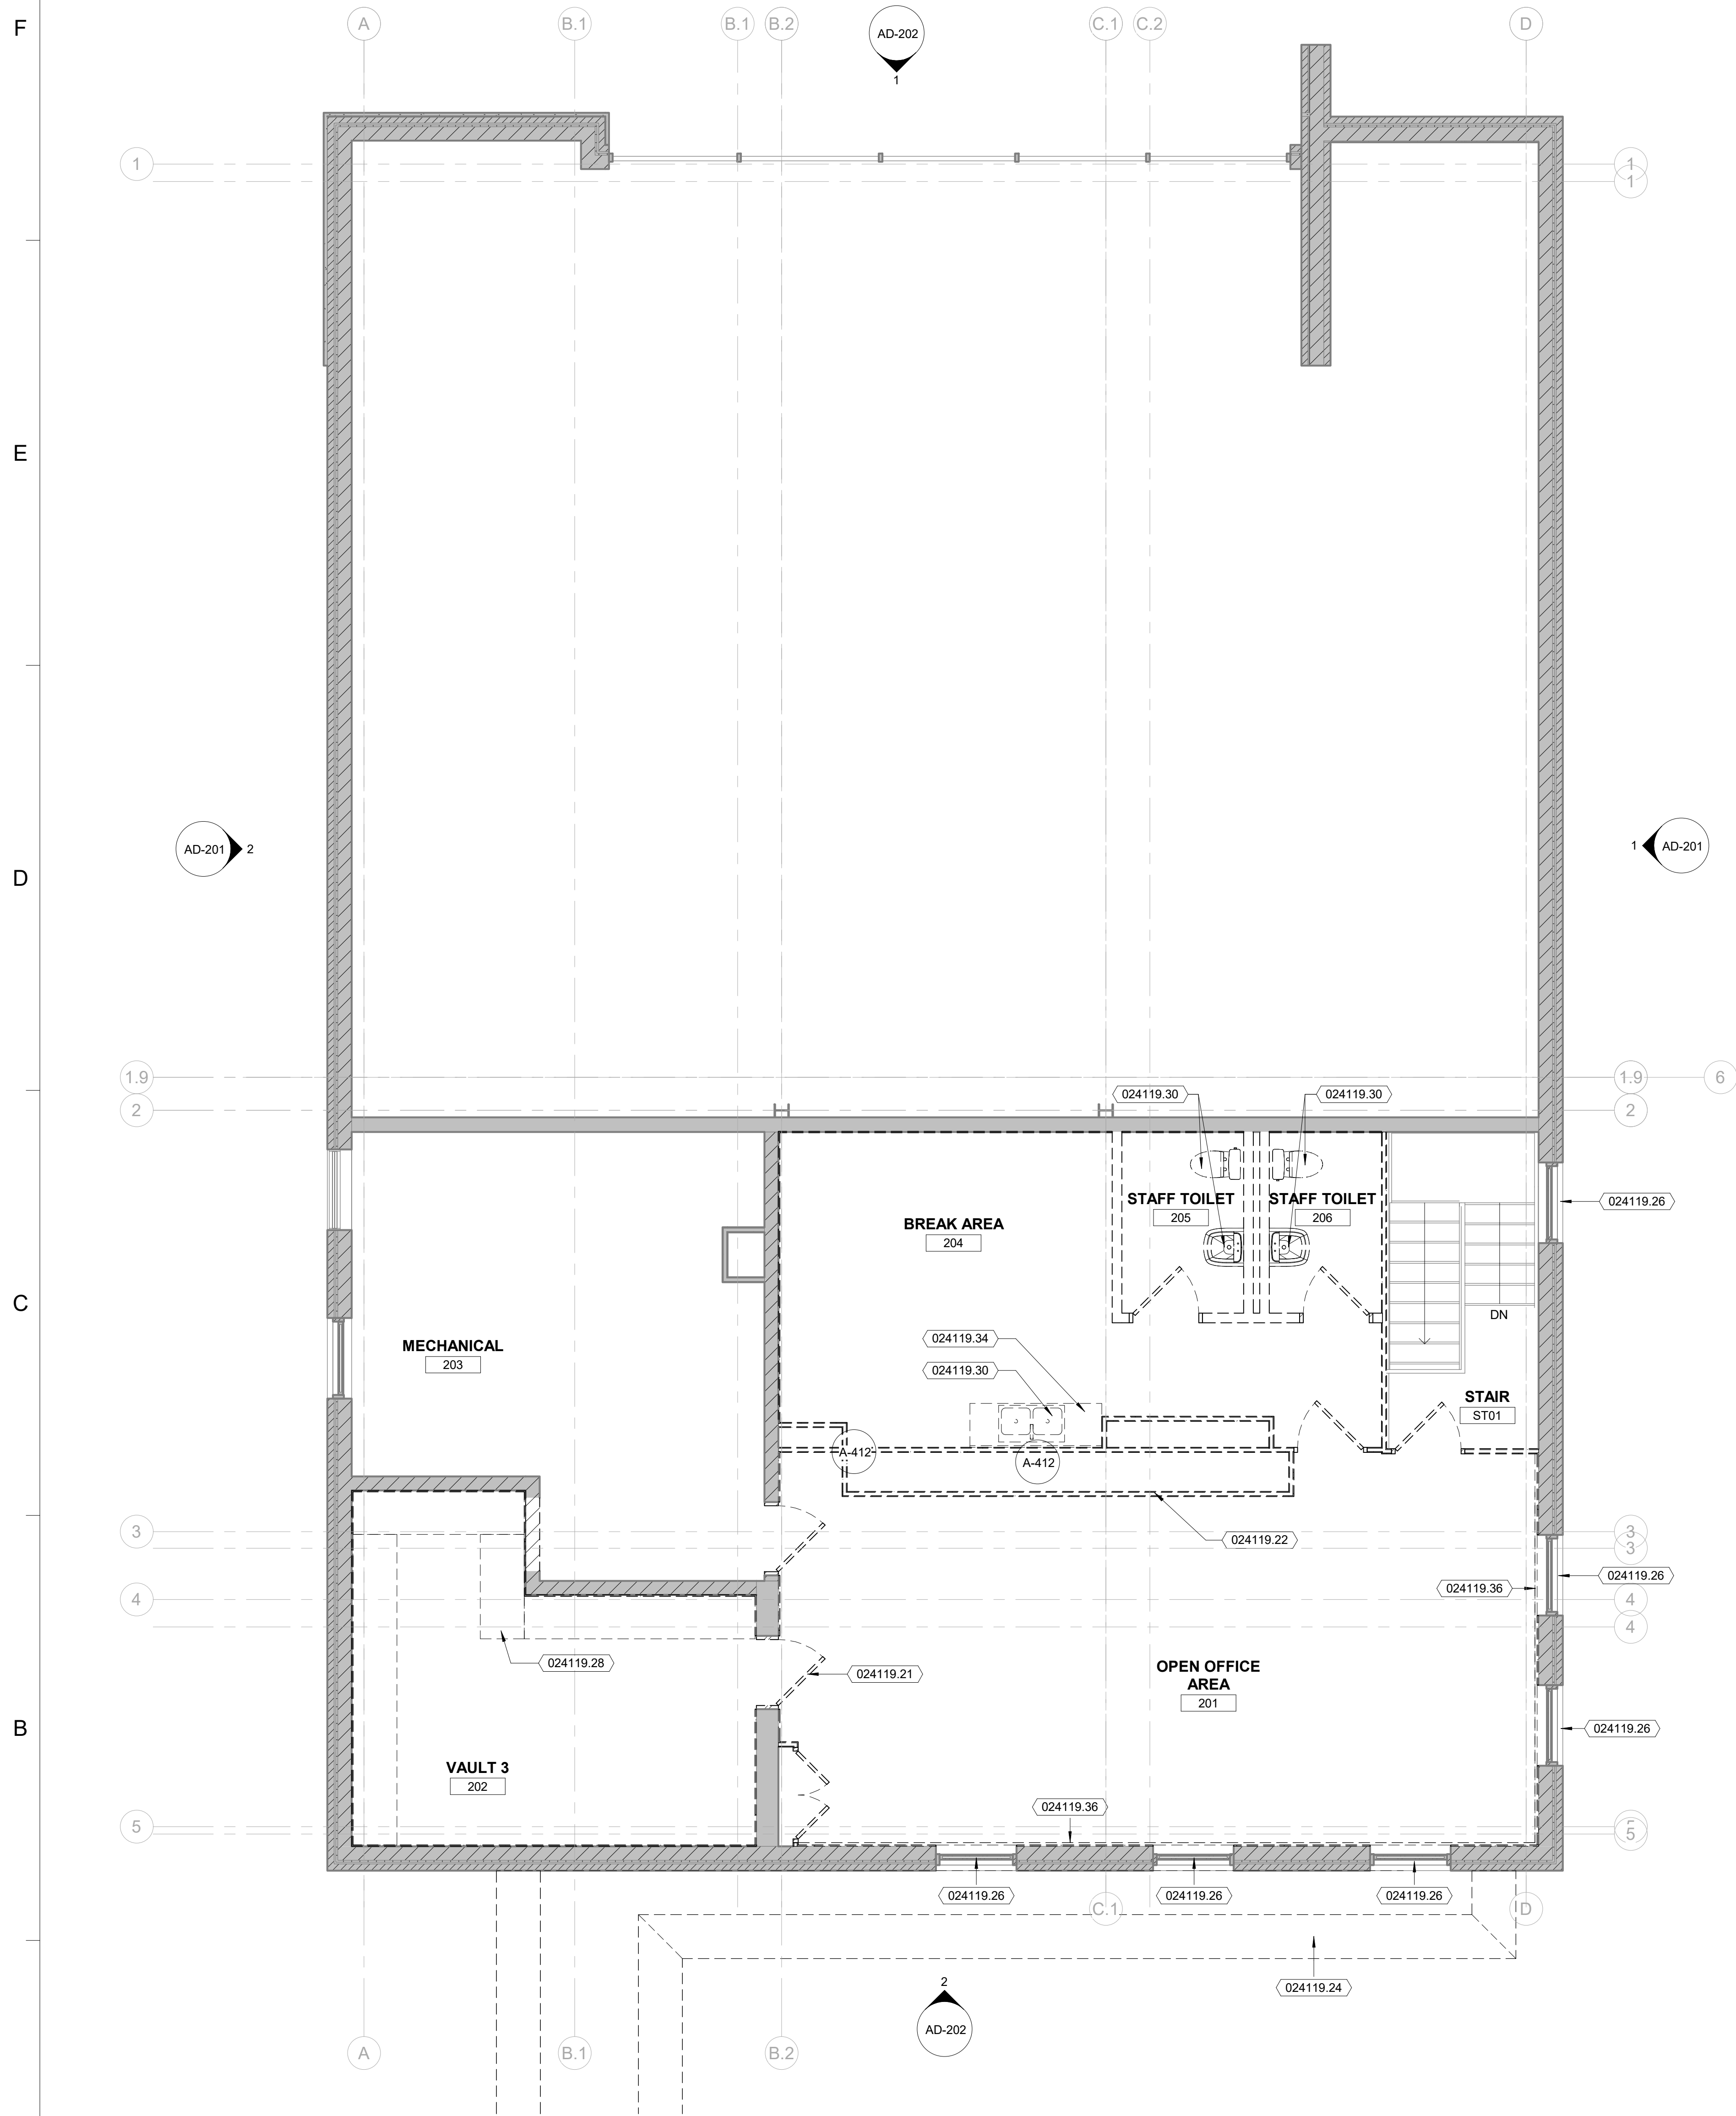

1 SECOND FLOOR DEMOLITION PLAN
Scale: 1/4" = 1'-0"

Scale: 1/4" = 1'-0"

- ## DEMOLITION PLAN GENERAL NOTES

1. VISIT SITE AND VERIFY EXISTING CONDITIONS PRIOR TO BID SUBMISSION. DISCREPANCIES BETWEEN CONSTRUCTION INDICATED ON DRAWINGS AND EXISTING CONDITIONS SHALL BE BROUGHT TO ARCHITECT'S ATTENTION IMMEDIATELY IN WRITING.
2. DEMOLISHED ITEMS NOT INDICATED TO BE "DELIVERED TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED FROM SITE AS SOON AS POSSIBLE UNLESS THE USE OF SUCH ITEMS IS INDICATED ON PLANS FOR NEW CONSTRUCTION THAT IS TO REMAIN. NO OTHER DEMOLISHED ITEMS SHALL BE STORED ON SITE.
3. DEMOLISHED ITEMS NOTED AS "DELIVER TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED OR DISASSEMBLED IN SUCH A MANNER THAT WILL NOT DAMAGE THE ITEM AND PREVENT IT FROM BEING RELOCATED. REPAIR OR REPLACE ANY DAMAGE TO EXISTING CONSTRUCTION THAT OCCURS IMMEDIATELY IF DAMAGE HAS OCCURRED, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
4. DEMOLISHED ITEMS INDICATED AS "DELIVER TO THE OWNER" ON IN-SITE LOCATION, DESIGNATED BY THE OWNER. OWNER SHALL MOVE ITEM(S), AS NECESSARY, TO NOT HINDER OR DELAY PERFORMANCE OF WORK IN AREA.
5. EXISTING CONSTRUCTION TO BE DEMOLISHED SHALL BE PROTECTED TO PREVENT AND PROTECT ITEMS FROM DAMAGE PRIOR TO INSTALLATION IN NEW LOCATION.
6. ITEMS INDICATED TO REMAIN THAT ARE DAMAGED DURING THE PERFORMANCE OF DEMOLITION WORK. SUCH DAMAGE SHALL BE REPORTED TO OWNER'S REPRESENTATIVE IMMEDIATELY, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
7. CONCEPT DEMOLITION WORK WITH NEW CONSTRUCTION WORK IN EACH AREA OF DEMOLITION. EXISTING CONSTRUCTION IN AREAS ADJACENT TO DEMOLITION WORK SHALL BE PATCHED AND REPAIRED TO MATCH ORIGINAL CONSTRUCTION. CONSTRUCTION SHALL BE PROVIDED FOR NEW CONSTRUCTION WORK IN AREA OF DEMOLITION.
8. ITEMS INDICATED TO BE REMOVED BY OWNER SHALL BE COMPLETED PRIOR TO DEMOLITION WORK.
9. AT LOCATIONS WHERE A PORTION OF EXISTING CONSTRUCTION IS TO BE REMOVED AND PREPARED FOR NEW INFILL CONSTRUCTION, OR AN OPENING IN A WALL, ROOF, OR FLOOR IS CREATED BY DEMOLITION WORK, CONSTRUCT INFILL WITH MATCHING MATERIALS TO EXISTING CONSTRUCTION. UNLESS NOTED OTHERWISE, SEE ARCHITECTURAL DRAWINGS FOR INFILL CONSTRUCTION. INFILL CONSTRUCTION SHALL SMOOTHLY BUTT INTO EXISTING CONSTRUCTION SURFACE.
10. AT LOCATIONS WHERE AN ITEM IS TO BE REMOVED FROM A SURFACE THAT IS TO REMAIN, PATCH AND REPAIR EXISTING SURFACE TO MATCH EXISTING ADJACENT CONSTRUCTION. UNLESS NOTED OTHERWISE, SEE ARCHITECTURAL DRAWINGS FOR CONSTRUCTION OF PATCH.
11. EXISTING ITEMS ANCHORED TO CONSTRUCTION THAT IS INDICATED TO BE DEMOLISHED SHALL BE CONSIDERED A PART OF DEMOLISHED CONSTRUCTION AND SHALL BE REMOVED WITH THE INDICATED CONSTRUCTION, UNLESS NOTED OTHERWISE.
12. IN CONDITIONS WHERE A WALL OR FLOOR FINISH IS DEMOLISHED CREATING A SIMILAR ELEVATION, CONSTRUCTION SHALL BE PROVIDED TO MATCH EXISTING LEVEL OF FINISH, TERMINAL TO BRING LOWER FLOOR FINISH ELEVATION UP TO AN ELEVATION FLUSH WITH ADJACENT FLOOR.
13. CONSTRUCT TEMPORARY DUST PARTITIONS TO CONTAIN DEMOLITION WORK OF ADJACENT AREAS. CONSTRUCTION OF DUST ENTERING ADJACENT EXISTING CONSTRUCTION, SUBMIT LOCATIONS FOR THESE PARTITIONS FOR APPROVAL BY OWNER'S REPRESENTATIVE. PARTITION LOCATIONS SHALL NOT IMPEDE OR OBSTRUCT EXISTING CONSTRUCTION OF BUILDING. REFER TO SPECIFICATIONS FOR CONSTRUCTION OF DUST PARTITIONS.
14. RETAIN DEMOLISHED MATERIALS AS NEEEDED FOR INFILLING OPENINGS IN CONSTRUCTION OF NEW CONSTRUCTION. DEMOLISHED MATERIALS TO BE RE-USE WITH EXISTING AND MATCH THE EXISTING FINISH. IF DEMOLISHED MATERIALS ARE NOT SALVAGEABLE, NOTIFY OWNER'S REPRESENTATIVE, SO THAT DEMOLITION WASTE SOLUTIONS CAN BE PROVIDED.
15. IF EXISTING CONSTRUCTION IS REVEALED NOT CONSTRUCTED OR FINISHED IN A MANNER THAT MATCHES ADJACENT SURFACES, PATCH AREA AS NECESSARY WITH APPROPRIATE MATERIALS AND METHODS OF CONSTRUCTION TO MATCH EXISTING CONSTRUCTION. IF EXISTING CONSTRUCTION IS REVEALED NEW FINISH, CONTACT OWNER'S REPRESENTATIVE AS SOON AS POSSIBLE SO THAT CONCEALED CONSTRUCTION MAY BE IDENTIFIED AND SCOPE OF POSSIBLE CONSTRUCTION OF NEW WORK IS DETERMINED.
16. WHEN EXISTING SURFACE IS INDICATED TO BE "PATCHED AND REPAIRED" OR "PREPARED" TO RECEIVE NEW FINISH MATERIAL, PROVIDE A CONSTRUCTION SOLUTION TO MATCH EXISTING FINISH.
17. WHEN THE TERM "ENTIRETY" IS DIRECTED TO A SPECIFIC ITEM OR ASSEMBLY, DEMOLISH AND REMOVE IDENTIFIED ITEM AND ASSOCIATED CONSTRUCTION. DEMOLITION SHALL INCLUDE ALL ITEMS AND MATERIALS, INCLUDING EXISTING AND CONCEALED CONSTRUCTION, SUCH AS FOOTINGS AND FOUNDATIONS, SEWER, PLUMBING, AND ELECTRICAL WORK. THIS DEMOLITION WORK SHALL BE COMPLETED AND MATCHED WITH EXISTING CONSTRUCTION. PLUMBING, MECHANICAL, ELECTRICAL, AND TECHNOLOGY DRAWINGS.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
024119.21	DEMOLISH BANK VAULT DOOR AND REPLACE WITH NEW. SEE PICTURE 1.
024119.22	EXISTING CABINETS TO BE DEMOLISHED. SEE PICTURE 2.
024119.24	DEMOLISH EXISTING COVERED WALKWAY AND ASSOCIATED STRUCTURE. SEE PICTURE 1. PATCH AND REPAIR EXISTING EXTERIOR WALL WHERE WALKWAY WAS DEMOLISHED.
024119.26	DEMOLISH EXISTING STONE WINDOW SILL.
024119.28	DEMOLISH EXISTING SHELVING.
024119.30	REMOVE EXISTING PLUMBING FIXTURE AND ALL ASSOCIATED ITEMS. REFER TO PLUMBING DRAWINGS FOR ADDITIONAL COORDINATION.
024119.34	DEMOLISH EXISTING COUNTER, CABINETS, AND ASSOCIATED ITEMS.
024119.36	EXISTING PLUGMOLDS TO BE DEMOLISHED.



DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID


ISSUED FOR BID

SEAL

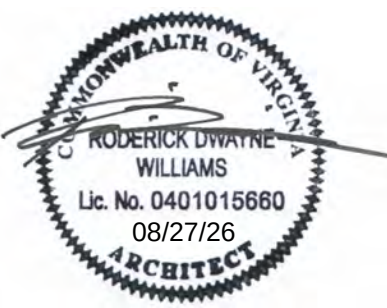

KEY PLAN

SCALE

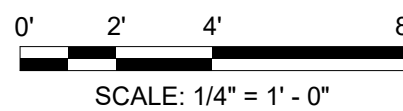

REVISIONS

[illegible]

NO.	DESCRIPTION	DATE
-----	-------------	------

DRAWN BY TF

APPROVED BY RW

CHECKED BY _____ Checker _____

TITLE

SECOND FLOOR DEMOLITION PLAN

PROJECT NO.	5016575
-------------	---------

AD-111


SHEET NO.



1



2



DEMOLITION PLAN GENERAL NOTES

1. VISIT SITE AND VERIFY EXISTING CONDITIONS PRIOR TO BID SUBMISSION. DISCREPANCIES BETWEEN CONSTRUCTION INDICATED ON DRAWINGS AND ACTUAL, SITE CONDITIONS SHALL BE BROUGHT TO ARCHITECT'S ATTENTION IMMEDIATELY IN WRITING.
2. DEMOLISHED ITEMS NOT INDICATED TO BE "DELIVERED TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED FROM SITE AS SOON AS POSSIBLE UNLESS OTHERWISE BEING USED FOR REUSE OR RECYCLING. DEMOLISHED ITEMS NOT BEING REUSED OR RECYCLED SHALL BE DESTROYED BY CONSTRUCTION THAT IS TO REMAIN. NO OTHER DEMOLISHED ITEMS SHALL BE STORED ON SITE.
3. DEMOLISHED ITEMS NOTED AS "DELIVER TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED OR DISASSEMBLED IN SUCH A MANNER THAT WILL NOT DAMAGE THE ITEM AND PREVENT IT FROM BEING RELOCATED. REPAIR OR REPLACE SUCH ITEMS IMMEDIATELY IF DAMAGE HAS OCCURRED, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
4. DEMOLISHED ITEMS NOTED AS "DELIVER TO THE OWNER" OR "ON SITE LOCATION, DESIGNATED BY THE OWNER. OWNER SHALL MOVE ITEM(S), AS NECESSARY, TO NOT HINDER OR DELAY PERFORMANCE OF WORK IN AREA.
5. TEMPORARILY STORE ITEMS INDICATED AS "TO BE RELOCATED" IN LOCATION OTHER THAN DESIGNATED LOCATION PRIOR TO INSTALLATION AND PROTECT ITEMS FROM DAMAGE.
6. ITEMS INDICATED "TO REMAIN" THAT ARE DAMAGED DURING THE PERFORMANCE OF CONSTRUCTION SHALL BE RELOCATED IMMEDIATELY TO OWNERS' REPRESENTATIVE IMMEDIATELY, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
7. CONSTRUCT DEMOLITION WORK WITH NEW CONSTRUCTION WORK IN EACH AREA OF DEMOLITION. EXISTING CONSTRUCTION IN AREAS ADJACENT TO DEMOLITION WORK SHALL BE PATCHED AND REPAIRED TO MATCH ORIGINAL CONSTRUCTION CONDITION. PROVIDE PATCHES TO PROVIDE FOR NEW CONSTRUCTION WORK IN AREA OF DEMOLITION.
8. ITEMS INDICATED TO BE REMOVED BY OWNER SHALL BE COMPLETED PRIOR TO CONSTRUCTION OF DEMOLITION ELEMENT.
9. AT LOCATIONS WHERE A PORTION OF EXISTING CONSTRUCTION IS TO BE REMOVED AND PREPARED FOR NEW INFILL CONSTRUCTION, OR AN OPENING IN A WALL, ROOF, OR FLOOR IS CREATED FOR DEMOLITION WORK, CONSTRUCT INFILL WITH MATCHING MATERIALS TO EXISTING CONSTRUCTION. IF EXISTING CONSTRUCTION, UNLESS NOTED OTHERWISE, SEE ARCHITECTURAL DRAWINGS FOR INFILL CONSTRUCTION. INFILL CONSTRUCTION SHALL SMOOTHLY BUTT INTO EXISTING SURFACES.
10. AT LOCATIONS WHERE AN ITEM IS TO BE REMOVED FROM A SURFACE THAT IS TO REMAIN, PATCH AND REPAIR EXISTING SURFACE TO MATCH EXISTING ADJACENT CONSTRUCTION. UNLESS NOTED OTHERWISE, SEE ARCHITECTURAL DRAWINGS FOR PATCHES.
11. EXISTING ITEMS ANCHORED TO CONSTRUCTION THAT IS INDICATED TO BE DEMOLISHED SHALL BE CONSIDERED A PART OF DEMOLISHED CONSTRUCTION AND SHALL BE REMOVED WITH THE INDICATED CONSTRUCTION, UNLESS NOTED OTHERWISE.
12. IN CONDITIONS WHERE A WALL OR FLOOR FINISH IS DEMOLISHED CREATING A HOLE IN THE ELEVATION, REPAIR THE ELEVATION TO MATCH EXISTING ELEVATION LEVELING MATERIAL TO BRING LOWER FINISH ELEVATION UP TO AN ELEVATION FLUSH WITH ADJACENT FLOOR.
13. LOCATIONS WHERE DEMOLITION IS REQUIRED TO CONTAIN DEMOLITION WORK AND PREVENT CONSTRUCTION DUST FROM ENTERING ADJACENT EXISTING CONSTRUCTION. SUBMIT LOCATIONS OF THESE PARTITIONS FOR APPROVAL BY OWNERS' REPRESENTATIVE. PARTITION LOCATIONS SHALL NOT IMPED OR DELAY CONSTRUCTION. PROVIDE PROPER SEALING, REFER TO SPECIFICATIONS FOR CONSTRUCTION OF DUST PARTITIONS.
14. RETAIN DEMOLISHED MATERIALS AS NEEDED FOR INFILLING OPERATIONS IN EXISTING CONSTRUCTION. DEMOLISHED MATERIALS SHALL BE STORED TO ALIGN WITH EXISTING AND MATCH THE EXISTING FINISH. IF DEMOLISHED MATERIALS ARE NOT SALVAGEABLE, NOTIFY OWNERS REPRESENTATIVE, SO THAT APPROPRIATE SOLUTIONS CAN BE IDENTIFIED AND SCOPE OF POSSIBLE ADDITIONAL WORK DETERMINED.
15. IF EXISTING CONSTRUCTION IS REVEALED NOT CONSTRUCTED OR FINISHED IN A MANNER THAT MATCHES ADJACENT SURFACES, PATCH AREA AS NECESSARY TO MATCH EXISTING SURFACES. PROVIDE PATCHES TO PROVIDE FOR NEW EXISTING ADJACENT FINISH, OR PREPARE SURFACE FOR INSTALLATION OF NEW FINISH. CONTACT OWNER'S REPRESENTATIVE AS SOON AS POSSIBLE SO THAT THE CONSTRUCTION CAN BE IDENTIFIED AND SCOPE OF POSSIBLE ADDITIONAL WORK DETERMINED.
16. WHEN EXISTING SURFACE IS INDICATED TO BE "PATCHED AND REPAIRED" OR "PREPARED TO RECEIVE NEW FINISH MATERIAL" FOR A NEW CONSTRUCTION SURFACE THAT IS CAPABLE OF RECEIVING NEW FINISH MATERIAL.
17. WHEN THE TERM "ENTIRETY" IS DIRECTED TO A SPECIFIC ITEM OR ASSEMBLY, DEMOLISH AND REMOVE IDENTIFIED ITEM AND ASSOCIATED CONSTRUCTION RELATIVE TO THE ITEM OR ASSEMBLY. DEMOLITION SHALL INCLUDE EXPOSED AND CONCEALED CONSTRUCTION, SUCH AS FOOTINGS AND FOUNDATIONS, SEWER, PLUMBING, AND ELECTRICAL WORK. THIS DEMOLITION WORK SHALL BE COMPLETED AND COORDINATED WITH THE PLUMBING, MECHANICAL, ELECTRICAL, AND TECHNOLOGY DRAWINGS.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
024119.32	DEMOLISH EXISTING CEILING GRID AND LIGHTS. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR OTHER CEILING MOUNTED DEVICES.
024119.33	DEMOLISH EXISTING GYPSUM CEILING AND LIGHTS. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS FOR OTHER CEILING MOUNTED DEVICES.
024119.35	DEMOLISH EXISTING LIGHT FIXTURES. COORDINATE WITH MECHANICAL AND ELECTRICAL FOR OTHER CEILING MOUNTED DEVICES.

DEMOLITION REFLECTED CEILING PLAN LEGEND

	EXISTING APC TO BE DEMOLISHED		EXISTING APC TO REMAIN
	EXISTING GYPSUM CEILING TO BE DEMOLISHED		EXISTING GYPSUM CEILING TO REMAIN
	EXISTING LIGHT FIXTURE TO BE DEMOLISHED		EXISTING LIGHT FIXTURE TO REMAIN
	EXISTING DOWNLIGHT TO BE DEMOLISHED		AREA OF CONSTRUCTION
	EXISTING PENDANT TO BE DEMOLISHED		AREA TO REMAIN OCCUPIED DURING CONSTRUCTION
	EXISTING SURFACE MTD FIXTURE TO BE DEMO'D		EXISTING SURFACE MTD FIXTURE TO BE DEMO'D

Dewberry

DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

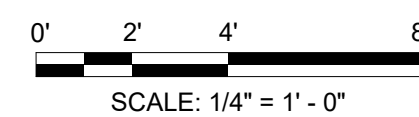

REVISIONS

[illegible]

NO.	DESCRIPTION	DATE
-----	-------------	------

DRAWN BY _____ TF _____

APPROVED BY _____ RW

CHECKED BY _____ Checker _____

DATE 08.26.2026

TITLE

SECOND FLOOR
DEMOLITION RCP

PROJECT NO.	50165756
-------------	----------

AD-112

SHEET NO.

SECOND FLOOR DEMOLITION RCP

Scale: 1/4" = 1'-0"

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
024119.25	DEMOLISH EXISTING CARPORT BUILDING AND ASSOCIATED STRUCTURE. SEE PICTURE 2.
024119.38	REMOVE EXISTING ROOF LADDER.
024119.39	COORDINATE WITH MECHANICAL FOR NEW WORK.

DEMOLITION PLAN GENERAL NOTES

1. VISIT SITE AND VERIFY EXISTING CONDITIONS PRIOR TO BID SUBMISSION. DISCREPANCIES BETWEEN CONSTRUCTION INDICATED ON DRAWINGS AND ACTUAL SITE CONDITIONS SHALL BE BROUGHT TO ARCHITECT'S ATTENTION IMMEDIATELY IN WRITING.
2. DEMOLISHED ITEMS NOT INDICATED TO BE "DELIVERED TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED FROM SITE AS SOON AS POSSIBLE UNLESS THE ITEM IS TO BE USED IN ANOTHER PART OF THE PROJECT OR IN THE CONSTRUCTION THAT IS TO REMAIN. NO OTHER DEMOLISHED ITEMS SHALL BE STORED ON SITE.
3. DEMOLISHED ITEMS NOTED AS "DELIVER TO OWNER" OR "TO BE RELOCATED" SHALL BE REMOVED OR DISASSEMBLED IN SUCH A MANNER THAT WILL NOT DAMAGE THE ITEM AND PREVENT IT FROM BEING RELOCATED, REPAIR OR REFINISH. IF SUCH ITEM IS NOT TO BE RELOCATED, IT SHALL BE REMOVED IMMEDIATELY IF DAMAGE HAS OCCURRED, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
4. TEMPORARILY STORED ITEMS INDICATED AS "DELIVER TO THE OWNER" ON SITE LOCATION, DESIGNED BY THE OWNER, OWNER SHALL MOVE ITEM(S), AS NECESSARY, TO NOT HINDER OR DELAY PERFORMANCE OF WORK IN AREA.
5. TEMPORARILY STORED ITEMS INDICATED AS "TO BE RELOCATED" IN LOCATION ORDERED TO PROTECT ITEMS FROM DAMAGE PRIOR TO INSTALLATION IN NEW LOCATION.
6. ITEMS INDICATED "TO REMAIN" THAT ARE DAMAGED DURING THE PERFORMANCE OF THE CONSTRUCTION SHALL BE REPAIRED OR REPLACED WITH A MATCHING REPRESENTATIVE IMMEDIATELY, AND SUBMIT A REPAIR SOLUTION TO ARCHITECT FOR REVIEW.
7. CONSTRUCT DEMOLITION WORK WITH NEW CONSTRUCTION WORK IN EACH AREA OF DEMOLITION. EXISTING CONSTRUCTION IN AREAS ADJACENT TO DEMOLITION WORK SHALL BE PATCHED AND REPAIRED TO MATCH ORIGINAL EXISTING CONDITION. DEMOLITION WORK SHALL BE PROVIDED FOR NEW CONSTRUCTION WORK IN AREA OF DEMOLITION.
8. ITEMS INDICATED TO BE REMOVED BY OWNER SHALL BE COMPLETED PRIOR TO COMMENCEMENT OF WORK.
9. AREAS WHERE A PORTION OF EXISTING CONSTRUCTION IS TO BE REMOVED AND PREPARED FOR NEW INFILL CONSTRUCTION, OR AN OPENING IN A WALL, ROOF, OR FLOOR IS CREATED BY DEMOLITION WORK, CONSTRUCT INFILL WITH MATCHING MATERIAL AND FINISH. PATCH AREAS TO MATCH EXISTING CONSTRUCTION, UNLESS NOTED OTHERWISE. SEE ARCHITECTURAL DRAWINGS FOR INFILL CONSTRUCTION. INFILL CONSTRUCTION SHALL SMOOTHLY BUTT INTO EXISTING SURFACE.
10. AT LOCATIONS WHERE AN ITEM IS TO BE REMOVED FROM A SURFACE THAT IS TO REMAIN, PATCH AND REPAIR EXISTING SURFACE TO MATCH EXISTING ADJACENT SURFACE, UNLESS NOTED OTHERWISE.
11. EXISTING ITEMS ANCHORED TO CONSTRUCTION THAT IS INDICATED TO BE DEMOLISHED SHALL BE CONSIDERED A PART OF DEMOLISHED CONSTRUCTION AND SHALL BE DEMOLISHED WITH THE INDICATED CONSTRUCTION, UNLESS NOTED OTHERWISE.
12. IN CONDITIONS WHERE A WALL OR FLOOR FINISH IS DEMOLISHED CREATING A DISSIMILAR ELEVATION IN ADJACENT FLOOR FINISHES, INSTALL AN APPROVED PATCH OF FINISH MATERIAL TO MATCH EXISTING FLOOR FINISH AT NEW ELEVATION FLUSH WITH ADJACENT FLOOR.
13. CONSTRUCT TEMPORARY DUST PARTITIONS TO CONTROL DEMOLITION WORK AND PREVENT CONSTRUCTION DUST FROM SPREADING ADJACENT EXISTING CONSTRUCTION. SUBMIT LOCATIONS FOR THESE PARTITIONS FOR APPROVAL BY OWNER'S REPRESENTATIVE. PARTITION LOCATIONS SHALL NOT IMPEDER OR DELAY EMERGENCY EVACUATION FROM BUILDING. REFER TO SPECIFICATIONS FOR CONSTRUCTION OF DUST PARTITIONS.
14. RETAIN DEMOLISHED MATERIALS AS NEEDED FOR INFILLING OPERATIONS IN EXISTING CONSTRUCTION. DEMOLISHED MATERIALS NOTED AS "TO REMAIN" WITH EXISTING AND MATCH THE EXISTING FINISH. IF DEMOLISHED MATERIALS ARE NOT SALVAGEABLE, NOTIFY OWNER'S REPRESENTATIVE, SO THAT DEMOLISHED MATERIALS CAN BE REMOVED FROM SITE.
15. IF EXISTING CONSTRUCTION IS REVEALED NOT CONSTRUCTED OR FINISHED IN A MANNER THAT MATCHES ADJACENT SURFACES, PATCH AREA AS NECESSARY WITH APPROPRIATE MATERIALS AND METHODS OF CONSTRUCTION TO MATCH EXISTING ADJACENT SURFACES. PATCH AREAS TO MATCH EXISTING ADJACENT FINISH. CONTACT OWNER'S REPRESENTATIVE AS SOON AS POSSIBLE SO THAT CONCEALED CONSTRUCTION MAY BE IDENTIFIED AND SCOPE OF WORK DETERMINED.
16. WHEN EXISTING SURFACE IS INDICATED TO BE "PATCHED AND REPAIRED" OR "PREPARED" TO RECEIVE NEW FINISH MATERIAL, PROVIDE A CONSTRUCTION SOLUTION TO ARCHITECT FOR REVIEW.
17. WHEN THE TERM "ENTIRETY" IS DIRECTED TO A SPECIFIC ITEM OR ASSEMBLY, DEMOLISH AND REMOVE IDENTIFIED ITEM AND ASSOCIATED CONSTRUCTION PERMANENTLY FROM THE PROJECT. DEMOLITION WORK SHALL INCLUDE ALL CONCEALED CONSTRUCTION, SUCH AS FOOTINGS AND FOUNDATIONS, SEWER, PLUMBING, AND ELECTRICAL WORK. THIS DEMOLITION WORK SHALL BE COORDINATED WITH THE PROJECT'S ELECTRICAL, PLUMBING, MECHANICAL, ELECTRICAL, AND TECHNOLOGY DRAWINGS.



DEWBERRY


8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID


ISSUED FOR BID

SEAL

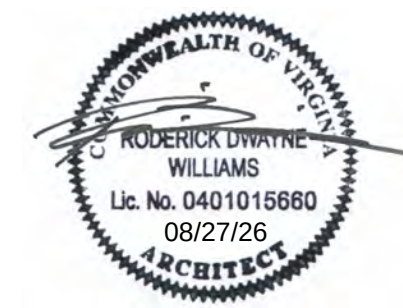

KEY PLAN

SCALE

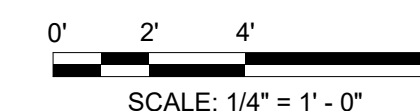

REVISIONS

[illegible]

DRAWN BY	TF
APPROVED BY	RW
CHECKED BY	Checker
DATE	08.26.2026

TITLE

ROOF DEMOLITION PLAN

PROJECT NO. 50165756

AD-121

SHEET NO.



1 ROOF DEMOLITION PLAN

Scale: 1/4" = 1'-0"

2 CARPORT DEMOLITION PLAN

Scale: 1/4" = 1'-0"

1

2

3

4

5

6

F



E

D

C

B

A

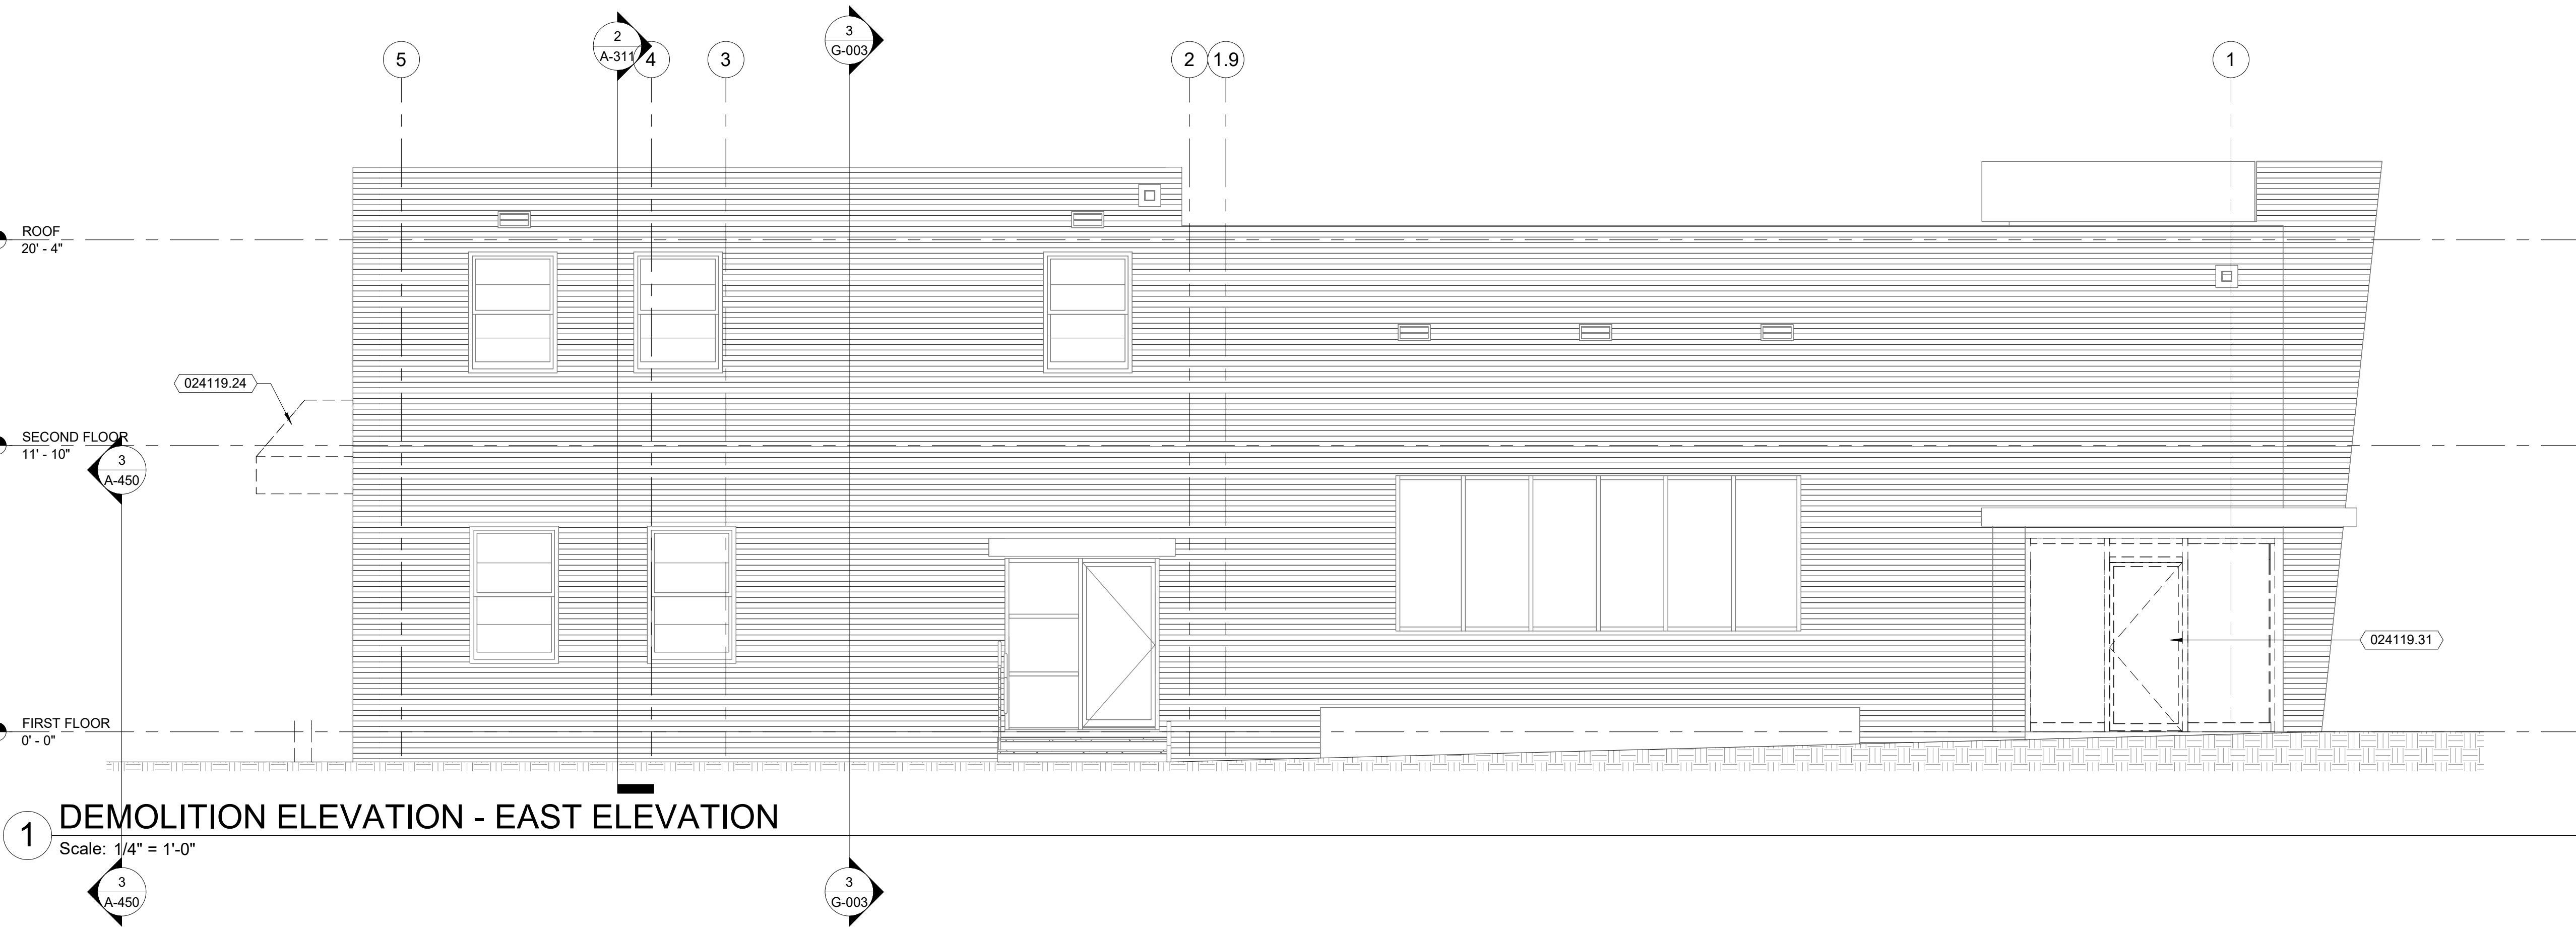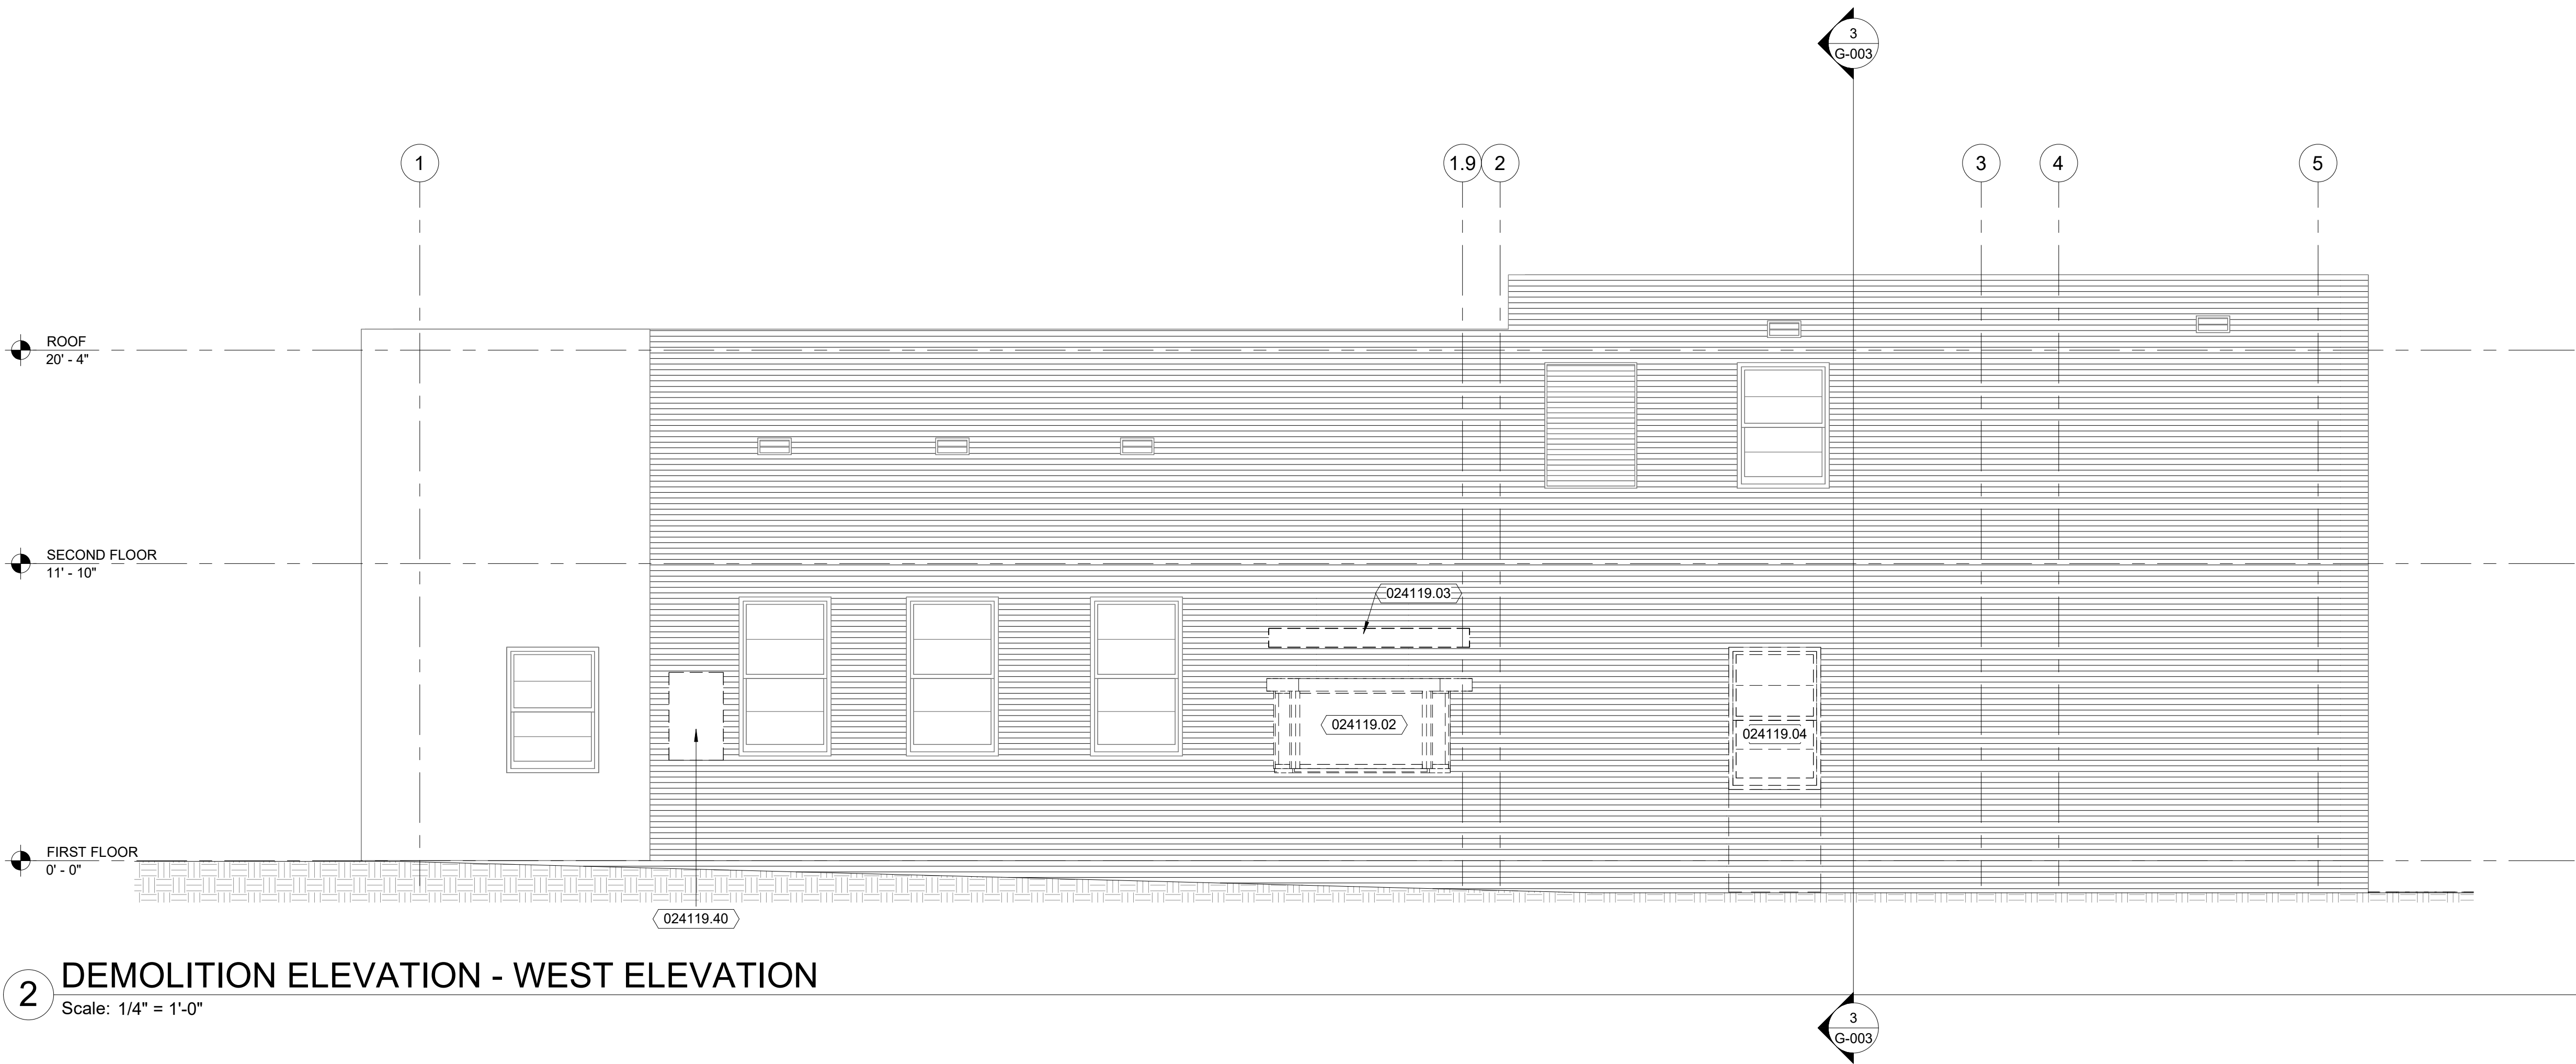

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
024119.02	DEMO EXISTING TELLER WINDOW AND INFILL WITH BRICK TO MATCH EXISTING. SEE PICTURE 15.
024119.03	EXISTING CONCRETE CANOPY TO BE DEMOLISHED.
024119.04	EXISTING WINDOW AND WALL AREA BELOW TO BE DEMOLISHED FOR NEW DOOR OPENING.
024119.24	DEMOLISH EXISTING COVERED WALKWAY AND ASSOCIATED STRUCTURE. SEE PICTURE 1. PATCH AND REPAIR EXISTING EXTERIOR WALL WHERE WALKWAY WAS DEMOLISHED.
024119.31	DEMOLISH EXISTING STOREFRONT AND STOREFRONT DOORS
024119.40	DEMOLISH EXISTING NIGHT DEPOSITORY




DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

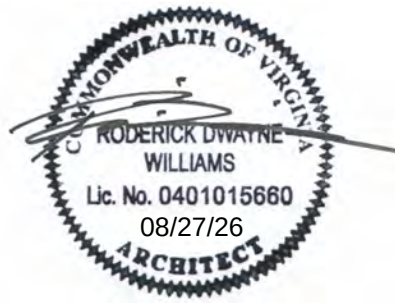

KEY PLAN

SCALE

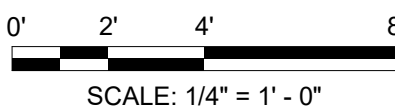

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE

DEMOLITION
EXTERIOR
ELEVATIONS

PROJECT NO. 50165756

AD-201

SHEET NO.

ANNOTATION PLAN GENERAL NOTES

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
042000.01	NEW BRICK VENEER INFILL AT EXISTING WALL
042000.09	INFILL EXISTING OPENING; INFILL MATERIAL SHALL MATCH EXISTING ADJACENT MATERIALS. TOOTH IN MASONRY WITH FULL MASONRY UNITS. TIE-IN AIR/VAPOR MEMBERS SO WEATHERPROOFING IS CONTINUOUS BETWEEN INFILL AND ADJACENT CONSTRUCTION
061053.02	INSTALL NEW WOOD SILL AT EXISTING WINDOW.
107400.01	ADA PUSH OPERATOR BOLLARD
107400.02	ADA PUSH BUTTON
107400.03	KNOX BOX




DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

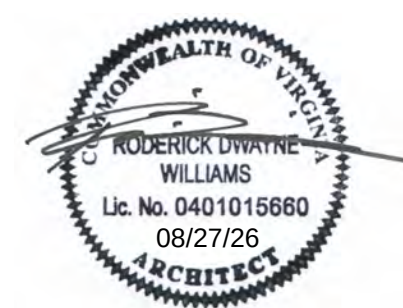

KEY PLAN

SCALE

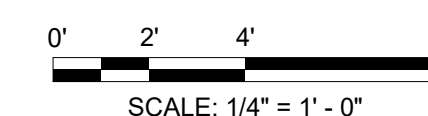

REVISIONS

[illegible]

DRAWN BY	TF
APPROVED BY	RW
CHECKED BY	DL
DATE	08.26.2026

TITLE

FIRST FLOOR ANNOTATION PLAN

PROJECT NO.	50165756
-------------	----------

A-101

SHEET NO.



1 FIRST FLOOR ANNOTATION PLAN
Scale: 1/4" = 1'-0"

1

2

3

4

5

6

F


E

D

C

B

A

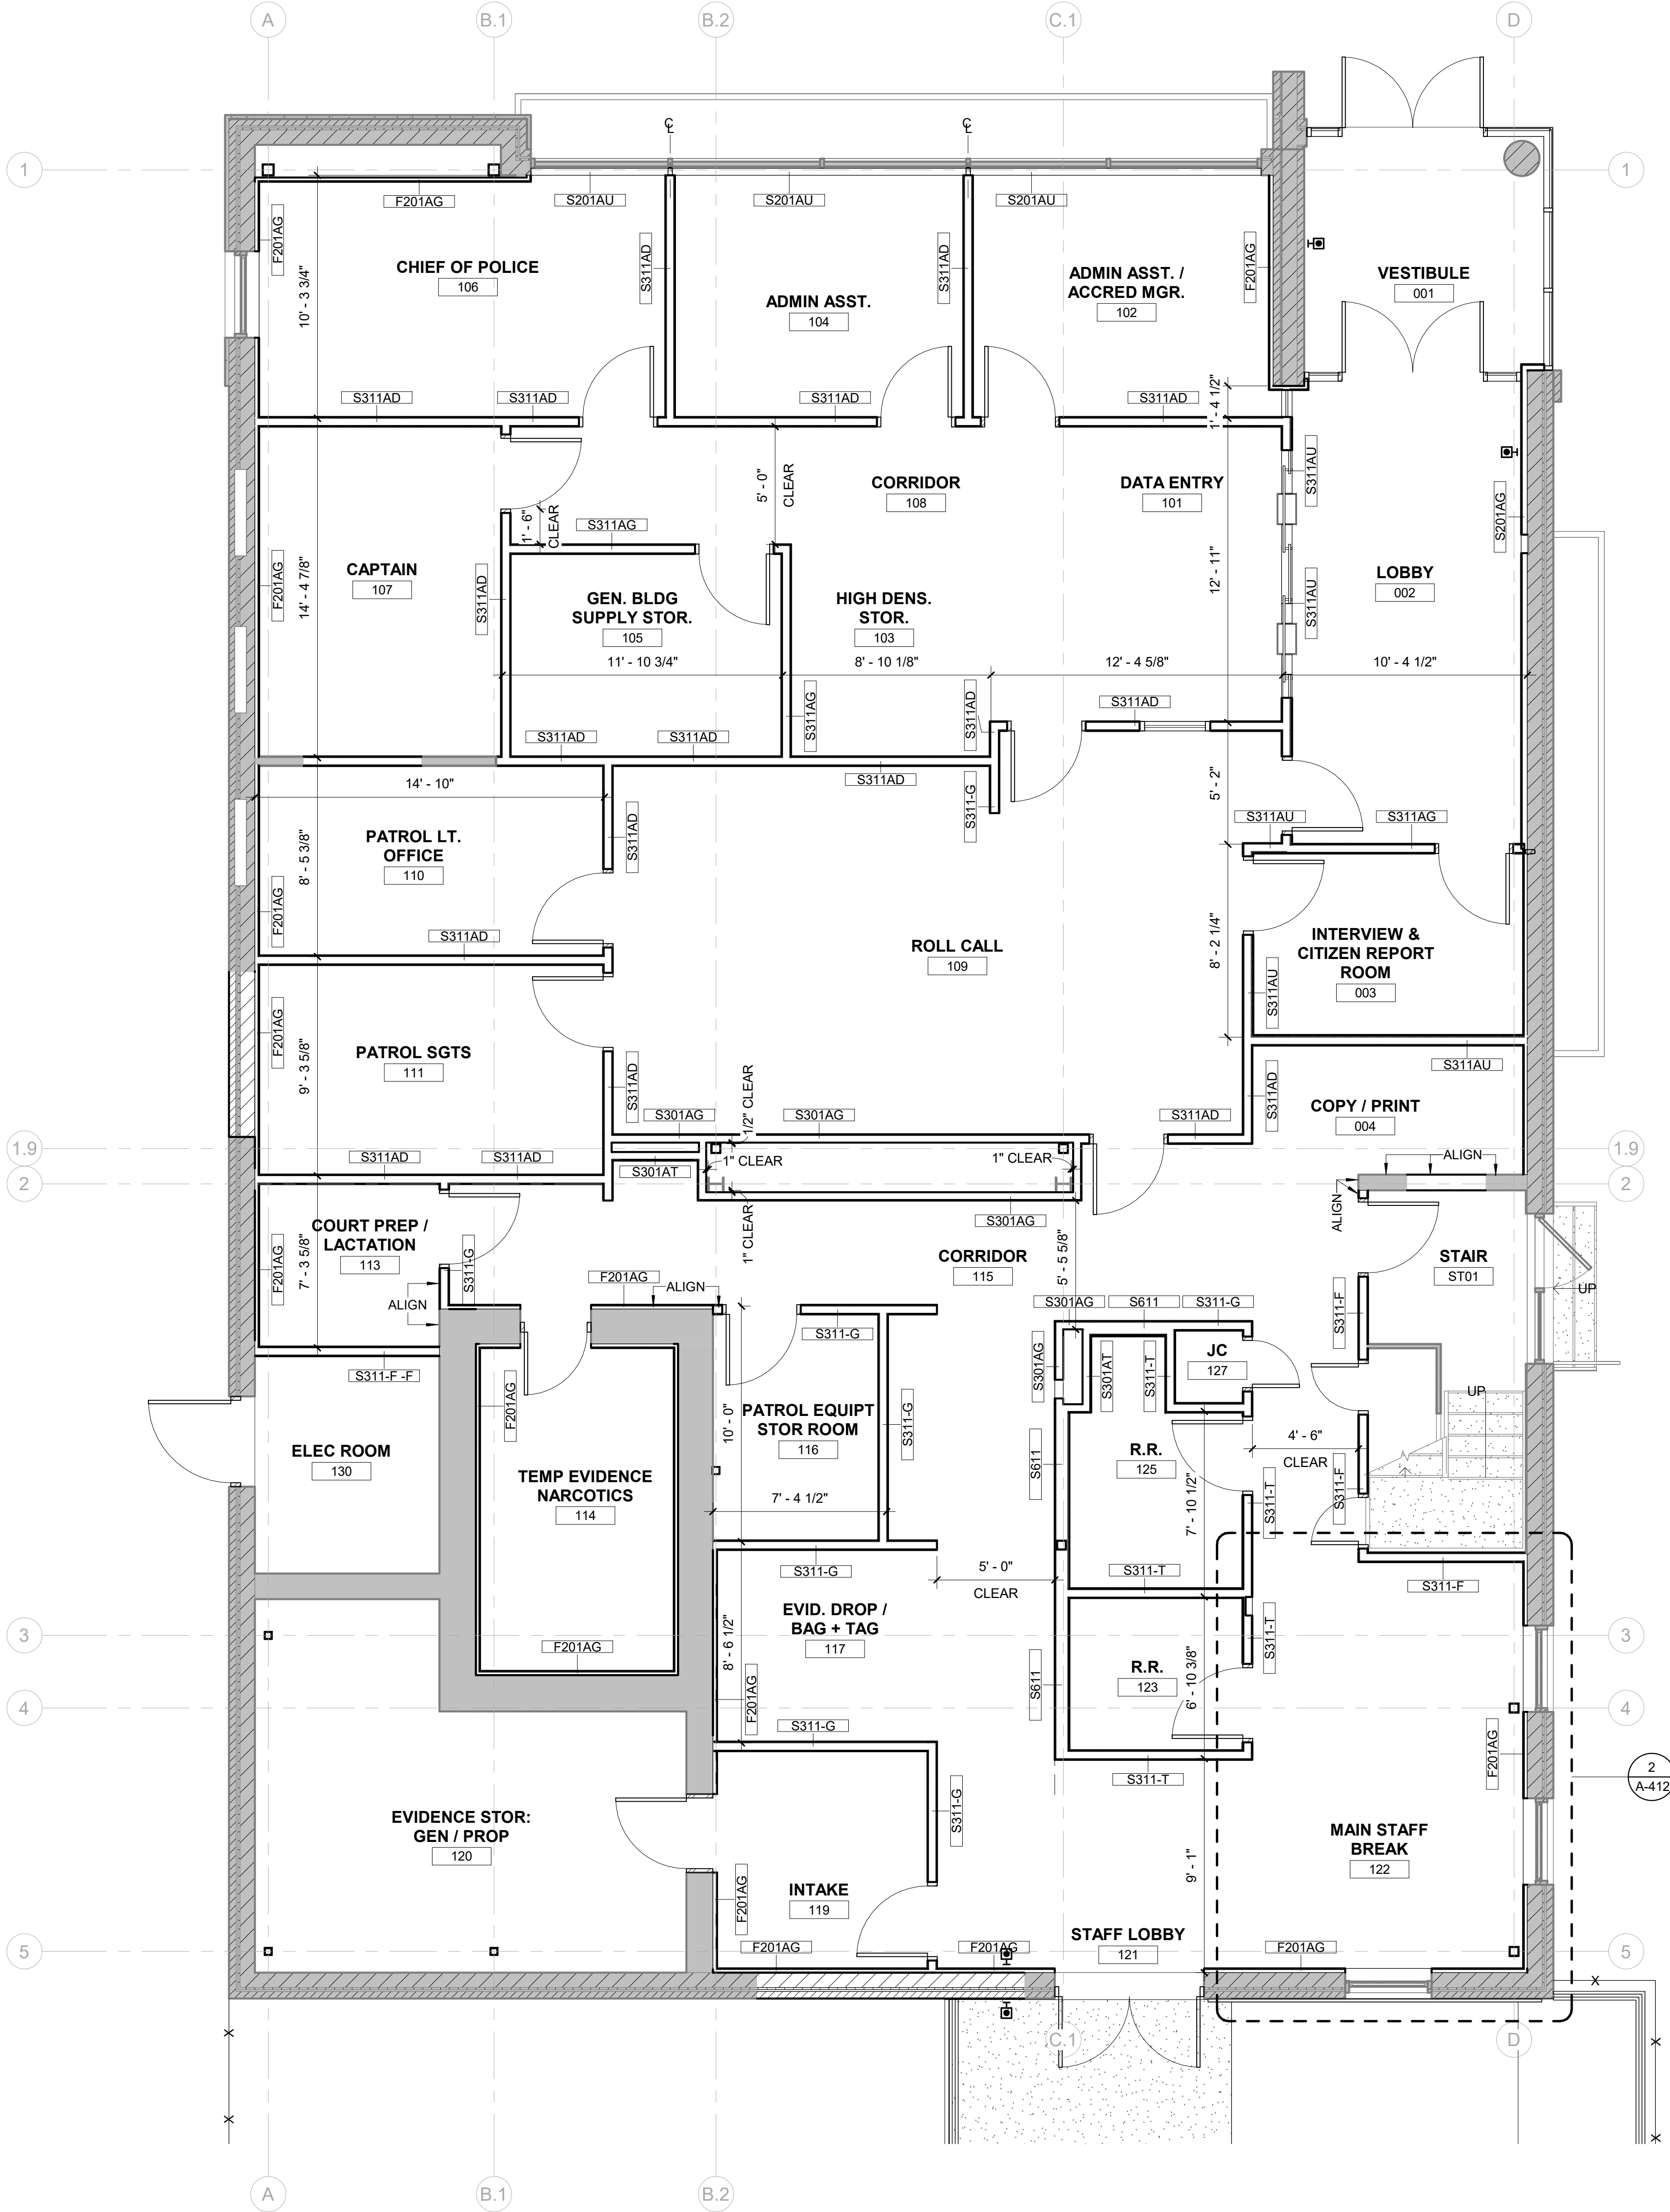

DIMENSION PLAN GENERAL NOTES

1. INTERIOR DIMENSIONS ARE TO FACE OF METAL STUD OR CMU UNIT AND TO CENTERLINES OF COLUMNS, U.N.O.
2. REFER TO CODE PLANS FOR GRAPHIC REPRESENTATION AND U.L. DESIGNS OF RATED WALLS AND SMOKE PARTITIONS.
3. EXTEND PARTITIONS TO UNDERSIDE OF STRUCTURE/DECK, U.N.O.
4. FINAL WALL PREP REQUIREMENTS ARE BASED ON FINISH SHOWN IN ROOM FINISH SCHEDULE AND WITH THE SPECIFICATIONS.
5. BACK-TO-BACK OUTLETS CANNOT OCCUPY SAME STUD CAVITY SPACE. IN ACOUSTICALLY TREATED WALLS, PROVIDE ACOUSTIC PUTTY PADS AROUND OUTLET BOXES.
6. REFER TO ENLARGED PLANS FOR DIMENSIONS WITHIN THESE AREAS.
7. SEE PLANS AND DETAIL PLANS FOR CHASE DIMENSIONS.
8. REFER TO DETAIL PLANS AND SECTIONS FOR FURTHER DESCRIPTION OF INTERIOR PARTITIONS.

KEYNOTES PER SHEET

NOTE	DESCRIPTION
------	-------------




DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

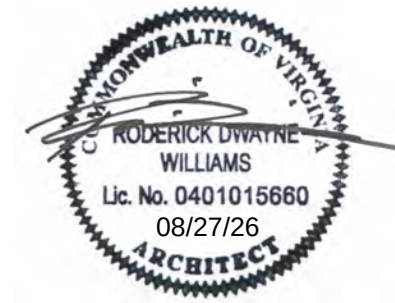

KEY PLAN

SCALE

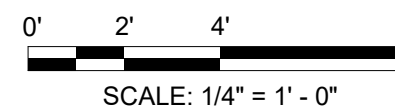

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE

FIRST FLOOR
DIMENSION PLAN

PROJECT NO. 50165756

A-102


SHEET NO.

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

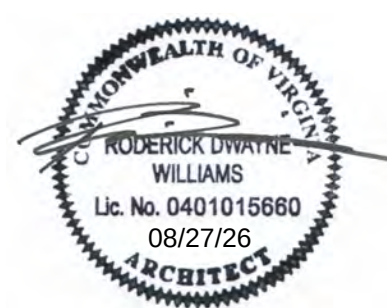

KEY PLAN

SCALE

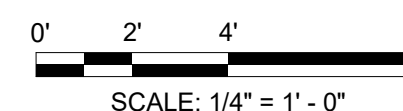

REVISIONS

[illegible]

DRAWN BY	TF
APPROVED BY	RW
CHECKED BY	Checker
DATE	08.26.2026

TITLE

FIRST FLOOR
REFLECTED
CEILING PLAN

PROJECT NO.	50165756
-------------	----------






A-103

SHEET NO.

CEILING PLAN GENERAL NOTES

1. CONTROL JOINTS SHOWN IN GYPSUM BOARD SOFFITS SHALL CONTINUE ON VERTICAL SURFACE OF SAME SOFFIT. SPACE CONTROL JOINTS NO MORE THAN 25' O.C. ARCHITECT TO VERIFY JOINT LOCATIONS PRIOR TO INSTALLATION.
2. SEE ENCLOSED CEILING PLANS FOR ADDITIONAL SOFFIT DIMENSIONS AND CONTROL JOINT LOCATIONS.
3. ELECTRICAL, MECHANICAL, AND TELECOMMUNICATIONS DEVICES ARE SHOWN FOR REFERENCE AND TO COORDINATE PLACEMENT. REFER TO ENGINEERING DRAWINGS FOR INFORMATION REGARDING TYPE AND OTHER REQUIREMENTS.
4. ESTABLISH PRE-INSTALLATION MEETING WITH ARCHITECT TO REVIEW STARTING POINT OF CEILING GRID IN EACH AREA ROOM.
5. SUBMIT A REFLECTED CEILING PLAN AND AN COORDINATION DRAWING TO ARCHITECT AFTER COORDINATING LAYOUT WITH OTHER TRADES PRIOR TO COMMENCING CEILING WORK.
6. GYPSUM CEILING TO BE PAINTED.
7. EXPOSED STRUCTURE, MECHANICAL, ELECTRICAL, AND FIRE PROTECTION COMPONENTS ARE TO BE PAINTED UNO.
8. CEILING HEIGHTS SHOWN ON REFLECTED CEILING PLANS ARE FROM FINISHED FLOOR OF PLAN SHOWN.
9. COORDINATE LOCATION OF ACCESS PANELS WITH MECHANICAL/ELECTRICAL ENGINEERS.
10. IN ROOMS WITH EXPOSED CEILING, MOUNT LIGHT FIXTURES TO UNDERSIDE OF STRUCTURE. OTHER MEPP IF ITEMS TO MAINTAIN A MINIMUM CLEARANCE OF 7' ~~TO~~ FROM CEILING.
11. SEE TELECOMMUNICATIONS DRAWINGS FOR SECURITY CAMERA AND MOTION DETECTOR LOCATIONS.
12. SEE ELECTRICAL LIGHTING PLANS FOR EMERGENCY LIGHT FIXTURE LOCATIONS.
13. CONTRACTOR TO COORDINATE CEILING FIXTURE LOCATIONS WITH ABOVE. CEILING WORK TO AVOID CONFLICT WITH LIGHTING.
14. REFER TO SHEET A-104 FOR SCHEDULED HB-1 INFORMATION.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
099123.01	PRIME AND REPAINT EXISTING COFFERED CEILING.


CEILING LEGEND			
	CEILING TYPE		LED LIGHT FIXTURE
	CEILING HEIGHT		SURFACE MOUNTED LIGHT FIXTURE - BOH
	SUSPENDED ACOUSTICAL PANEL CEILING (APC-#)		SURFACE MTD LINEAR LIGHT FIXTURE
	GYPSPUM BOARD CEILING (GYP)		RECESSED LIGHT FIXTURE
	IMPACT RESISTANT GYPSPUM BOARD CEILING W/ SECURITY MESH (SEC-#)		DECORATIVE PENDANT
	LINEAR WOOD CEILING (VWD-1)		EMERGENCY LIGHT
	EXISTING CONCRETE COFFERED CEILING (TRC) TO REMAIN		EXIT SIGN
	CONTROL JOINT		DAYLIGHTING SENSOR
	EXPOSED STRUCTURE		SPEAKER
	HORIZONTAL BLINDS (HB-1)		FIRE ALARM
	CEILING ACCESS PANEL (AP-#) SEE PLAN FOR TYPE		HEAT DETECTOR
			SMOKE DETECTOR
			OCCUPANCY SENSOR
			HORN/STROBE DEVICE
			SPEAKER/STROBE
			STROBE
			SUPPLY DIFFUSER
			RETURN DIFFUSER
			EXHAUST AIR DEVICE
			LINEAR SLOT DIFFUSER

NOTE: FOR MEPPF DEVICES, REFER TO MEPPF DRAWINGS.

NOTE: FOR MEPFP DEVICES, REFER TO MEPFP DRAWINGS

1 FIRST FLOOR REFLECTED CEILING PLAN
Scale: 1/4" = 1'-0"

F
E
D
C
B
A

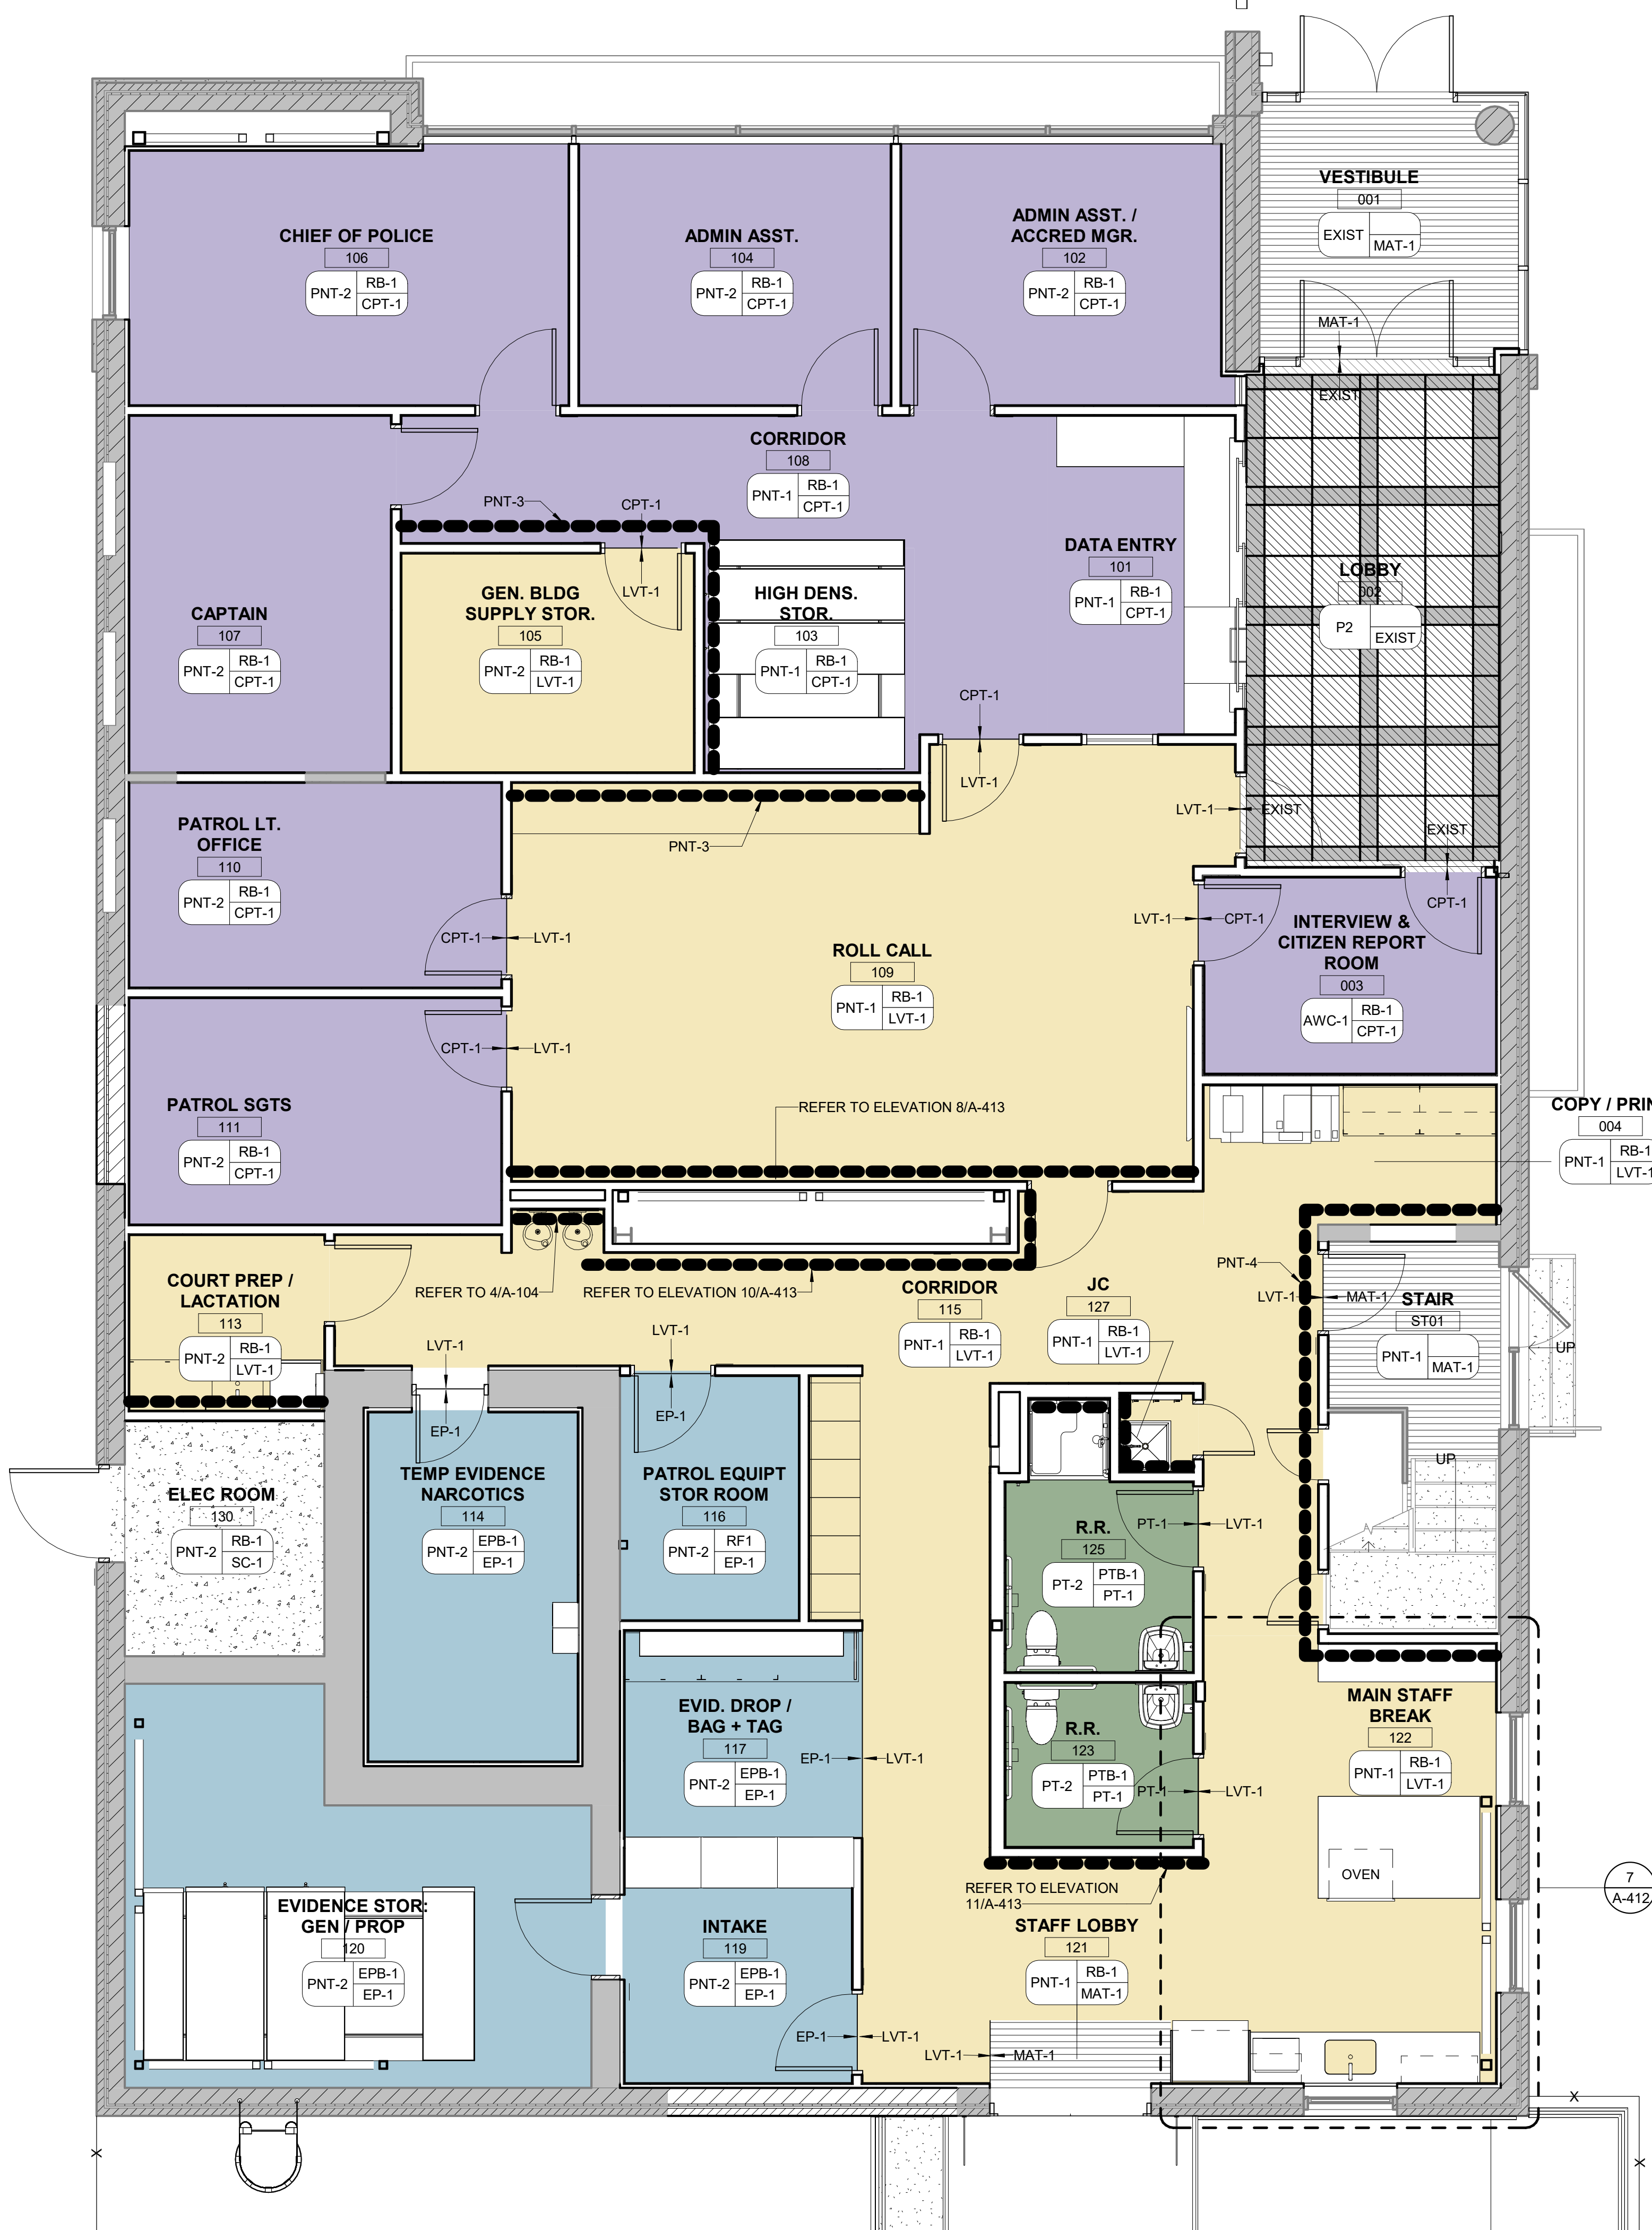

1 FIRST FLOOR FINISH PLAN
Scale: 1/4" = 1'-0"

FINISH LIST						
TYPE MARK	DESCRIPTION	MANUFACTURER	STYLE	COLOR	FINISH	SIZE
CEILING						
APC-1	CEILING TILE	ARMSTRONG	ULTIMA HIGH NRC 2080	WHITE		24" X 24" X 1"
VWD-1	CEILING TILE	ARMSTRONG	METAL WORKS LINEAR CLASSICS 5492	EFFECTS SESAME FXSE	M2 MICROPERFORATED	96" X 4" X 5/8"
PNT-8	PAINT	SHERWIN WILLIAMS	PRO MAR 200	CEILING WHITE	FLAT	
ACP-2	ACOUSTICAL CEILING TILE	ARMSTRONG	CALLA HIGH CAC 8805	WHITE		24" X 24" X 1"
SEC-1	CEILING TILE	ARMSTRONG	FINE FISSURED #746 CONCEALED	WHITE		12" X 12" X 5/8"
FLOORING						
CPT-1	CARPET TILE	J+J	THRIVE COLLECTION - ADJUST	PLUM PATH 3276		18" X 36"
PT-1	PORCELAIN TILE	CROSSVILLE	VOLUME 1.0	ELECTRIC MOSS VL79	MATTE	6" X 6"
LVT-1	LUXURY VINYL TILE	TARKETT	EVENT WOOD HERITAGE PLANK	HEIRLOOM 11220		6" X 48"
MAT-1	WALK OFF MAT	TARKETT	ABRASIVE ACTION II 02578	CHARCOAL 19100		24" X 24"
SC-1	SEALED CONCRETE					
EP-1	EPOXY FLOORING	TNEMEC	DECO-TREAD SERIES 222	DALMATION N222		
MISC.						
PLAM-1	PLASTIC LAMINATE	WILSONART		BRUSHED WALNUT Y0643K-12	SOFT GRAIN FINISH	
SS-1	SOLID SURFACE	CORIAN	SHEET	LIME STONE PRIMA		1/2" THICK
SS-2	SOLID SURFACE	CORIAN	SHEET	SILVER LINEAR		1/2" THICK
PT-3	PORCELAIN TILE	PORCELANOSA	XTONE	LIEM GREY	NATURE	12MM THICKNESS
GR-1	GROUT	MAPEI	KERAPOXY CO EPOXY GROUT	19 PEARL GRAY		
GR-2	GROUT	MAPEI	KERAPOXY CO EPOXY GROUT	14 BISCUIT		
HB-1	HORIZONTAL BLINDS	HUNTER DOUGLAS	RIVIERA COMMERCIAL	BRUSHED ALUMINUM		2" - M2-034
SS-3	SOLID SURFACE	CORIAN	SHEET	VENARO WHITE		1/2" THICK
GF-1	GLAZING FILM	DEFENSELITE	RIOLITE			
WALL						
PNT-2	PAINT	SHERWIN WILLIAMS	PRO MAR 200	SW 7017 DORIAN GRAY	EGGSHELL	
PNT-1	PAINT	SHERWIN WILLIAMS	PRO MAR 200	SW 6001 GRAYISH	EGGSHELL	
RB-1	RESILIENT BASE	JOHNSONITE	4" TOELESS	TG6 MINK WG		
AWC-1	ACOUSTIC WALL COVERING	KORSEAL	CHORDS	GHOST CHD-210		
CG-1	CORNER GUARDS	INPRO	FLEXIBLE	TO MATCH THE WALL ITS ON		1 1/2" WING
FRP-1	FIBER REINFORCED PANELS	MARLITE	FRP STANDARD	P100 WHITE CLASS A	PEBBLED	4" H
PTB-1	PORCELAIN TILE BASE	CROSSVILLE	VOLUME 1.0	ELECTRIC MOSS VL79		6" X 12" COVE BASE
PT-2	PORCELAIN TILE	CROSSVILLE	VOLUME 1.0	VAPOR VL63	MATTE	12" X 24"
PNT-3	PAINT	SHERWIN WILLIAMS	PRO MAR 200	SW 6559 CONCORD GRAPE	EGGSHELL	
PT-4	PORCELAIN TILE	PORTOBELLO AMERICA	COLOR MARKET	AUBERGINE 25893E		3" X 9"
PNT-4	PAINT	SHERWIN WILLIAMS	PRO MAR 200	SW2814 ROCKWOOD ANTIQUE GOLD	EGGSHELL	
PT-5	PORCELAIN TILE	PORTOBELLO AMERICA	COLOR MARKET	INDUSTRIAL GARAGE 25839E		3" X 9"
PT-6	PORCELAIN TILE	PORTOBELLO AMERICA	COLOR MARKET	MIRTILO 25882E		3" X 9"
PNT-5	PRIMER	SHERWIN WILLIAMS	PRERITE PROBLOCK			
PNT-6	PAINT	SHERWIN WILLIAMS	PRO INDUSTRIAL WATER BASED CATAL	SW 6001 GRAYISH	GLOSS	
PNT-7	PAINT	SHERWIN WILLIAMS		SW 6559 CONCORD GRAPE	GLOSS	

FINISH PLAN GENERAL NOTES

1. FINISH INDICATES ENTIRE SURFACE. U.N.O.
2. FINISH ON SOFFITS INDICATES ENTIRE FACE AND BOTTOM. U.N.O.
3. CEILINGS AND SOFFITS TO BE P1, U.N.O.
4. REFER TO DRAWING A-602 FOR TRANSITION DETAILS BETWEEN DISSIMILAR MATERIALS. CORNER GUARD DETAILS, AND WALL BASE DETAILS.
5. HOLLOW METAL FRAMES TO BE ~~PAINT FINISH~~.
6. CEILINGS TO BE PAINTED PNT-8, U.N.O.
7. SCORE TILES AROUND DRAIN AREAS FOR SLOPE.
8. REFER TO SPEC

INTERIOR FINISH LEGEND

ROOM NAME

PT-X RB-X CPT-X

WALL FINISH
BASE FINISH
FLOOR FINISH

NOTES: 22
(IF APPLICABLE)

ROOM FINISH TAG

XXX

ACCENT WALL MATERIAL / COLOR

XXX

FLOOR FINISH TRANSITION TAG

Floor Finish Legend

CPT-1

EXIST


MAT-1

SC-1

EP-1

LVT-1

PT-1

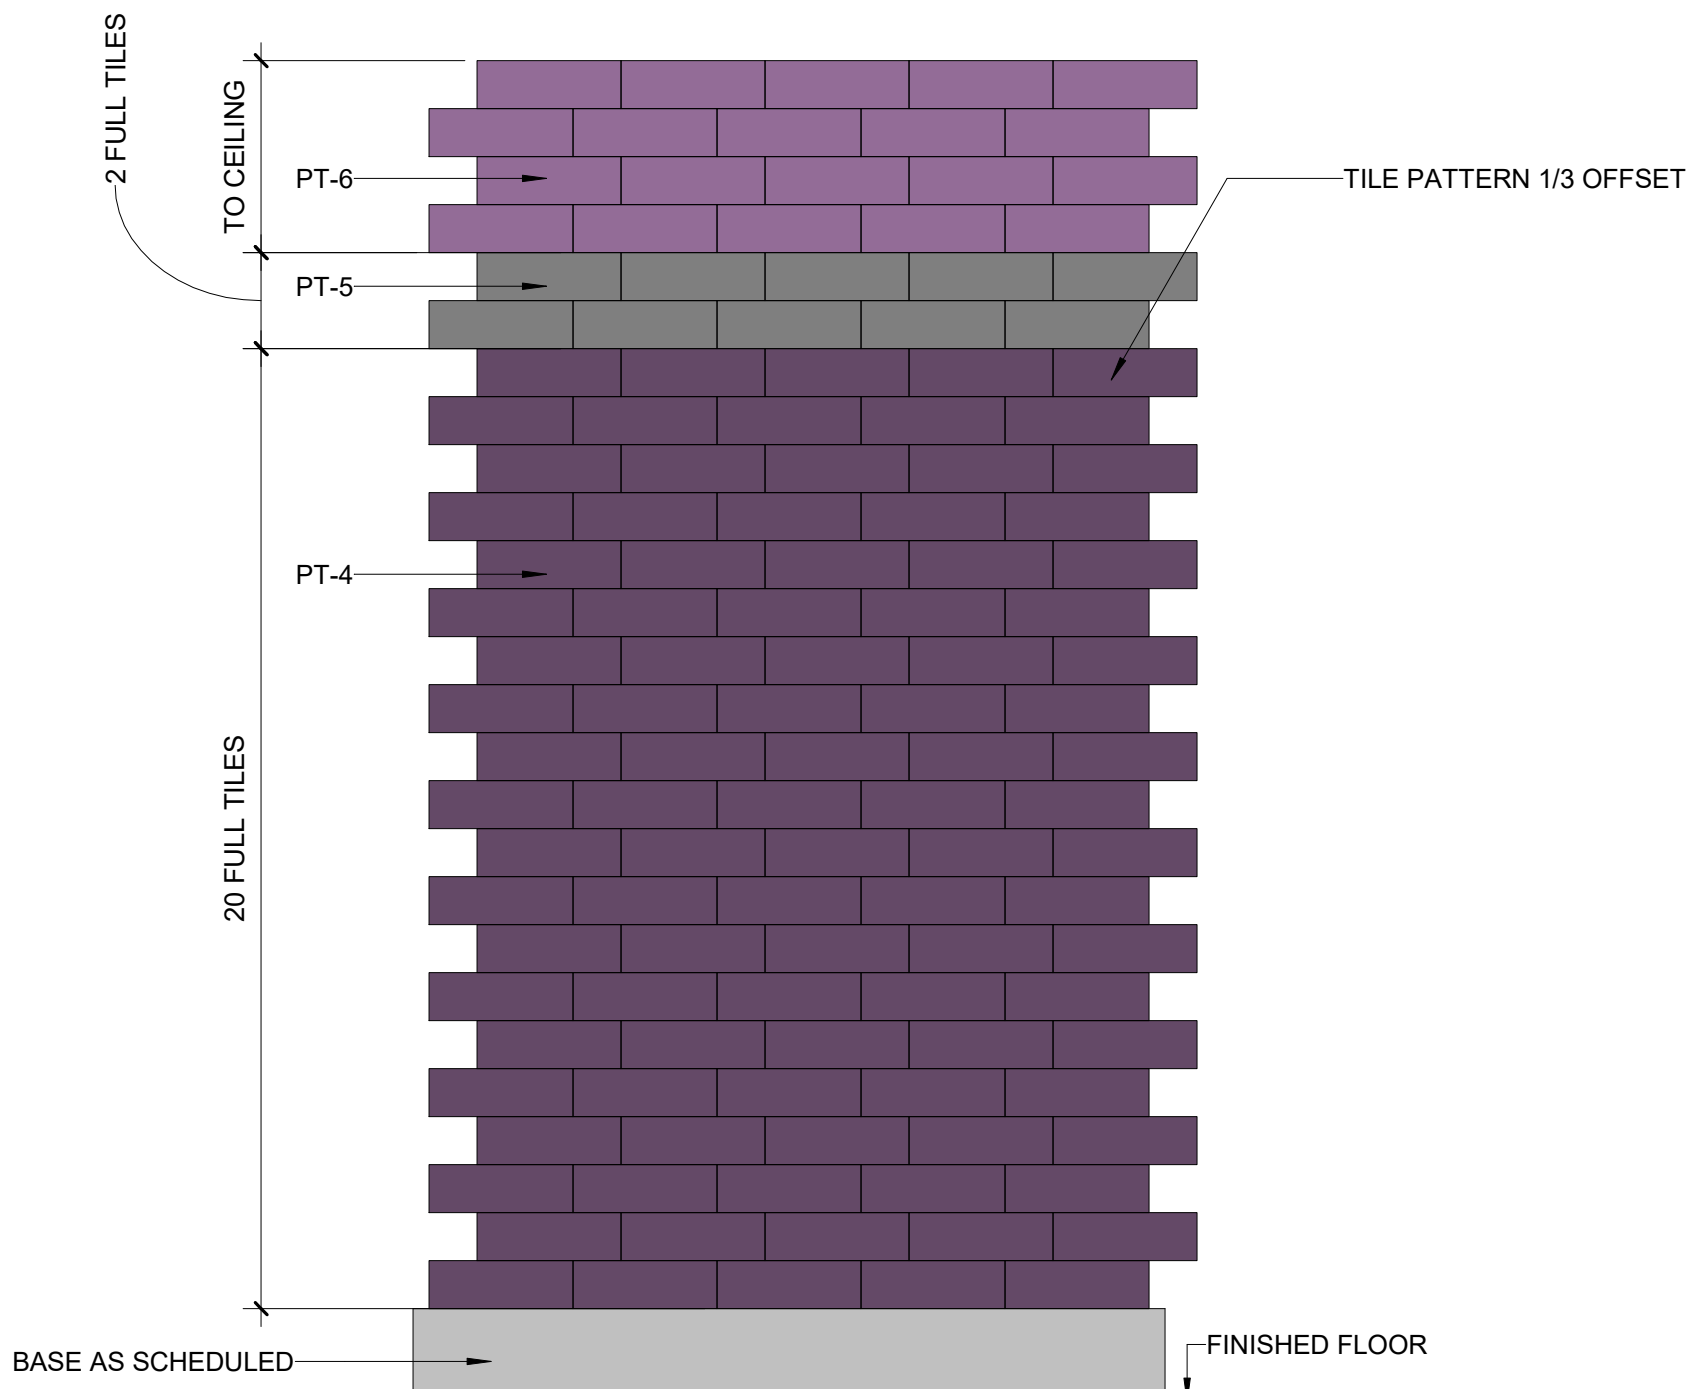

4 RESTROOM ACCENT TILE LAYING PATTERN
Scale: 1" = 1'-0"




DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

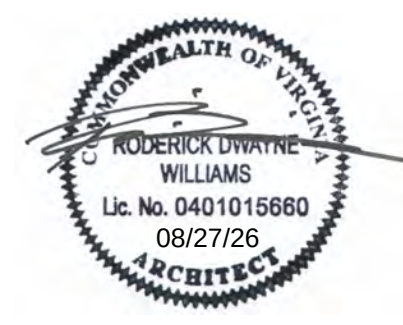

KEY PLAN

SCALE

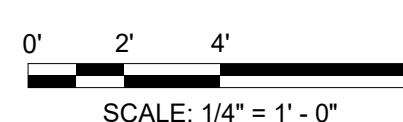

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JU / DN
APPROVED BY RW
CHECKED BY Checker
DATE 08.26.2026

TITLE

FIRST FLOOR
FINISH PLAN AND
SCHEDULE

PROJECT NO. 50165756

A-104

SHEET NO.

1 2 3 4 5 6

DIMENSION PLAN GENERAL NOTES

1. INTERIOR DIMENSIONS ARE TO FACE OF METAL STUD OR CMU UNIT AND TO CENTERLINES OF COLUMNS, U.N.O.
2. REFER TO CODE PLANS FOR GRAPHIC REPRESENTATION AND U.L. DESIGNS OF RATED WALLS AND SMOKE PARTITIONS.
3. EXTEND PARTITIONS TO UNDERSIDE OF STRUCTURE/DECK, U.N.O.
4. FINAL WALL PREP REQUIREMENTS ARE BASED ON FINISH SHOWN IN ROOM FINISH SCHEDULE AND WITH THE SPECIFICATIONS.
5. BACK-TO-BACK OUTLETS CANNOT OCCUPY SAME STUD CAVITY SPACE. IN ACOUSTICALLY TREATED WALLS, PROVIDE ACOUSTIC PUTTY PADS AROUND OUTLET BOXES.
6. REFER TO ENLARGED PLANS FOR DIMENSIONS WITHIN THESE AREAS.
7. SEE PLANS AND DETAIL PLANS FOR CHASE DIMENSIONS.
8. REFER TO DETAIL PLANS AND SECTIONS FOR FURTHER DESCRIPTION OF INTERIOR PARTITIONS.

KEYNOTES PER SHEET

NOTE	DESCRIPTION
061053.02	INSTALL NEW WOOD SILL AT EXISTING WINDOW.




DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

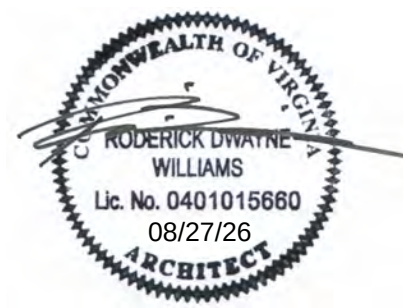

KEY PLAN

SCALE

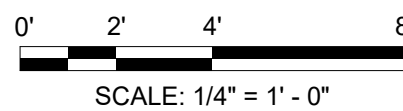

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE


SECOND FLOOR
ANNOTATION
PLAN

PROJECT NO. 50165756

A-111

SHEET NO.

F
E
D
C
B
A

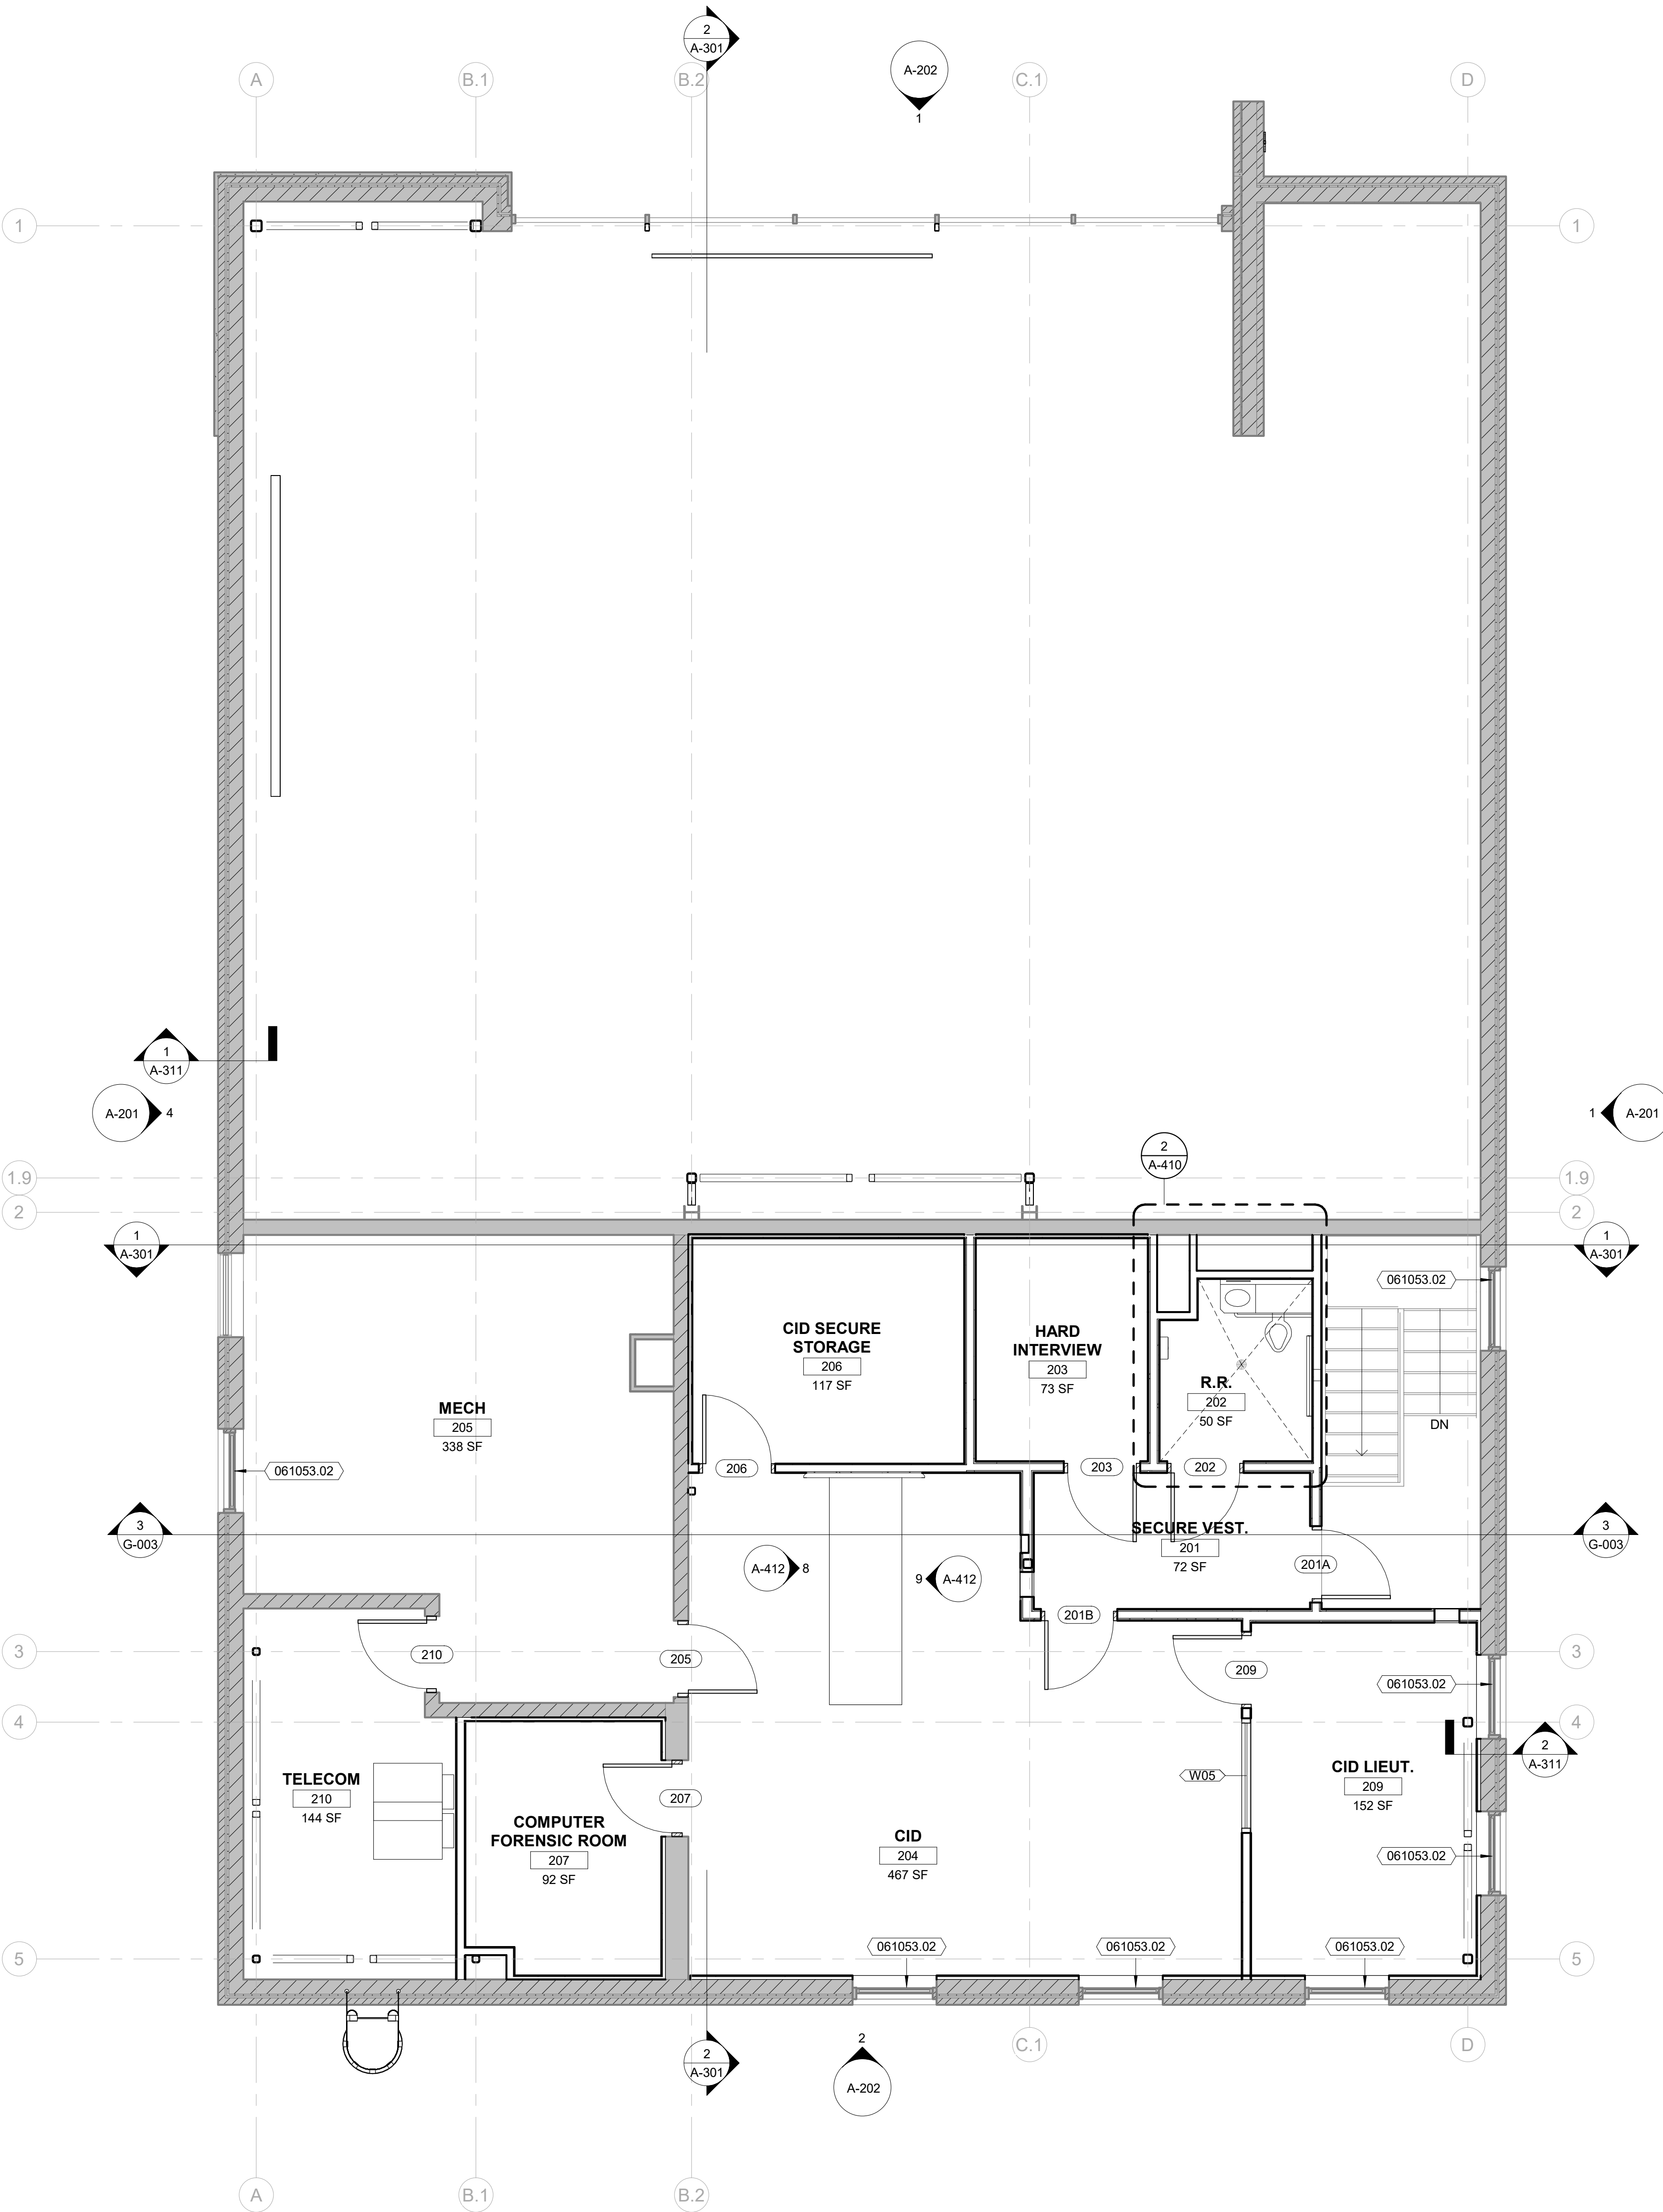

1 SECOND FLOOR ANNOTATION PLAN


Scale: 1/4" = 1'-0"

8/24/2026 11:58:16 AM

DIMENSION PLAN GENERAL NOTES

1. INTERIOR DIMENSIONS ARE TO FACE OF METAL STUD OR CMU UNIT AND TO CENTERLINES OF COLUMNS. U. O. U.
2. FINISH FLOOR PLANS FOR GRADING REPRESENTATION AND U. L. DESIGNS OF RATED WALLS AND SMOKE PARTITIONS.
3. EXTEND PARTITIONS TO UNDERSIDE OF STRUCTURE/DECK, U. N. O.
4. FINAL WALL PREP REQUIREMENTS ARE BASED ON FINISH SHOWN IN ROOM FINISH SCHEDULE AND WITH THE SPECIFICATIONS.
5. BACK-TO-BACK OUTLETS CANNOT OCCUPY SAME STUD CAVITY SPACE IN ACoustically TREATED WALLS. PROVIDE ACOUSTIC PUTTY PADS AROUND OUTLET BOXES.
6. REFER TO ENLARGED PLANS FOR DIMENSIONS WITH THESE AREAS.
7. REFER TO DETAIL PLANS AND SECTIONS FOR CHAMFER DIMENSIONS.
8. REFER TO DETAIL PLANS AND SECTIONS FOR FURTHER DESCRIPTION OF INTERIOR PARTITIONS.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION

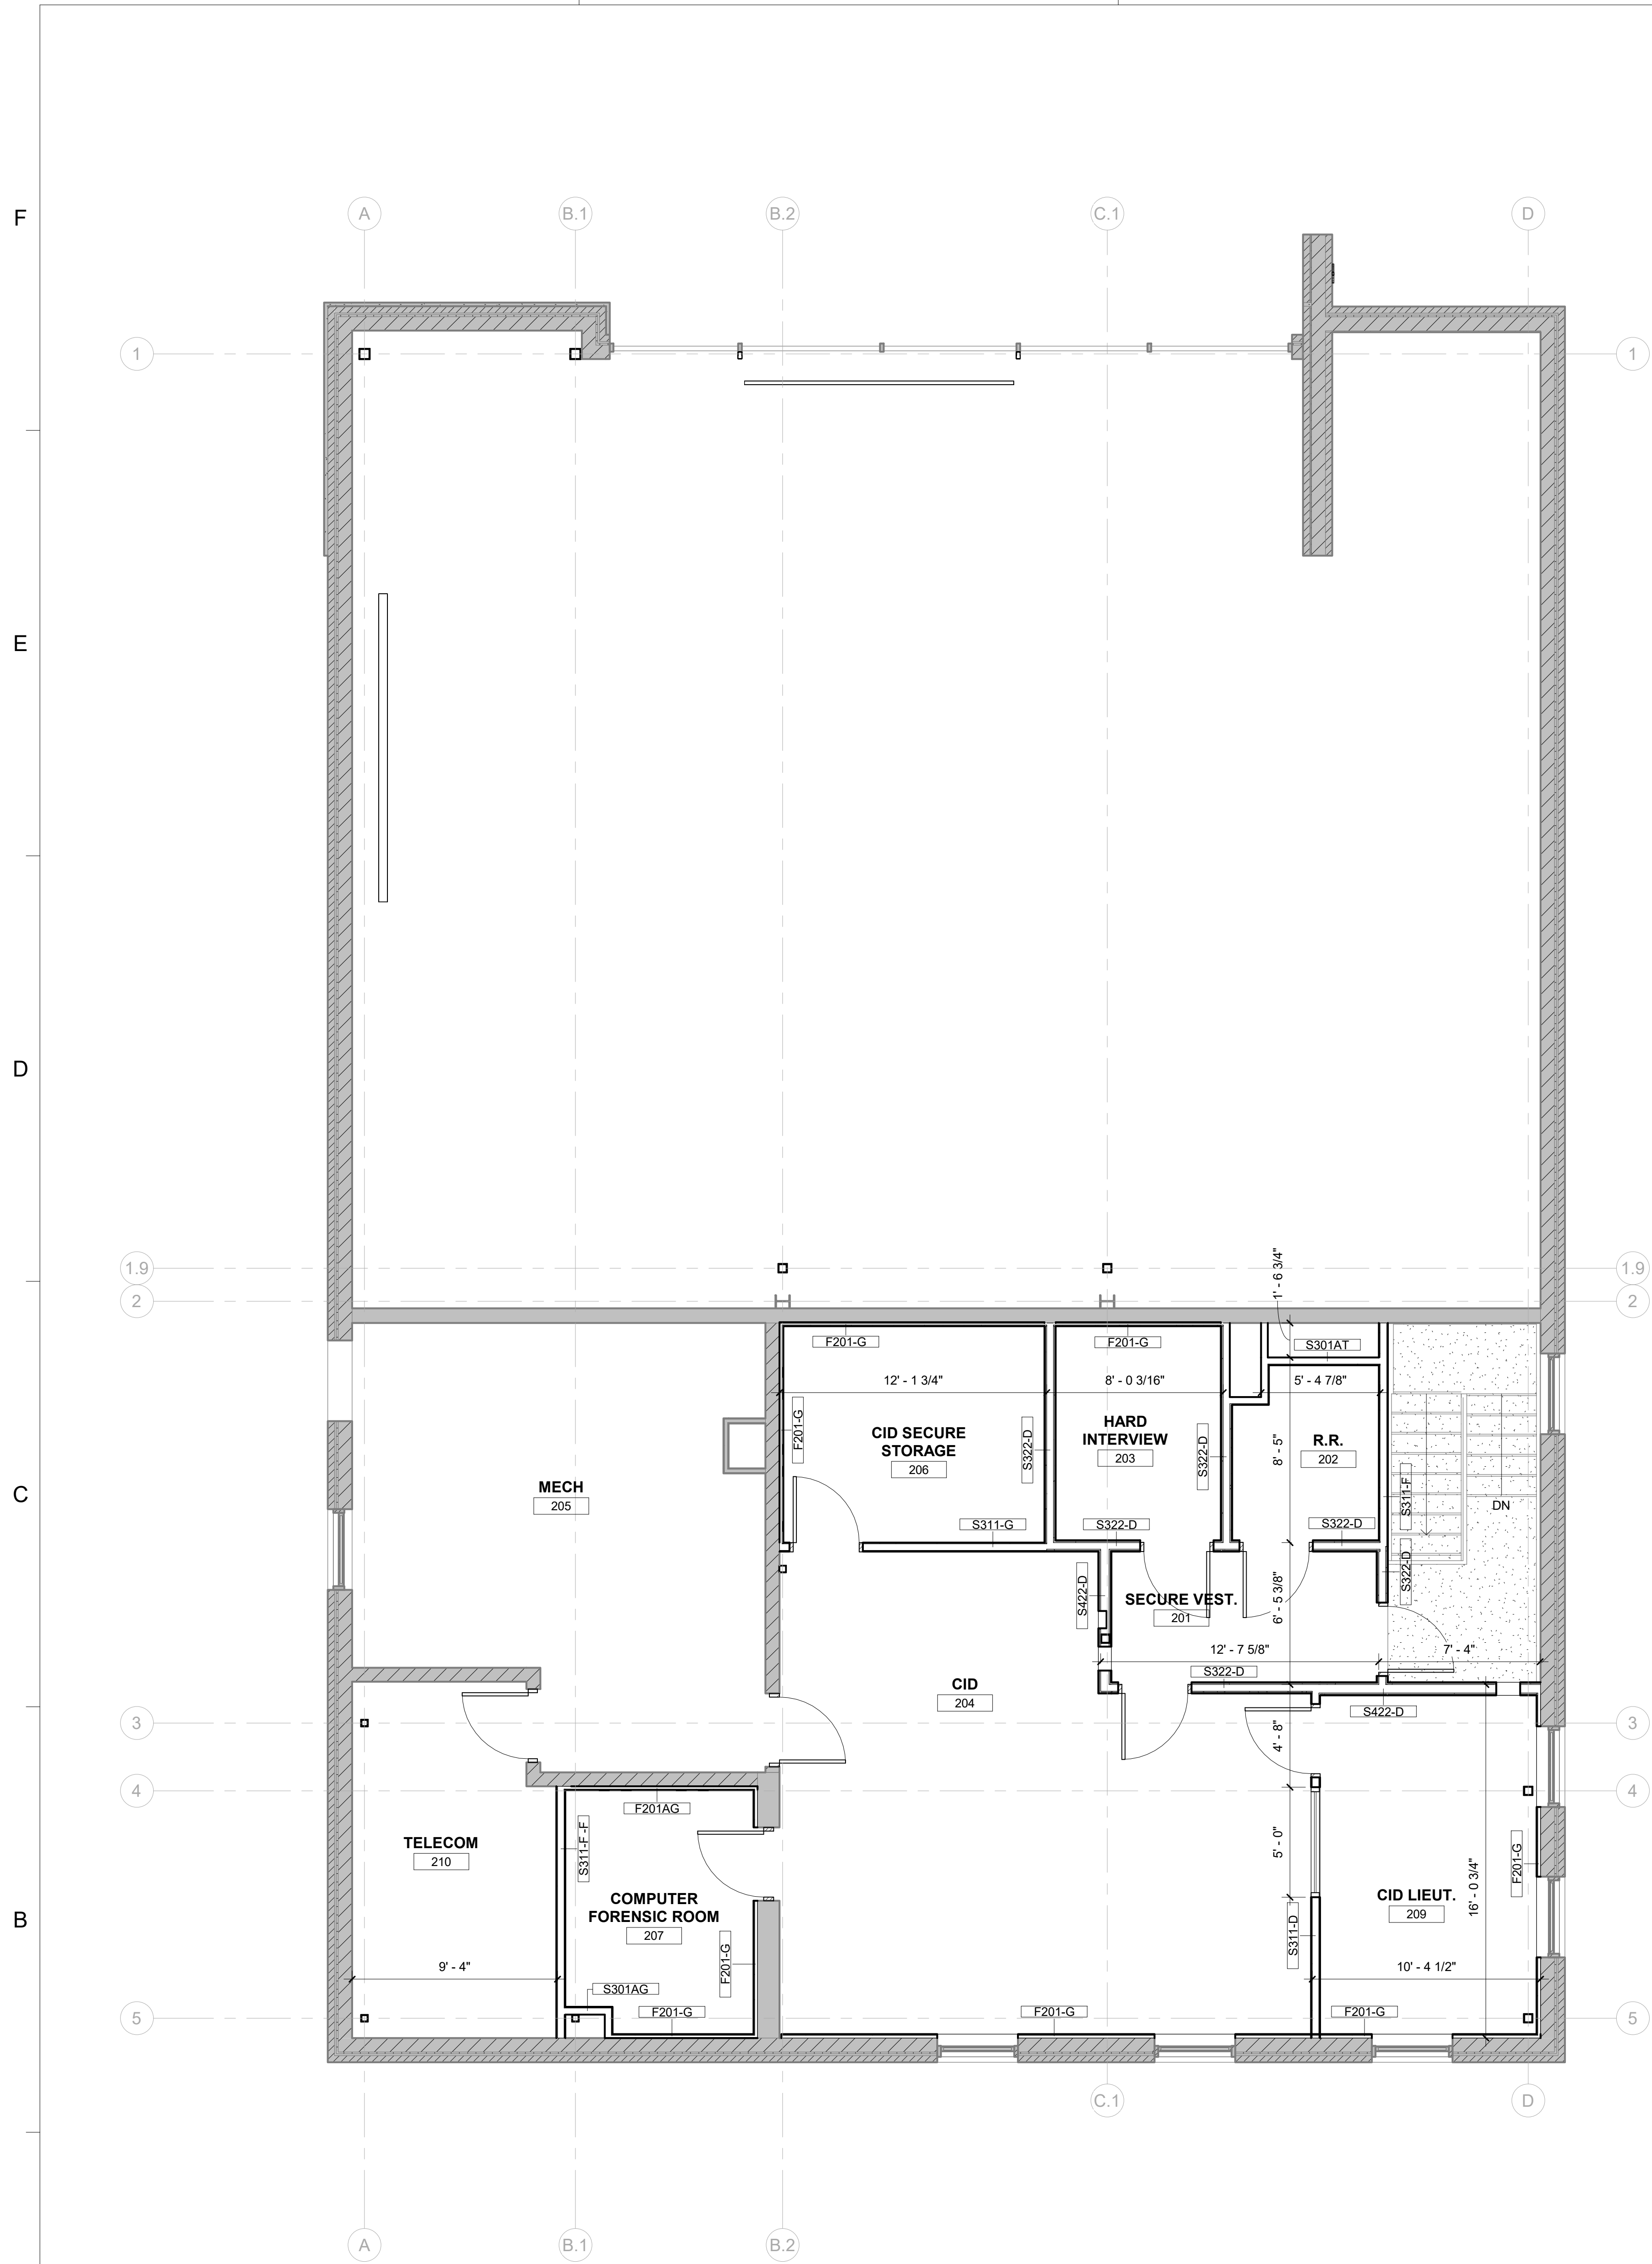

1 SECOND FLOOR DIMENSION PLAN

Scale: 1/4" = 1'-0"

8/24/2026 11:58:19 AM

A

B

C


D

E

F

1 SECOND FLOOR REFLECTED CEILING PLAN

Scale: 1/4" = 1'-0"

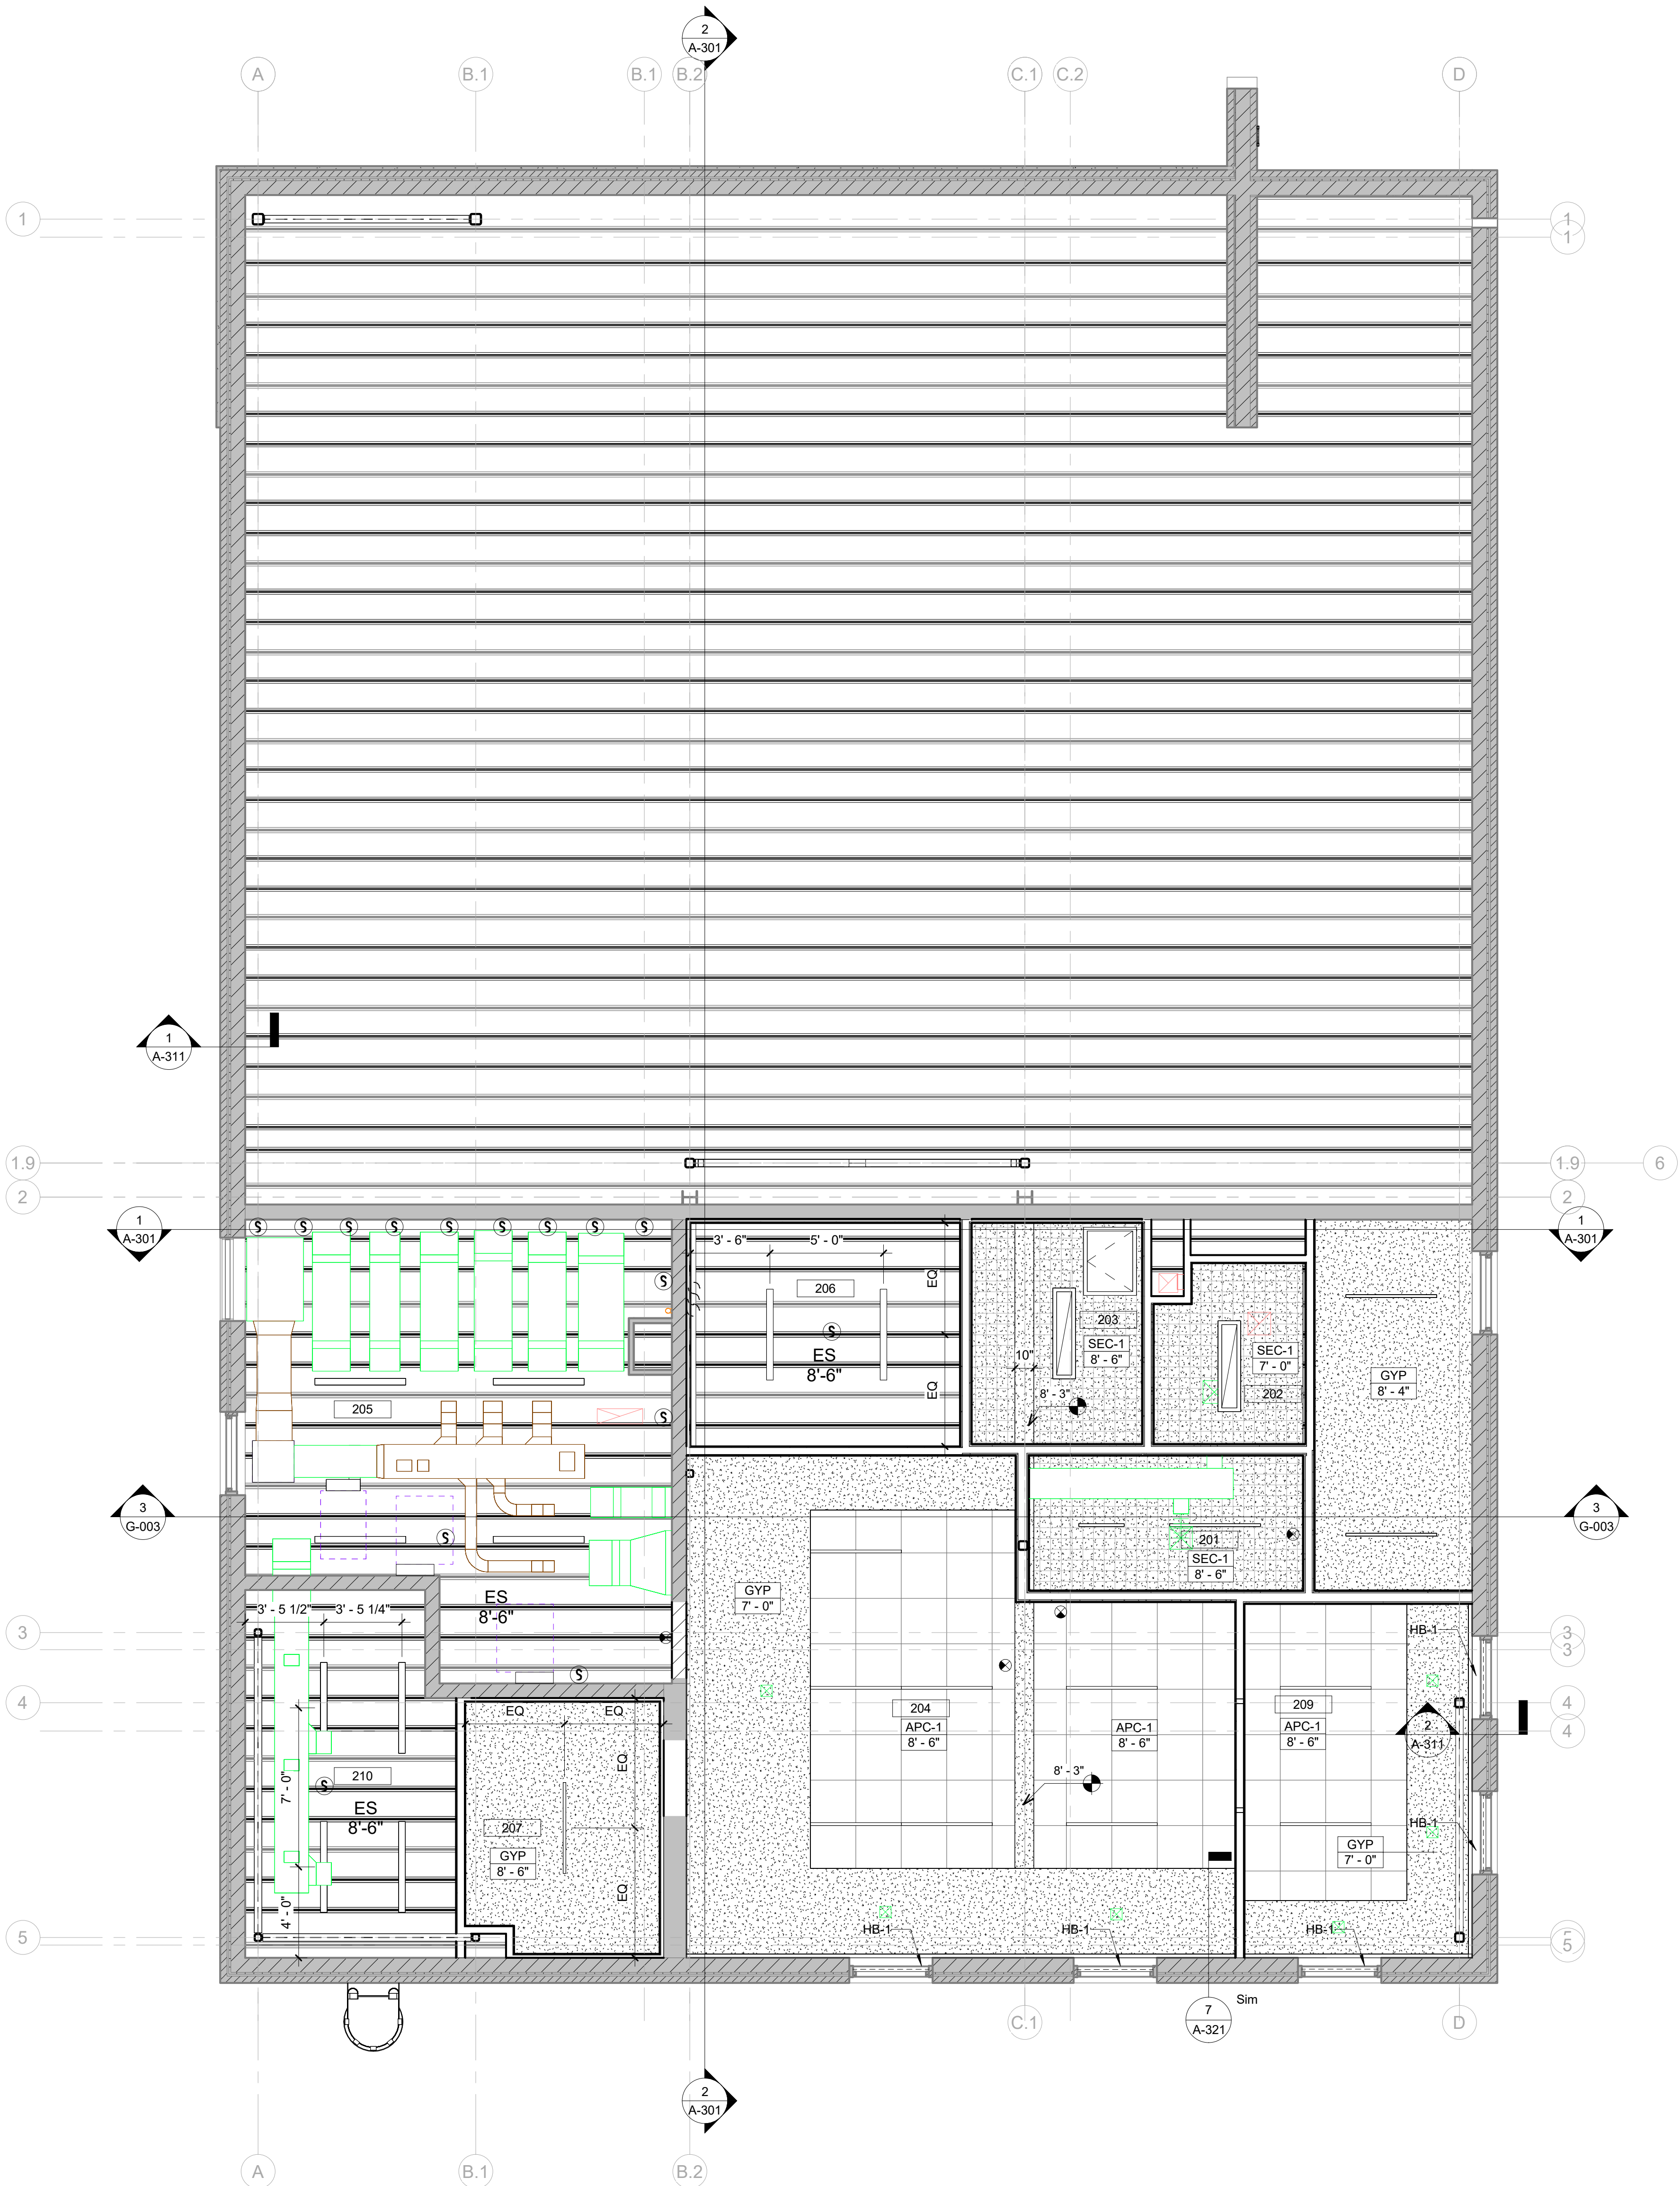

CEILING PLAN GENERAL NOTES

1. CONTROL JOINTS SHOWN IN GYPSUM BOARD SOFFITS SHALL CONTINUE ON VERTICAL SURFACE OF SAME SOFFIT. SPACE CONTROL JOINTS NO MORE THAN 26'-0" O.C. ARCHITECT TO VERIFY JOINT LOCATIONS PRIOR TO INSTALLATION.
2. SEE ENLARGED CEILING PLANS FOR ADDITIONAL SOFFIT DIMENSIONS AND CONTROL JOINT LOCATIONS.
3. ELECTRICAL, MECHANICAL AND TECHNOLOGY FIXTURES AND DEVICES ARE SHOWN FOR REFERENCE AND TO COORDINATE PLACEMENT. REFER TO ENGINEERING DRAWINGS FOR INFORMATION REGARDING TYPE AND OTHER FIXTURE AND DEVICE INFORMATION.
4. ESTABLISH PRE-INSTALLATION MEETING WITH ARCHITECT TO REVIEW STARTING POINT OF CEILING GRID IN EACH AREAROOM.
5. SUBMIT A REFLECTED CEILING PLAN COORDINATION DRAWING TO ARCHITECT AFTER COORDINATING LAYOUT WITH OTHER TRADES PRIOR TO COMMENCING CEILING WORK.
6. GYPSUM CEILING TO BE PAINTED.
7. EXPOSED STRUCTURE, MECHANICAL, ELECTRICAL, AND FIRE PROTECTION COMPONENTS ARE TO BE PAINTED, U.N.O.
8. CEILING HEIGHTS SHOWN ON REFLECTED CEILING PLANS ARE FROM FINISHED FLOOR OF PLAN SHOWN.
9. COORDINATE LOCATION OF ACCESS PANELS WITH MECHANICAL/ELECTRICAL CONTRACTORS.
10. IN ROOMS WITH EXPOSED CEILINGS, MOUNT LIGHT FIXTURES TO UNDERSIDE OF STRUCTURE. OTHER MEPFP ITEMS TO MAINTAIN A MINIMUM CLEARANCE OF 7'-0" A.F.F.
11. SEE TECHNOLOGY DRAWINGS FOR SECURITY CAMERA AND MOTION DETECTOR LOCATIONS.
12. SEE ELECTRICAL LIGHTING PLANS FOR EMERGENCY LIGHT FIXTURE LOCATIONS.
13. CONTRACTOR TO COORDINATE CEILING FIXTURE LOCATIONS WITH ABOVE-CEILING WORK TO AVOID CONFLICTS.
14. REFER TO SHEET A-104 FOR SCHEDULED HB-1 INFORMATION.

CEILING LEGEND

	CEILING TYPE		LED LIGHT FIXTURE
	CEILING HEIGHT		SURFACE MOUNTED LIGHT FIXTURE - BOH
	SUSPENDED ACOUSTICAL PANEL CEILING (APC-#)		SURFACE MTD LINEAR LIGHT FIXTURE
	GYPSUM BOARD CEILING (GYP)		RECESSED LIGHT FIXTURE
	IMPACT RESISTANT GYPSUM BOARD CEILING W/ SECURITY MESH (SEC-#)		DECORATIVE PENDANT
	LINEAR WOOD CEILING (VWD-1)		EMERGENCY LIGHT
	EXISTING CONCRETE COFFERED CEILING (TRC) TO REMAIN		EXIT SIGN
	CONTROL JOINT		DAYLIGHTING SENSOR
	EXPOSED STRUCTURE		SPEAKER
	HORIZONTAL BLINDS (HB-1)		FIRE ALARM
	CEILING ACCESS PANEL (AP-#) SEE PLAN FOR TYPE		HEAT DETECTOR
			SMOKE DETECTOR
			OCCUPANCY SENSOR
			HORN/STROBE DEVICE
			SPEAKER/STROBE
			STROBE
			SUPPLY DIFFUSER
			RETURN DIFFUSER
			EXHAUST AIR DEVICE
			LINEAR SLOT DIFFUSER

NOTE: FOR MEPFP DEVICES, REFER TO MEPFP DRAWINGS.

KEYNOTES PER SHEET

NOTE	DESCRIPTION
------	-------------



DEWBERRY


8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

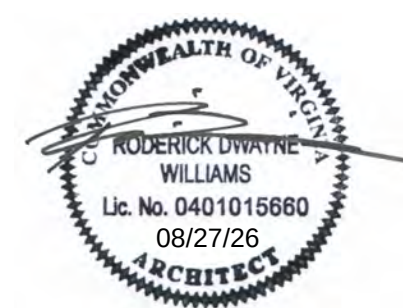

KEY PLAN

SCALE

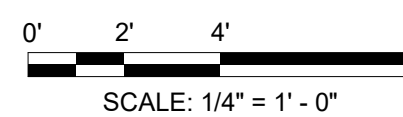

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE

SECOND FLOOR
REFLECTED
CEILING PLAN

PROJECT NO. 50165756

A-113

SHEET NO.

F
E
D
C
B
A

1


2

3

4

5

6

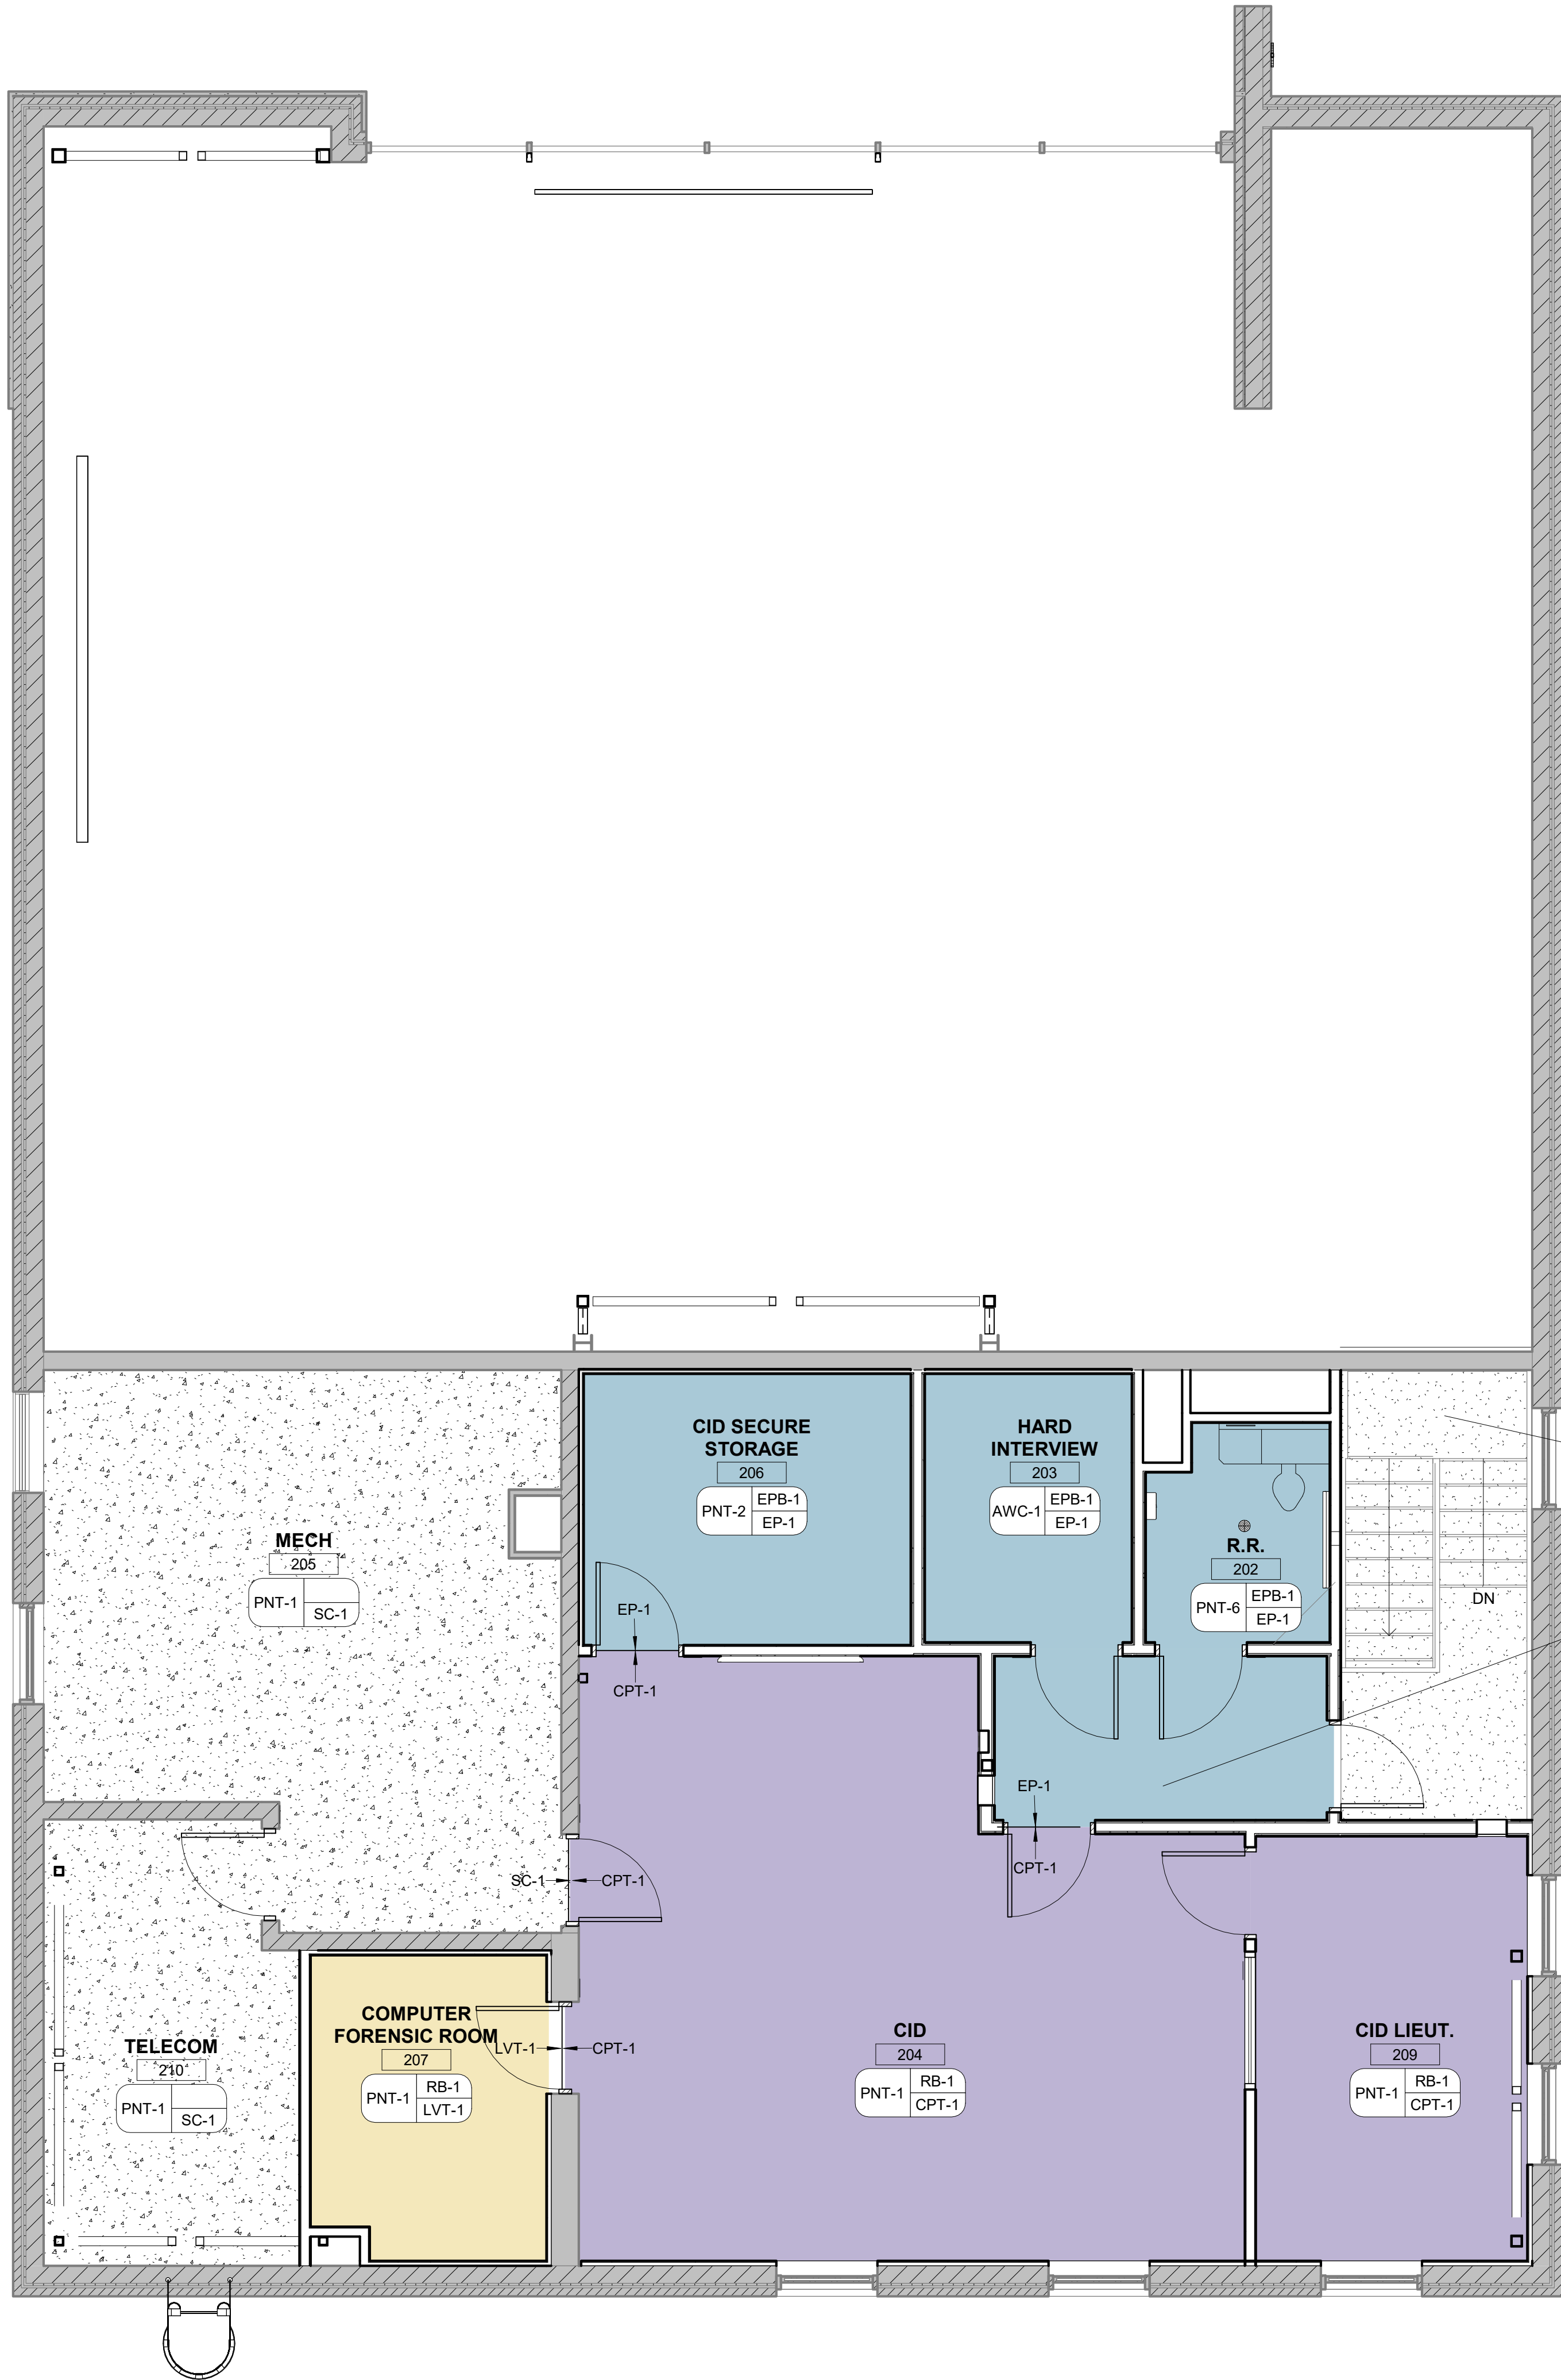

1 SECOND FLOOR FINISH PLAN

Scale: 1/4" = 1'-0"

FINISH PLAN GENERAL NOTES

1. FINISH INDICATES ENTIRE SURFACE. U.N.O.
2. FINISH ON SOFFITS INDICATES ENTIRE FACE AND BOTTOM. U.N.O.
3. CEILINGS AND SOFFITS TO BE P-1. U.N.O.
4. REFER TO DRAWING **A-602** FOR TRANSITION DETAILS BETWEEN DISSIMILAR MATERIALS. CORNER GUARD DETAILS, AND WALL BASE DETAILS.
5. HOLLOW METAL FRAMES TO BE **PAINT FINISH**.
6. CEILINGS TO BE PAINTED PNT-8, U.N.O.
7. SCORE TILES AROUND DRAIN AREAS FOR SLOPE.
8. REFER TO SPEC.

INTERIOR FINISH LEGEND

ROOM NAME

101 WALL FINISH
PT-X RB-X BASE FINISH
CPT-X FLOOR FINISH
NOTES: Z2 NOTES (IF APPLICABLE)

ROOM FINISH TAG

XXX ACCENT WALL MATERIAL / COLOR

XXX FLOOR FINISH TRANSITION TAG

Floor Finish Legend

CPT-1 EP-1 LVT-1 MAT-1 SC-1

KEYNOTES PER SHEET

NOTE	DESCRIPTION
------	-------------

Dewberry

DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657


ISSUED FOR BID

SEAL

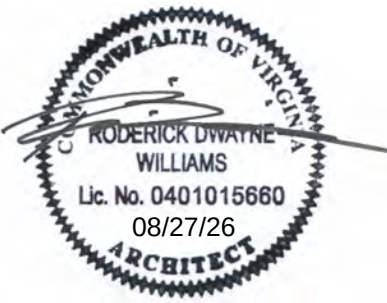

KEY PLAN

SCALE

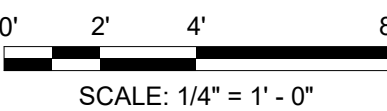

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JU / DN
APPROVED BY RW
CHECKED BY Checker
DATE 08.26.2026

TITLE


SECOND FLOOR
FINISH PLAN

PROJECT NO. 50165756

A-114

SHEET NO.

8/24/2026 11:58:21 AM

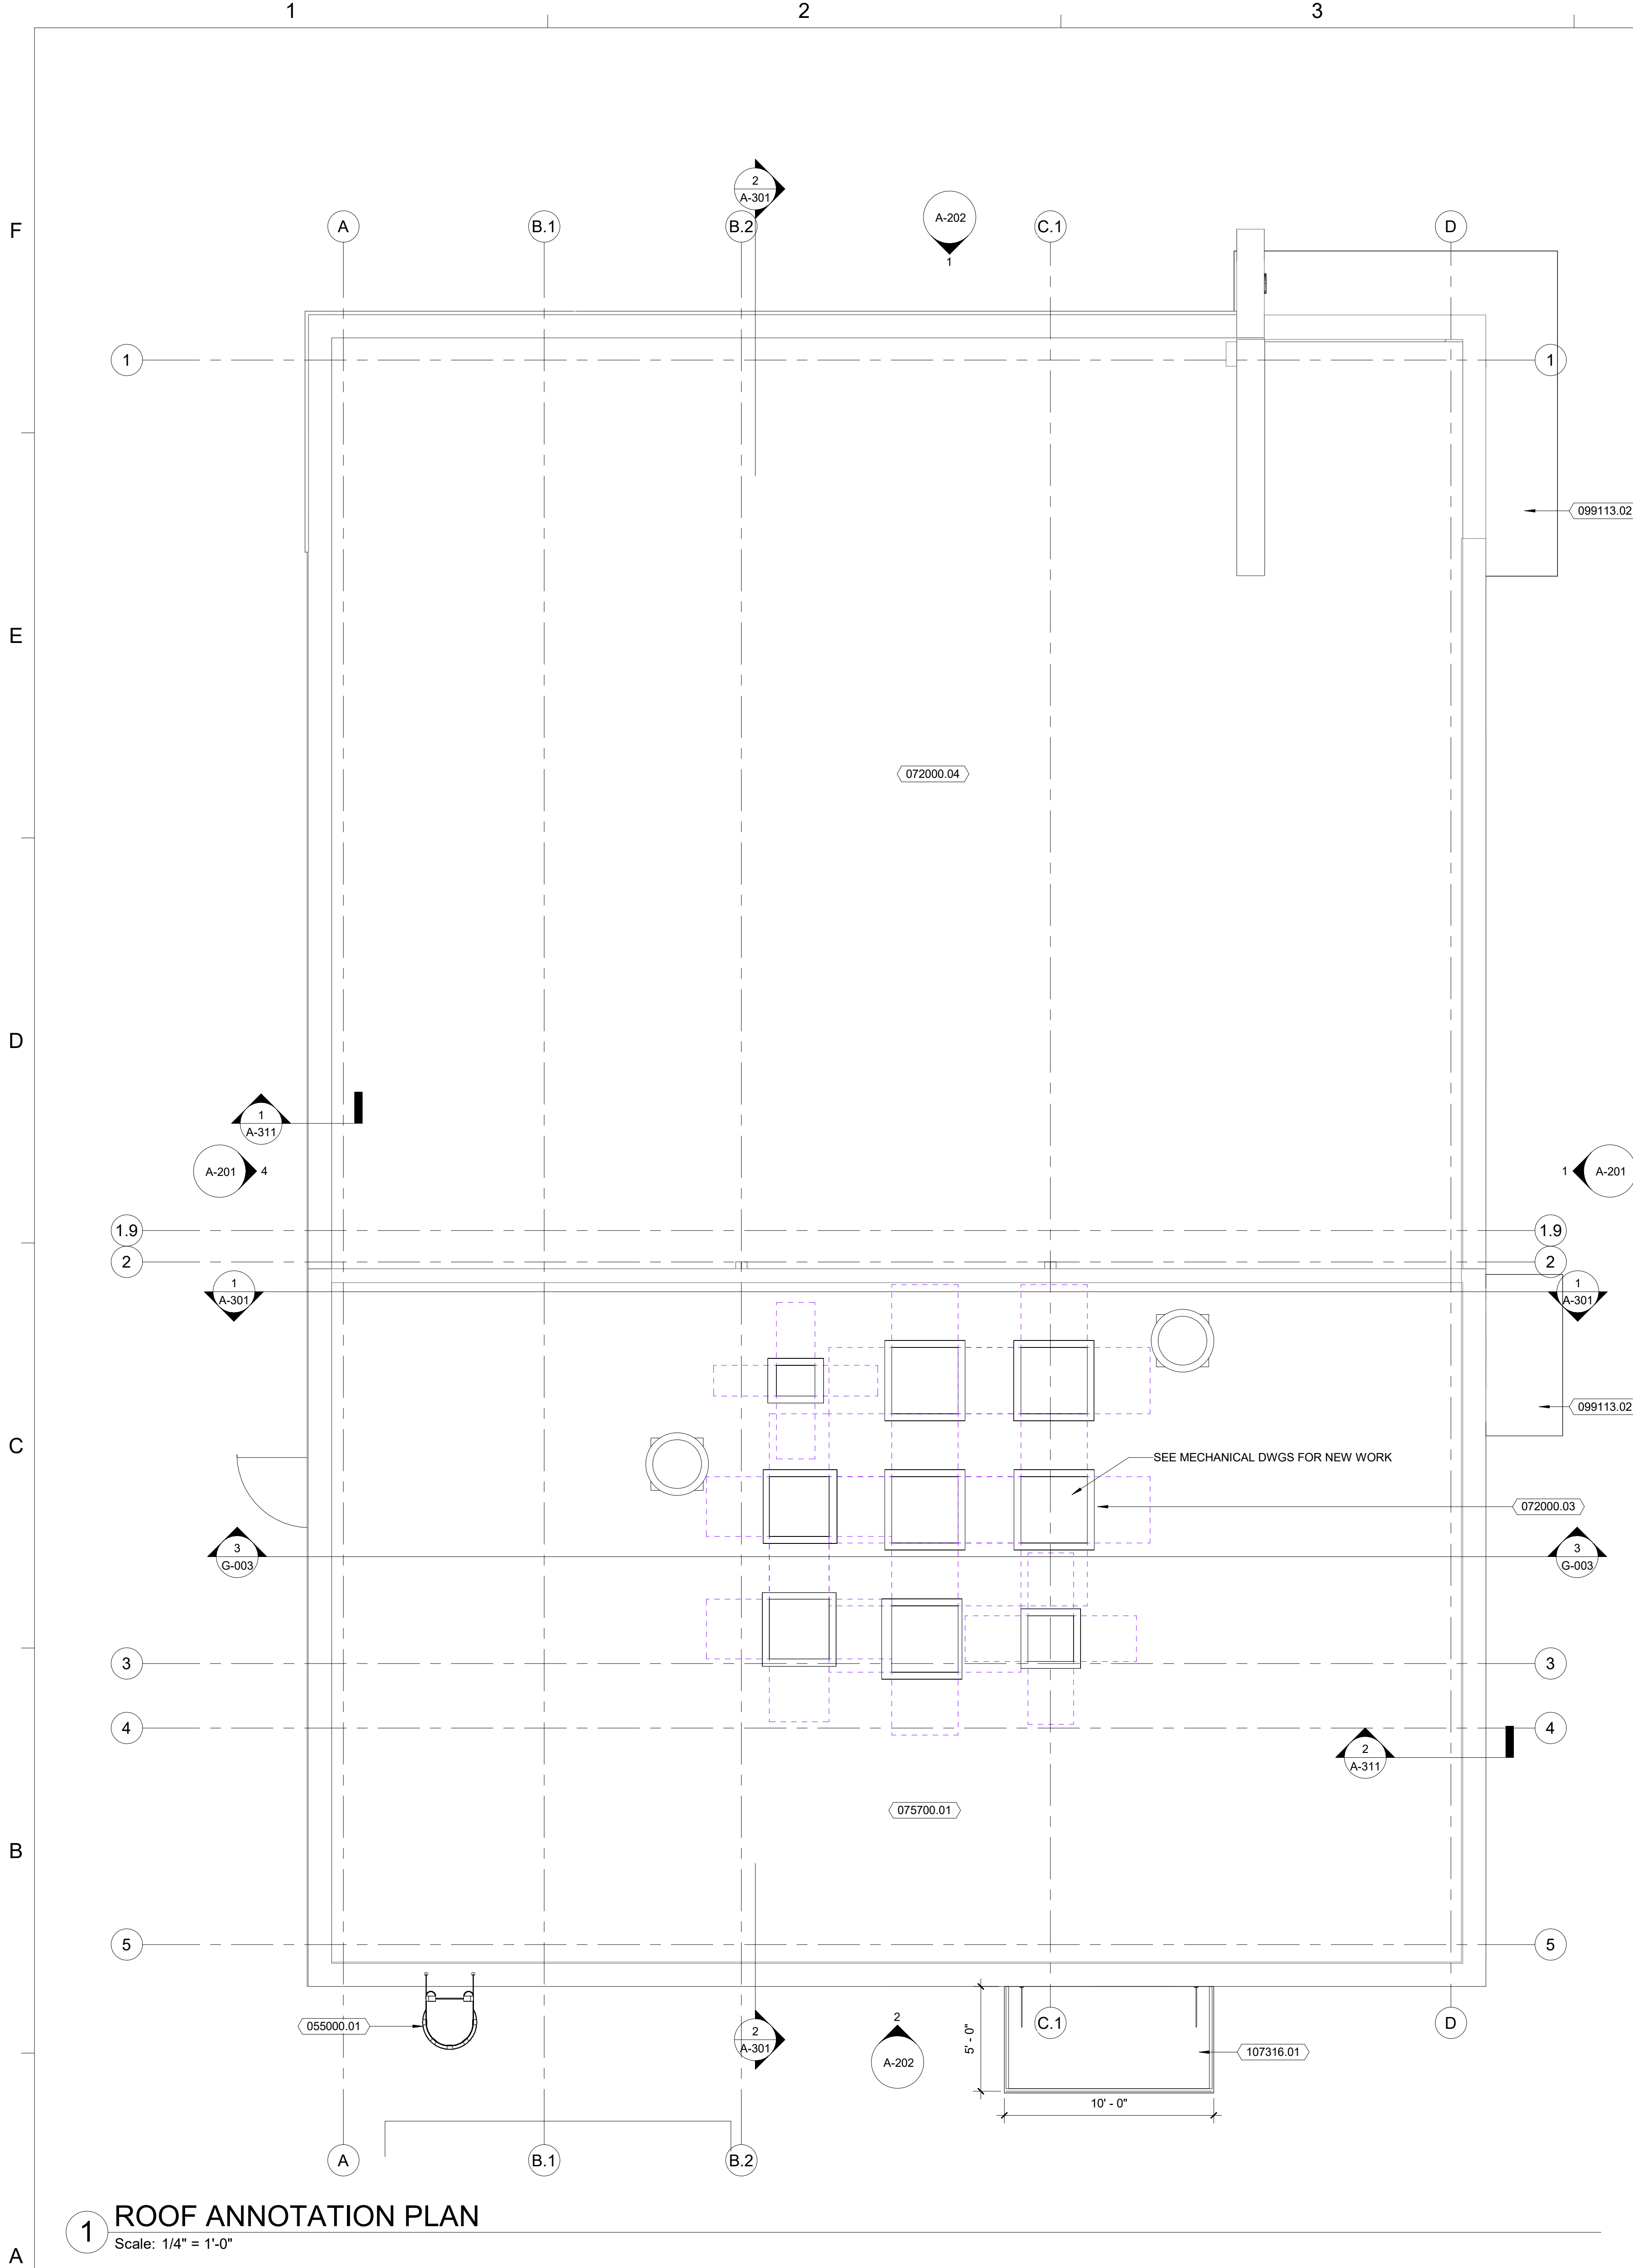

1 ROOF ANNOTATION PLAN
Scale: 1/4" = 1'-0"

ROOF PLAN LEGEND			
	EXPANSION JOINT - SEE DRAWINGS FOR SIZE		ROOF WALKWAY PAD
	EXISTING ROOF DRAIN		ROOF LADDER
	PRIMARY ROOF DRAIN		ROOF SLOPE DIRECTION
	SECONDARY ROOF DRAIN		CRICKET
	ROOF DRAIN SUMP PAN		VENT THROUGH ROOF, REFER TO MECHANICAL DWG'S
	OVERFLOW SCUPPER		MECHANICAL EQUIPMENT, REFER TO MECHANICAL DWG'S
	CONDUCTOR HEAD		HIGH POINT
	SPLASH PAN		LOW POINT
	ROOF HATCH		

ROOF PLAN GENERAL NOTES	
1. REFER TO DEMOLITION DRAWINGS FOR DEMOLITION AND SELECTIVE DEMOLITION OF ROOF, ROOFING SYSTEM, AND ROOF EDGE ASSEMBLY. 2. TAPERED INSULATION (TAPERED, CRICKETS, SADDLES) TO BE 1/4" PER FOOT MINIMUM TO ROOF DRAINS OR SCUPPERS, AS INDICATED. 3. COORDINATE WITH STRUCTURAL DRAWINGS FOR SLOPED STRUCTURE. 4. SHOP DRAWING OF TAPERED INSULATION SHALL ACCOUNT FOR CAMBER IN STRUCTURE TO INSURE POSITIVE DRAINAGE. 5. AT PENETRATIONS, PROVIDE CRICKETS AS REQUIRED FOR POSITIVE DRAINAGE. 6. COORDINATE ROOF AND OVERFLOW DRAIN LOCATIONS WITH STRUCTURAL ELEMENTS, TO AVOID LOCATING ROOF AND OVERFLOW DRAINS OVER TOP OF STEEL BEAMS AND JOISTS. 7. REFER TO EXTERIOR ELEVATIONS FOR LOCATION OF OVERFLOW SCUPPERS AND OUTFLOWS. 8. PROVIDE 24"W. x 48"L. PRECAST CONCRETE SPLASH BLOCKS ON GRADE BELOW SCUPPERS AND OUTFLOWS THAT FLOW WATER ONTO GRADE BELOW. 9. PROVIDE 24"W. x 48"L. STAINLESS STEEL SPLASHPAN ON ROOF BELOW SCUPPERS AND OUTFLOWS THAT FLOW WATER ONTO ROOFS BELOW. 10. ROOF WALKWAY PADS SHALL BE SPACED TO PROVIDE POSITIVE DRAINAGE. 11. AT ROOF LADDERS, TOP AND BOTTOM, PROVIDE 4' x 4' ROOF WALKWAY PADS. 12. ROOF FLASHING DETAILS ARE GENERIC AND WILL NEED TO BE FINALIZED DURING SHOP DRAWING SUBMITTALS BASED ON THE ROOFING MANUFACTURER'S STANDARD DETAILS	
KEYNOTES PER SHEET	
NOTE	DESCRIPTION
055000.01	INSTALL NEW ROOF LADDER
072000.03	PATCH AND REPAIR ROOF AS REQUIRED TO REMOVE EXISTING EQUIPMENT AND ADD NEW.
072000.04	IDENTIFY AND REPAIR EXISTING ROOF AS NEEDED.
075700.01	APPLY LIQUID SILICONE COATING TO ROOF PER MANUFACTURERS INSTRUCTIONS.
099113.02	PRIME AND PAINT EXISTING PRECAST CANOPY.
107316.01	PRE-MANUFACTURED METAL CANOPY

DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

KEY PLAN

SCALE

SCALE: 1/4" = 1' - 0"

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY TF

APPROVED BY RW

CHECKED BY Checker

DATE 08.26.2026


TITLE

ROOF PLAN

PROJECT NO. 50165756

A-121

SHEET NO.

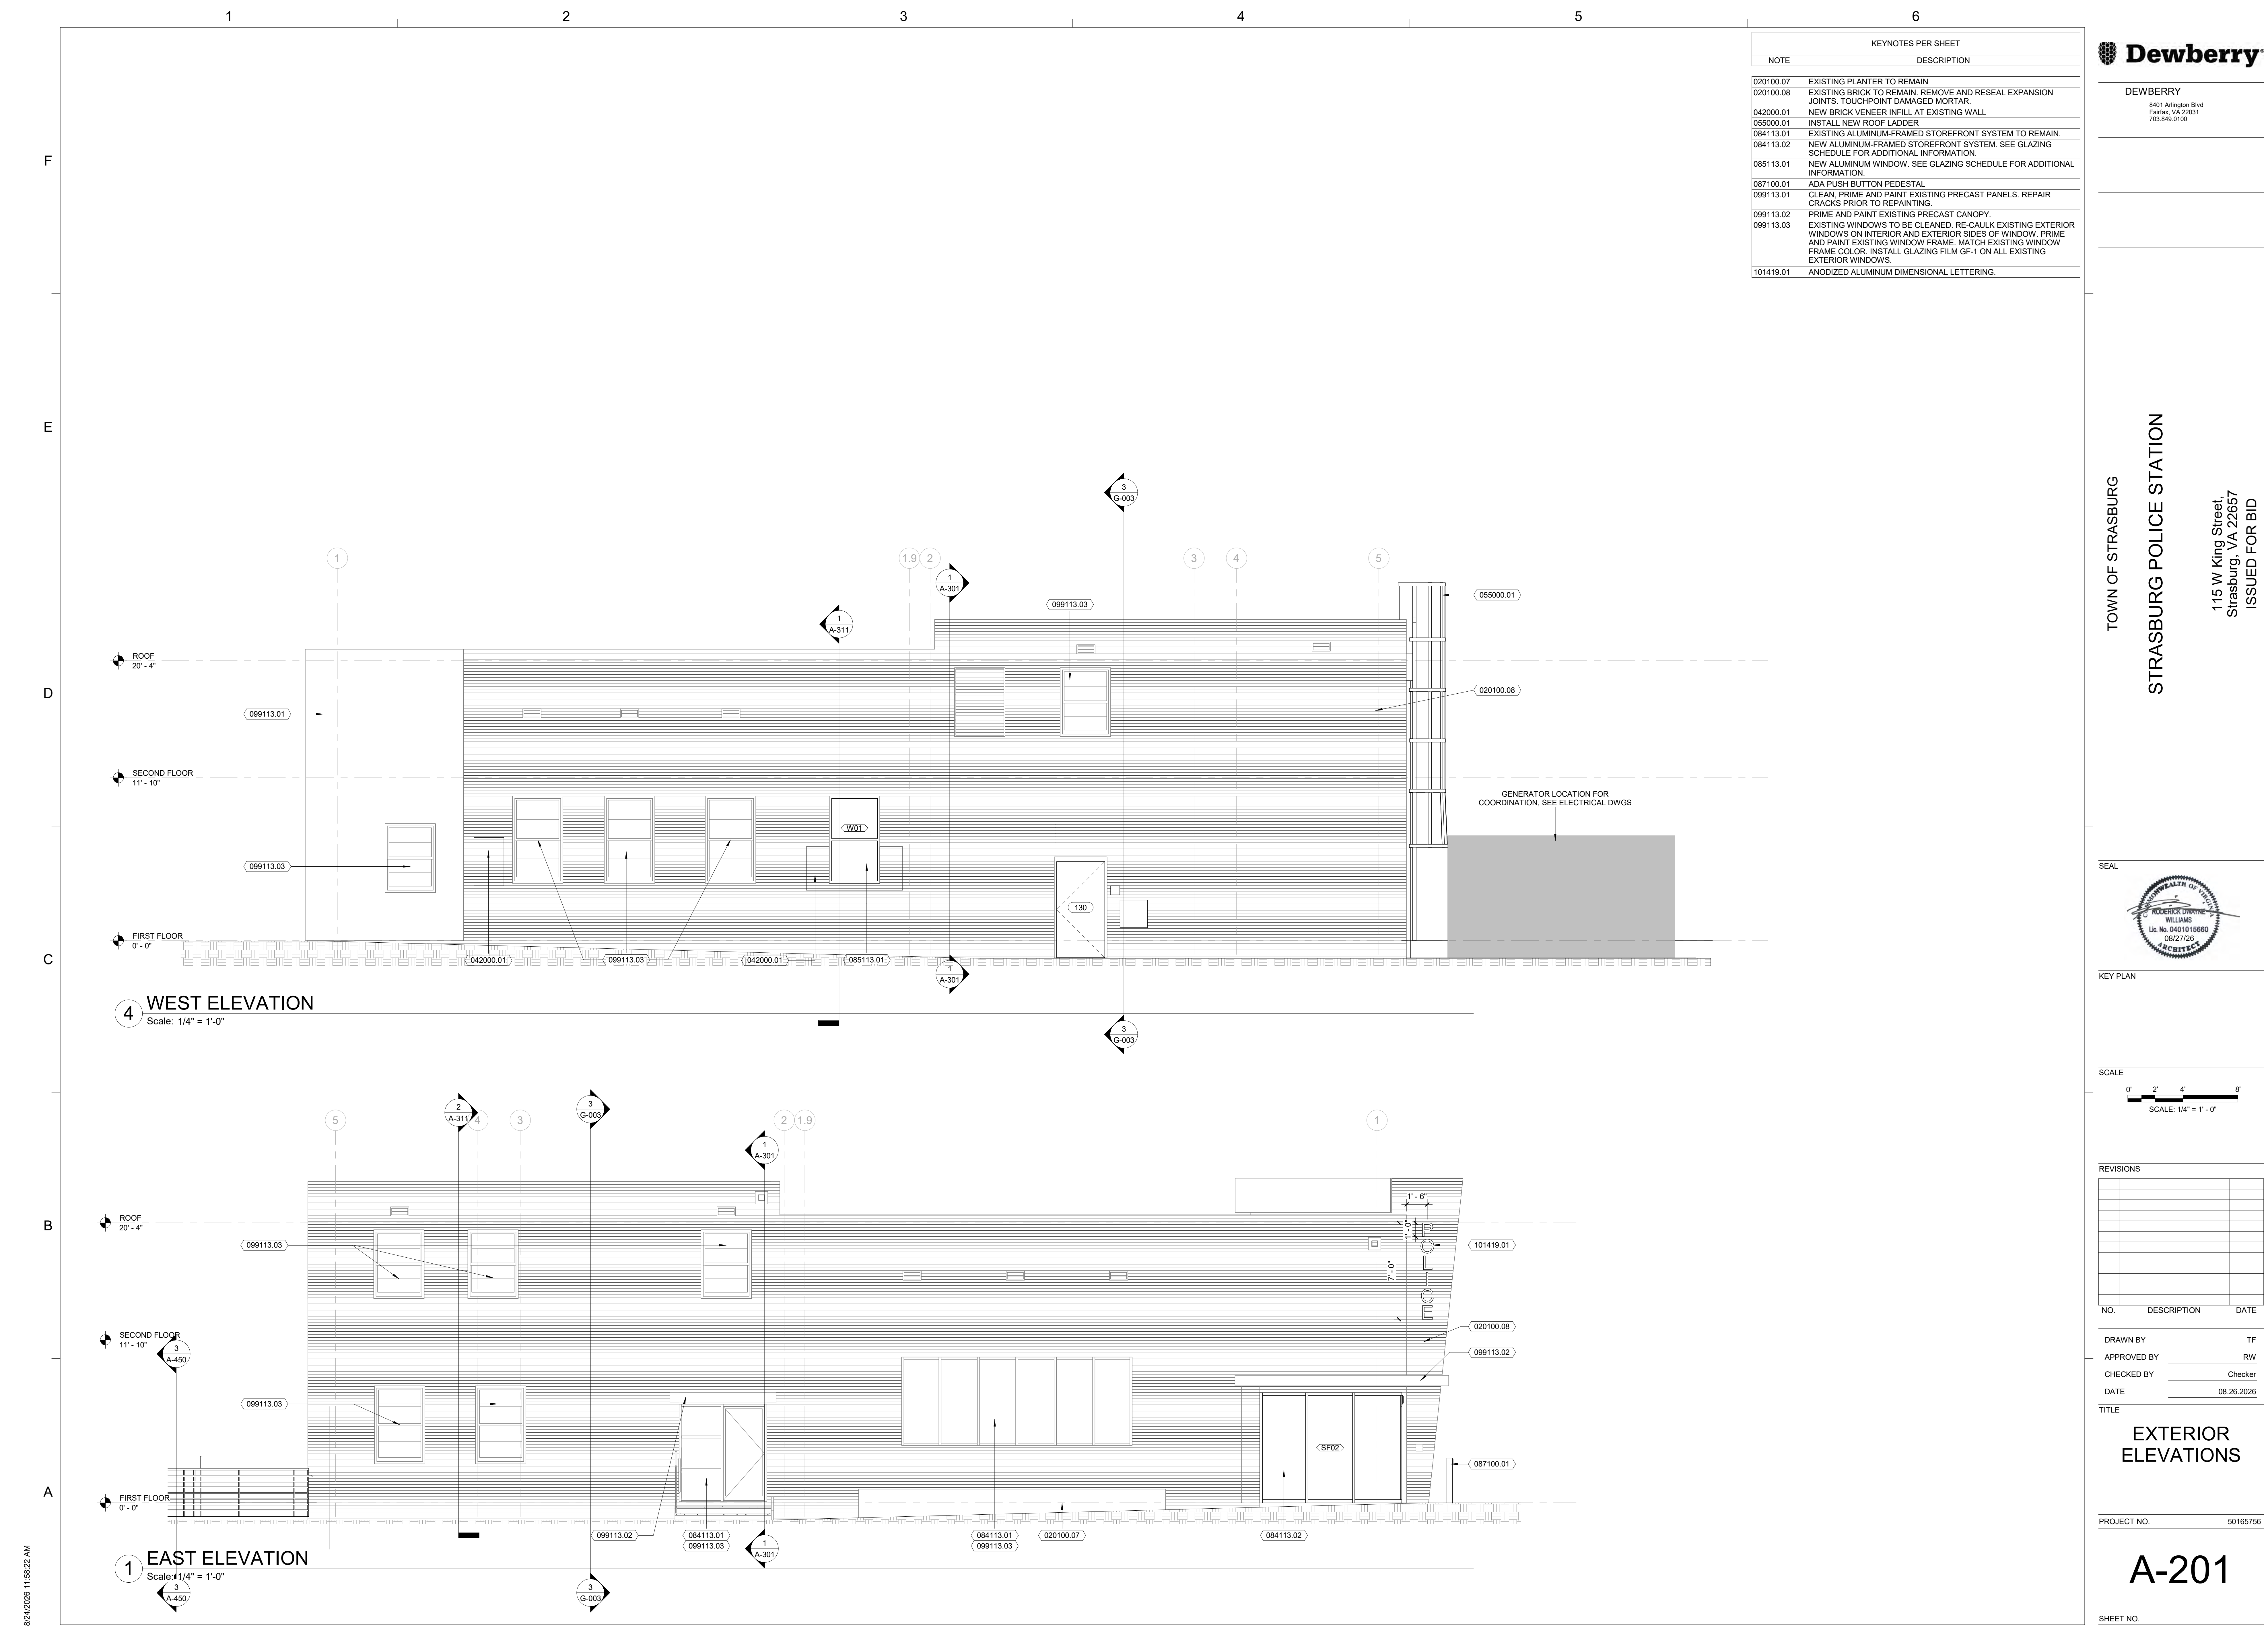

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
020100.07	EXISTING PLANTER TO REMAIN
020100.08	EXISTING BRICK TO REMAIN. REMOVE AND RESEAL EXPANSION JOINTS. TOUCH-POINT DAMAGED MORTAR.
042000.01	NEW BRICK VENEER INFILL AT EXISTING WALL.
055000.01	INSTALL NEW ROOF LADDER.
084113.01	EXISTING ALUMINUM-FRAMED STOREFRONT SYSTEM TO REMAIN.
084113.02	NEW ALUMINUM-FRAMED STOREFRONT SYSTEM. SEE GLAZING SCHEDULE FOR ADDITIONAL INFORMATION.
085113.01	NEW ALUMINUM WINDOW. SEE GLAZING SCHEDULE FOR ADDITIONAL INFORMATION.
087100.01	ADA PUSH BUTTON PEDESTAL
099113.01	CLEAN, PRIME AND PAINT EXISTING PRECAST PANELS. REPAIR CRACKS PRIOR TO REPAINTING.
099113.02	PRIME AND PAINT EXISTING PRECAST CANOPY.
099113.03	EXISTING WINDOWS TO BE CLEANED. RE-CAULK EXISTING EXTERIOR WINDOWS ON INTERIOR AND EXTERIOR SIDES OF WINDOW. PRIME AND PAINT EXISTING WINDOW FRAME. MATCH EXISTING WINDOW FRAME COLOR. INSTALL GLAZING FILM GF-1 ON ALL EXISTING EXTERIOR WINDOWS.
101419.01	ANODIZED ALUMINUM DIMENSIONAL LETTERING.




DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

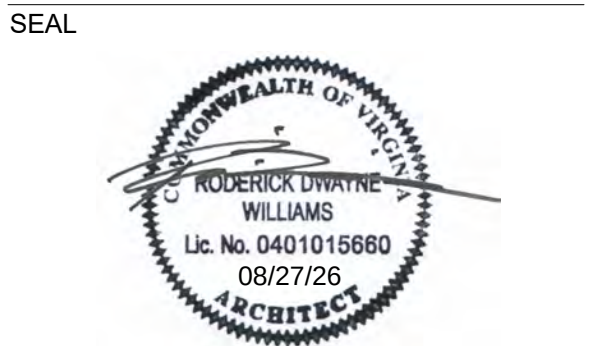

KEY PLAN

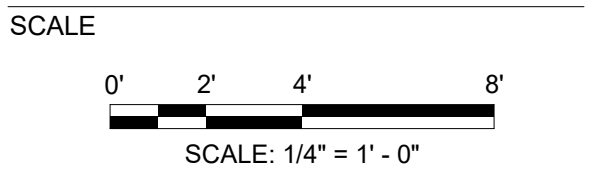

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY _____ TF

APPROVED BY _____ RW

CHECKED BY _____ Checker

DATE _____ 08.26.2026

TITLE

EXTERIOR ELEVATIONS

PROJECT NO. 50165756

A-201

SHEET NO.

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
072000.02	R30 INSULATION



DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

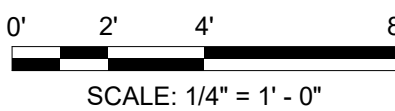

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026

TITLE

**BUILDING
SECTIONS**

PROJECT NO. 50165756

A-301

SHEET NO.

F


E

D


C

B

A

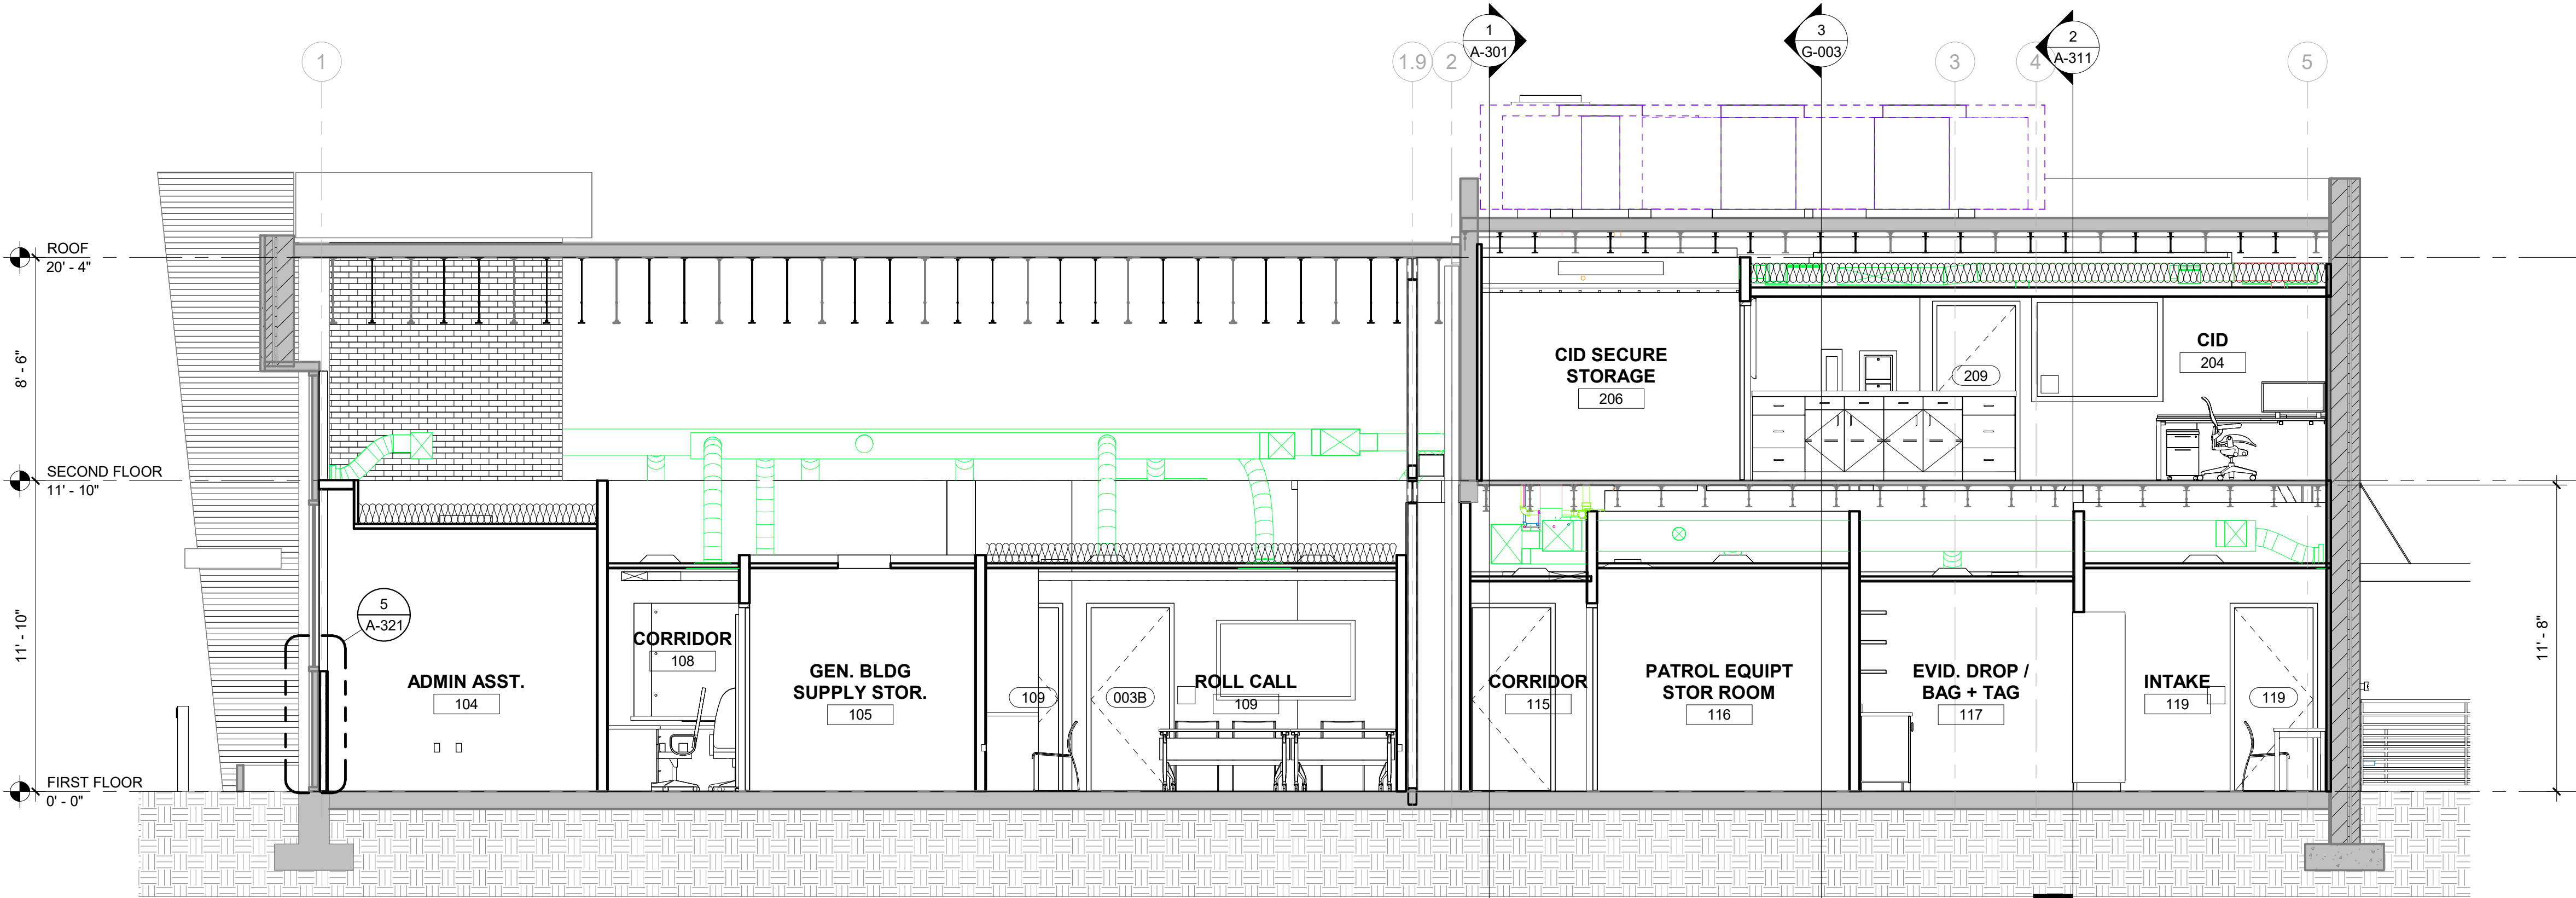

2 BUILDING SECTION - N-S
Scale: 1/4" = 1'-0"

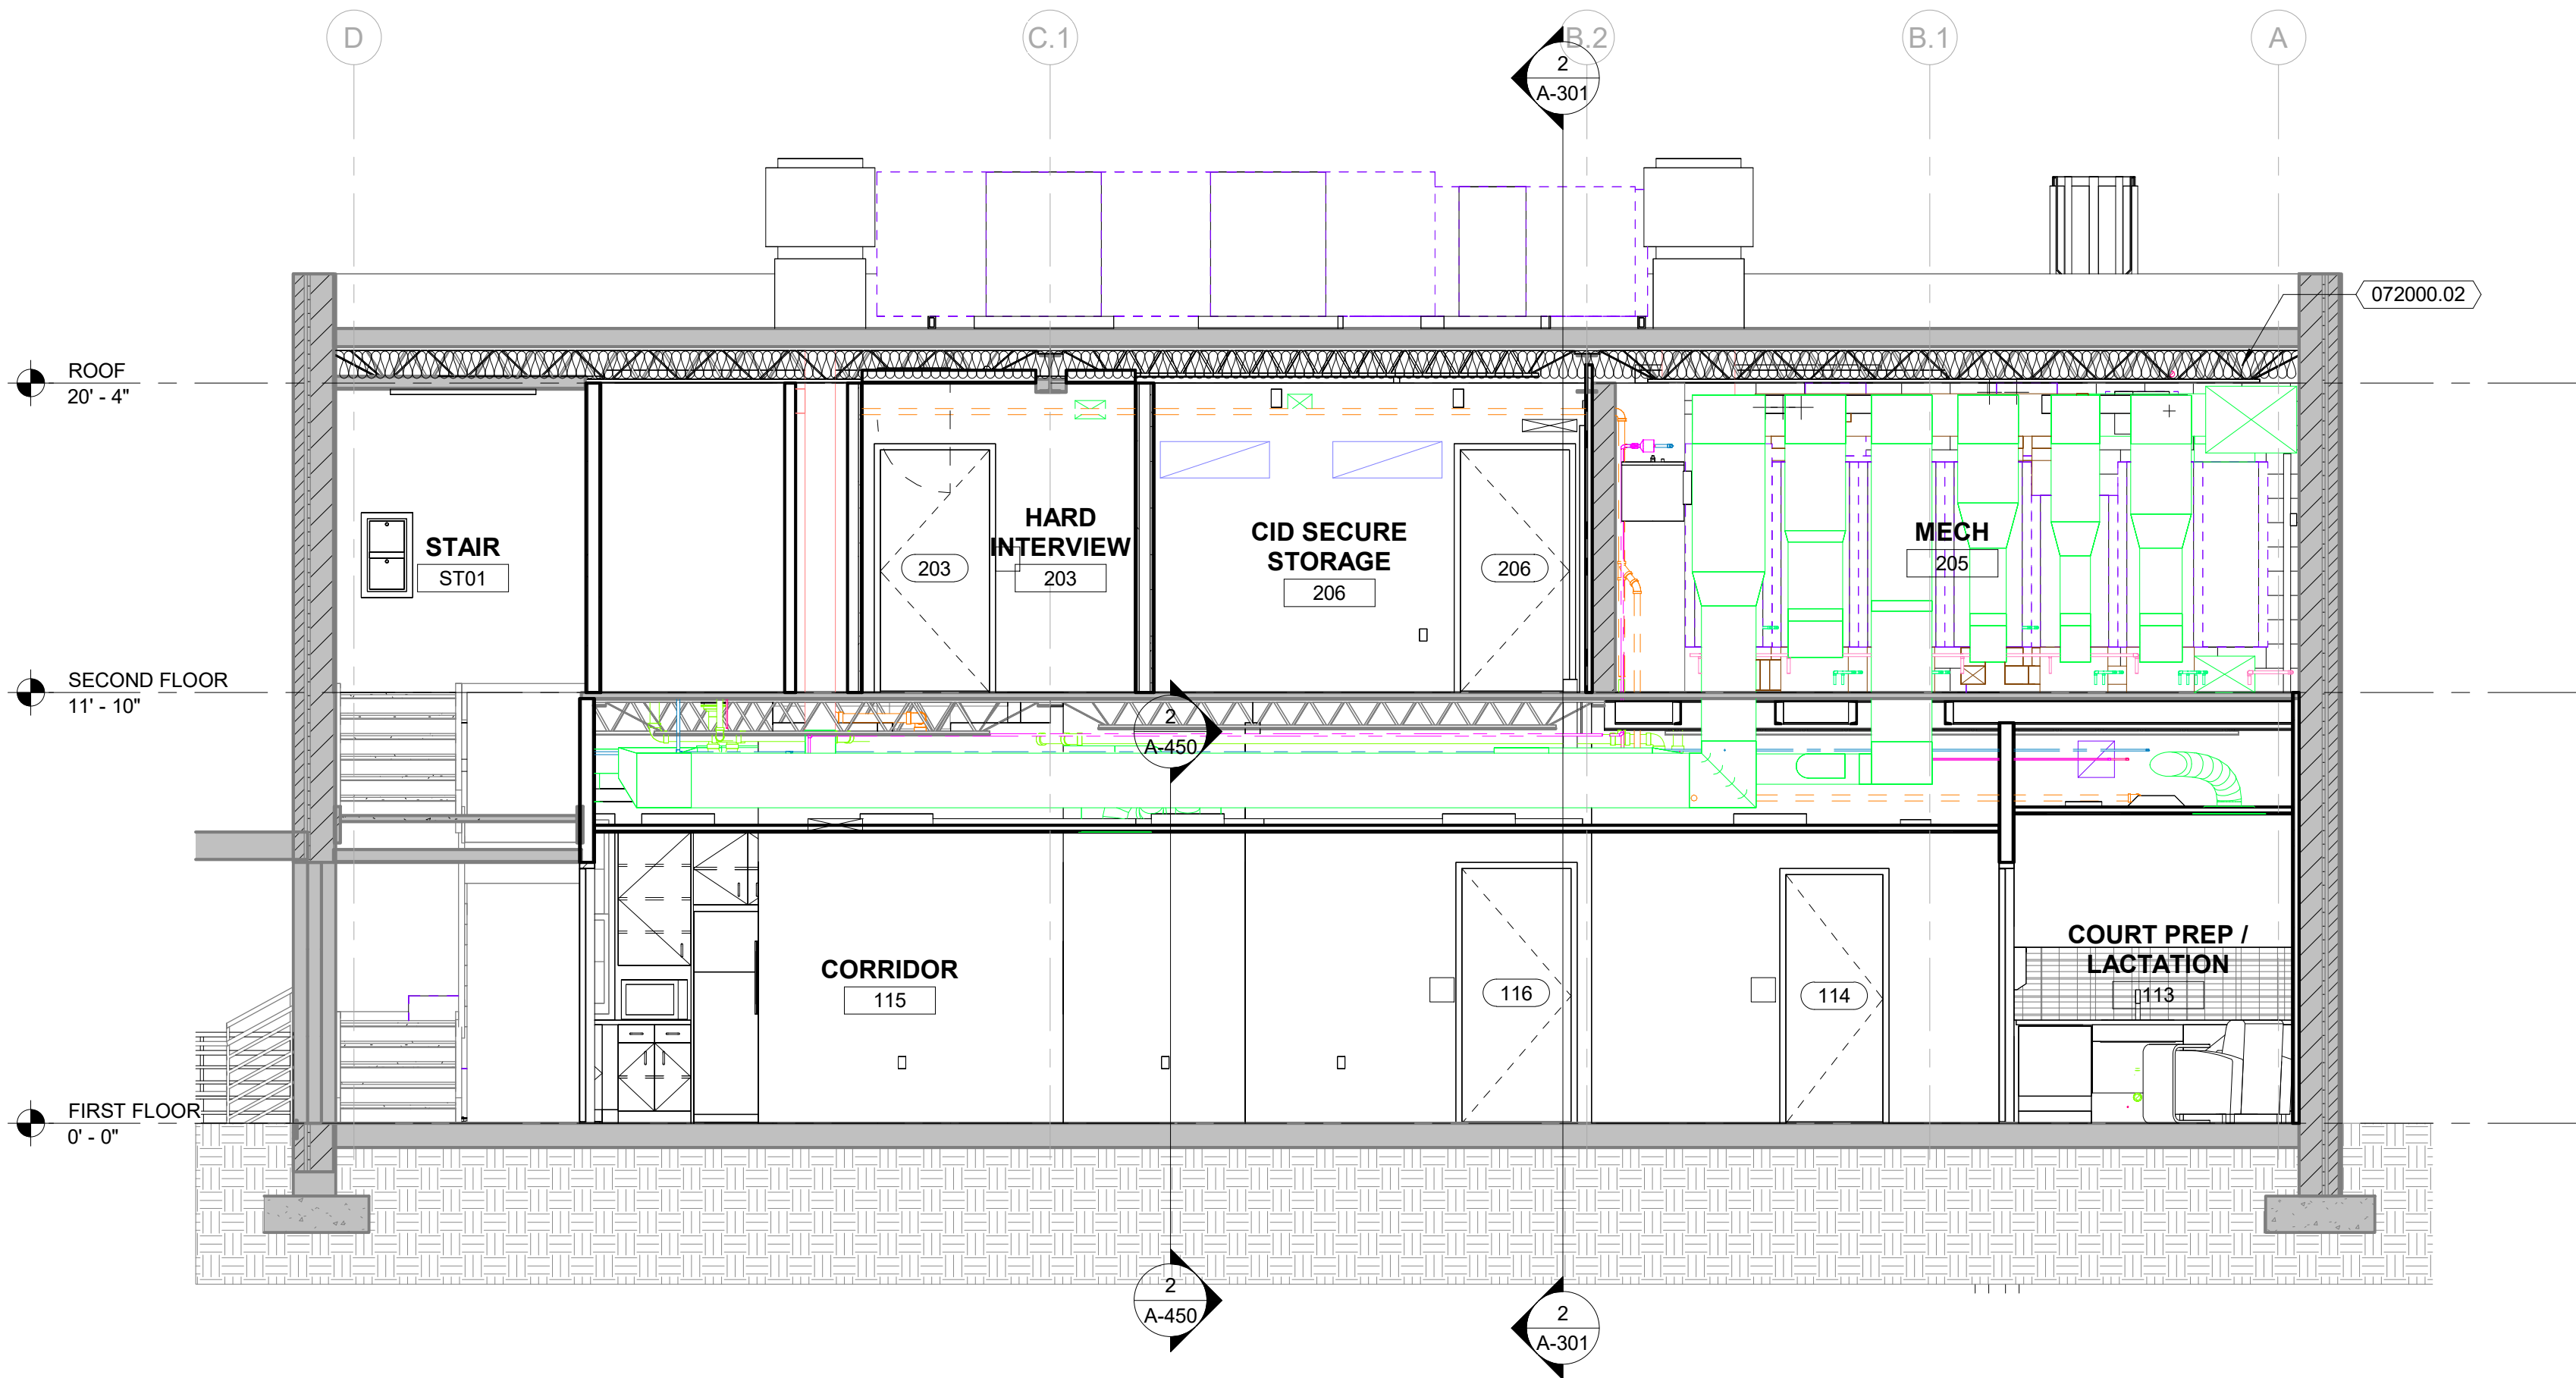

1 BUILDING SECTION - E-W
Scale: 1/4" = 1'-0"

1

2

3

4

5

6

F


E

D


C

B

A

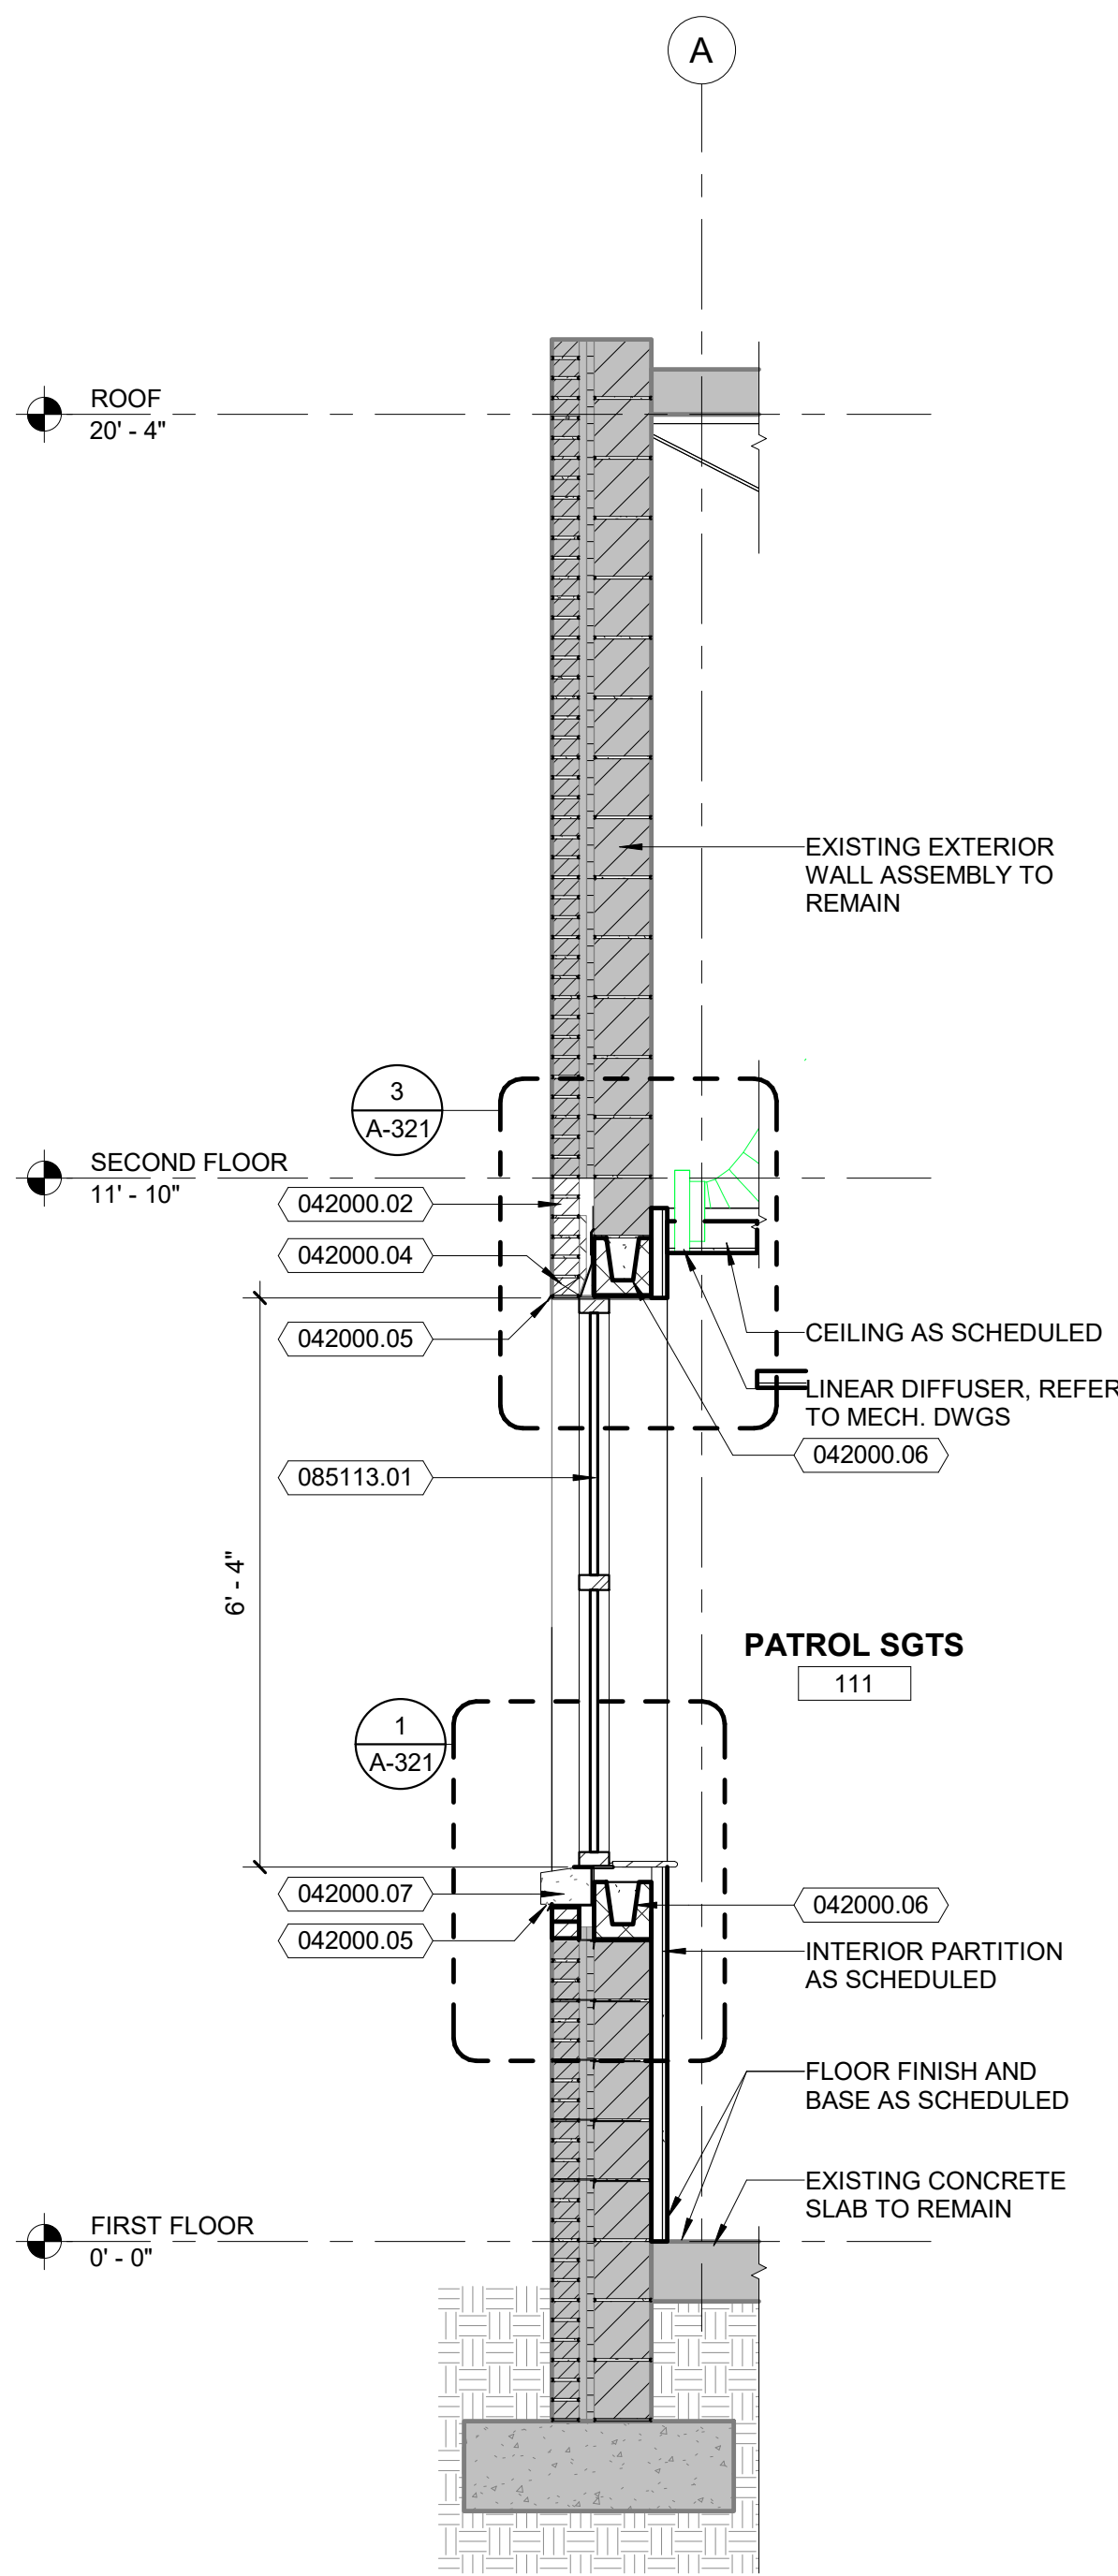

1 WALL SECTION @ EXIST. WALL
Scale: 1/2" = 1'-0" 1/A-101

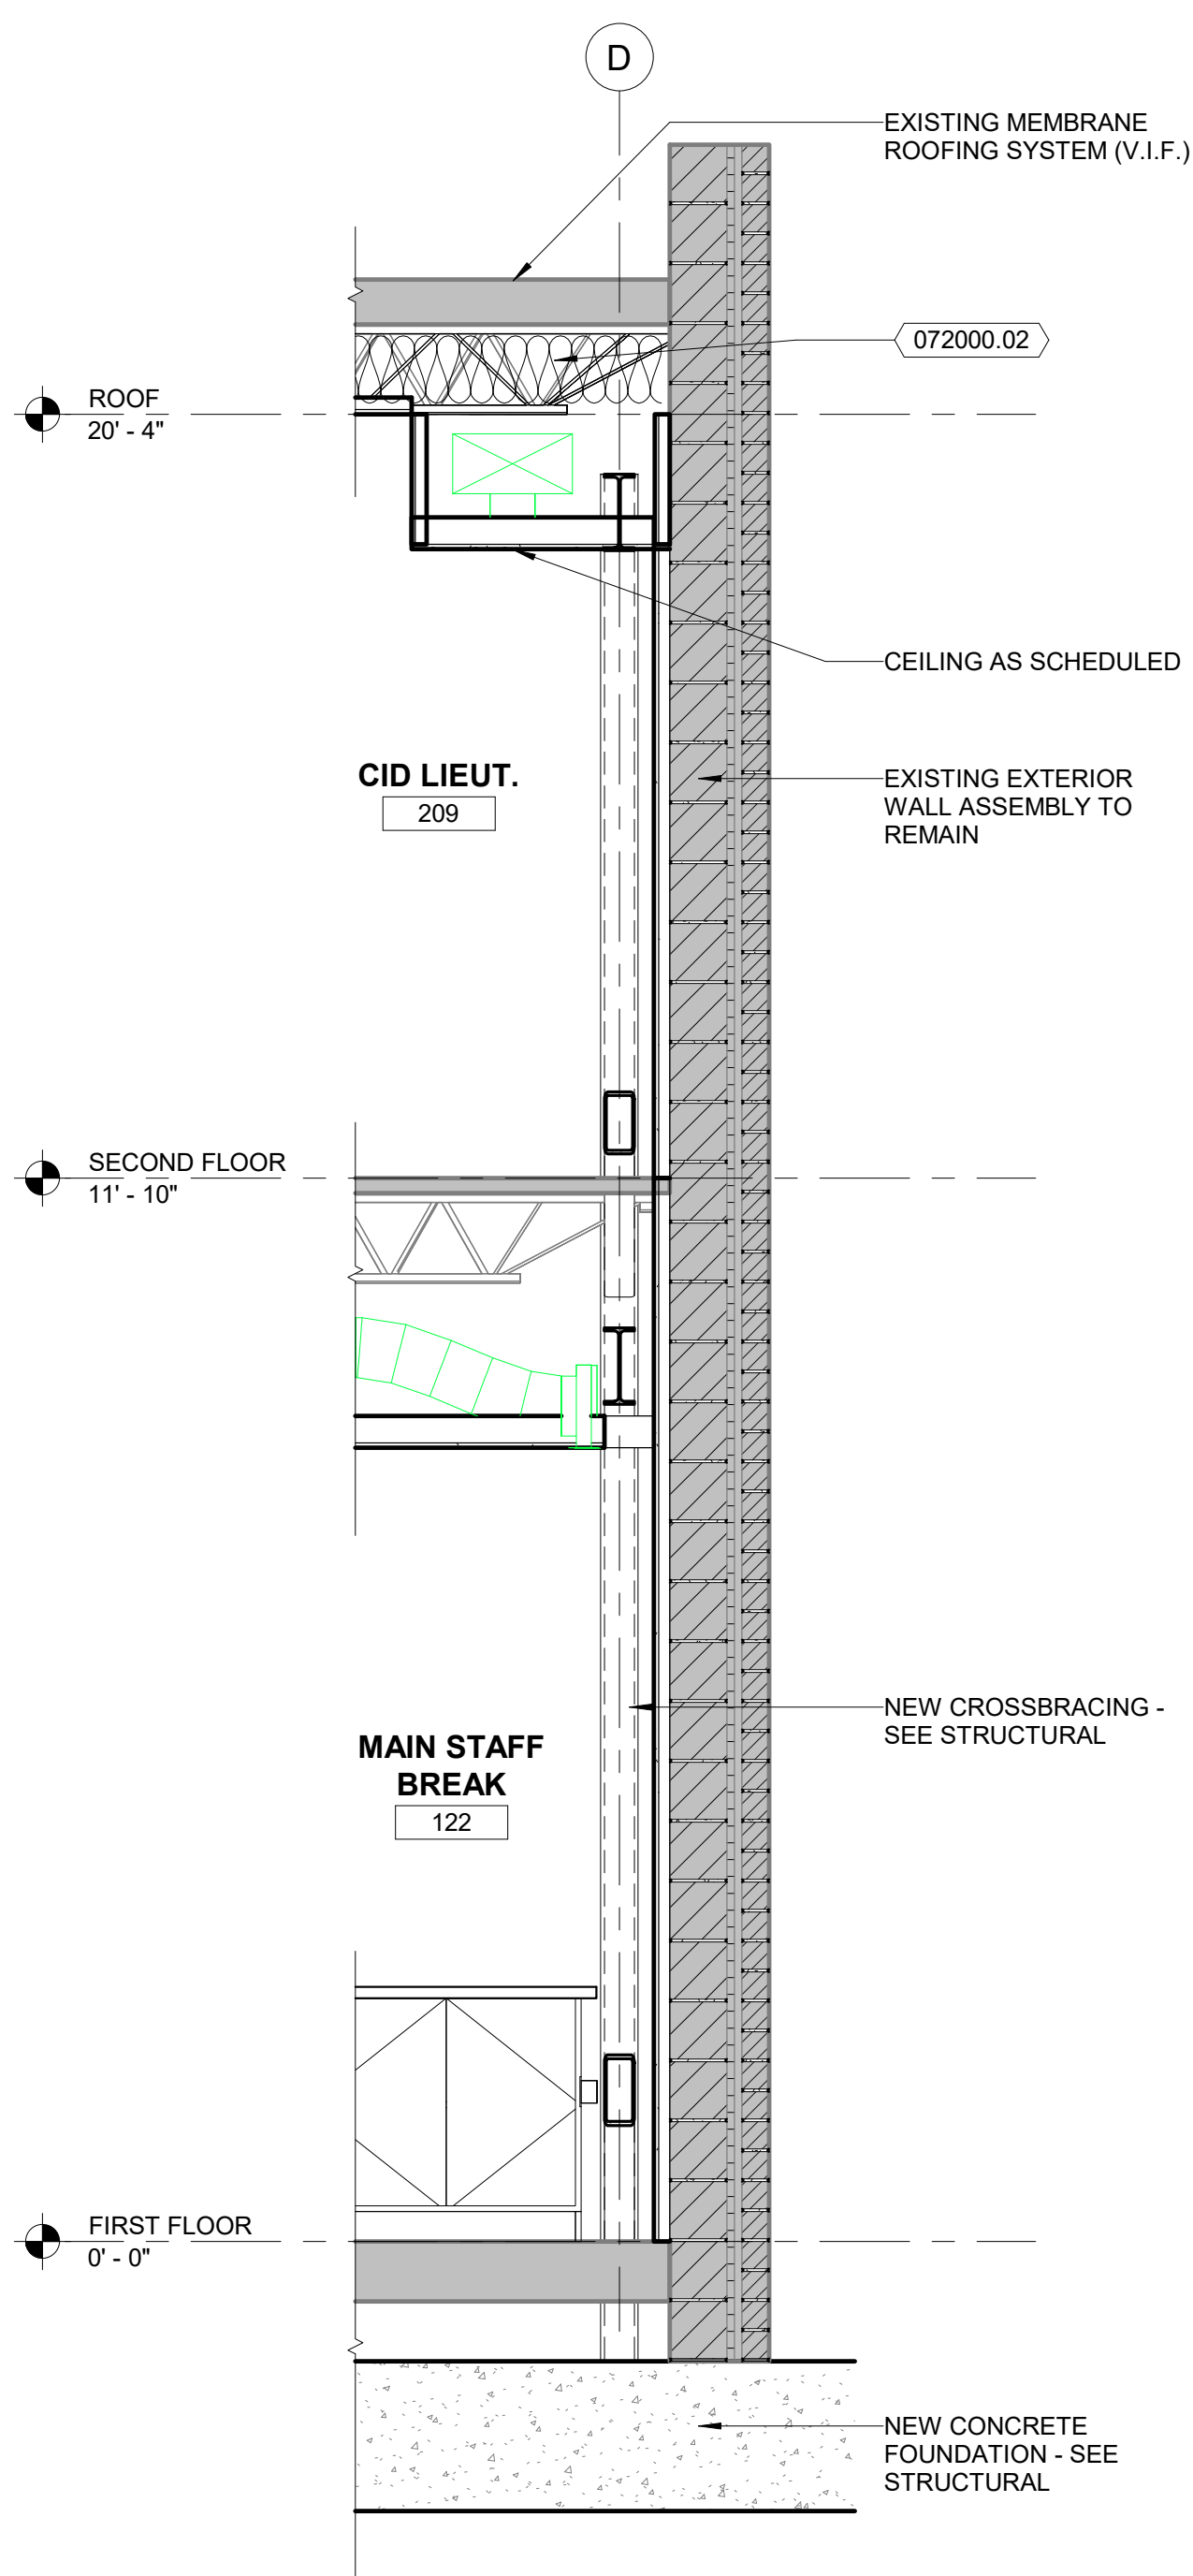

2 WALL SECTION @ EXISTING WALL
Scale: 1/2" = 1'-0"


KEYNOTES PER SHEET	
NOTE	DESCRIPTION
042000.02	NEW BRICK INFILL, TOOTH IN TO MATCH ADJACENT BRICK COURSING
042000.04	WEEP VENT @ 24" OC
042000.05	STAINLESS STEEL THROUGH-WALL FLASHING
042000.06	8" CMU BOND BEAM, SEE STRUCTURAL DRAWINGS
042000.07	CAST STONE SILL WITH DRIP EDGE
072000.02	R30 INSULATION
085113.01	NEW ALUMINUM WINDOW, SEE GLAZING SCHEDULE FOR ADDITIONAL INFORMATION.



DEWBERRY
8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

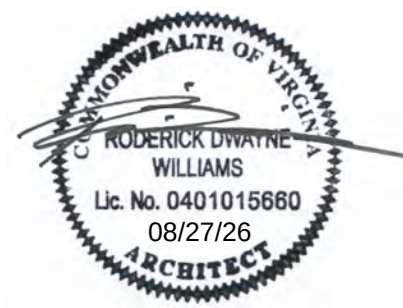

KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026
TITLE

WALL SECTIONS

PROJECT NO. 50165756

A-311

SHEET NO.

1

2

3

4

5

6

F

E

D

C

B

A



DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

KEYNOTES PER SHEET	
NOTE	DESCRIPTION
042000.02	NEW BRICK INFILL, TOOTH IN TO MATCH ADJACENT BRICK COURSING
042000.03	CAVITY DRAINAGE MESH
042000.04	WEEP VENT @ 24" OC
042000.05	STAINLESS STEEL THROUGH-WALL FLASHING
042000.06	8" CMU BOND BEAM. SEE STRUCTURAL DRAWINGS
042000.07	CAST STONE SILL WITH DRIP EDGE
042000.08	TURN END BRICK TO CLOSE CAVITY
051200	STEEL BENT PLATE. SEE STRUCTURAL DRAWINGS. PAINT TO MATCH ADJACENT FRAME
061053.01	P.T. WOOD BLOCKING
072000	RIGID INSULATION, MATCH THICKNESS OF EXISTING INSULATION
072713	
072713.01	AIR/VAPOR BARRIER, TRANSITION STRIP TO WRAP OVER THROUGH WALL FLASHING ON TO EXISTING WALL ASSEMBLY
072713.02	AIR/VAPOR BARRIER FLASHING OVER NEW OPENING
079200.01	CONTINUOUS BACKER ROD AND SEALANT AROUND PERIMETER OF WINDOW OPENING. BACKER ROD AND SEALANT TO BE PROVIDED ON BOTH SIDES OF WINDOW OPENING.
085113.01	NEW ALUMINUM WINDOW. SEE GLAZING SCHEDULE FOR ADDITIONAL INFORMATION.

SEAL

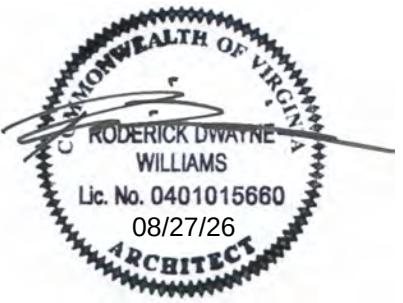

KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026


TITLE

ENLARGED PLAN
AND SECTION
DETAILS


PROJECT NO. _____ 50165756

A-321


SHEET NO.

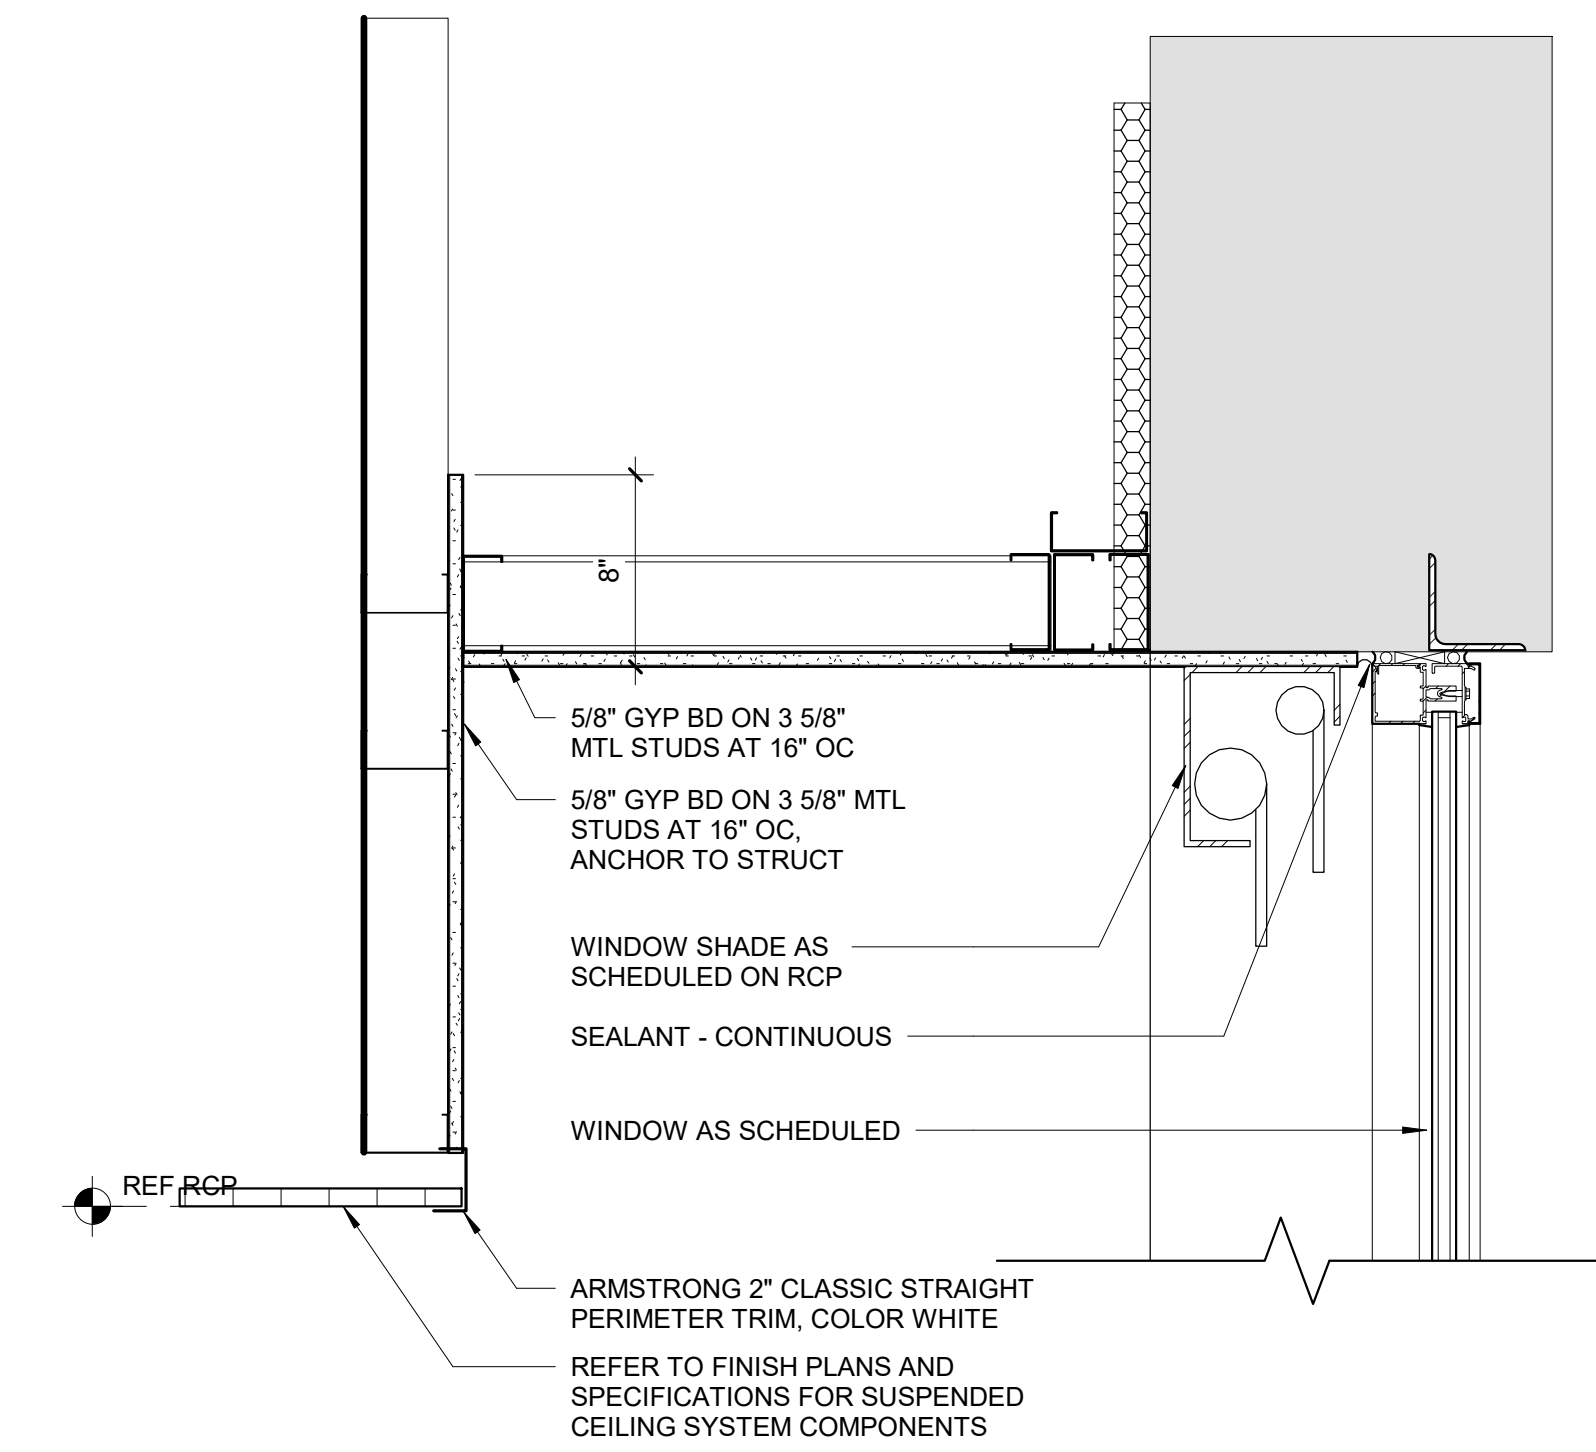


6 TRANSITION - ACT TO GYP BD CEILING
Scale: 1 1/2" = 1'-0"

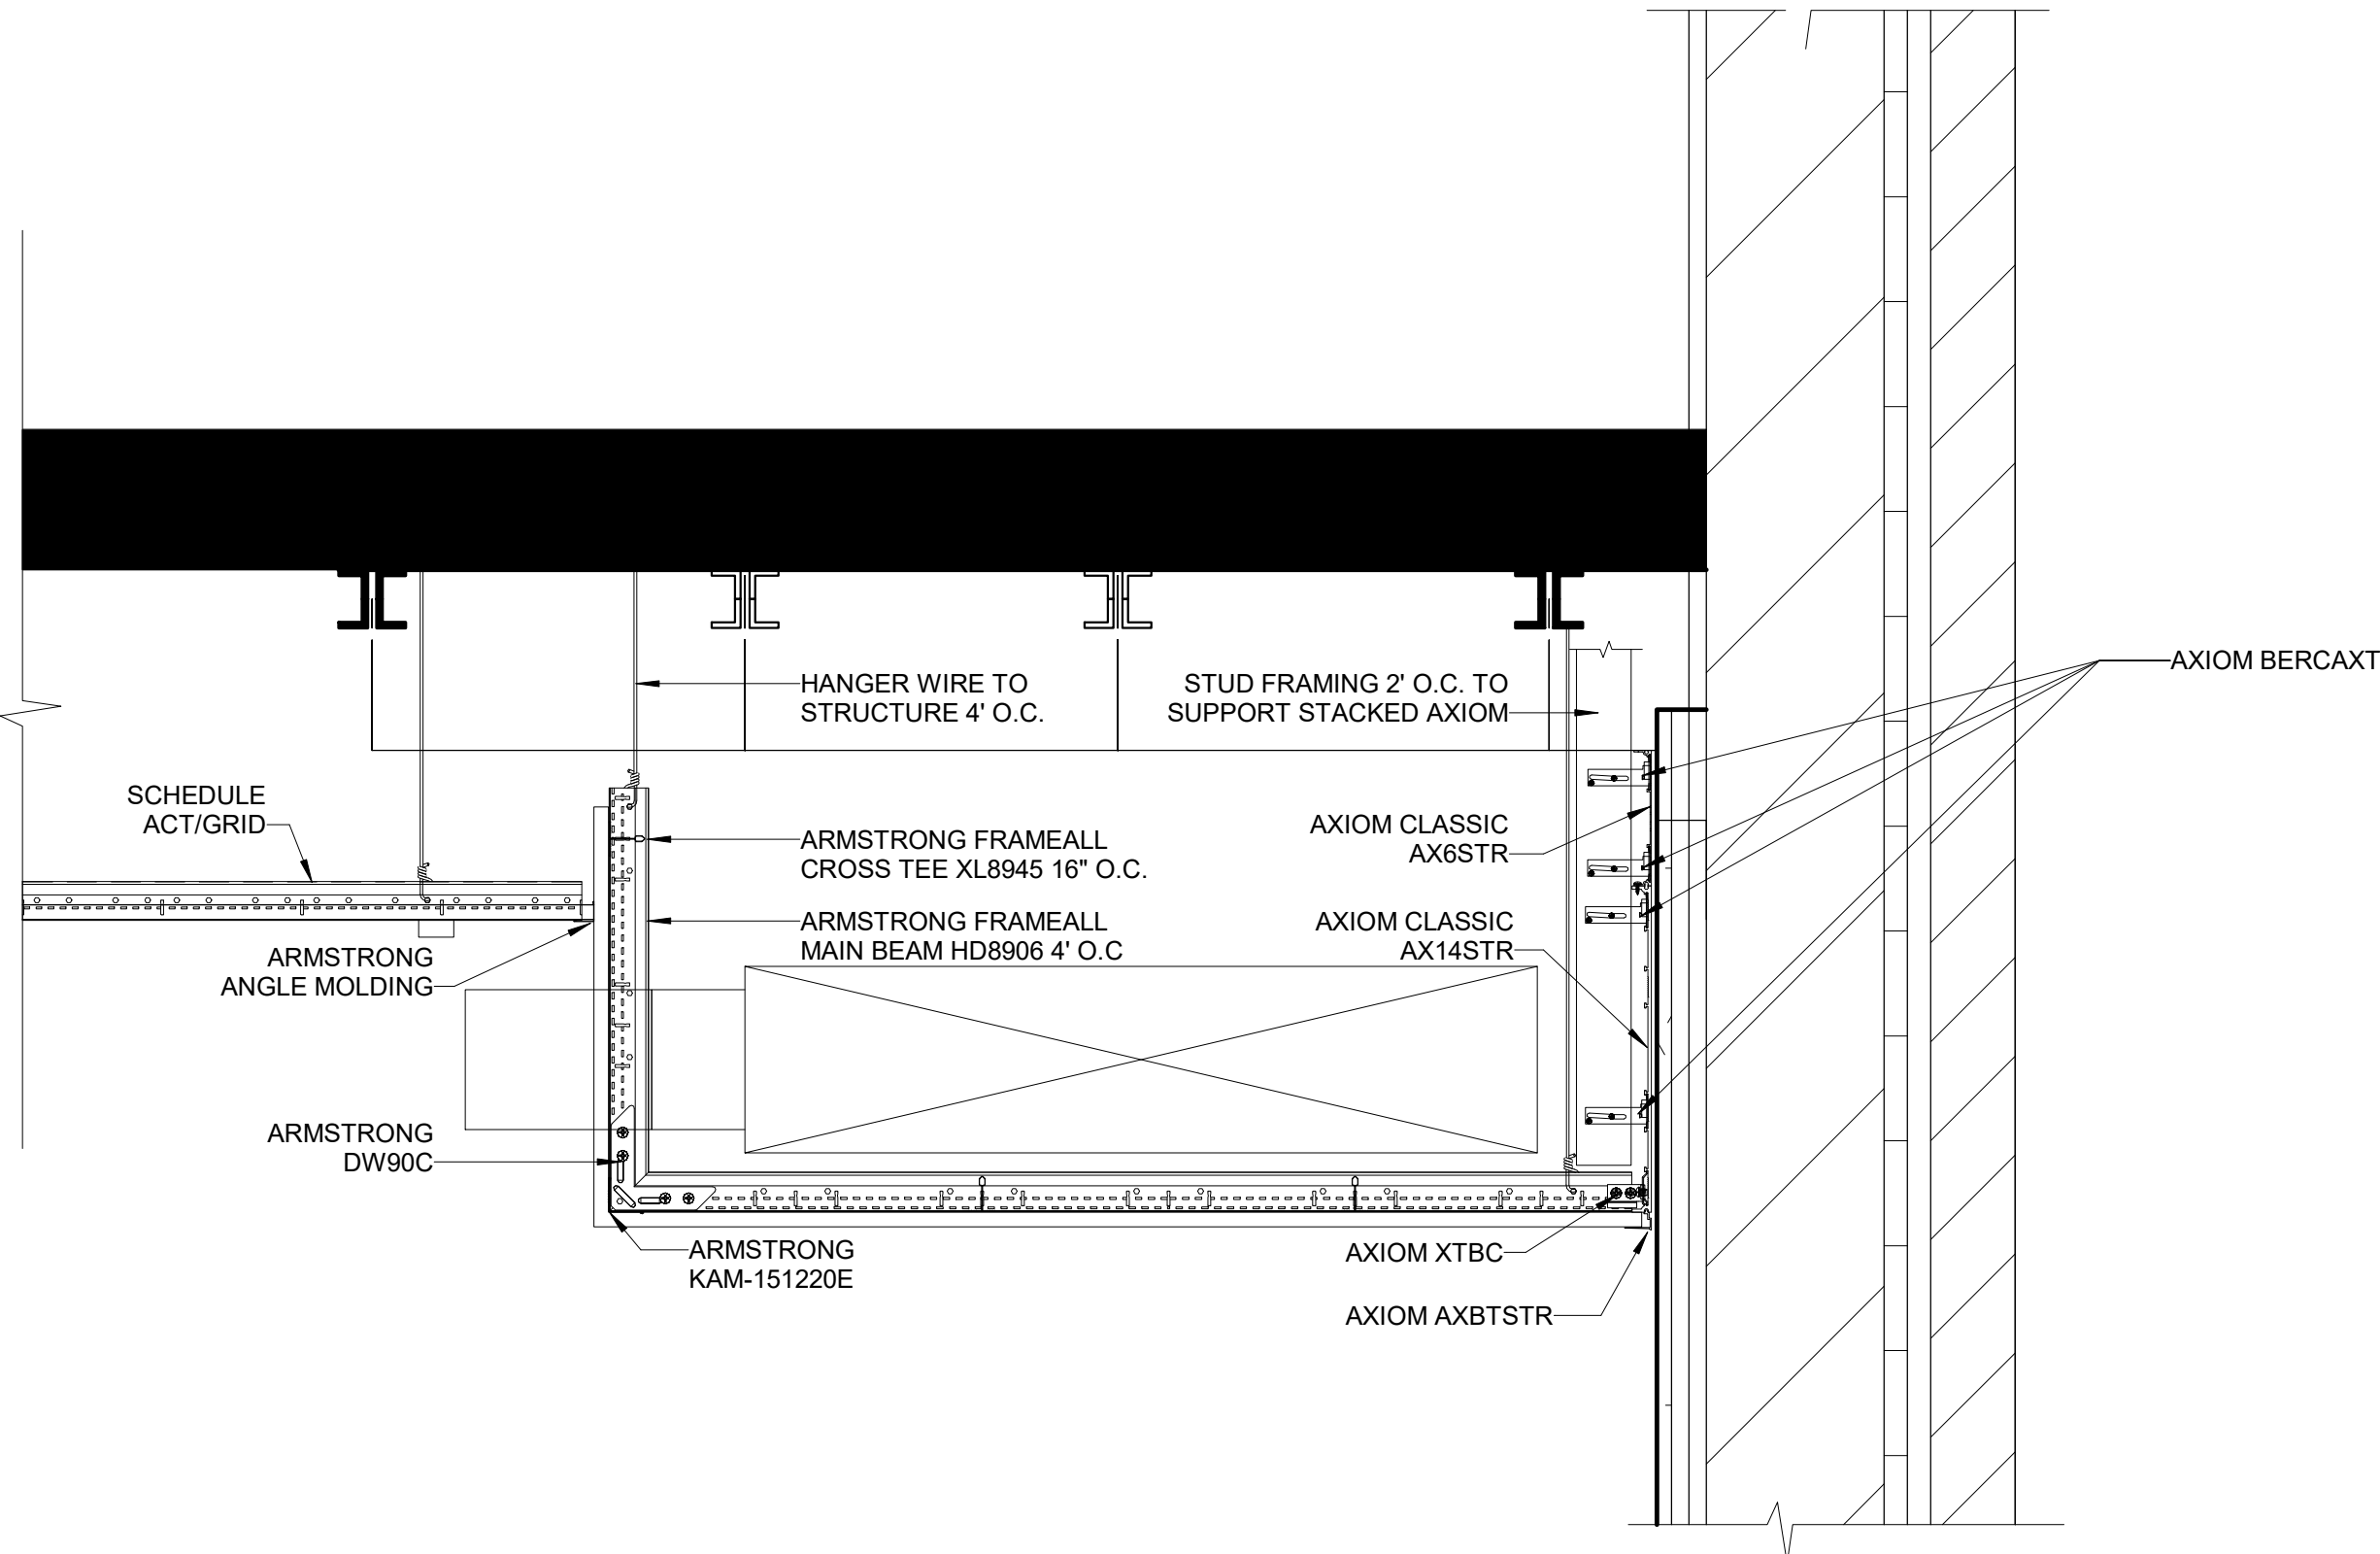


7 SECTION DTL - 2ND FLOOR CEILING
Scale: 1 1/2" = 1'-0"

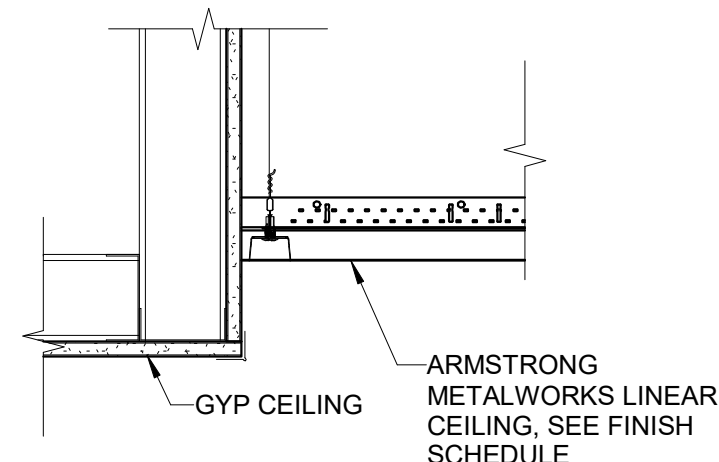


8 CEILING DTL - LOBBY
Scale: 1 1/2" = 1'-0"

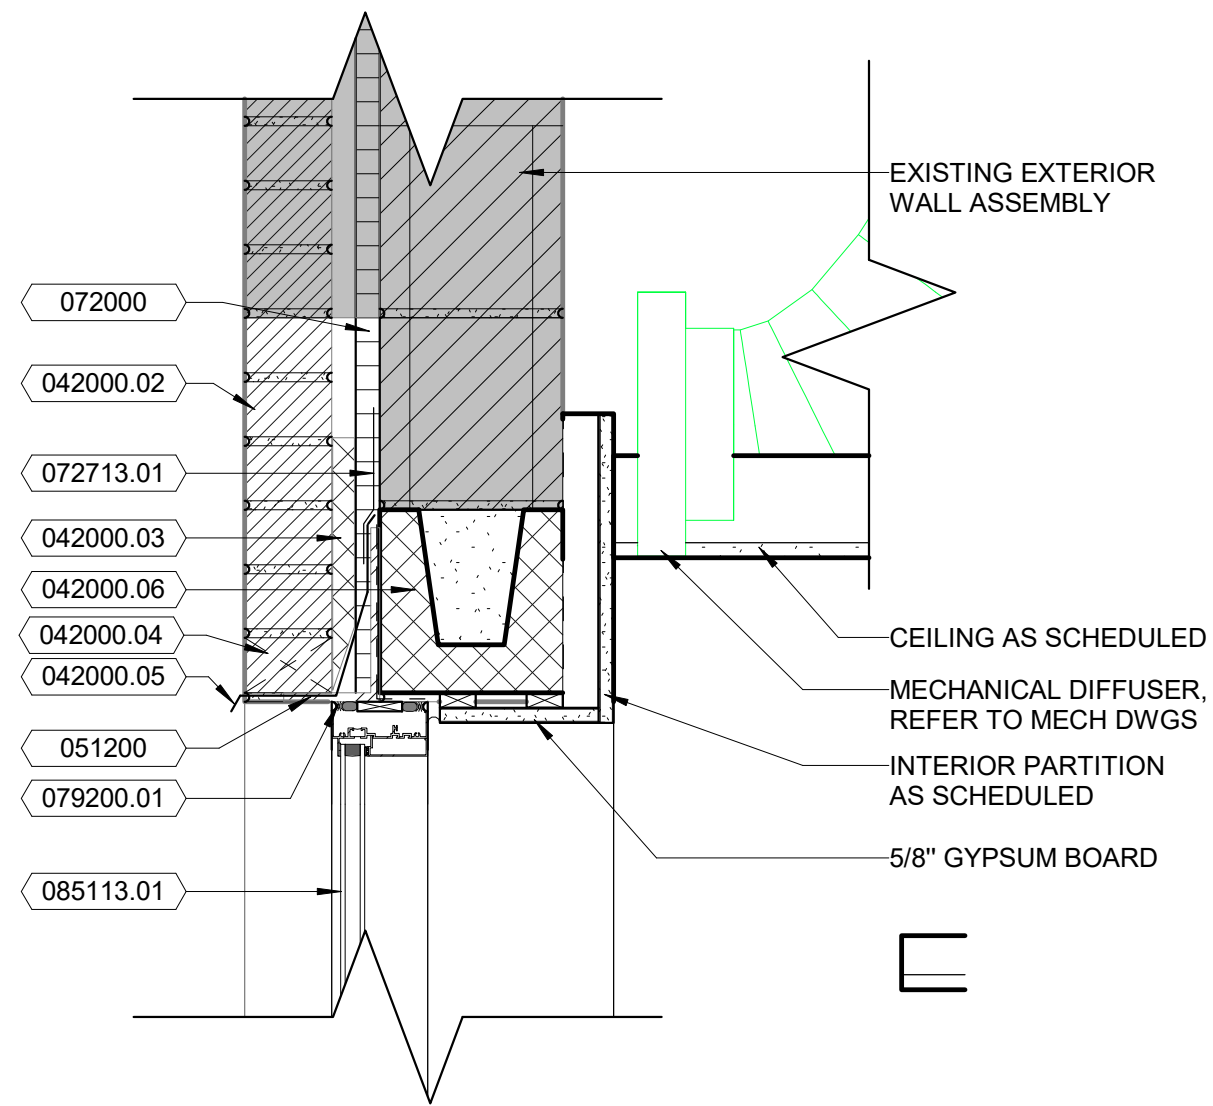


3 SECTION DTL - WINDOW HEAD
Scale: 1 1/2" = 1'-0"

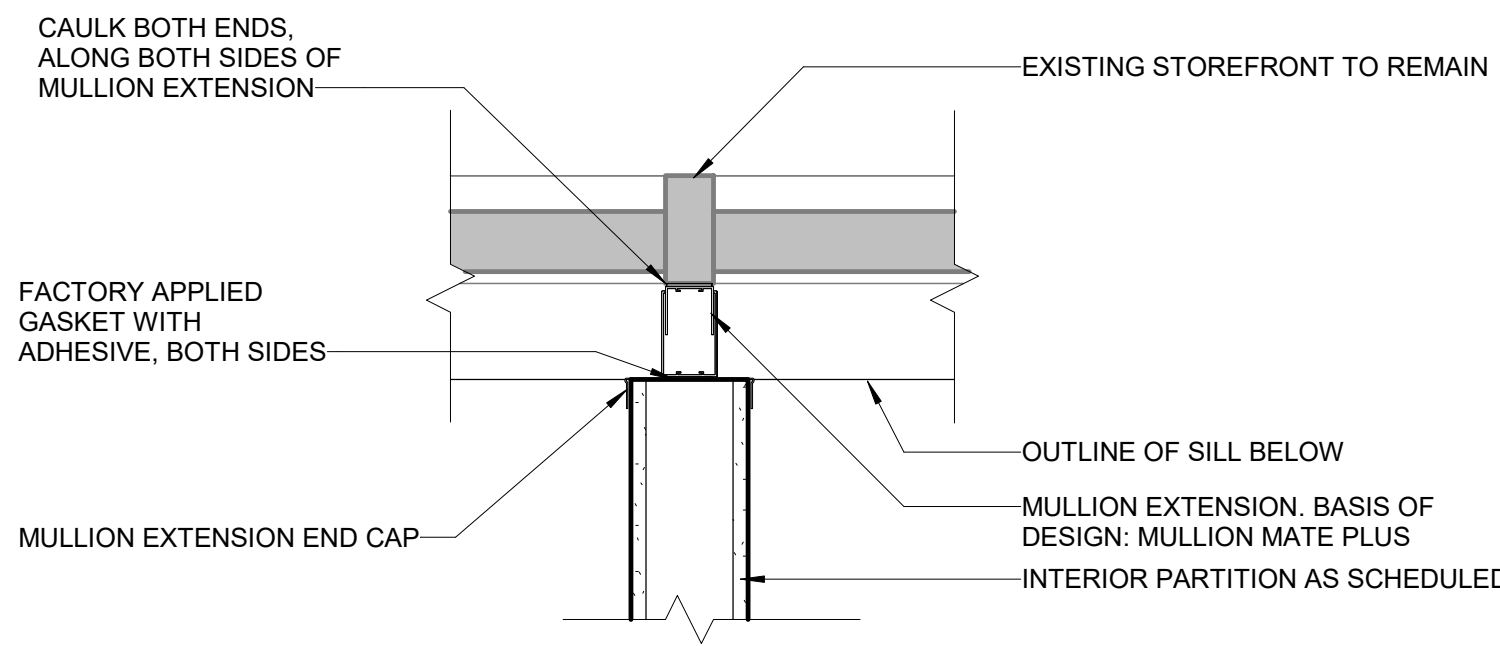


4 PLAN DTL - PARTITION TO STOREFRONT
Scale: 1 1/2" = 1'-0"

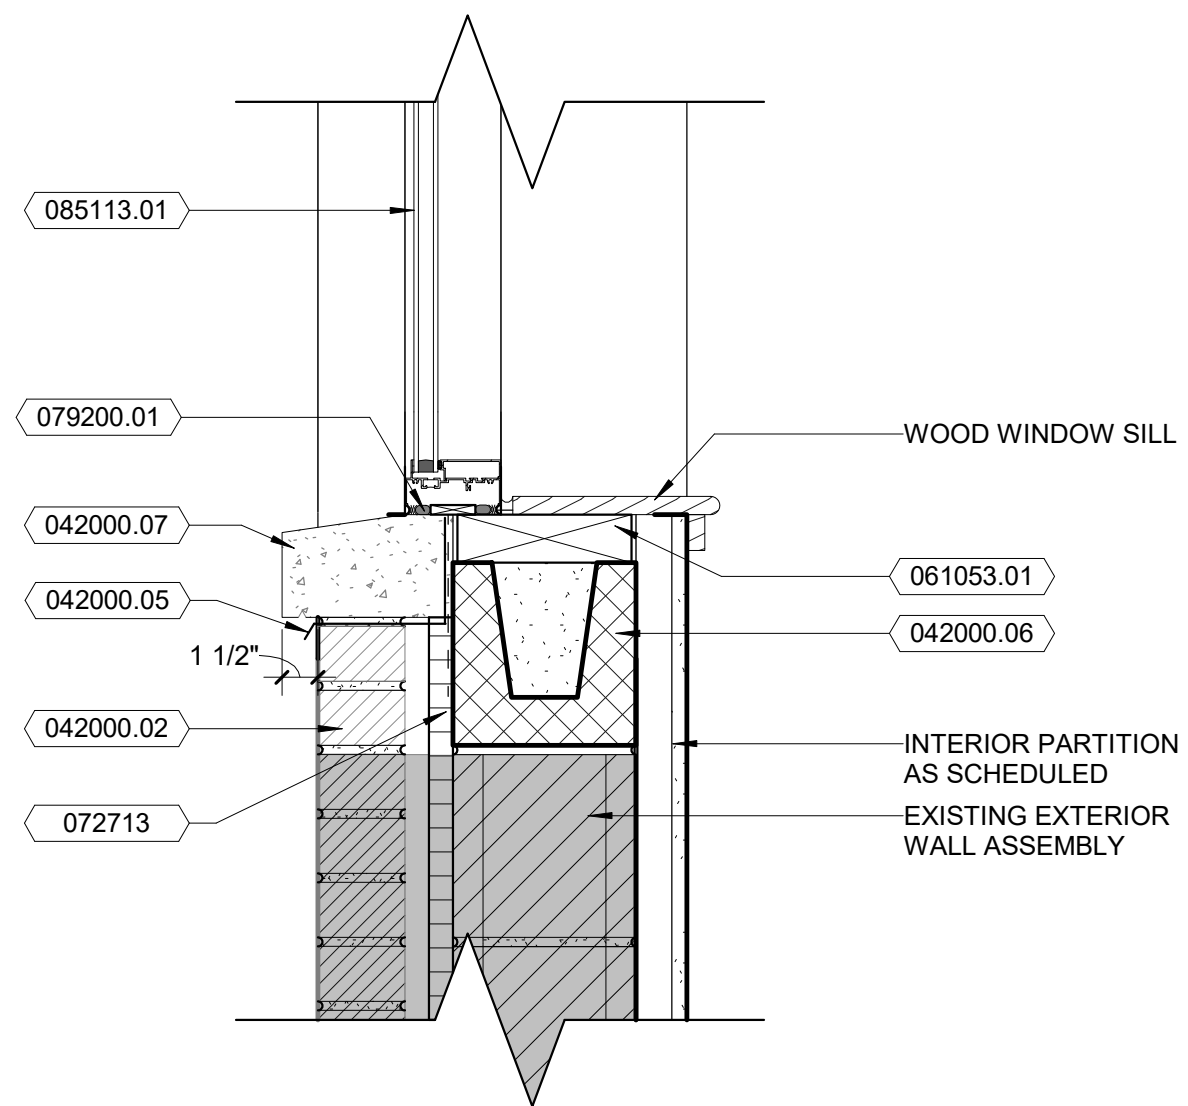

1 SECTION DTL - WINDOW SILL
Scale: 1 1/2" = 1'-0"

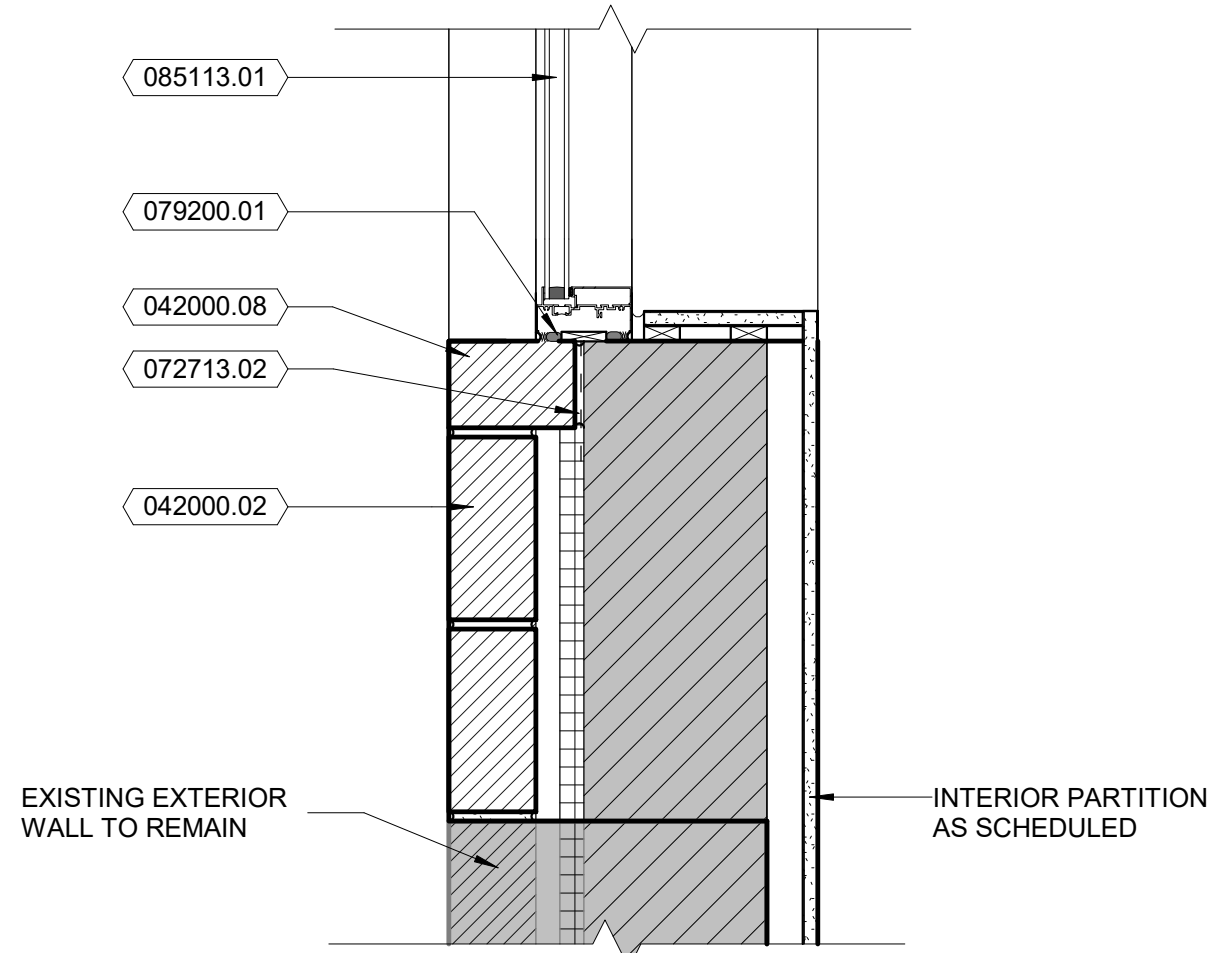

2 PLAN DTL - WINDOW JAMB
Scale: 1 1/2" = 1'-0"

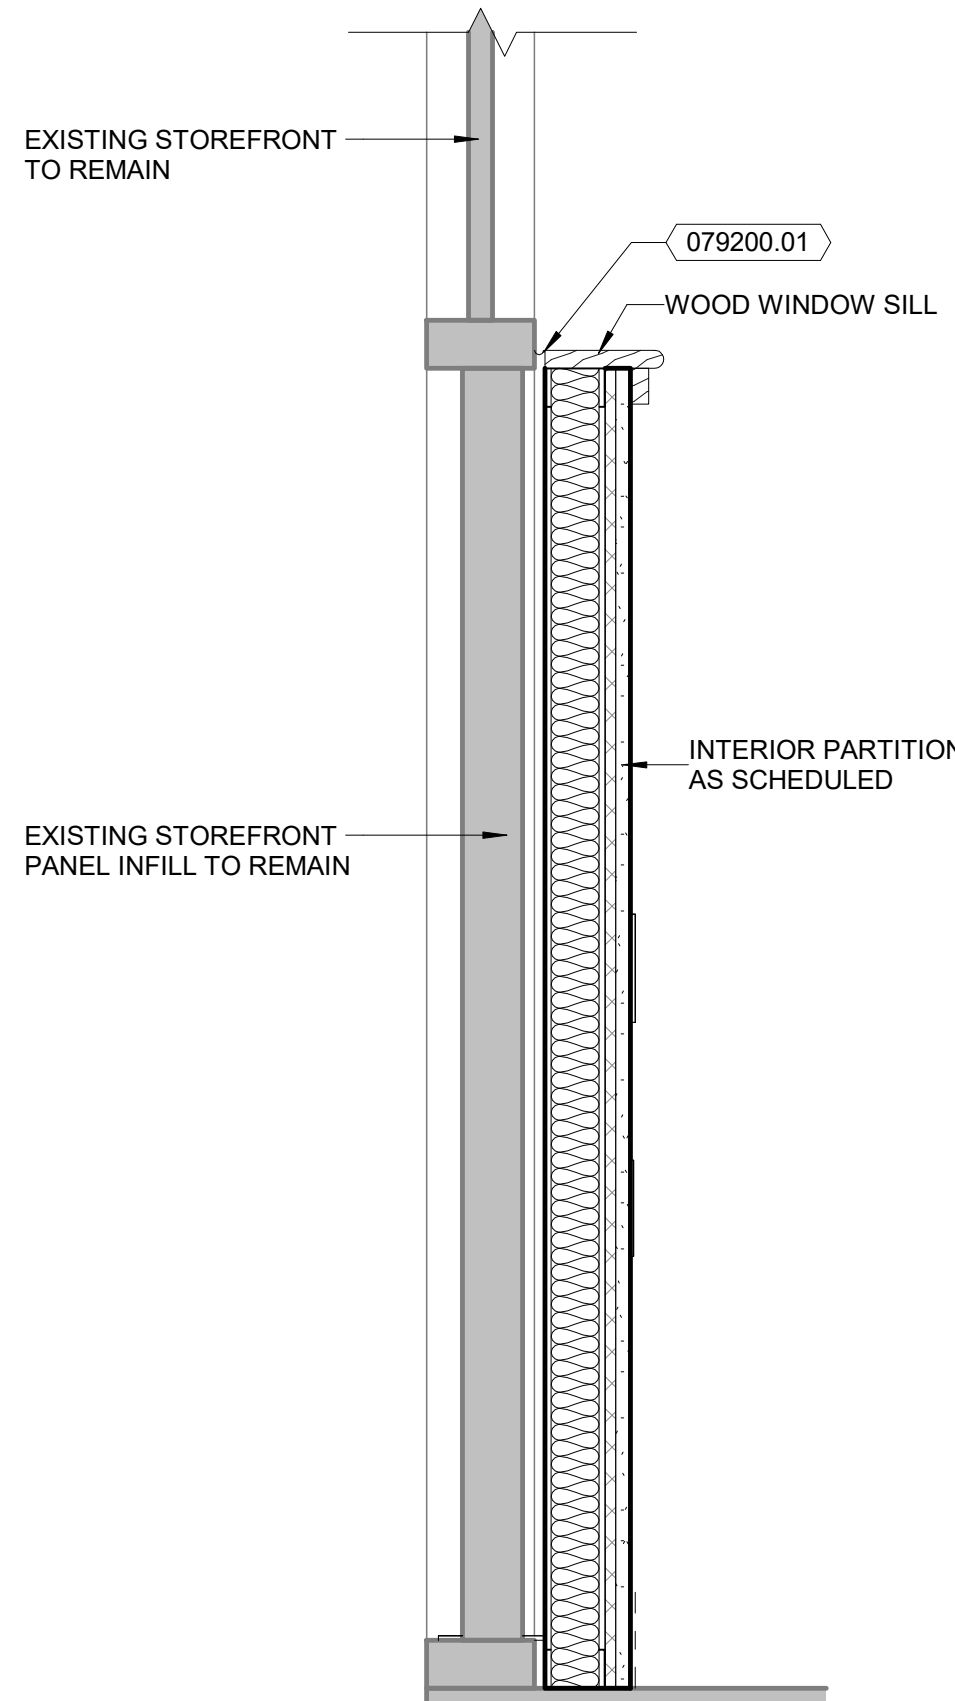

5 SECTION DTL - STOREFRONT @ NORTH ELEV
Scale: 1 1/2" = 1'-0" 1/A-101


8/24/2026 11:58:31 AM

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

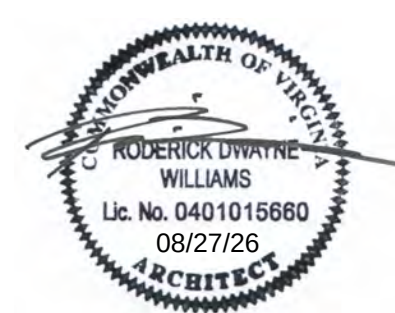

KEY PLAN

SCALE

REVISIONS

[illegible]

NO.	DESCRIPTION	DATE
DRAWN BY		TF / JU
APPROVED BY		RW
CHECKED BY		Checker
DATE		08.26.2026

TITLE

ENLARGED
PLANS &
INTERIOR
ELEVATIONS

PROJECT NO.	50165756
-------------	----------

A-411


SHEET NO.

INTERIOR ELEVATIONS GENERAL NOTES


1. REFER TO SHEET A-104 FOR INTERIOR FINIHSES AND SCHEDULE.
2. REFER TO SHEET A-104 FOR PT-4, PT-5 & PT-6 TILE LAYING PATTERN
3. REFER TO SHEET A-104 FOR TRANSITION DETAILS.
4. REFER TO SHEETS A-431 & A-432 FOR MILLWORK DETAILS.
5. REFER TO SHEET A-411 FOR EQUIPMENT SCEDHULE.

KEYNOTES PER SHEET


NOTE	DESCRIPTION
------	-------------

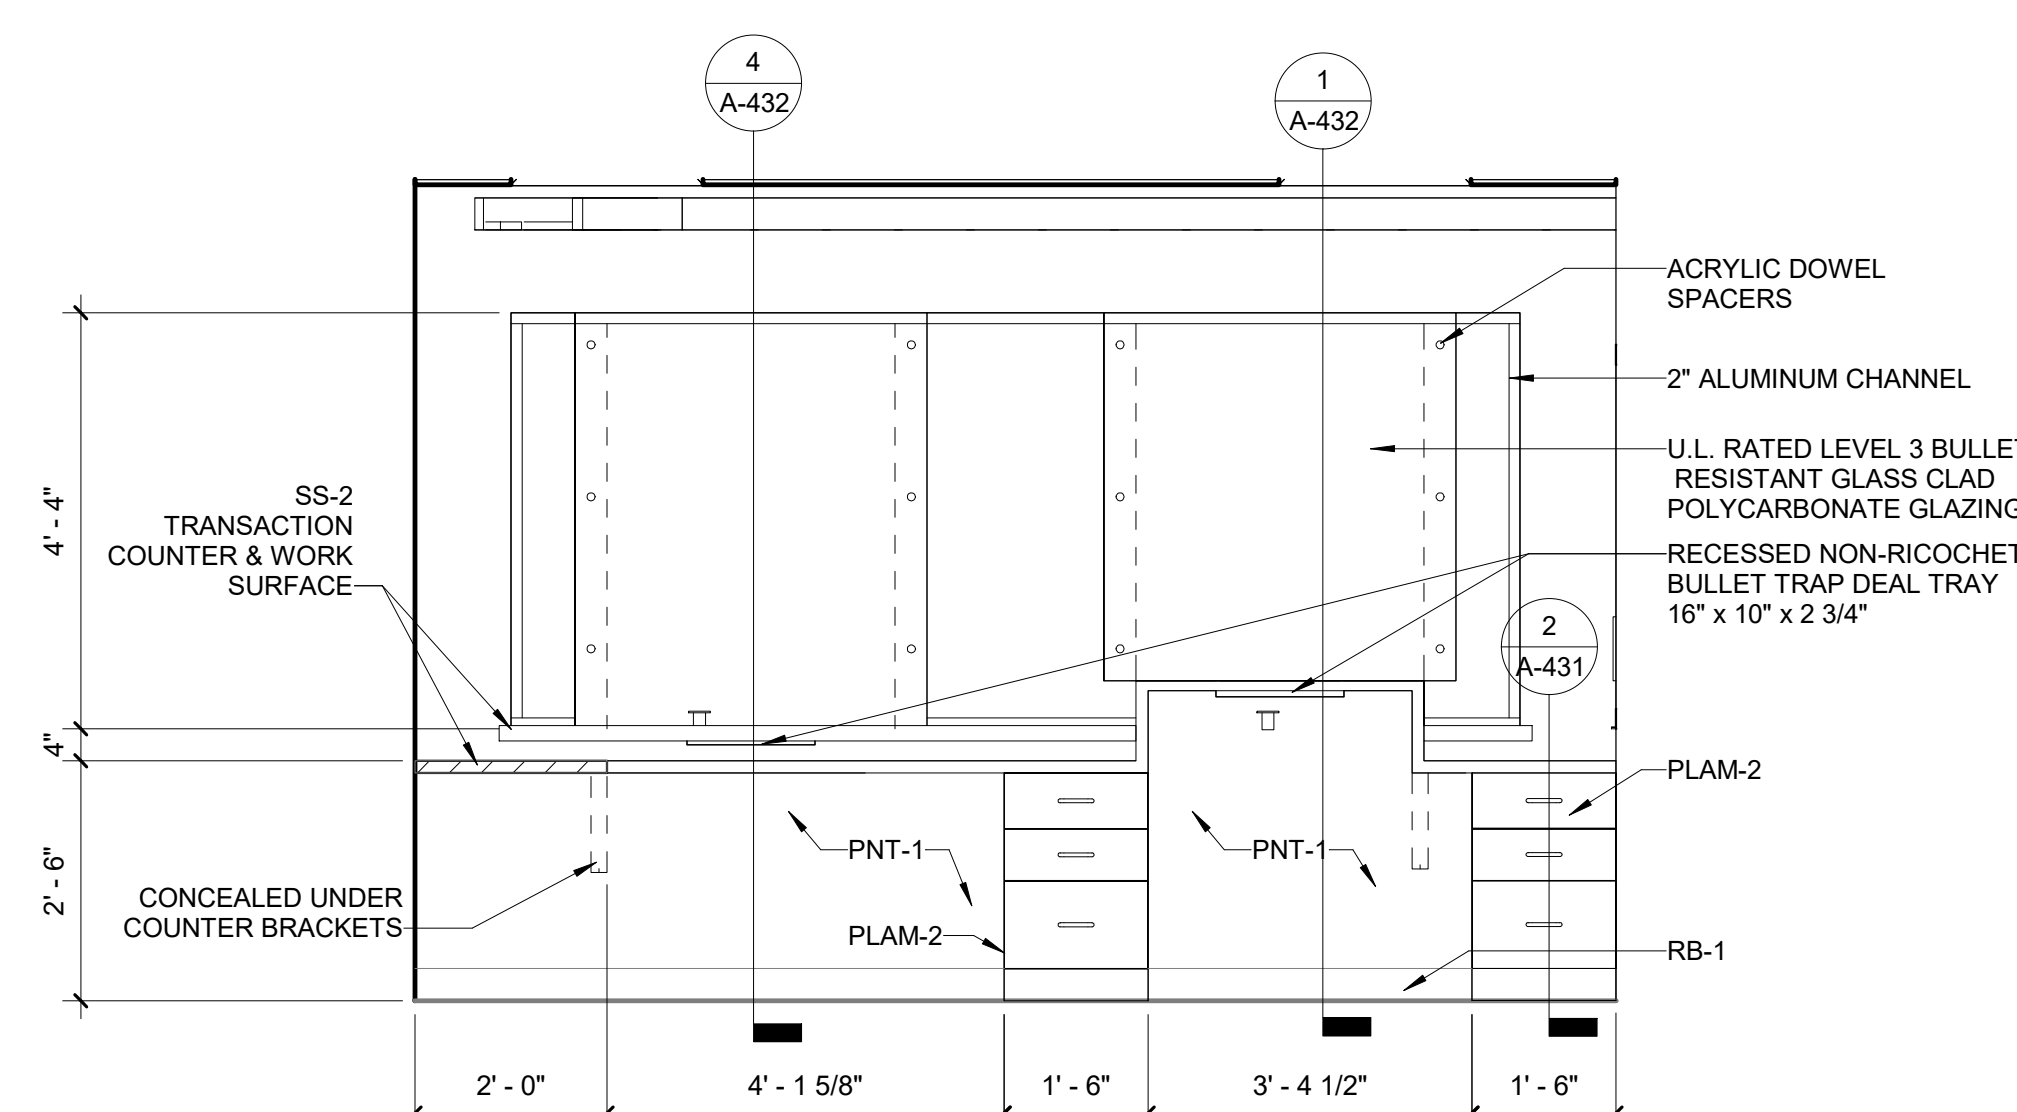


5 DATA ENTRY 101 - EAST
Scale: 1/2" = 1'-0"

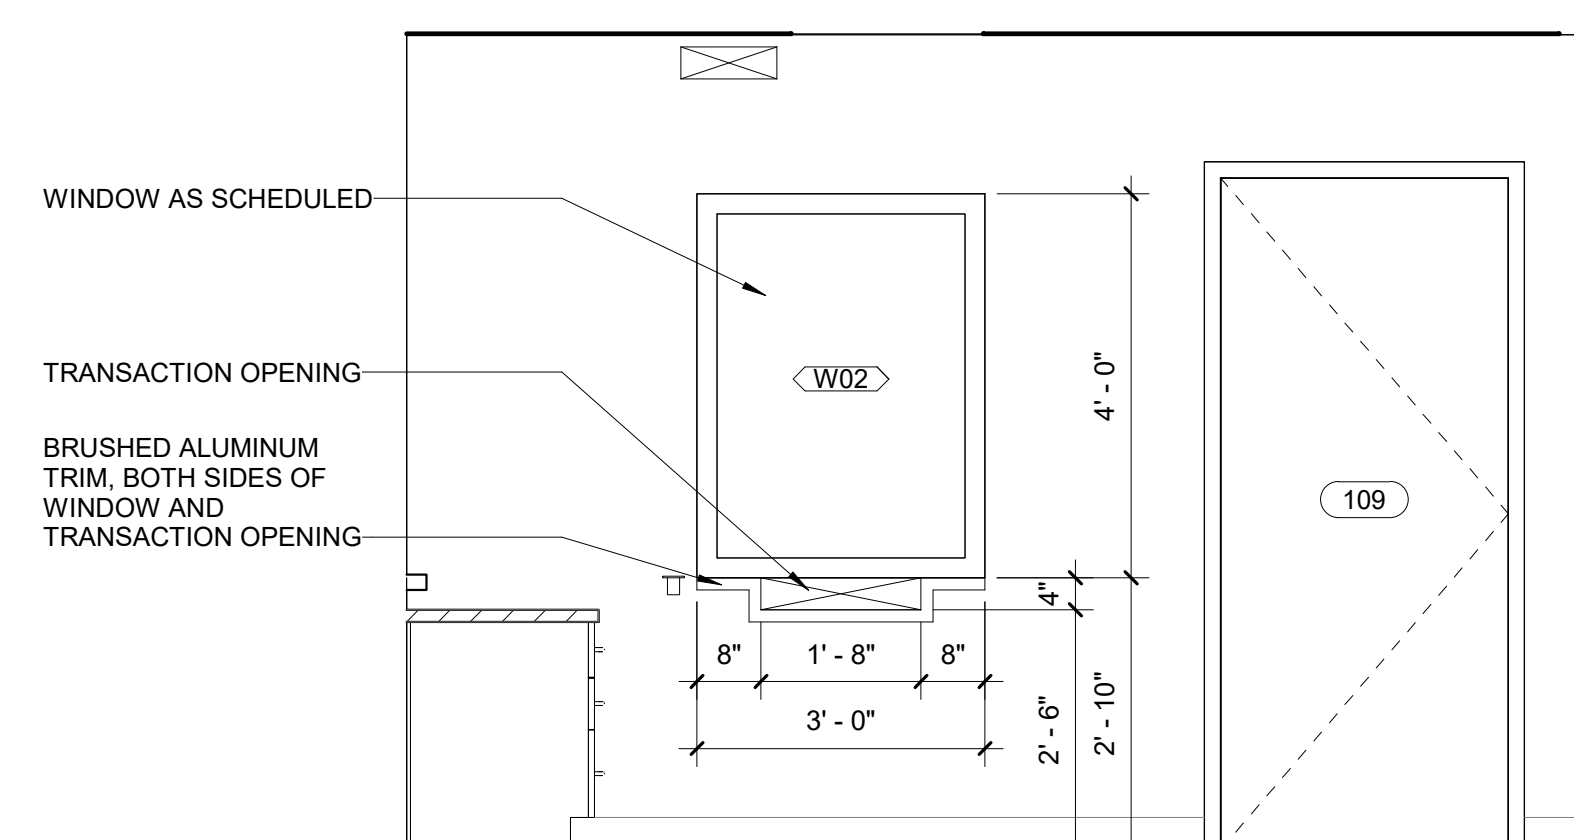


6 DATA ENTRY 101 - SOUTH
Scale: 1/2" = 1'-0"

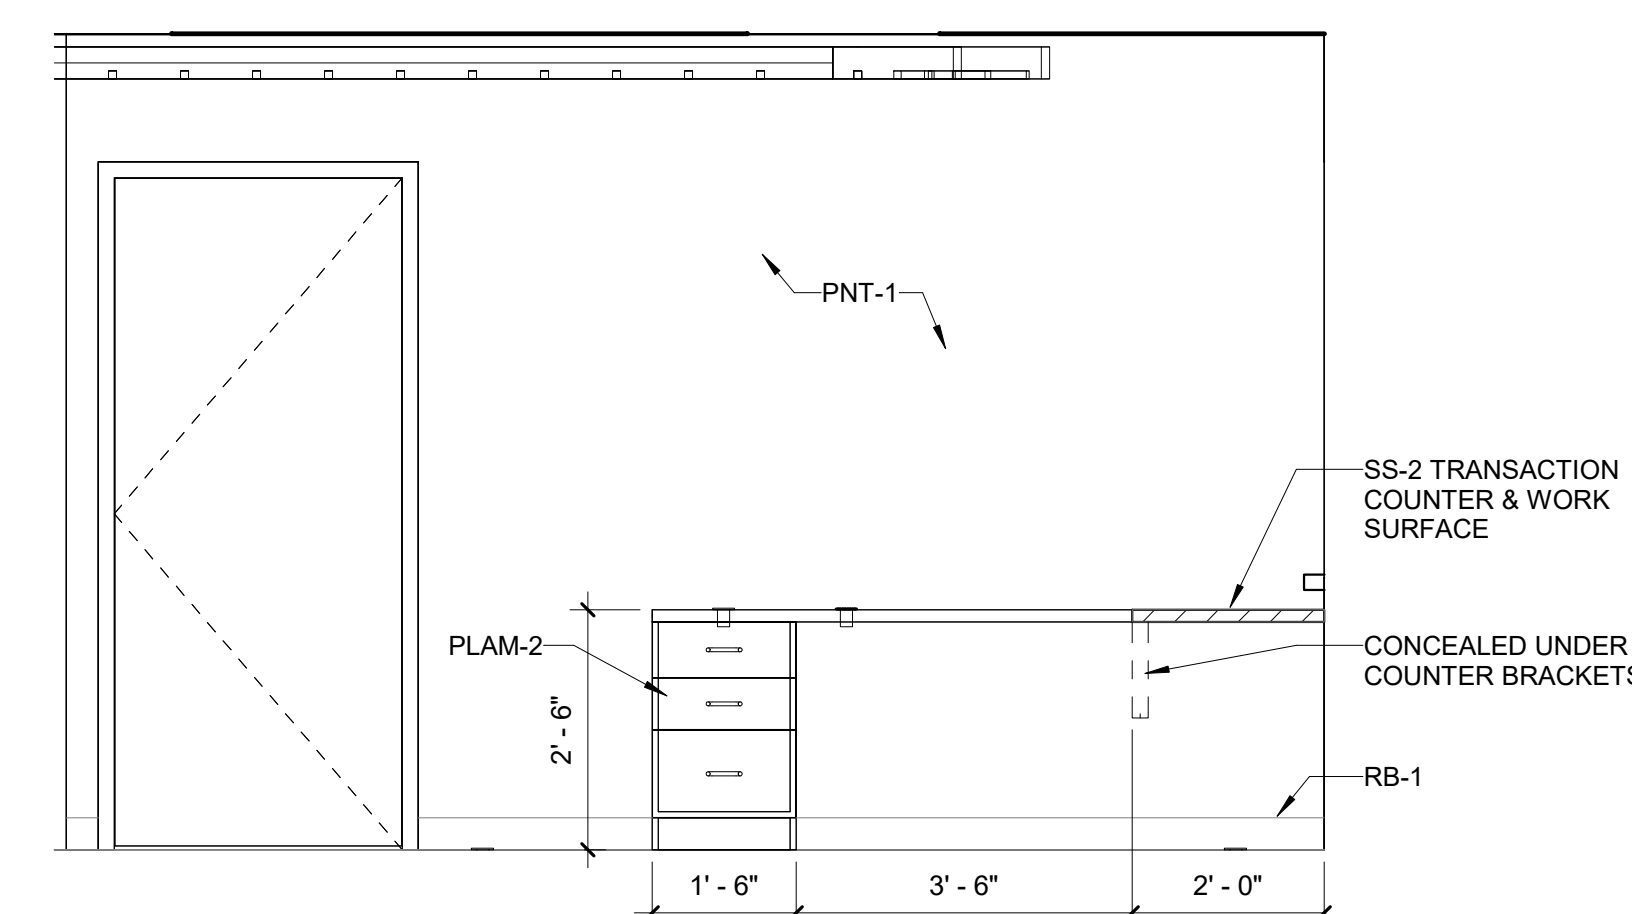


7 DATA ENTRY 101 - NORTH
Scale: 1/2" = 1'-0"

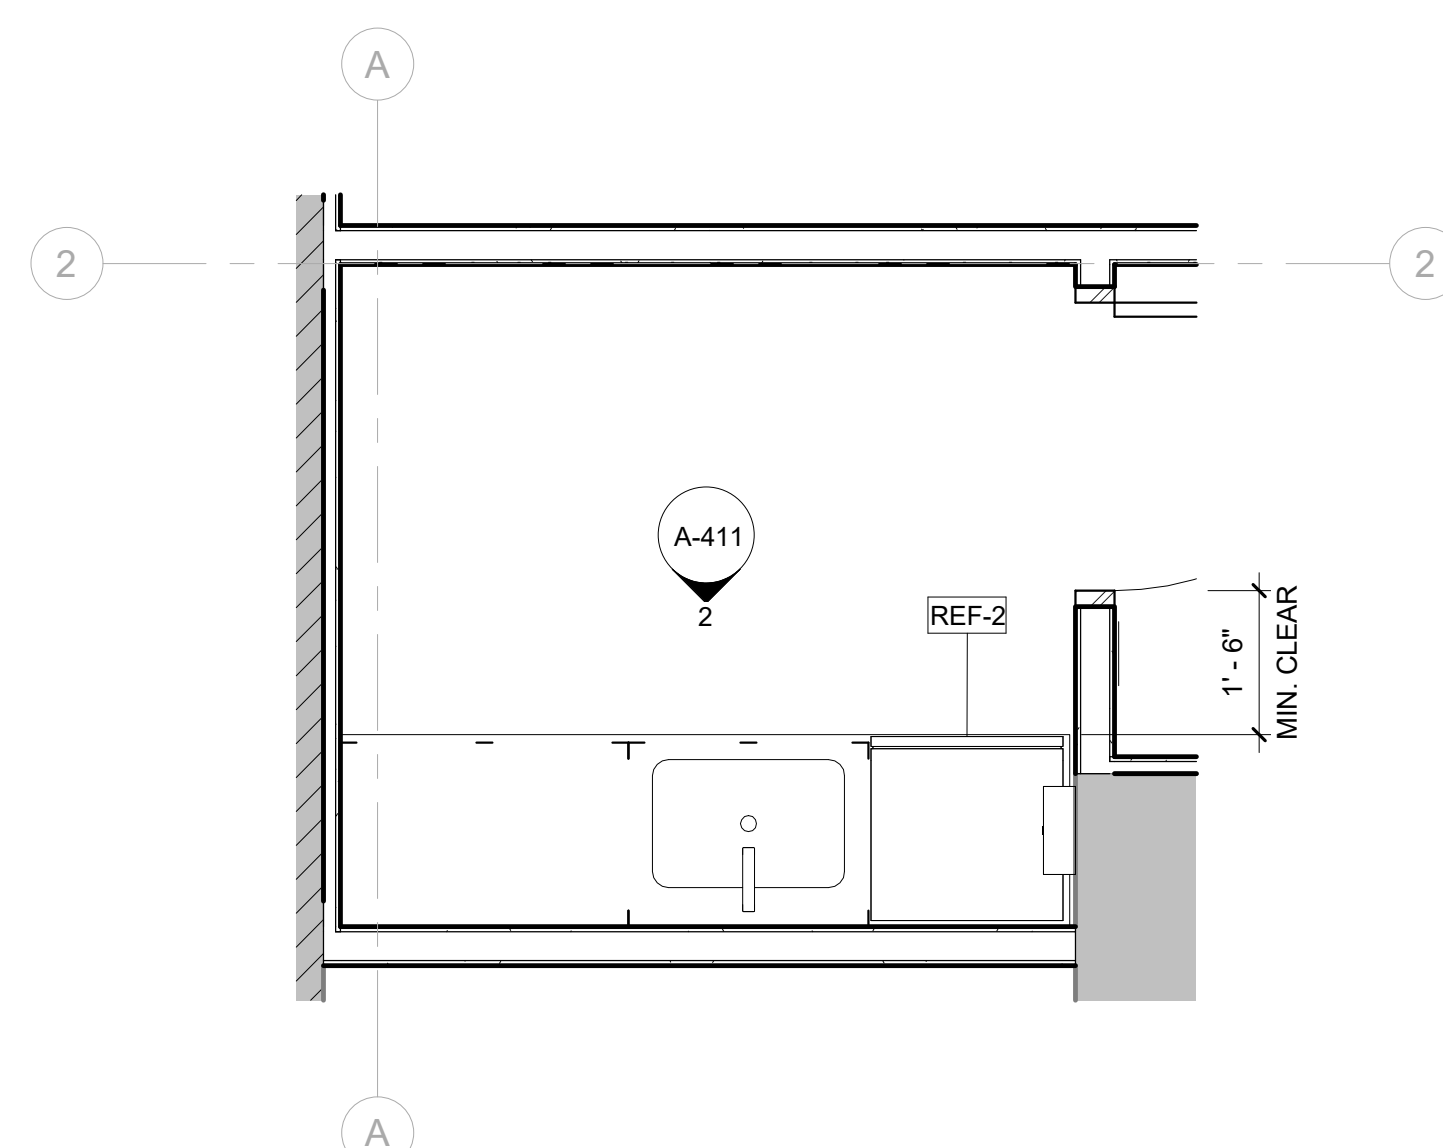


1 ENLARGED PLAN - COURT PREP 113
Scale: 1/2" = 1'-0"

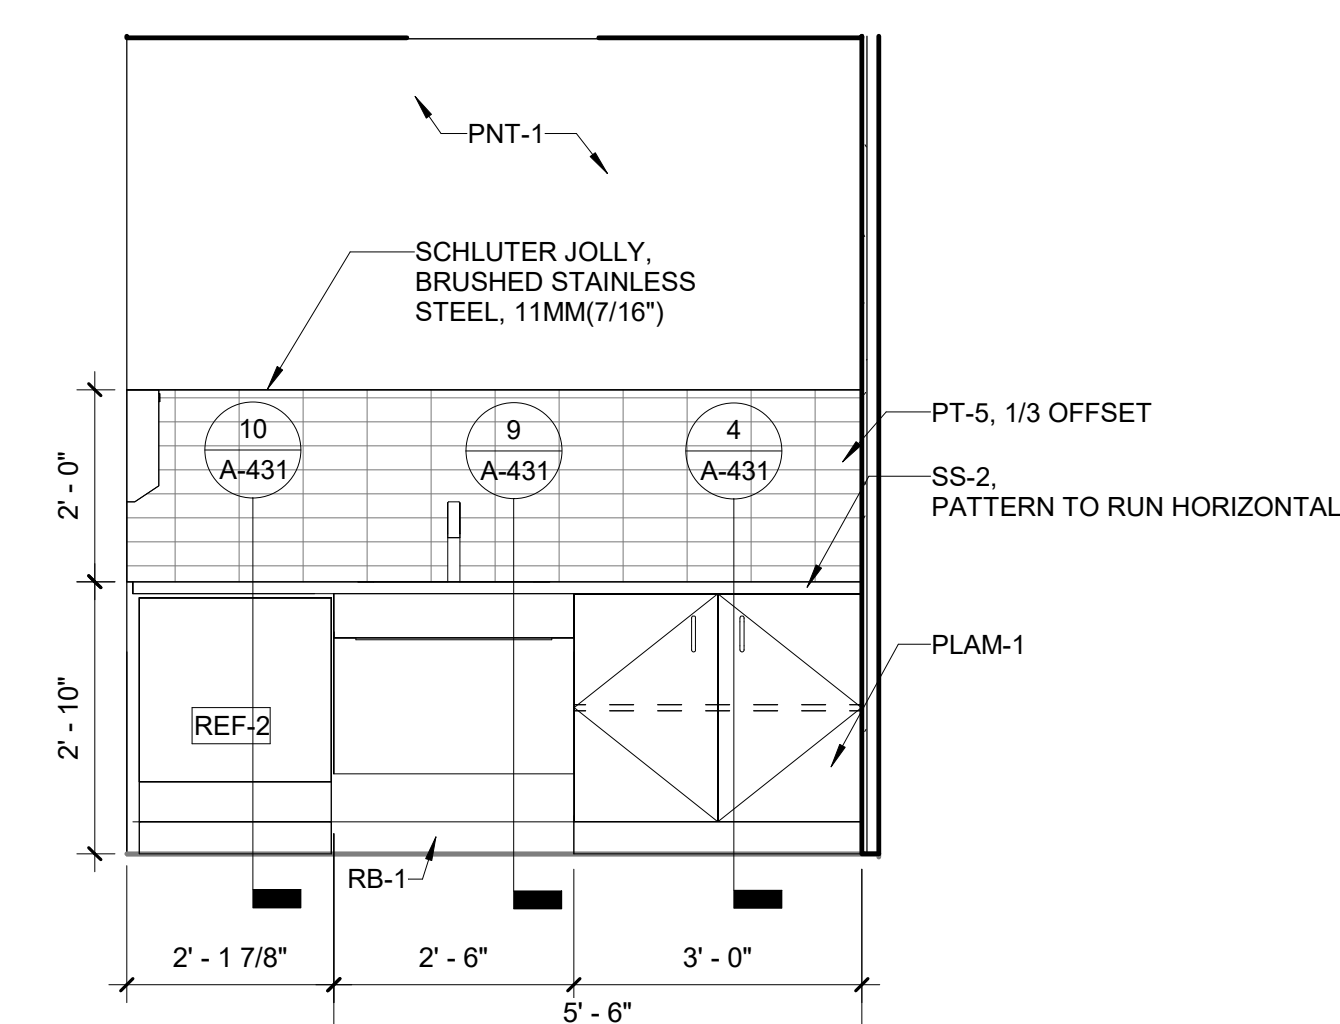

2 COURT PREP 113 - SOUTH
Scale: 1/2" = 1'-0"

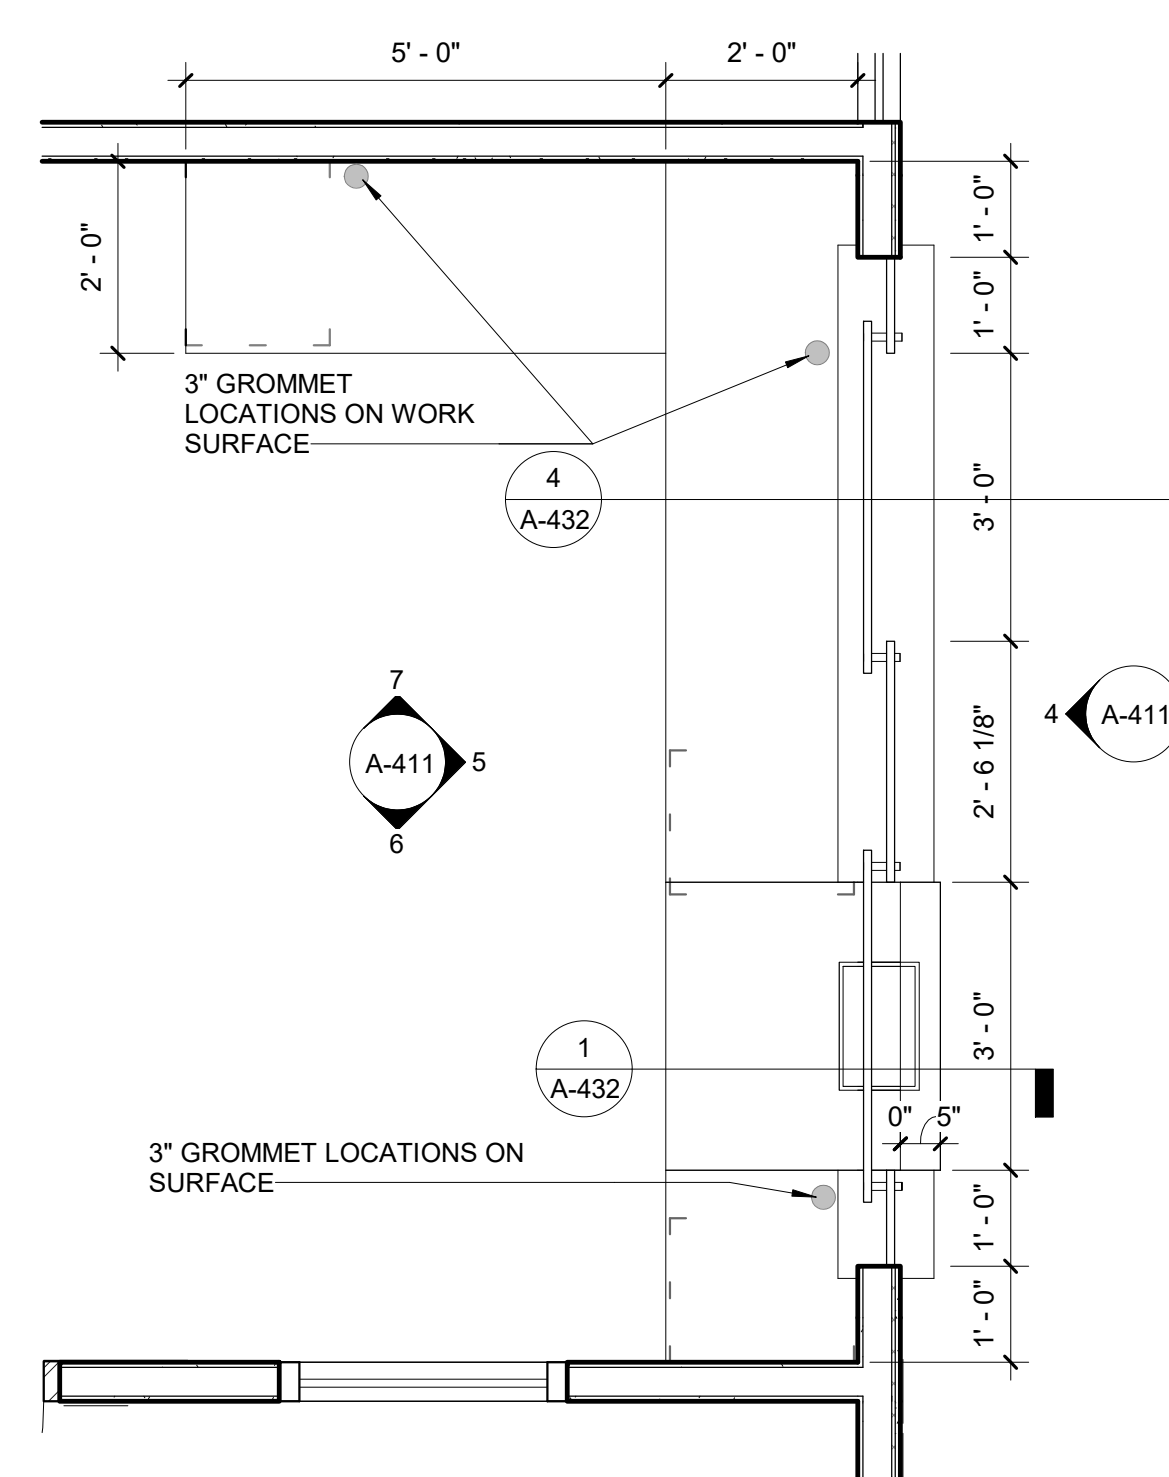

3 ENLARGED PLAN - DATA ENTRY DESK
Scale: 1/2" = 1'-0"

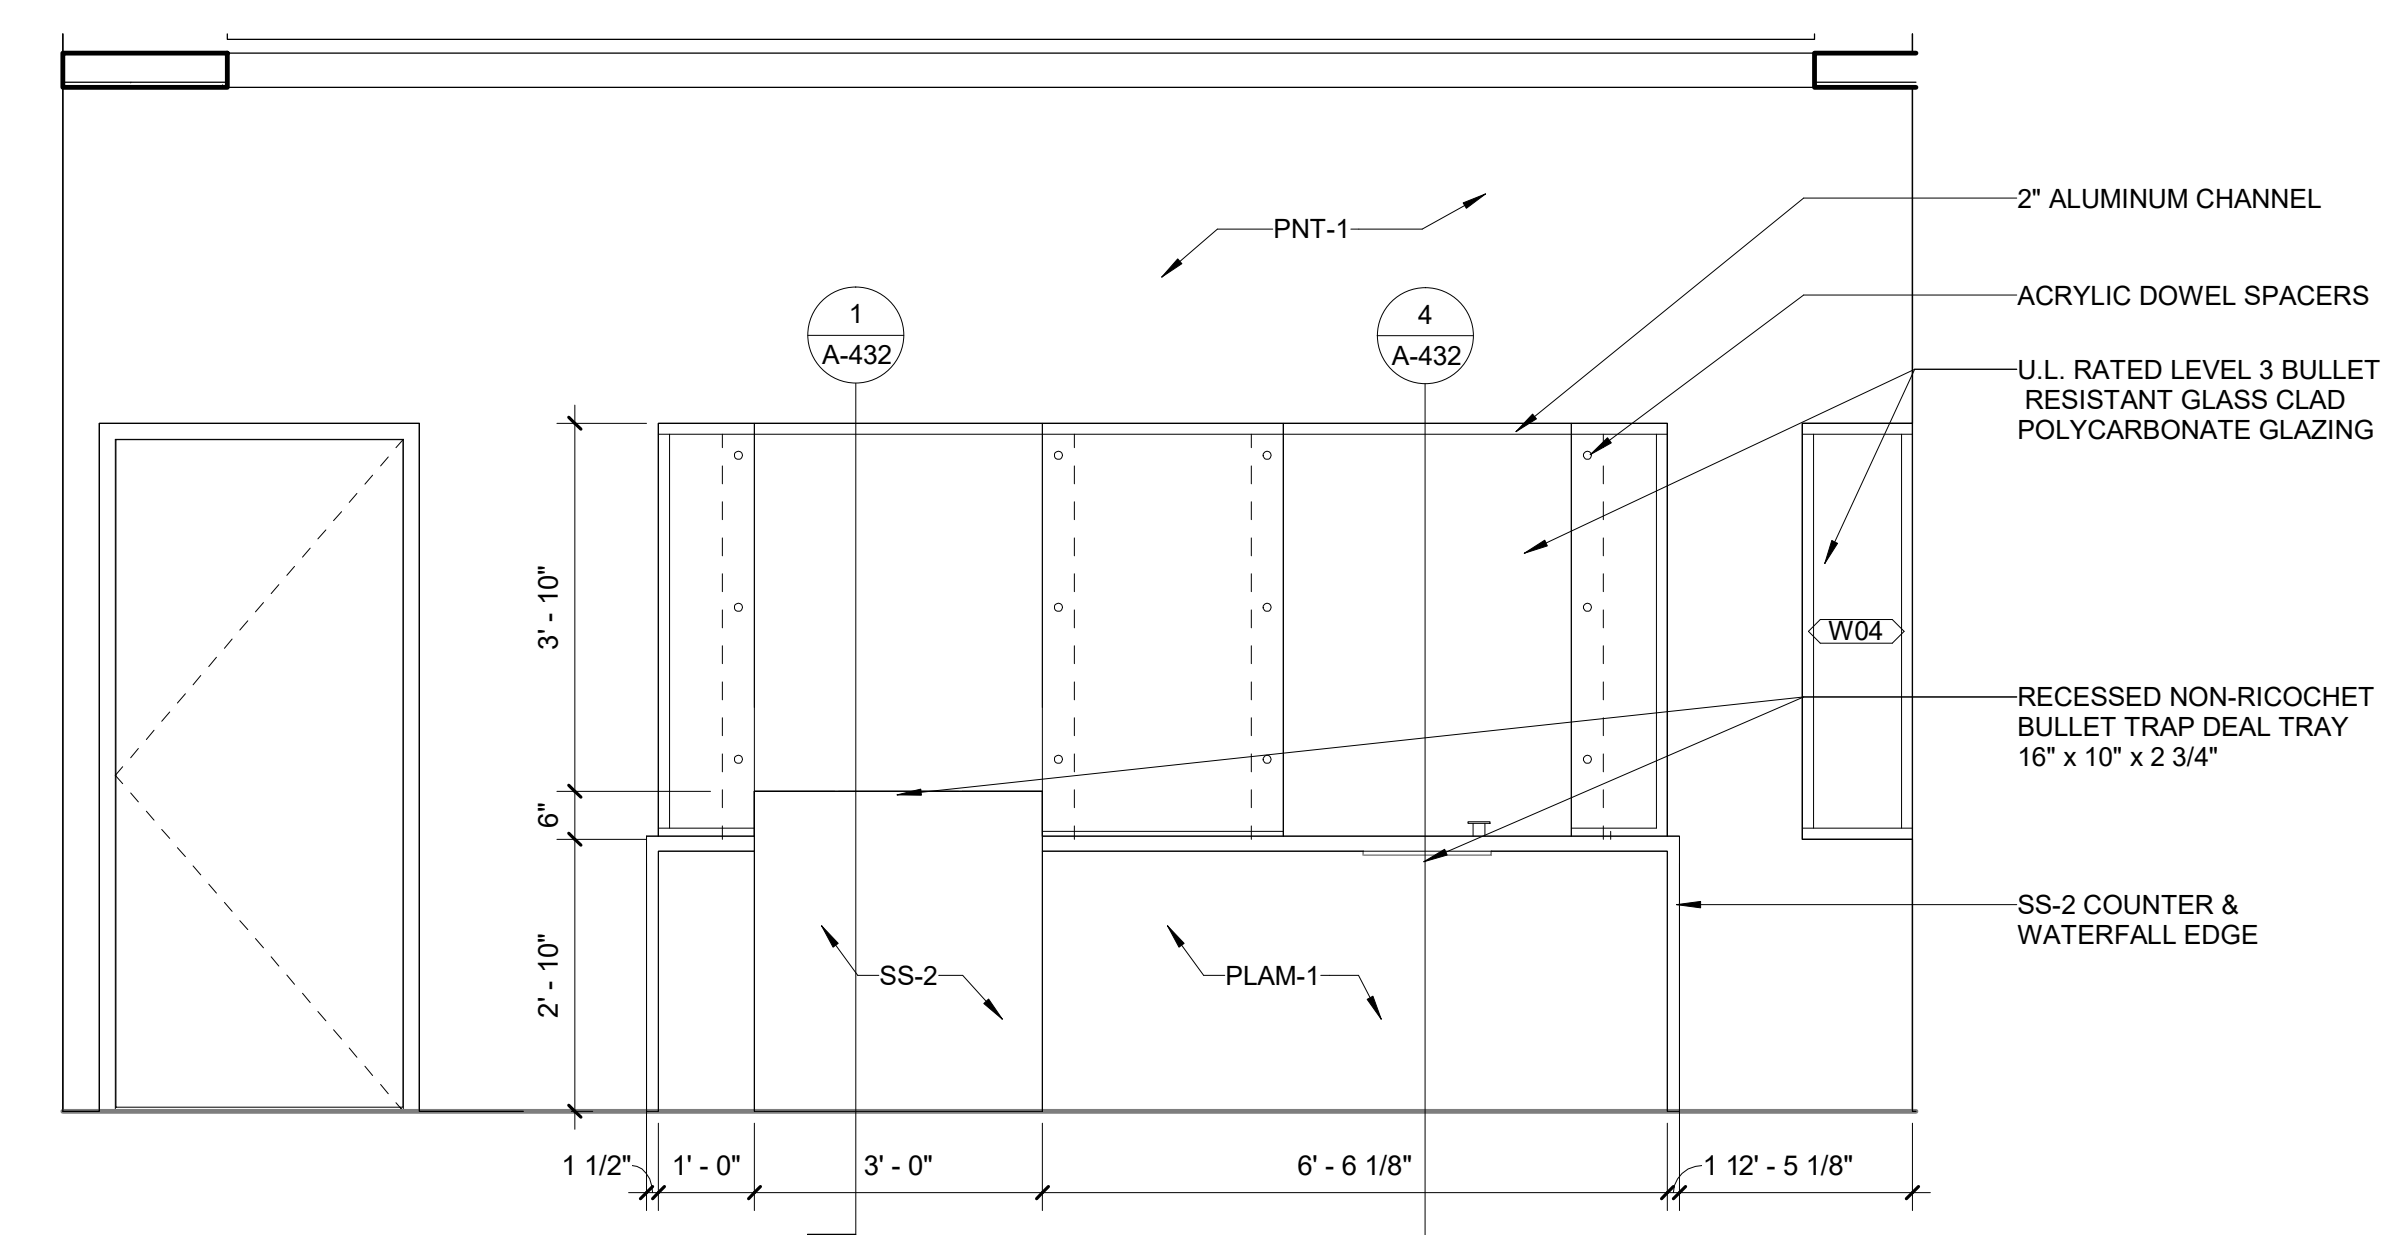

4 PUBLIC LOBBY 002 - WEST
Scale: 1/2" = 1'-0"

9/24/2026 11:59:40 AM

A

B


C

D


E

F


1 ENLARGED ANNOTATION PLAN - MAIN STAFF BREAK
Scale: 1/2" = 1'-0"

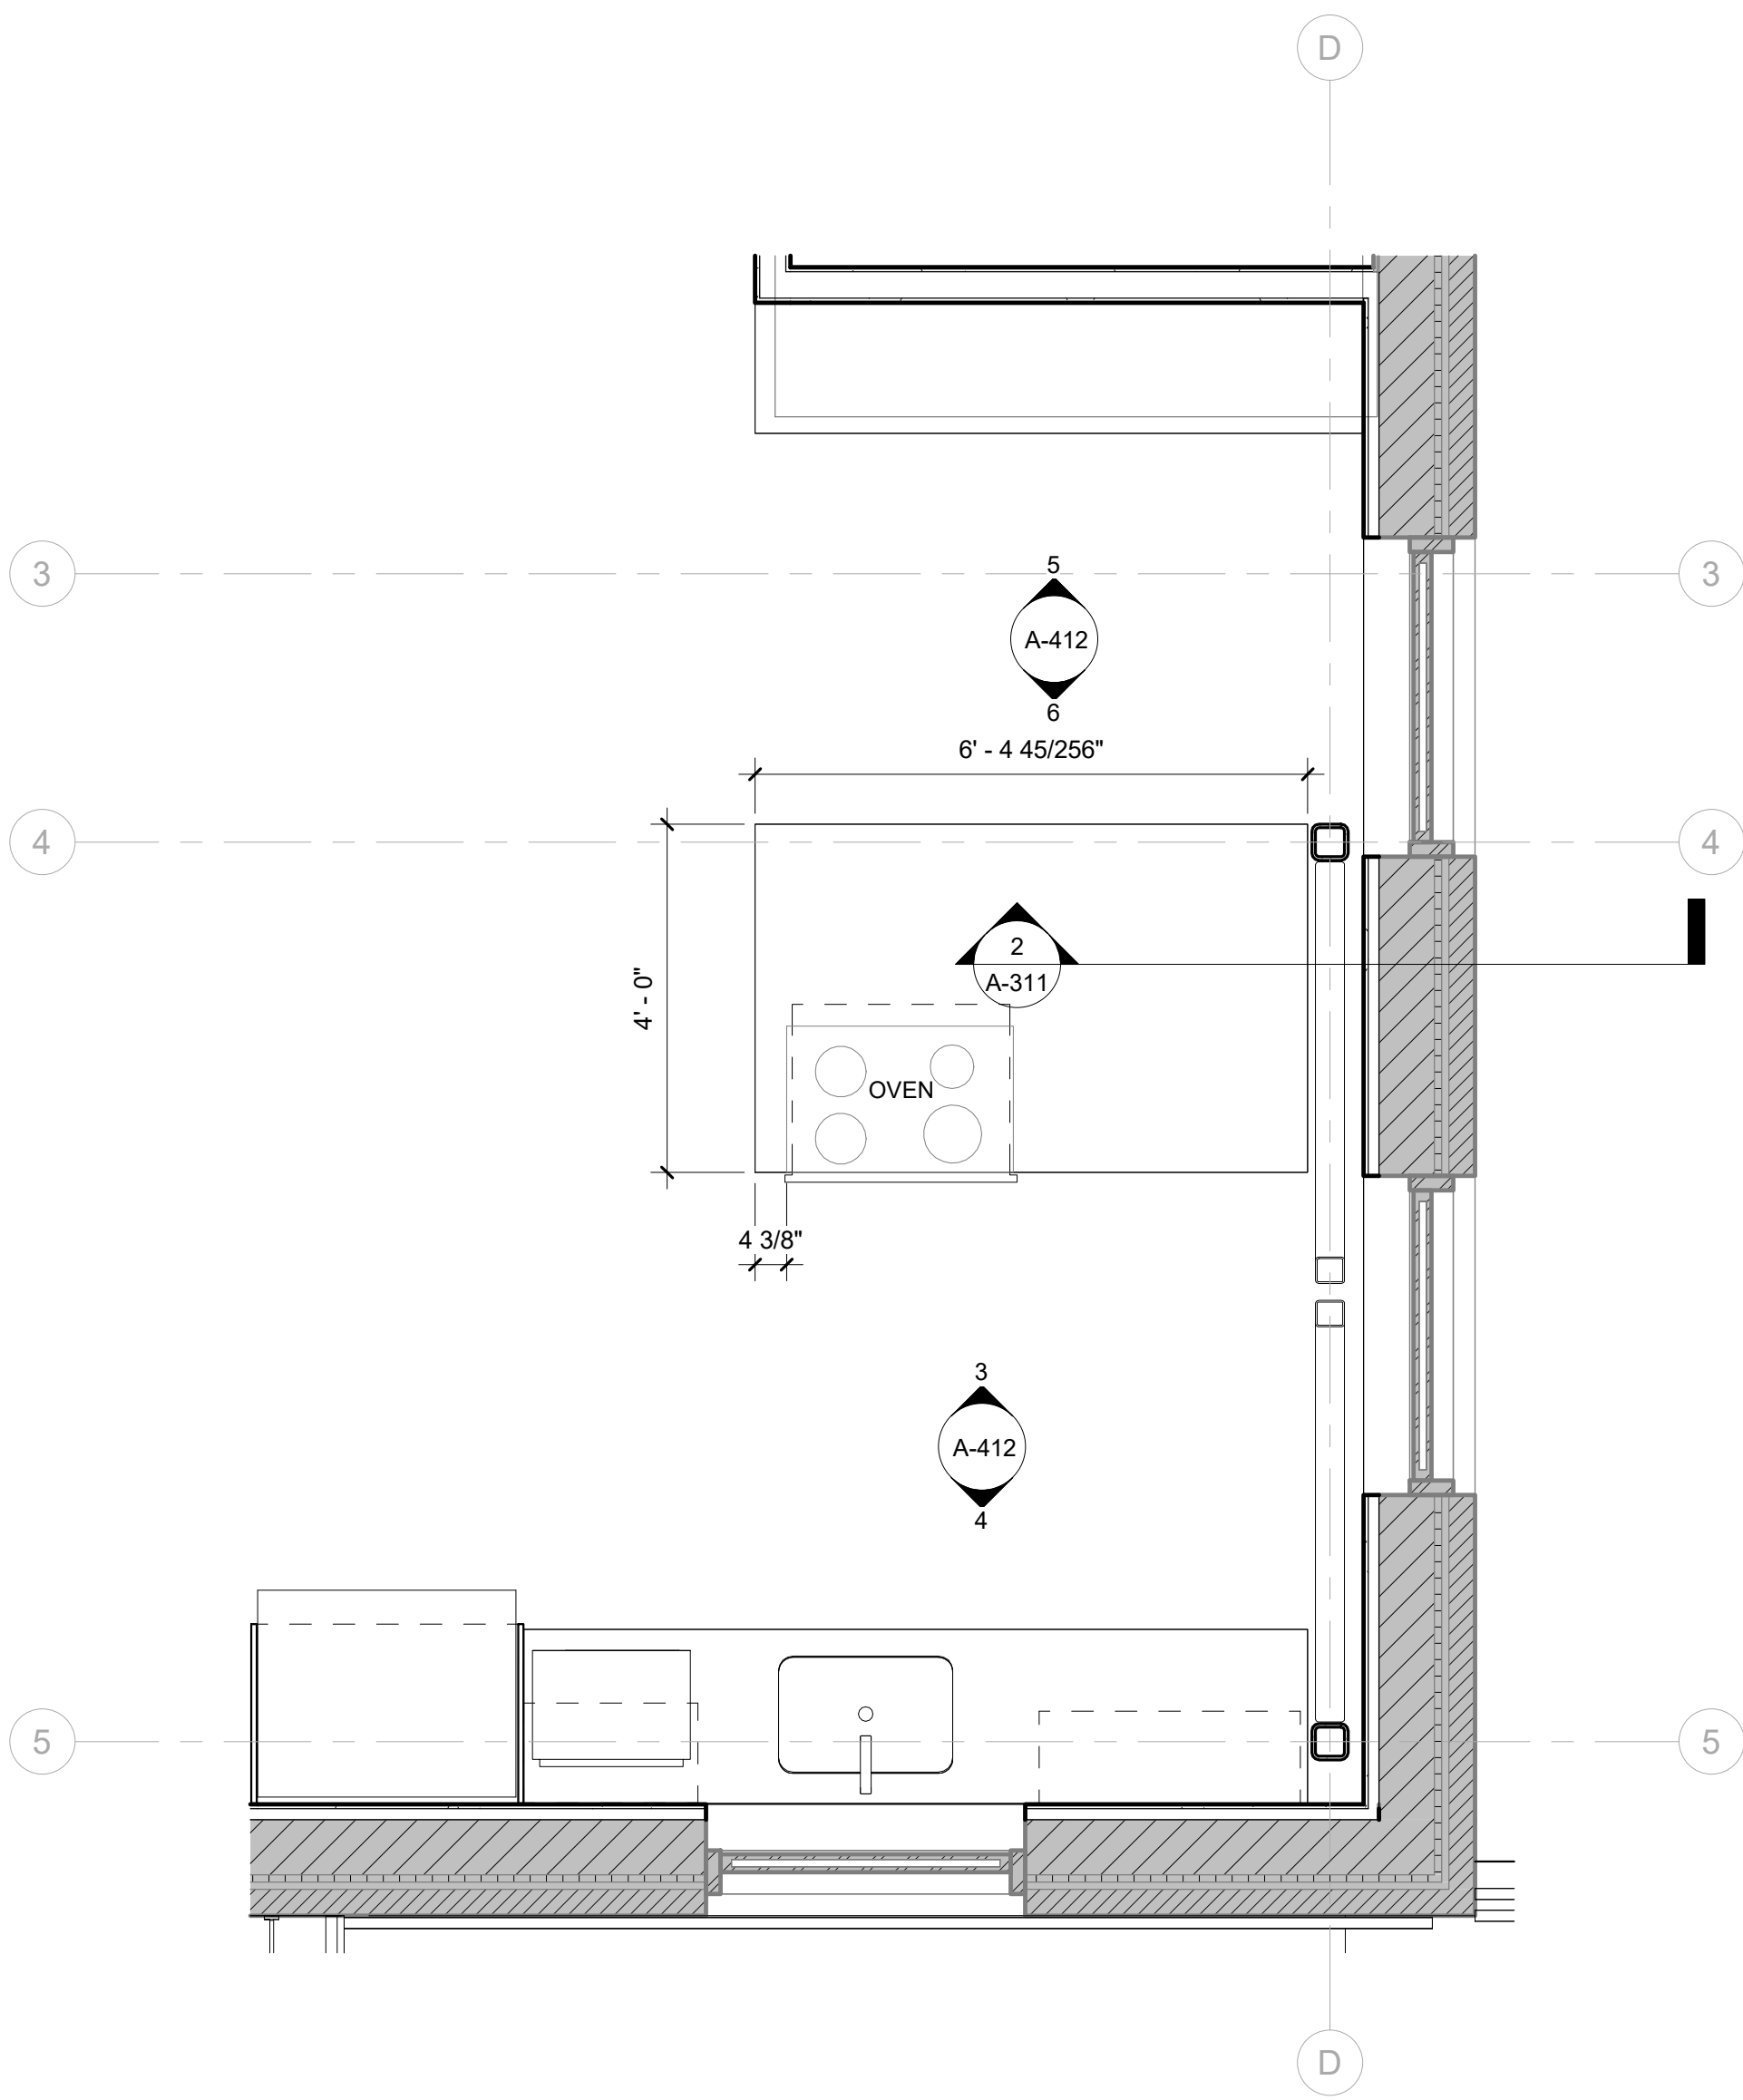


2 ENLARGED DIMENSION PLAN - MAIN STAFF BREAK
Scale: 1/2" = 1'-0"

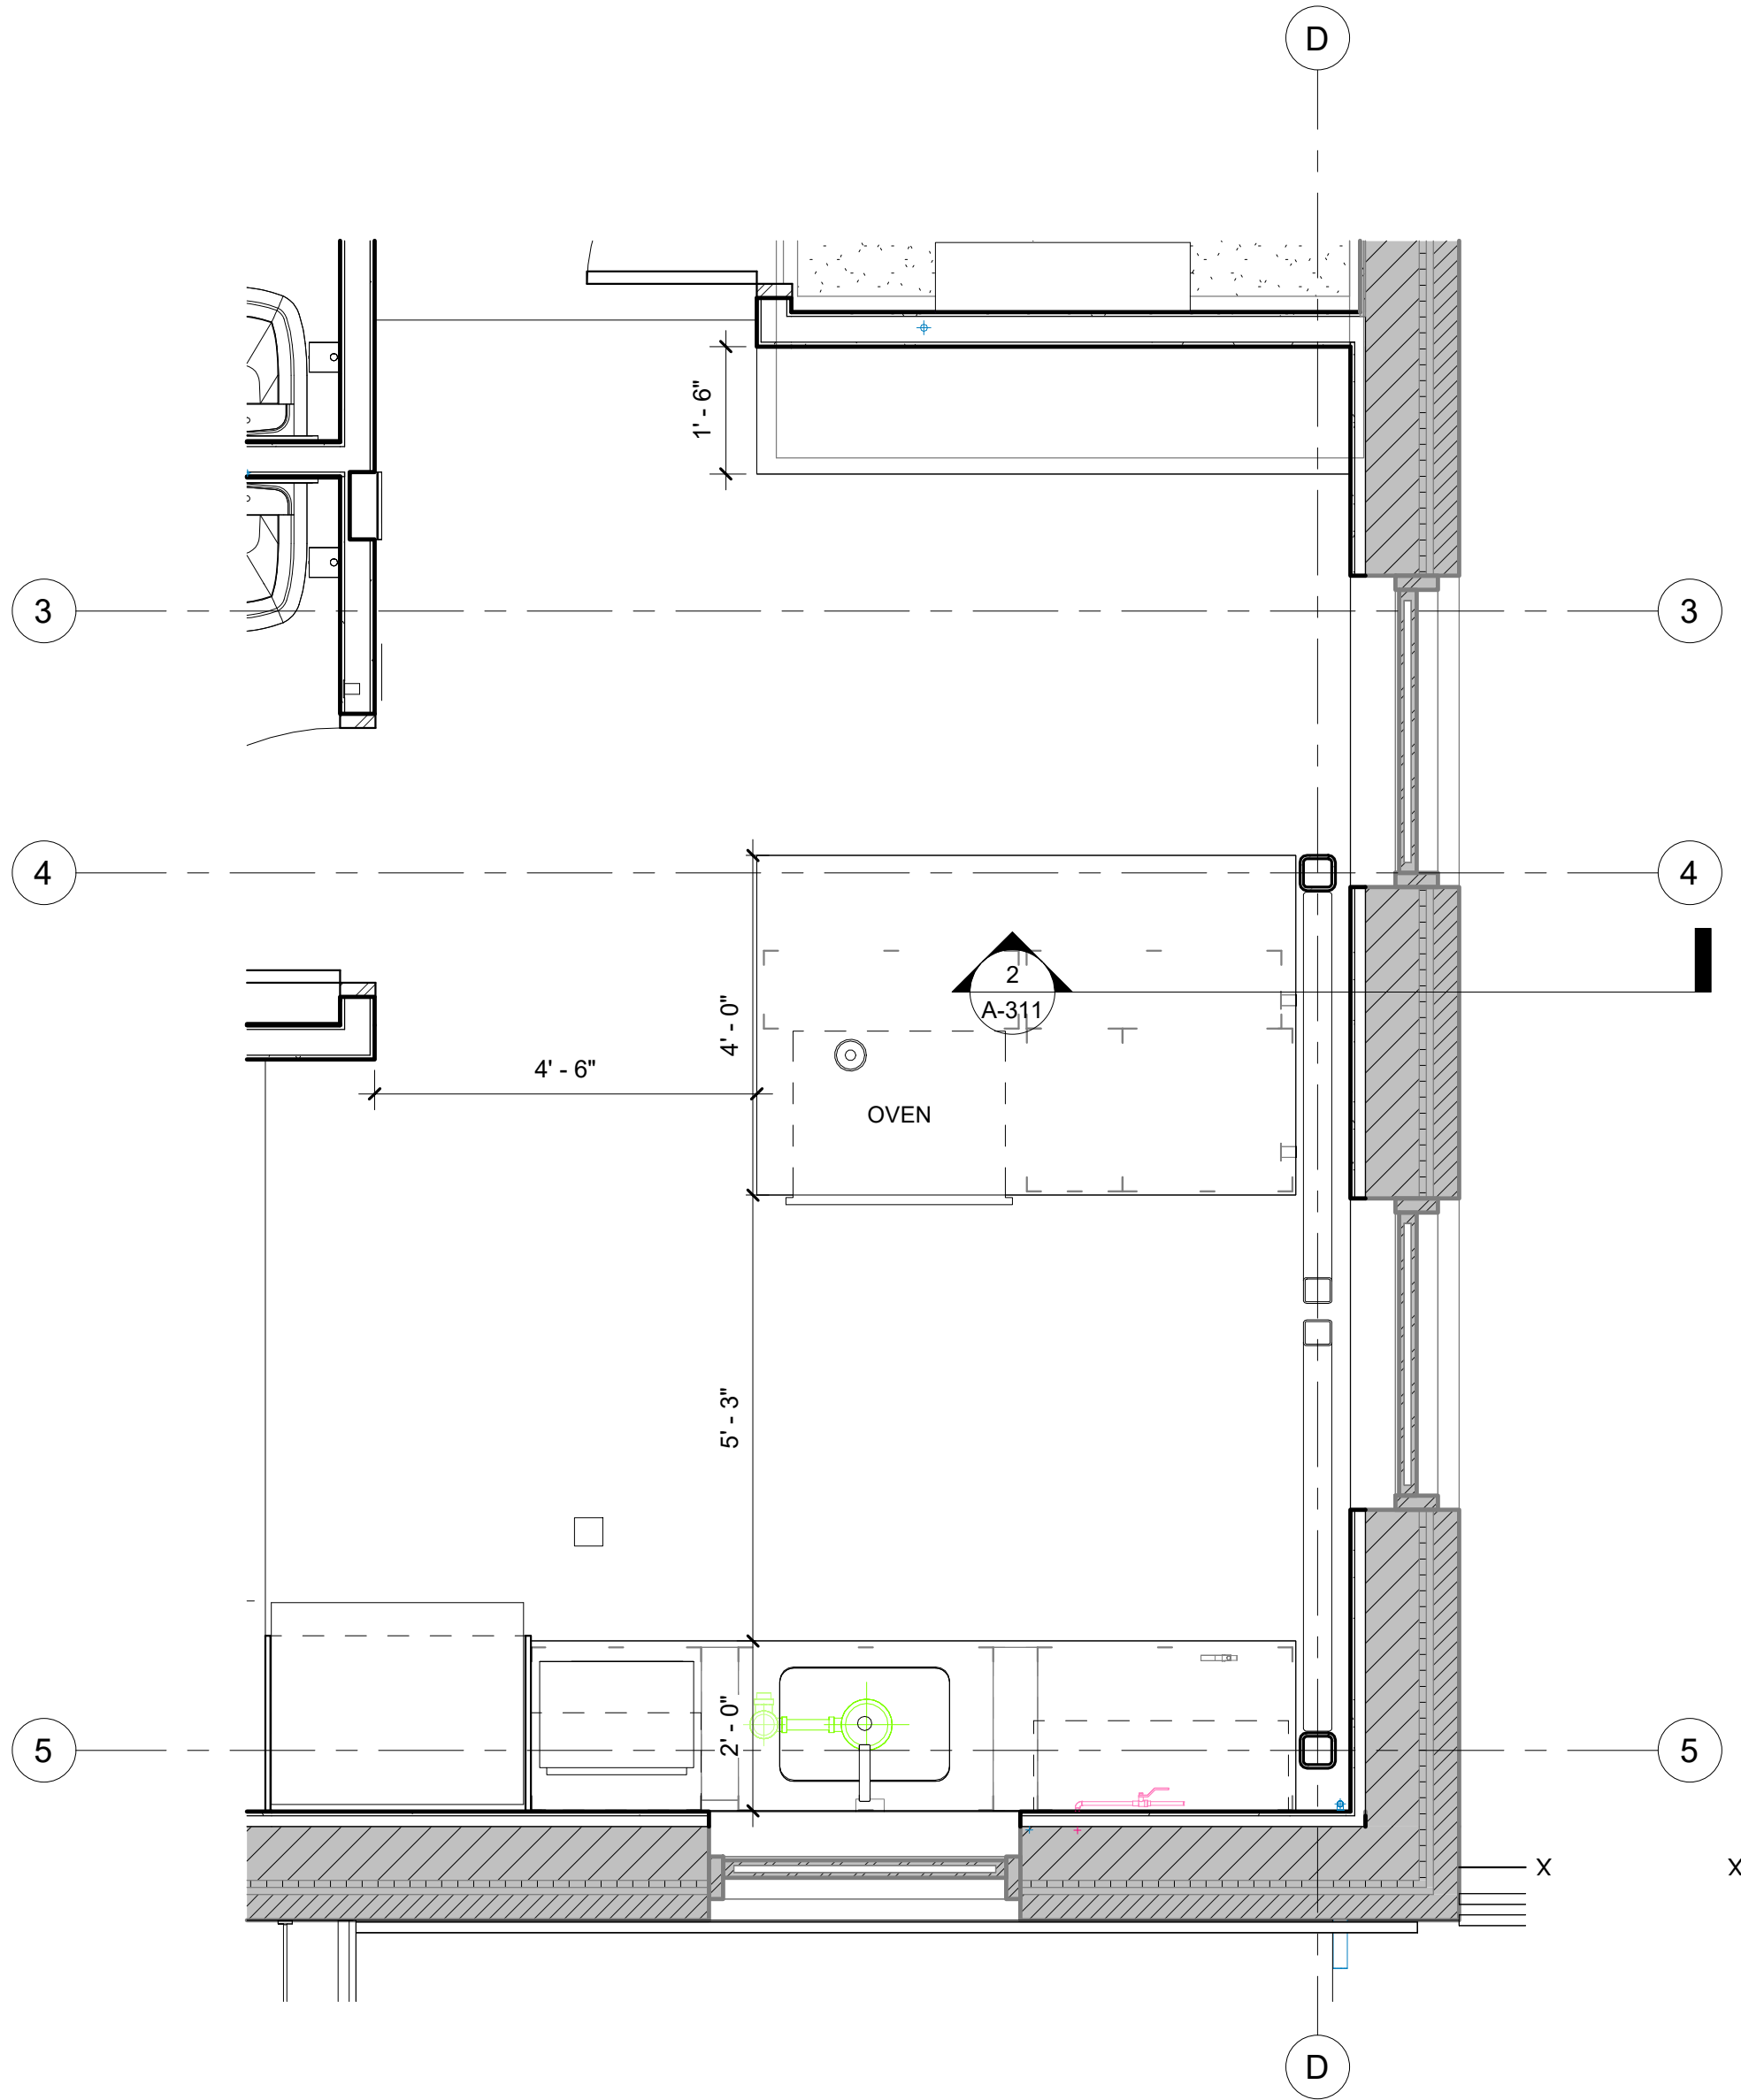


7 ENLARGED FINISH PLAN - MAIN STAFF BREAK
Scale: 1/2" = 1'-0"

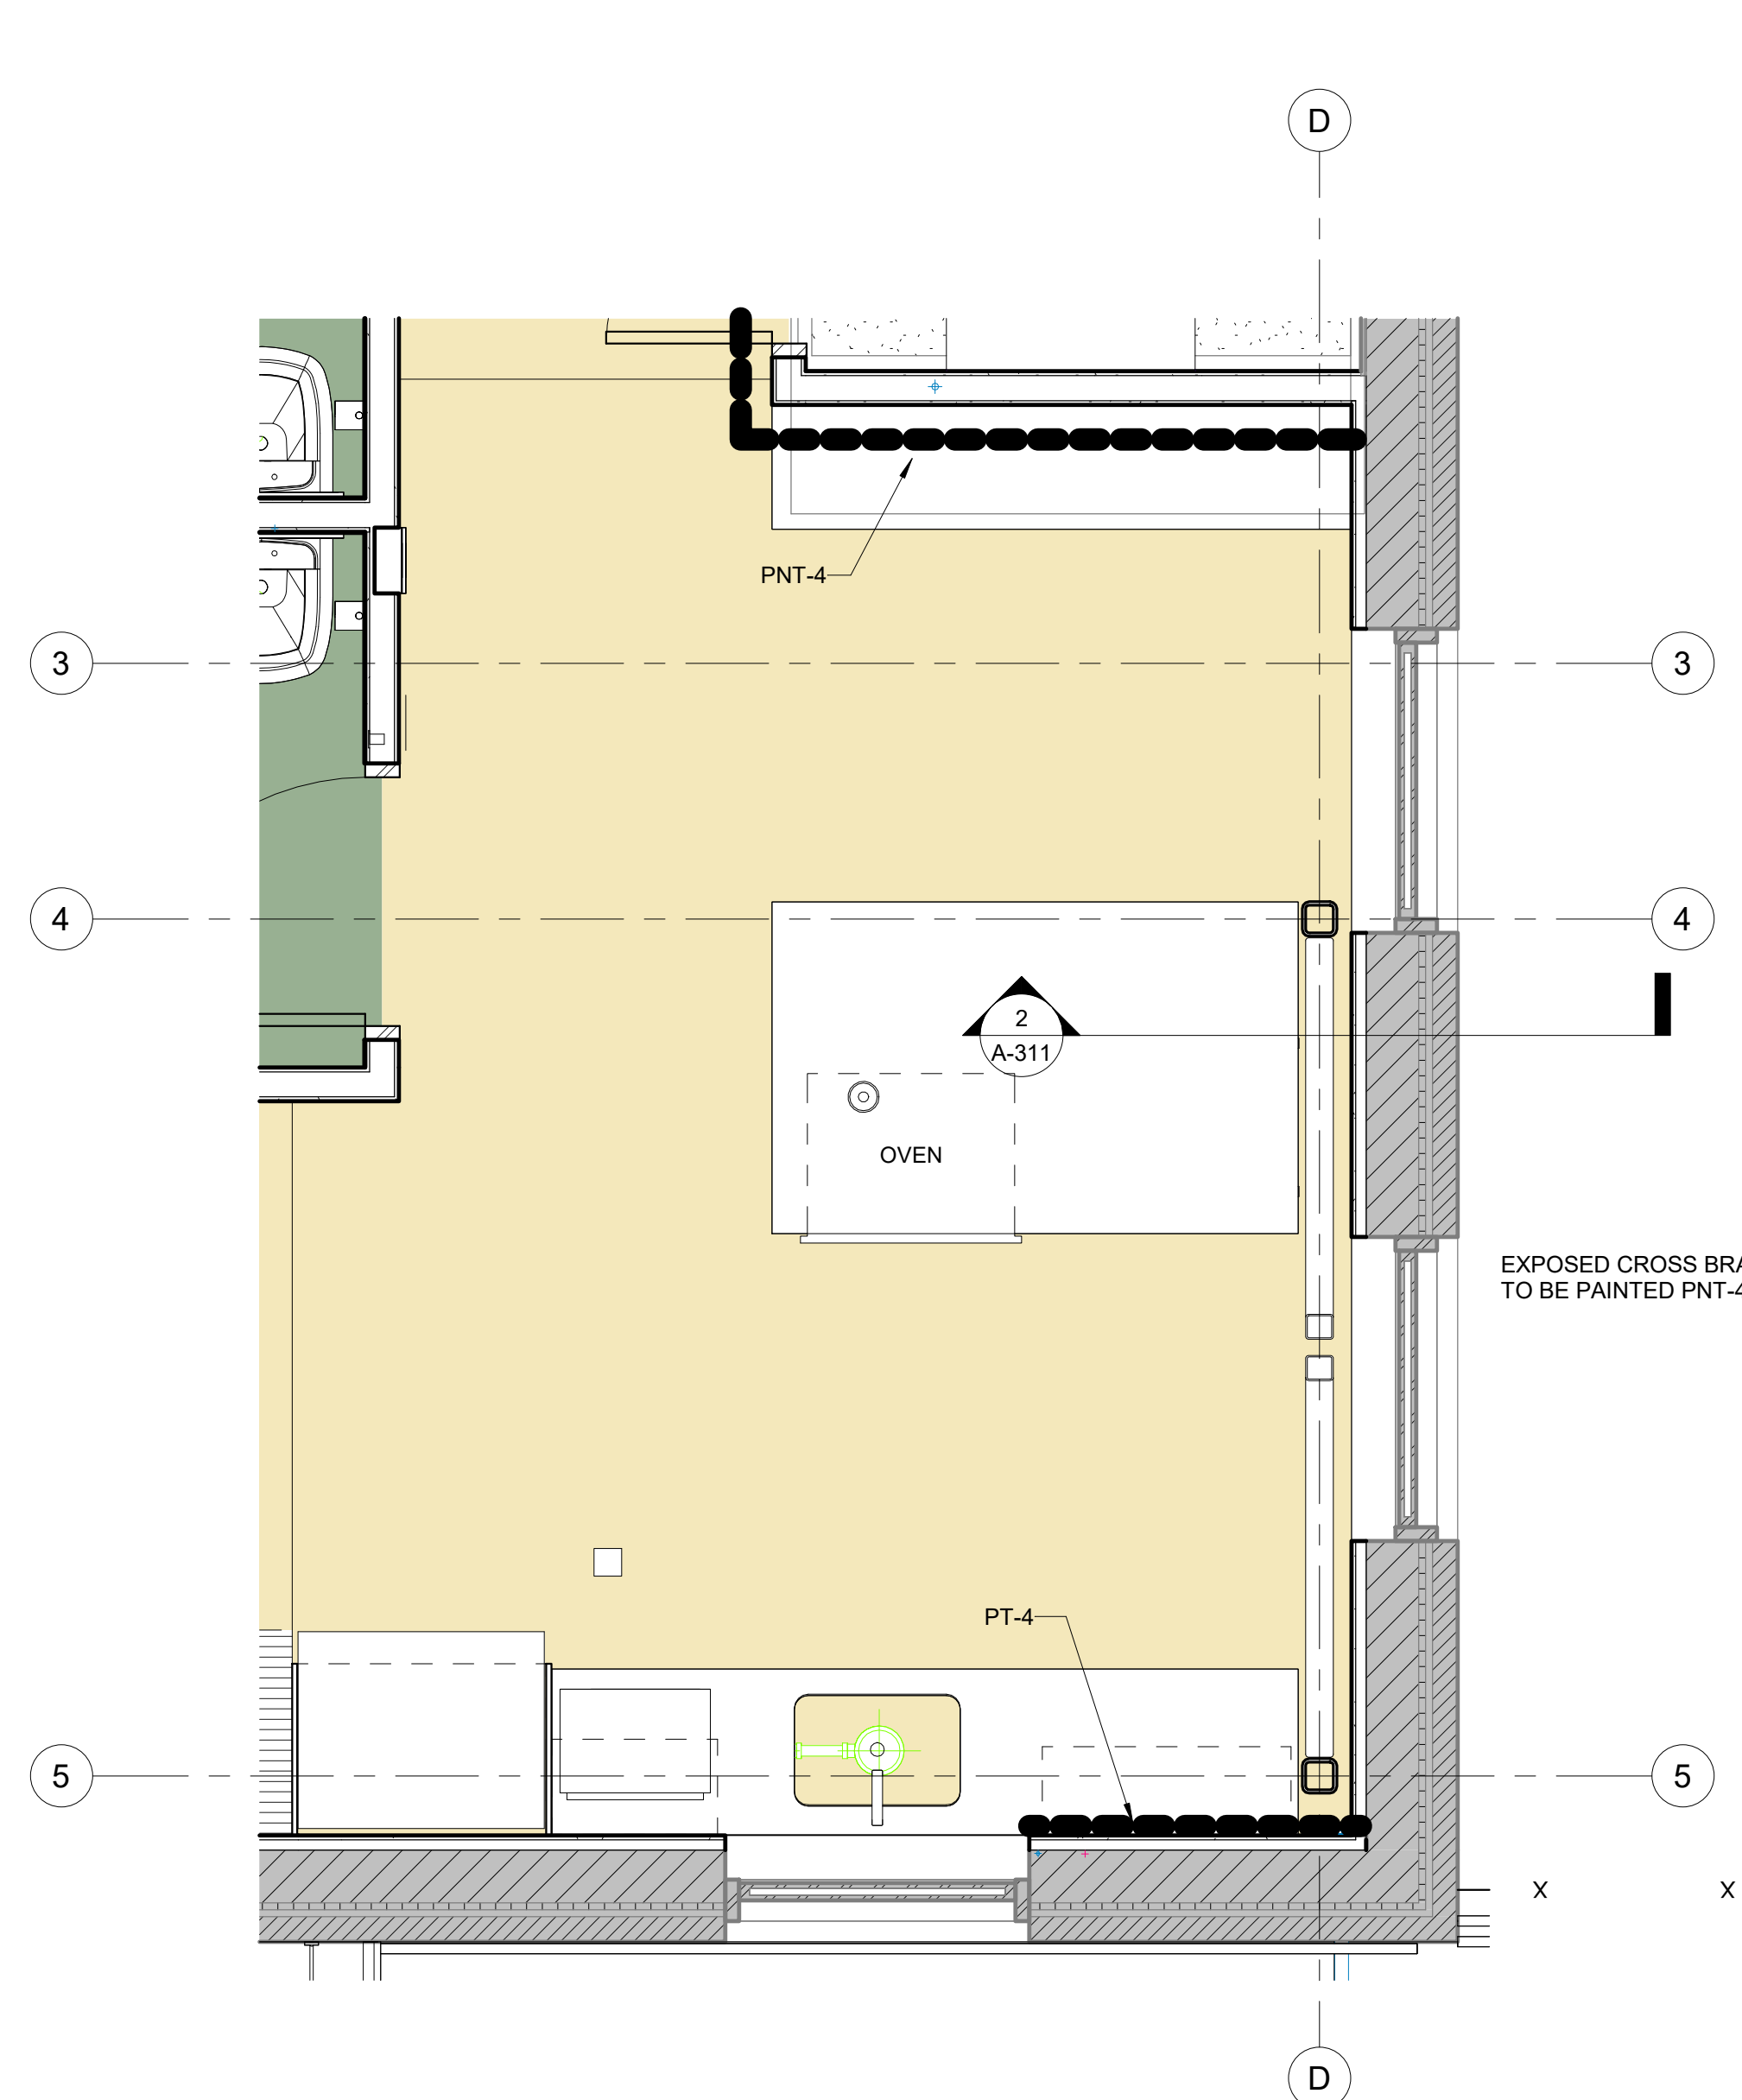


3 STAFF BREAK AREA - ISLAND
Scale: 1/2" = 1'-0"

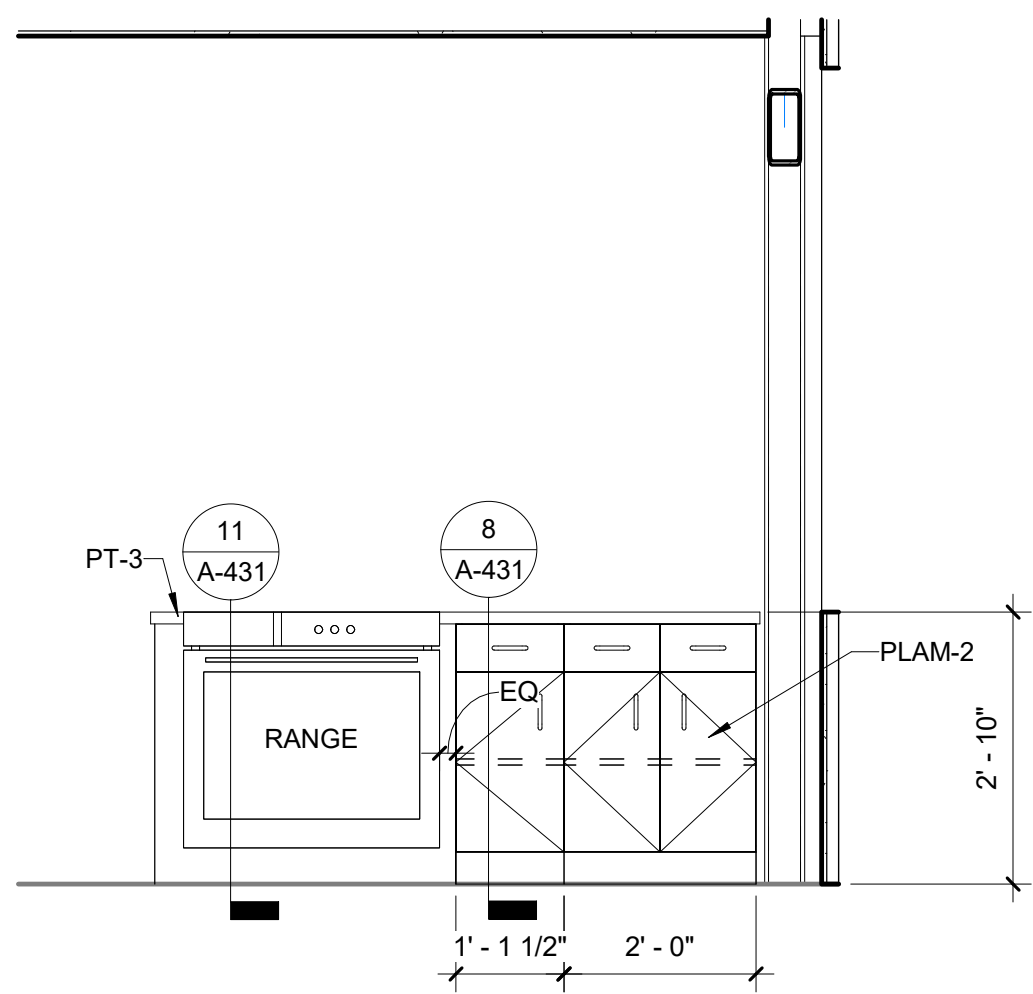


4 STAFF BREAK AREA - SOUTH
Scale: 1/2" = 1'-0"

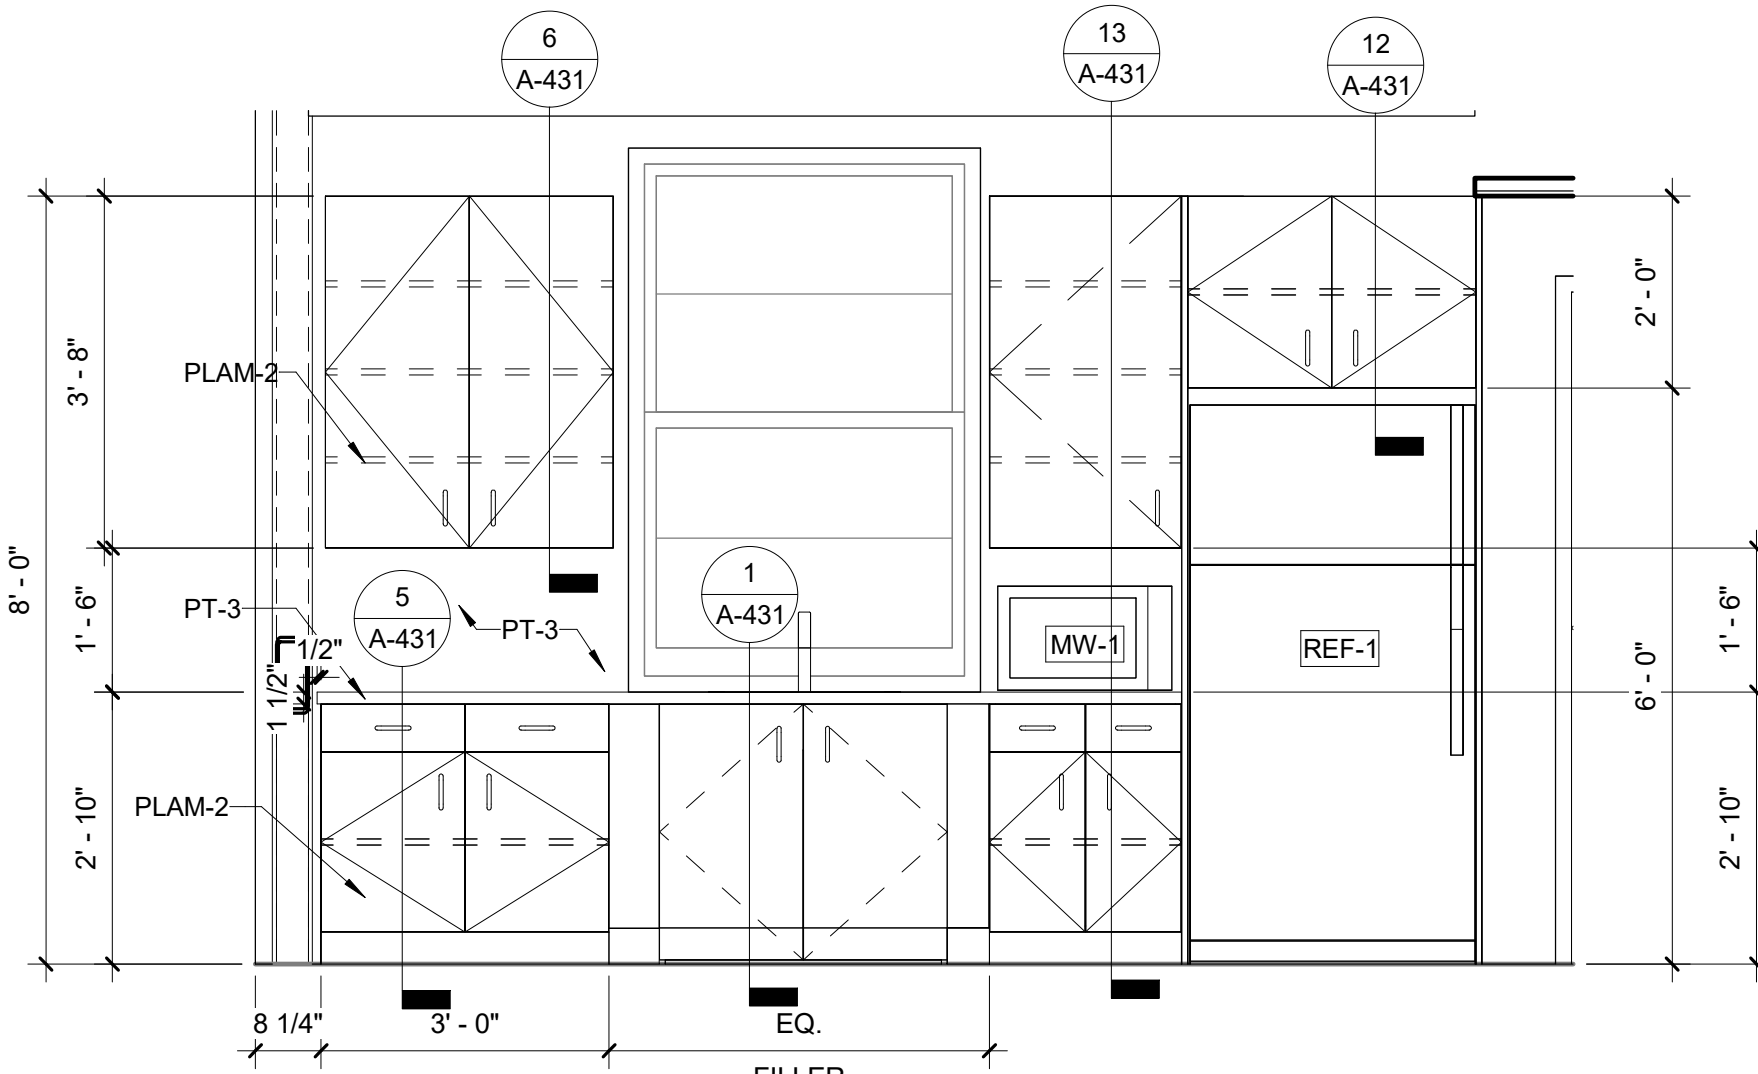


5 STAFF BREAK SEATING - NORTH
Scale: 1/2" = 1'-0"

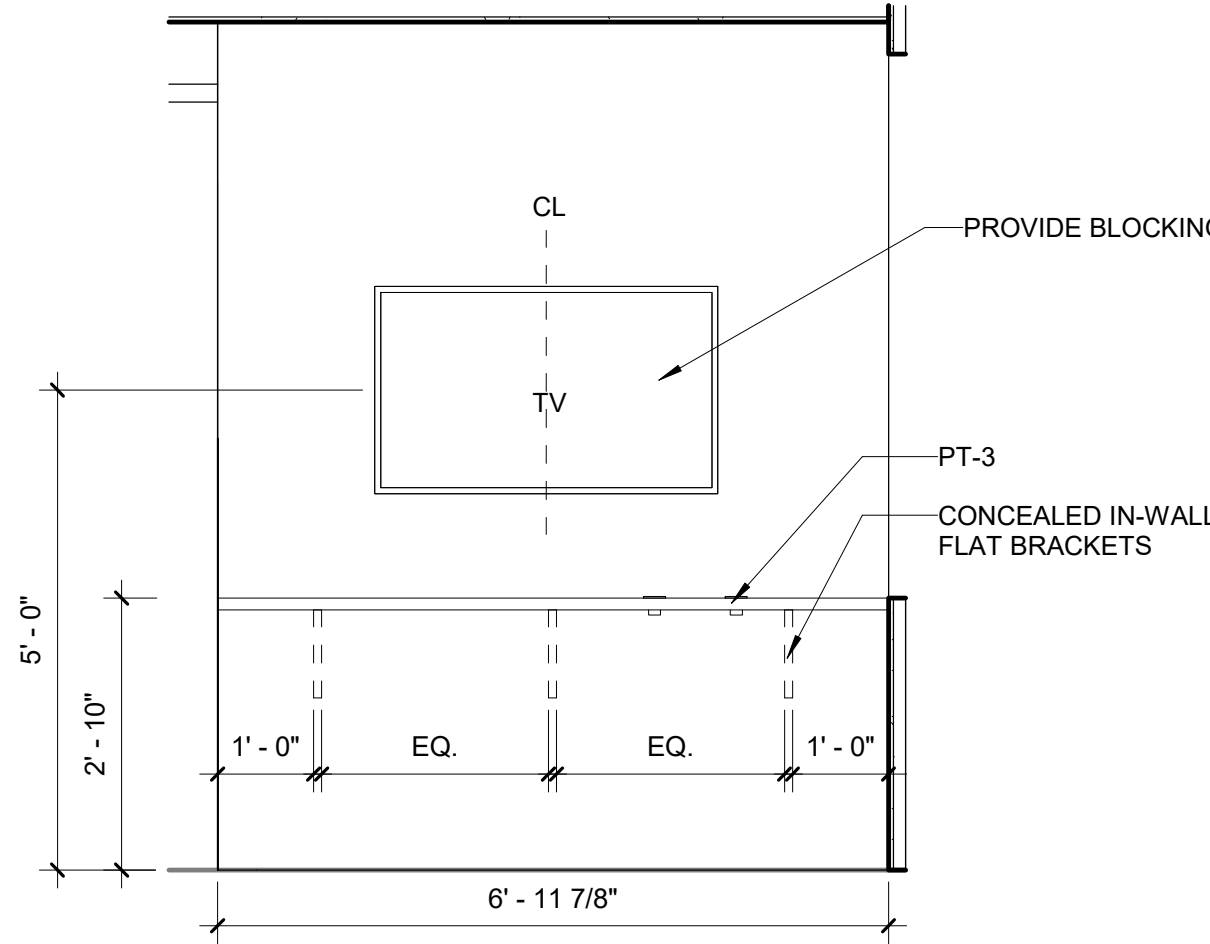


6 STAFF BREAK SEATING - SOUTH
Scale: 1/2" = 1'-0"

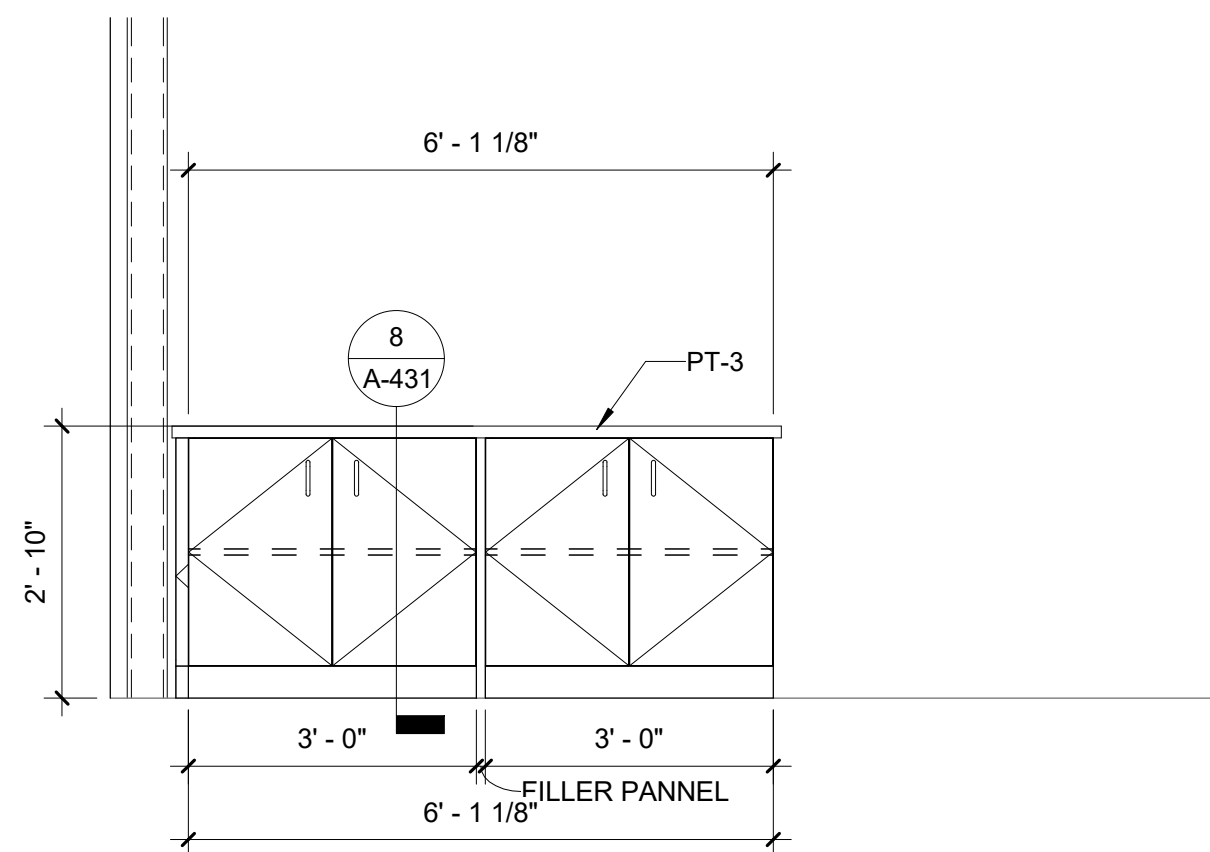

9 CID MILLWORK WEST
Scale: 1/2" = 1'-0"

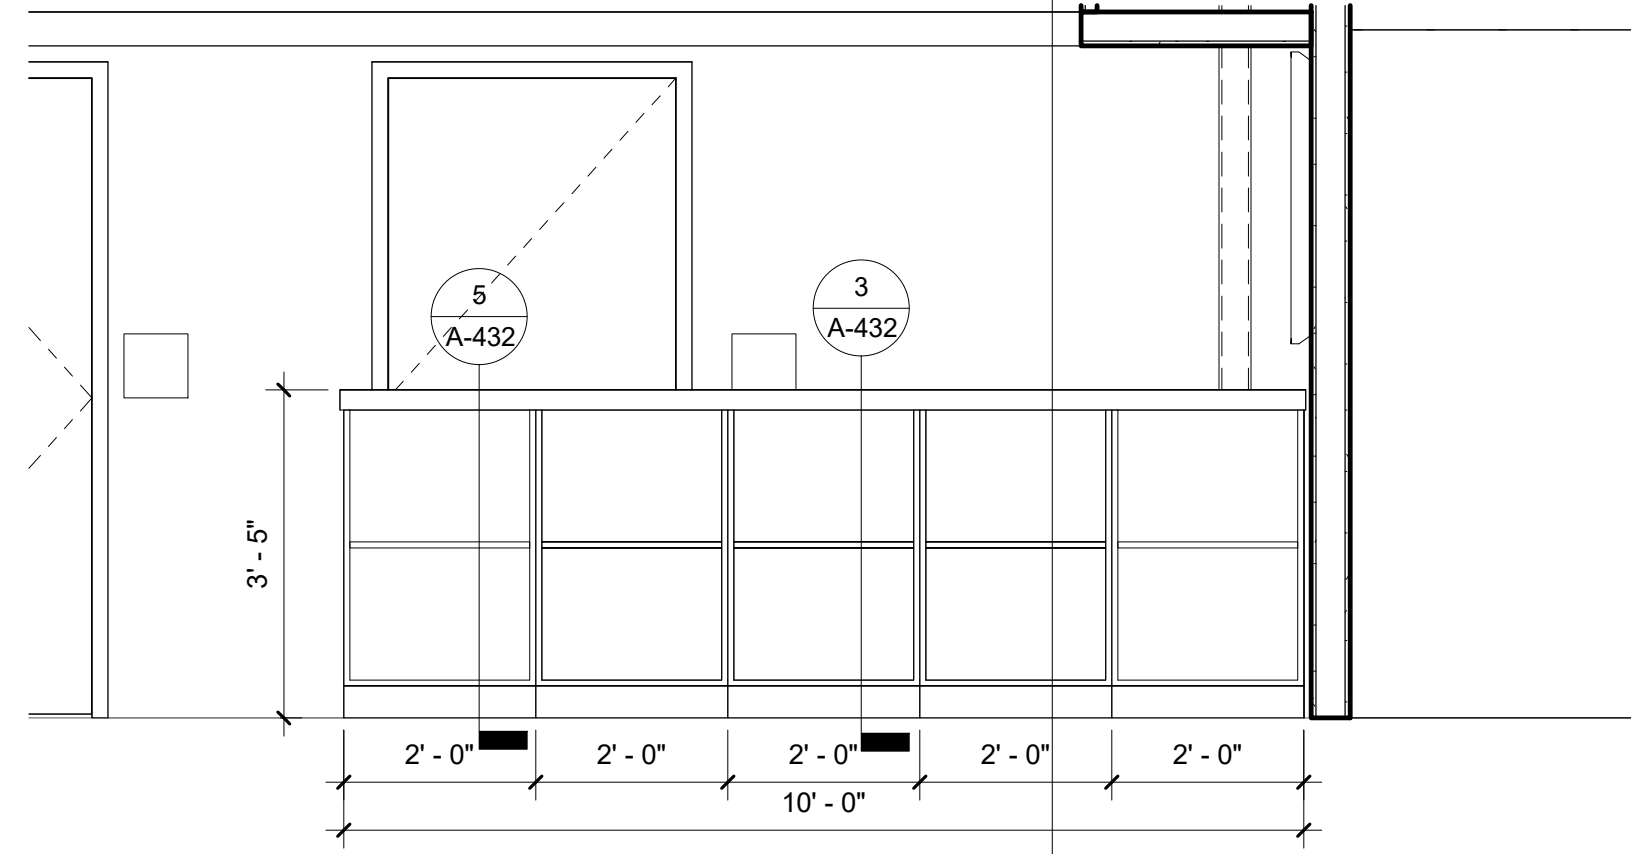

8 CID MILLWORK EAST
Scale: 1/2" = 1'-0"

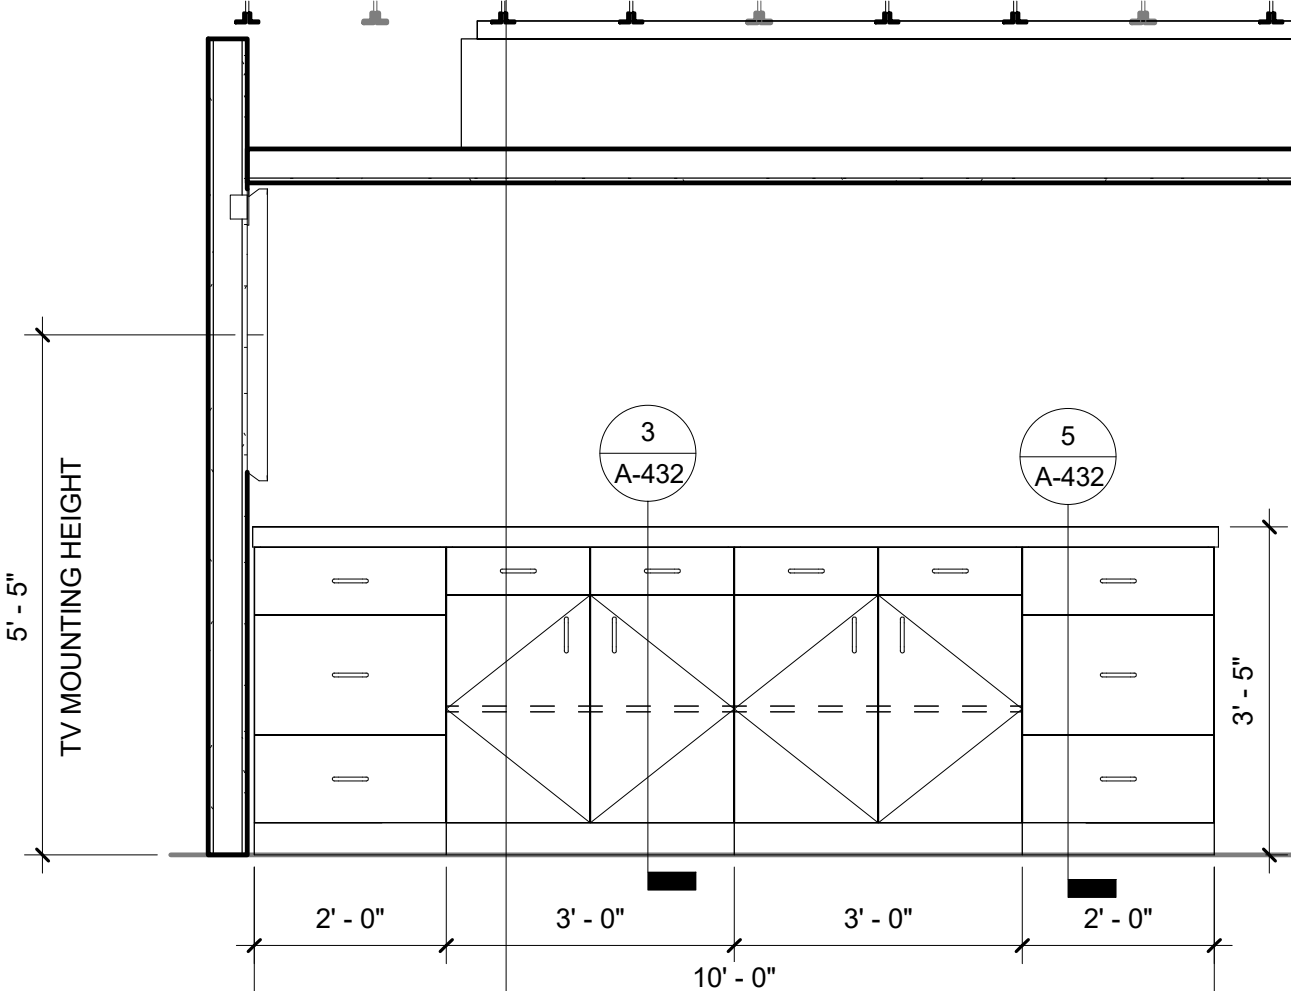

EQUIPMENT SCHEDULE					
TYPE MARK	DESCRIPTION	MANUFACTURER	MODEL	COMMENTS	RESPONSIBILITY
HDS-1	HIGH DENSITY STORAGE	SPACESAVER			
HDS-2	HIGH DENSITY STORAGE	SPACESAVER			
LK-1	36"W X 24"D LOCKER	SPACESAVER			
LK-2	16.5"H X 22.5"W X 24"D LOCKER	SPACESAVER		DUTY BAGS	CFCI
MW-1	MICROWAVE	G.E. APPLIANCES	PCWK15C1WSS		CFCI
OV-1	RANGE	G.E. APPLIANCES	JD630ST/DT		CFCI
PR-1	COPY MACHINE				OFOI
REF-1	REFRIGERATOR	G.E. APPLIANCES	GYE21JYMFS		CFCI
REF-2	UNDER COUNTER REFRIGERATOR	SUMMIT	AL54PLHD		CFCI

INTERIOR ELEVATIONS GENERAL NOTES	
1. REFER TO SHEET A-104 FOR INTERIOR FINISHES AND SCHEDULE.	
2. REFER TO SHEET A-104 FOR PT-4, PT-5 & PT-6 TILE LAYING PATTERN.	
3. REFER TO SHEET A-104 FOR TRANSITION DETAILS.	
4. REFER TO SHEETS A-431 & A-432 FOR MILLWORK DETAILS.	
5. REFER TO SHEET A-411 FOR EQUIPMENT SCHEDULE.	



DEWBERRY


8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG


STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

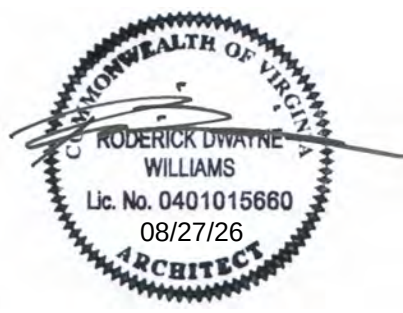

KEY PLAN

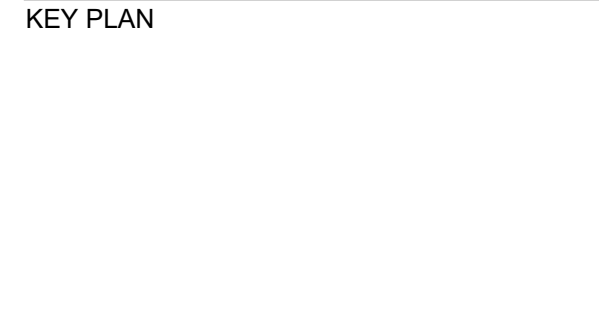

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF / JU
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026



TITLE

ENLARGED PLANS & INTERIOR ELEVATIONS

PROJECT NO. 50165756

SHEET NO.

A-412

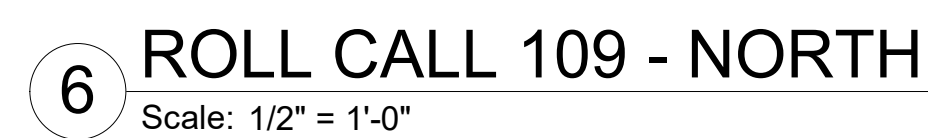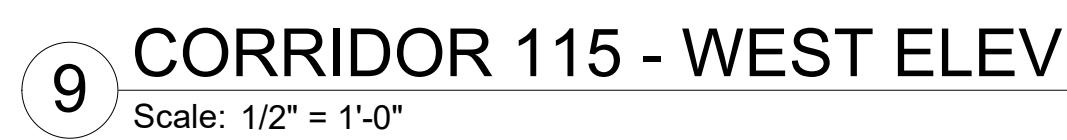

SCALE

REVISIONS		
IND		
5 BRACKET		
LACK		

DRAWN BY	TF / JU / DN
APPROVED BY	RW
CHECKED BY	Checker
DATE	08.26.2026

TITLE

ENLARGED
PLANS &
INTERIOR
ELEVATIONS

PROJECT NO.	50165756
-------------	----------

A-413

SHEET NO.

8/24/2026 11:58:44 AM

A

B


C

D


E

F


1 CASEWORK DTL - ADA SINK
Scale: 1" = 1'-0"

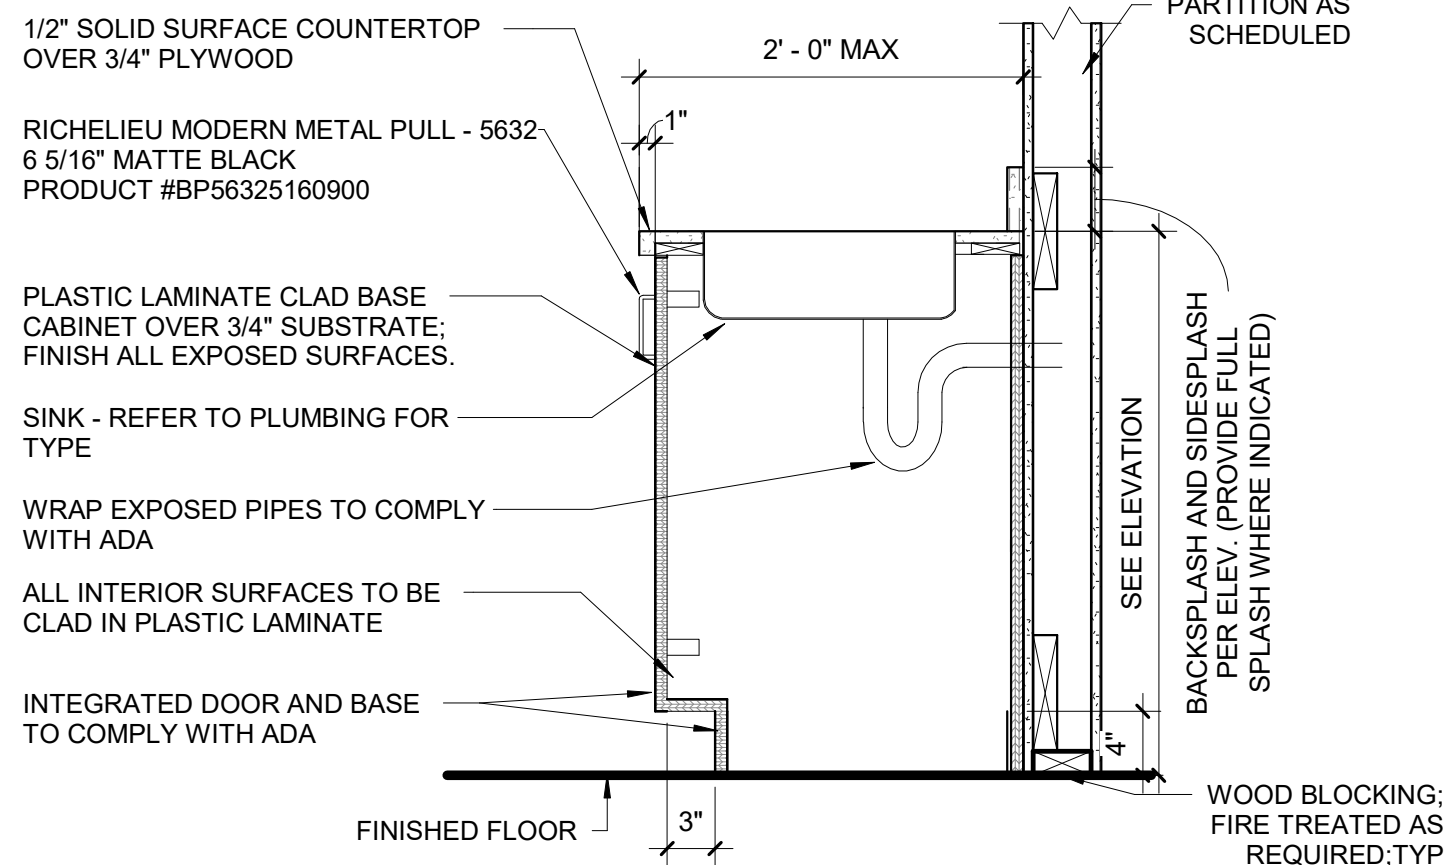


9 CASEWORK DTL - UPPER CABINET W/
TASK LIGHTING
Scale: 1" = 1'-0"

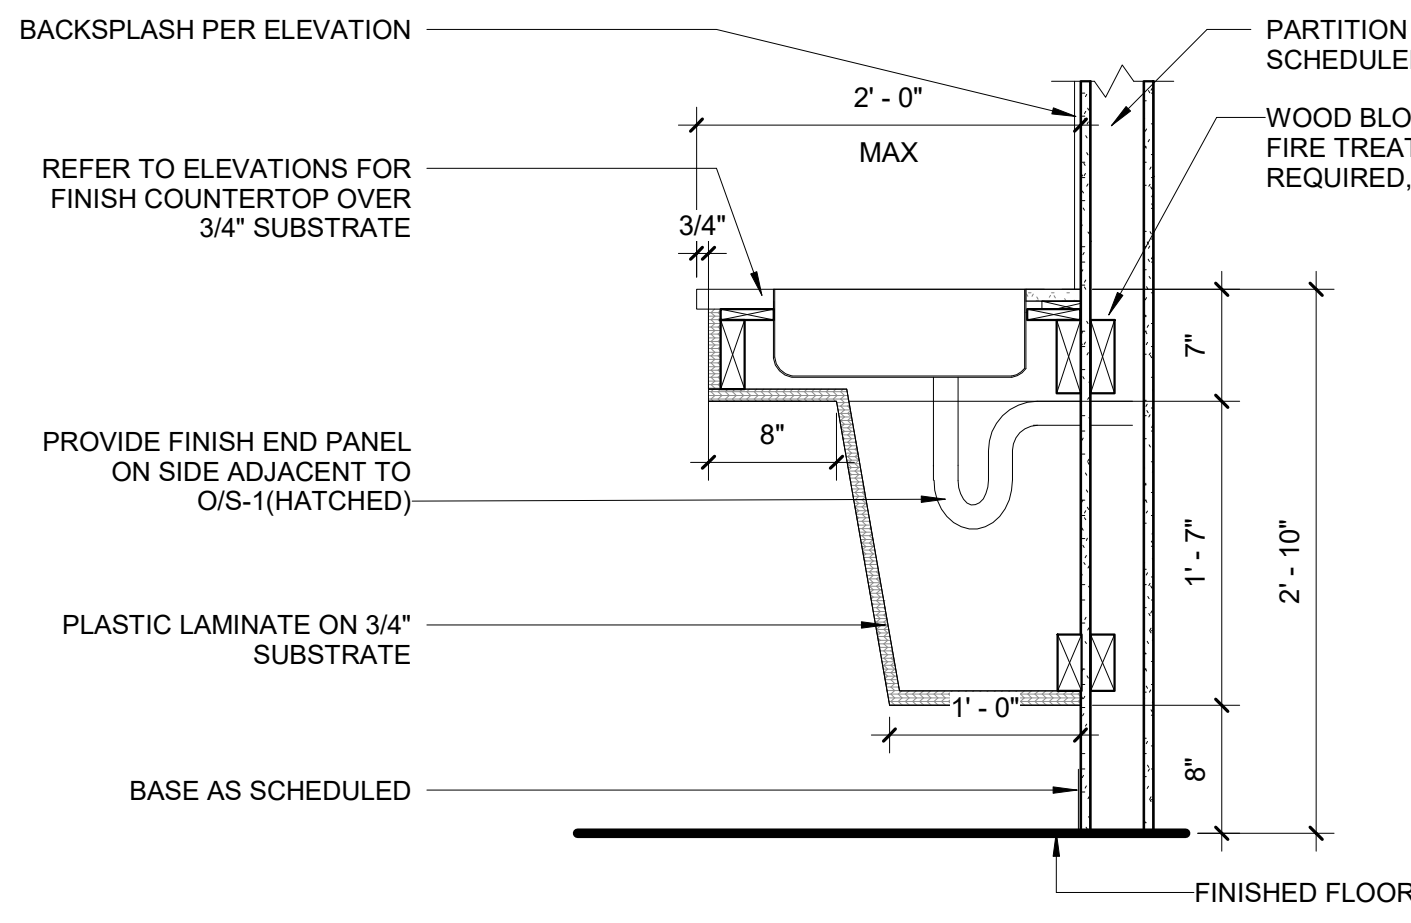


13 CASEWORK DTL - UPPERR/BASE
Scale: 1" = 1'-0"

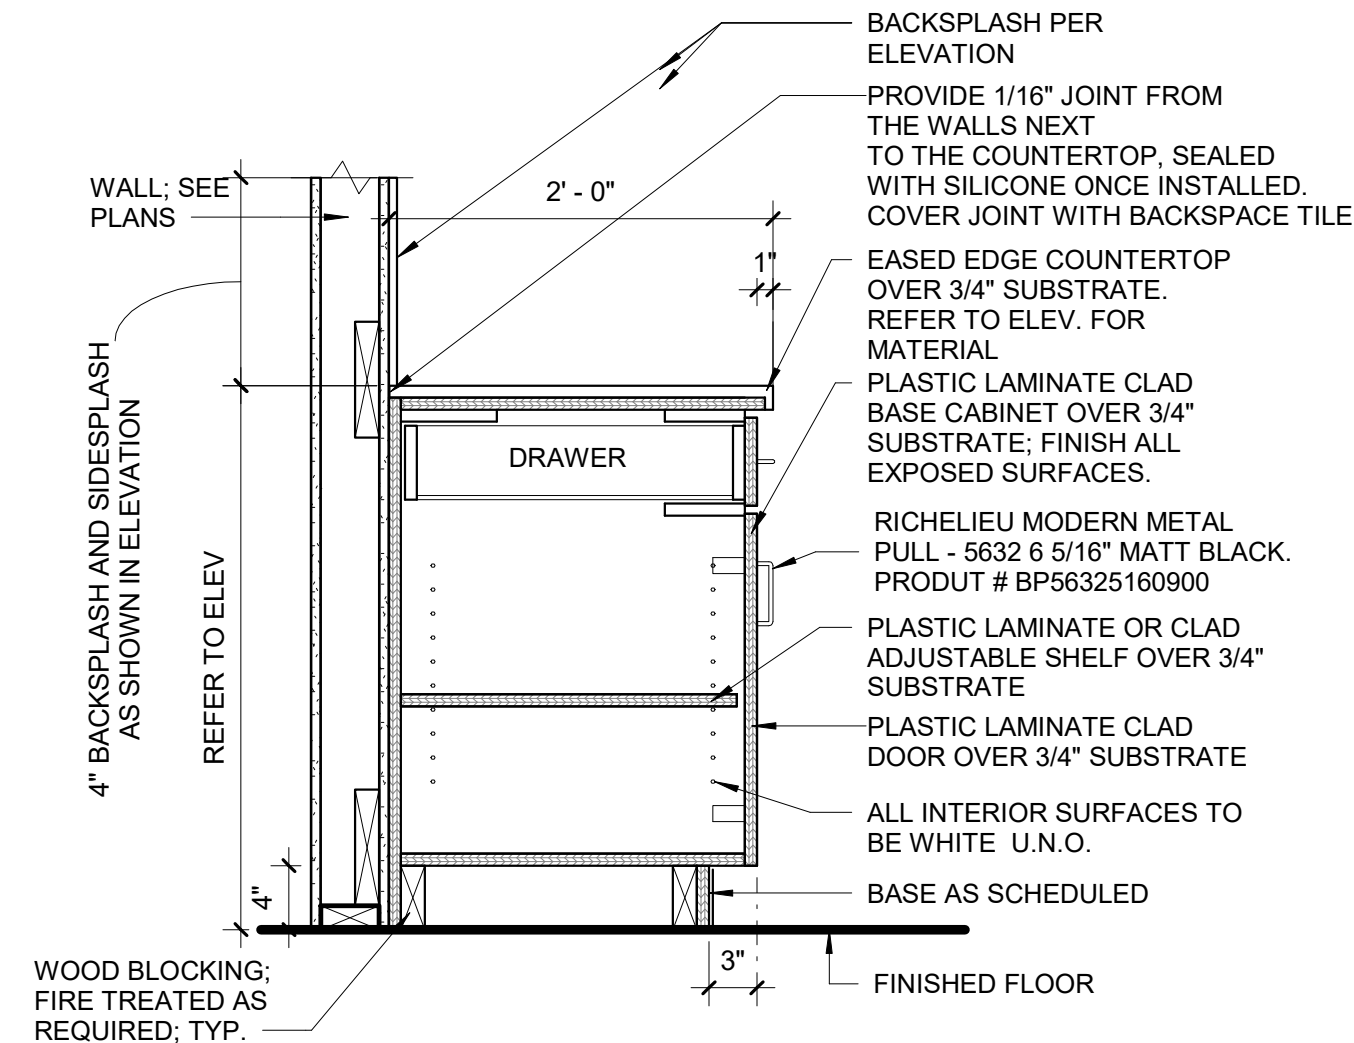


12 CASEWORK DTL - ABOVE REF.
Scale: 1" = 1'-0"

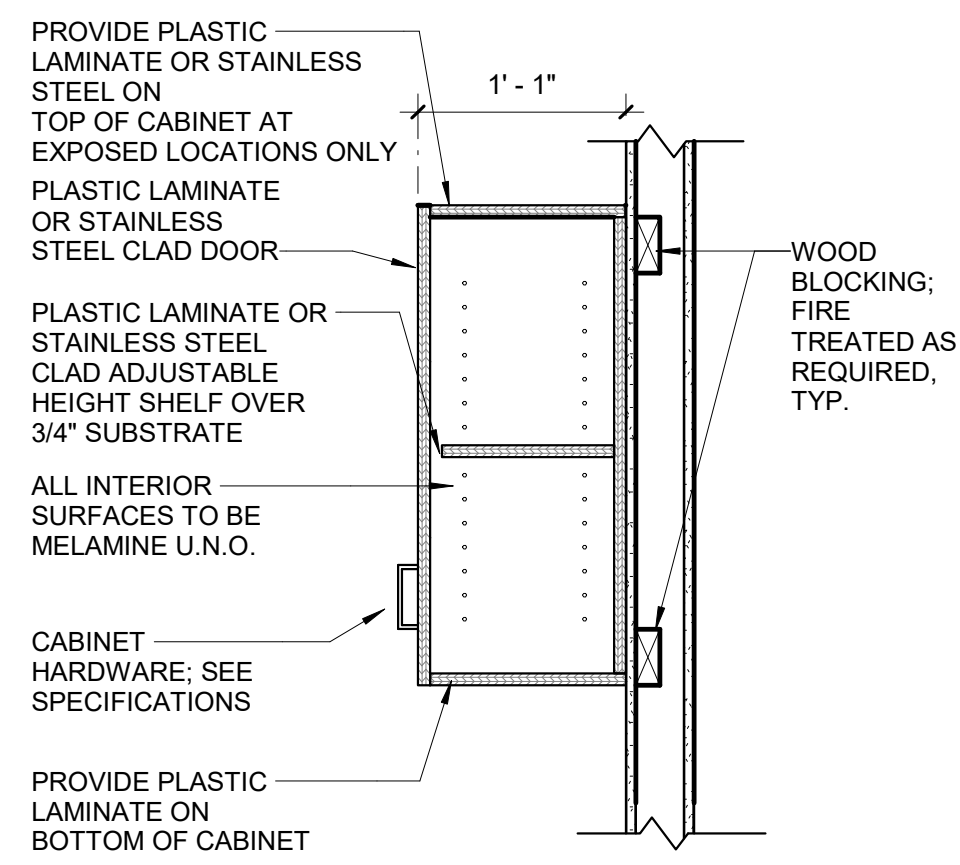


3 CASEWORK DTL - BASE CABINET
- 4 DRAWERS
Scale: 1" = 1'-0"

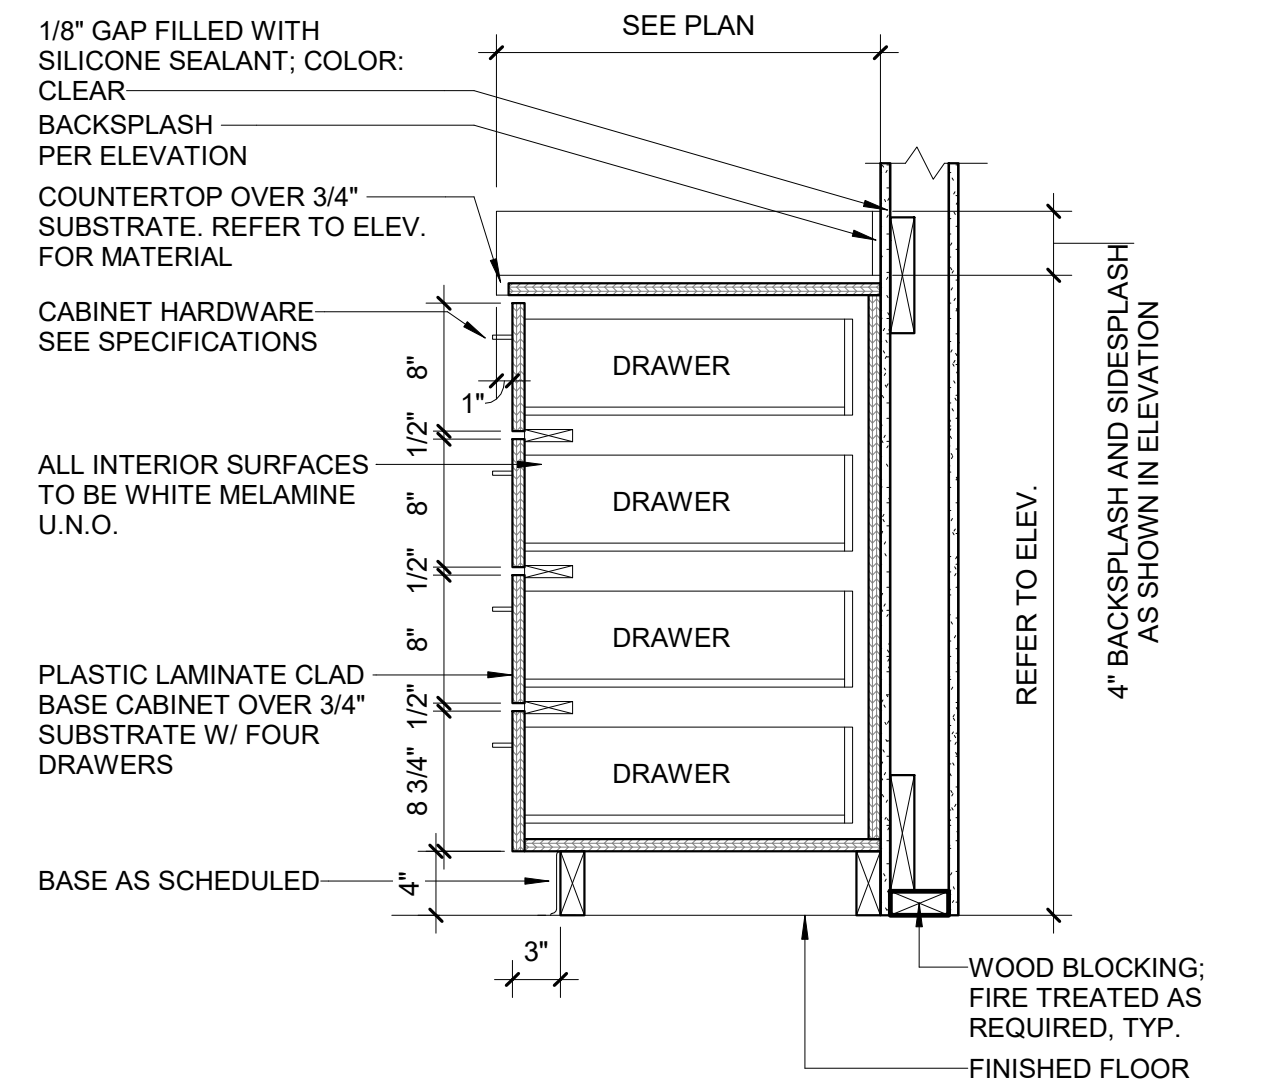


10 CASEWORK DTL - APPLIANCE OPENING
Scale: 1" = 1'-0"

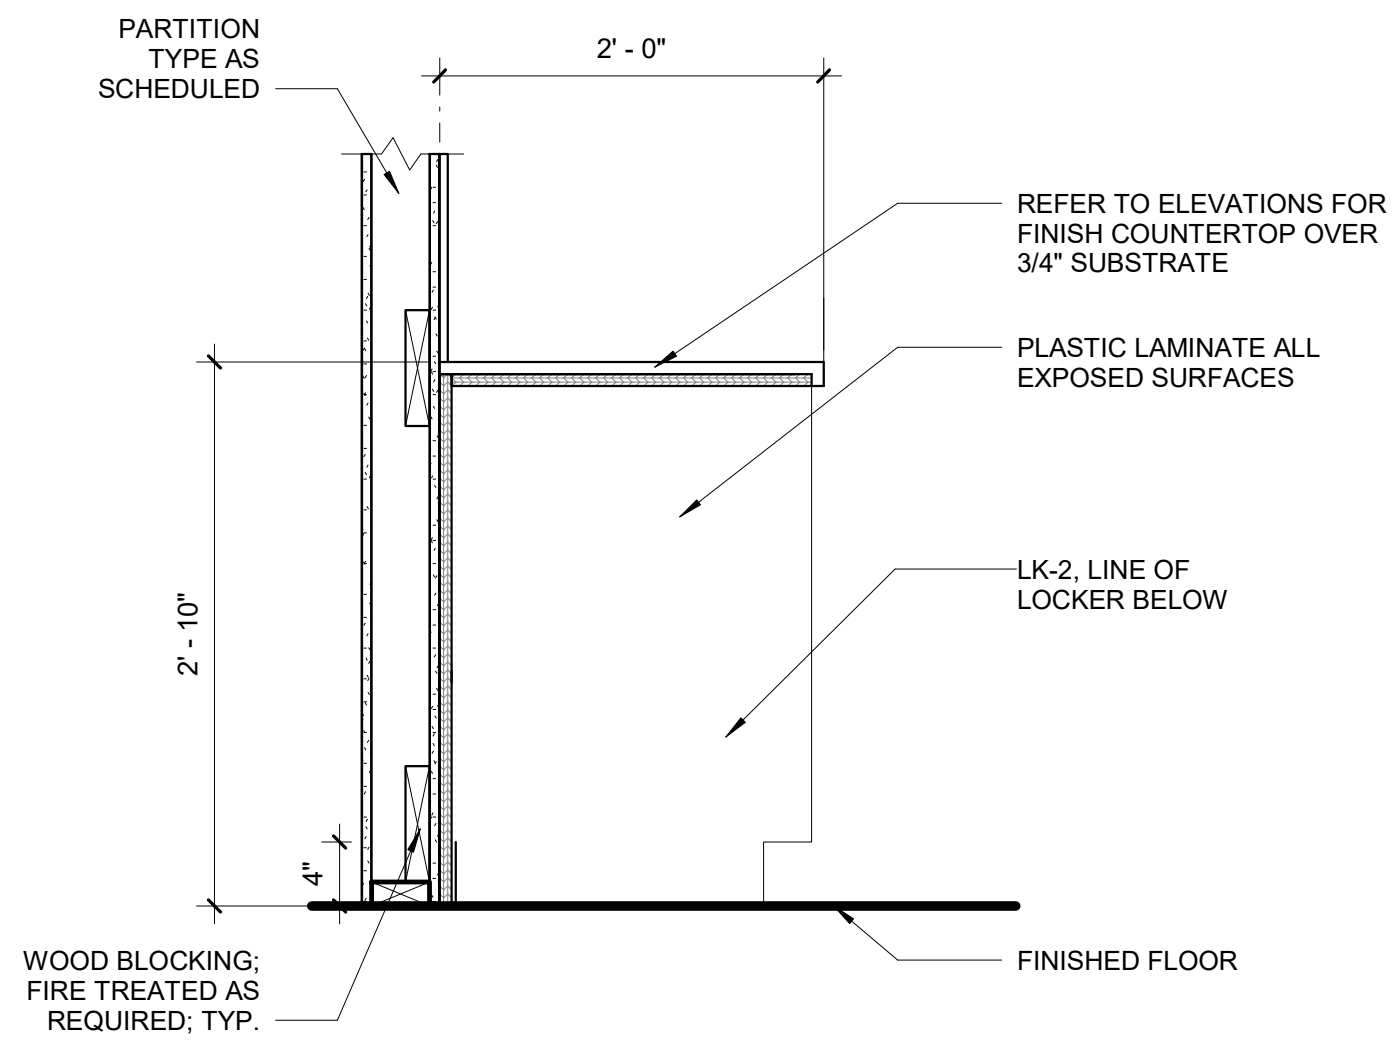


14 CASEWORK DTL - SHELVING
Scale: 1" = 1'-0"

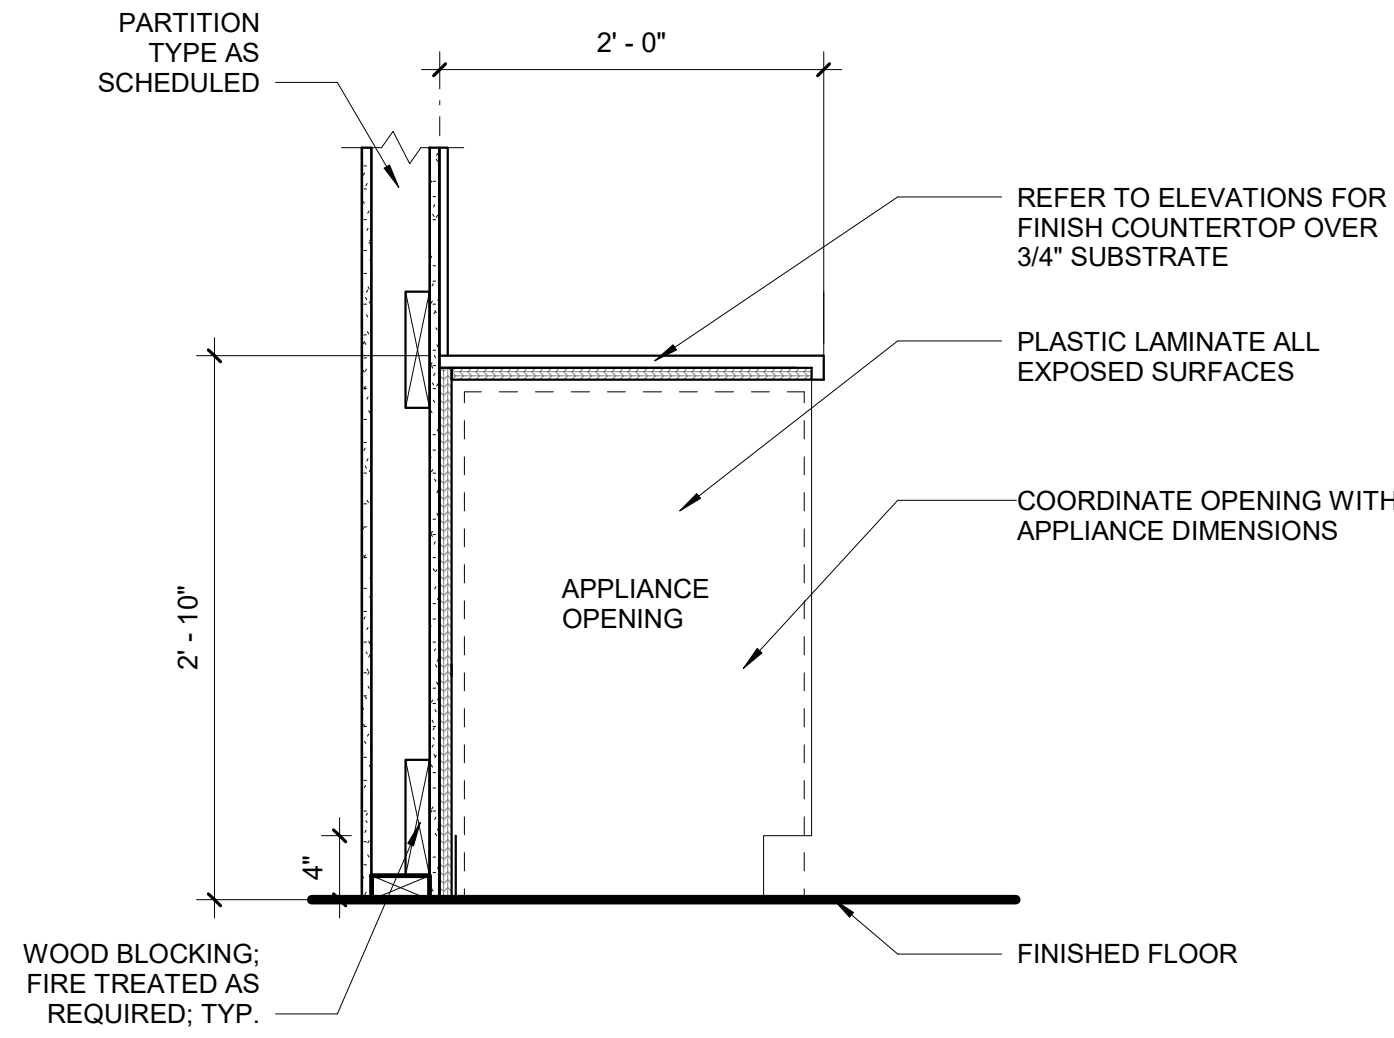



11 CASEWORK DTL - BASE CABINET - OVEN
Scale: 1" = 1'-0"

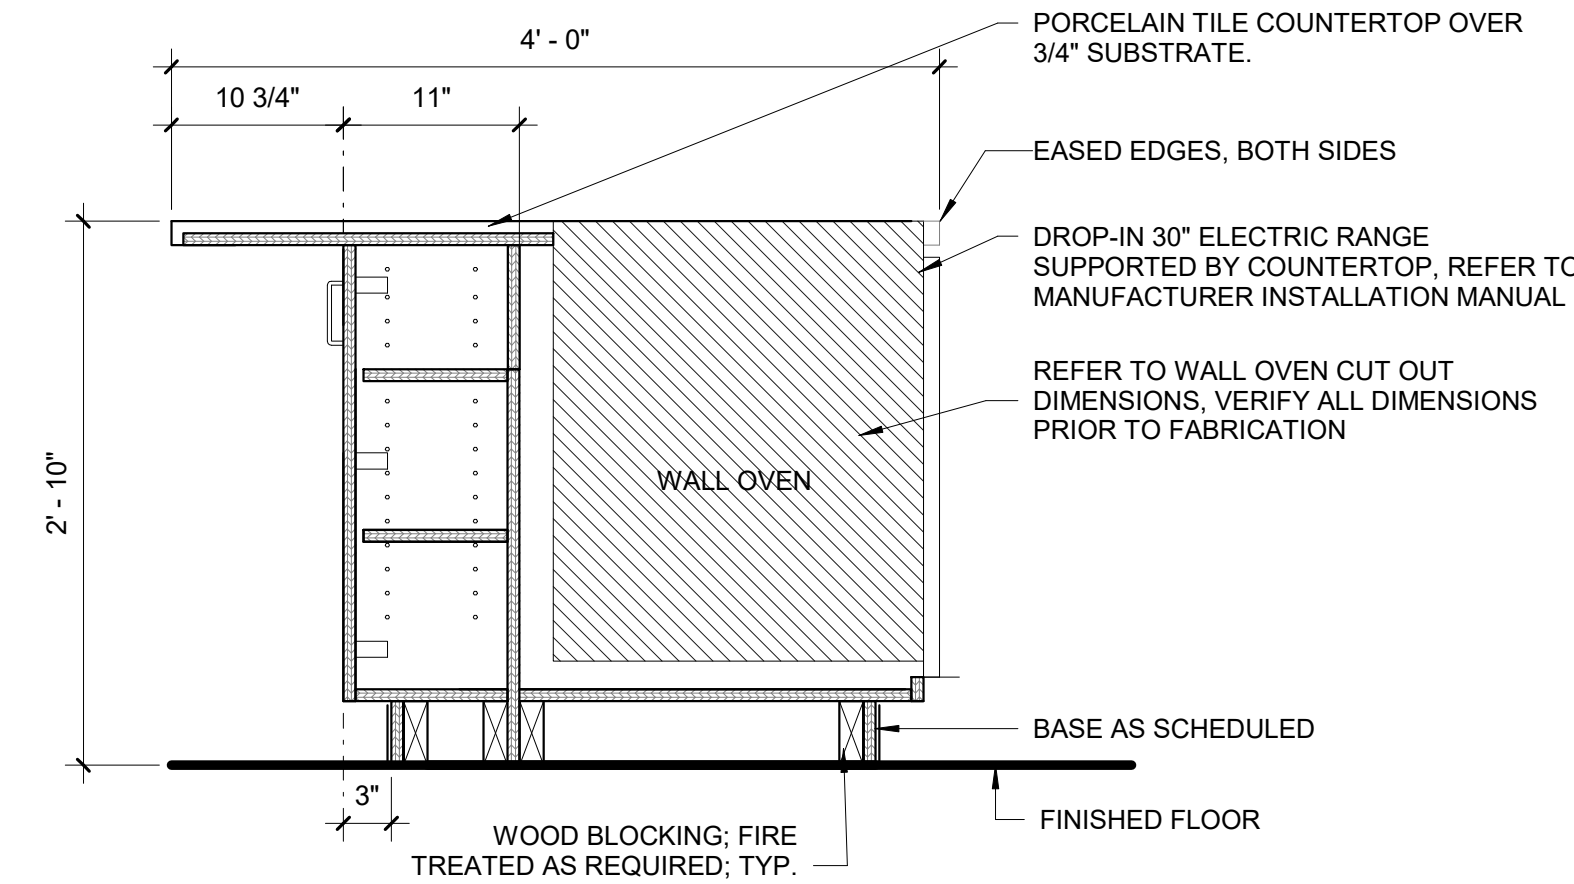

4 CASEWORK DTL - BASE CABINET -
DOOR
Scale: 1" = 1'-0"

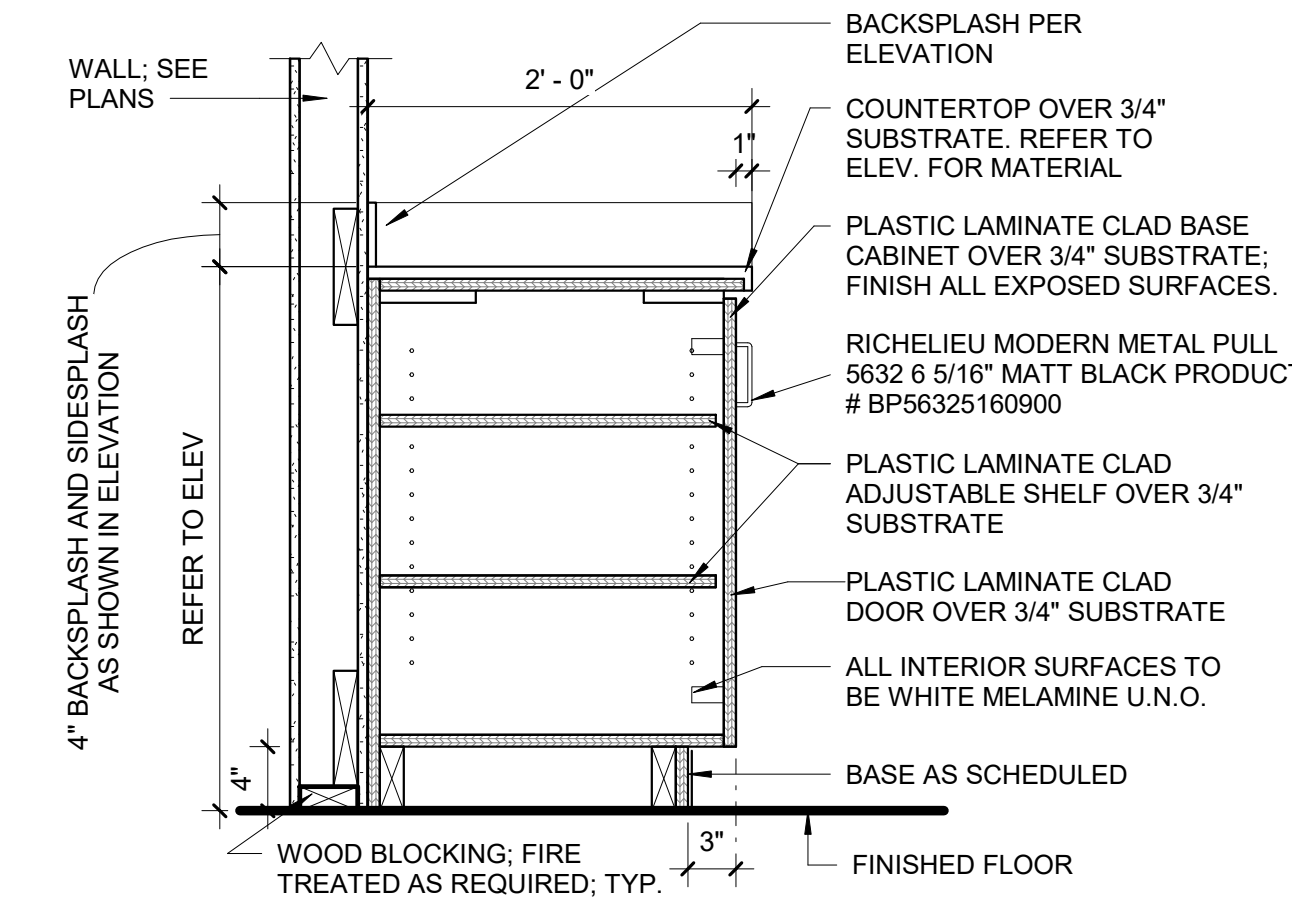

2 CASEWORK DTL - BASE CABINET -
3 DRAWERS
Scale: 1" = 1'-0"

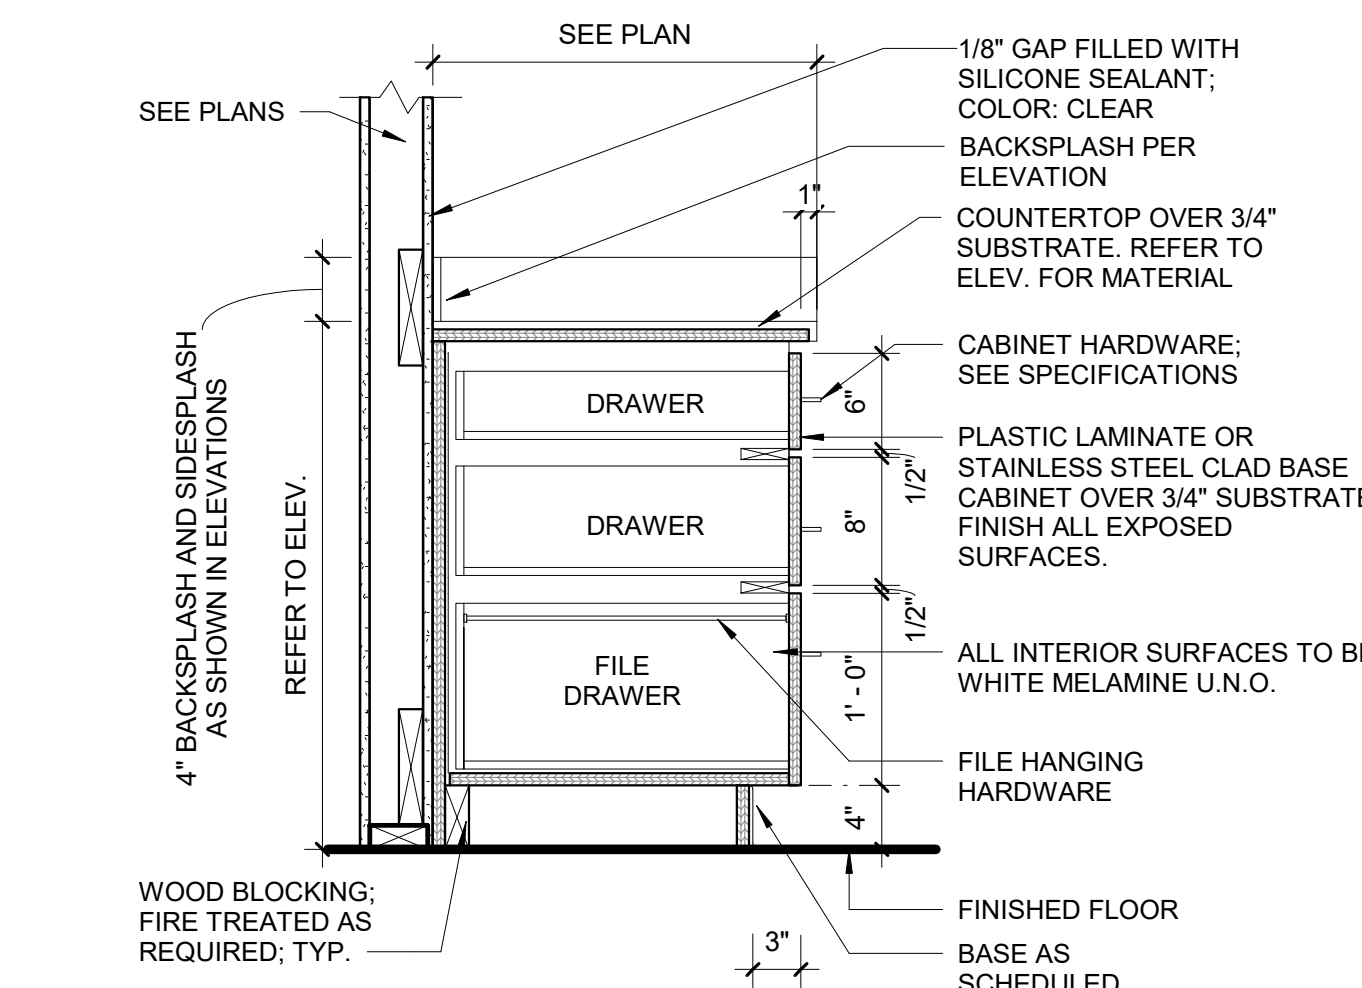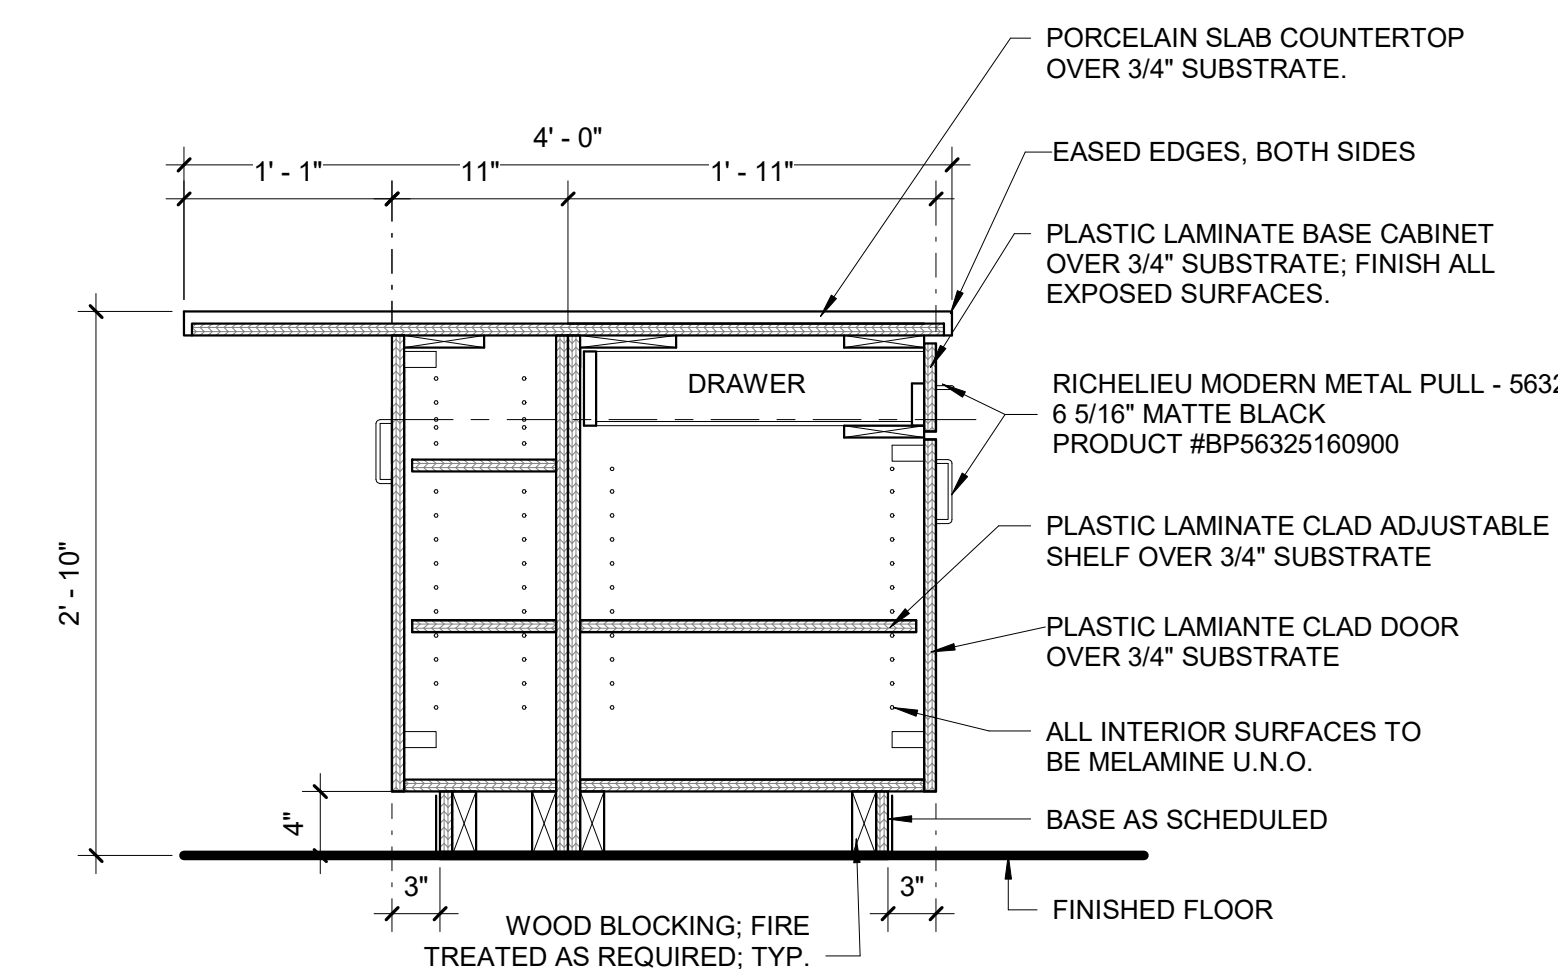

CASEWORK GENERAL NOTES

1. DETAILS ARE INTENDED TO SHOW DESIGN INTENT AND DIMENSIONAL INFORMATION. ACTUAL CASEWORK FABRICATION MUST MEET OR EXCEED STANDARDS REFERENCED IN THE SPECIFICATIONS.
2. SEE CASEWORK ELEVATIONS FOR FINISHES.
3. FINISH ALL EXPOSED SURFACES.
4. SEE SHEET **A-431** FOR FINISH LIST.
5. SEE SHEET **A-431** FOR STANDARD CASEWORK DETAILS.
6. PROVIDE WALL BLOCKING FOR TOILET ACCESSORIES (GRAB BARS, PARTITIONS, ETC.) & WALL CABINETS.
7. DO NOT SCALE DRAWINGS; REPORT ANY DISCREPANCIES TO THE ARCHITECT IN WRITING.
8. REFER TO SHEET **G-008** FOR ADA STANDARDS AND MOUNTING HEIGHTS.
9. FIELD VERIFY ALL DIMENSIONS BEFORE FABRICATING CASEWORK.
10. COUNTERTOPS ARE 24"D U.N.O., 1.25" THICK WITH 4" BACKSPLASH, U.N.O.
11. BASE CABINETS SHALL BE 23" DEEP, ALL UPPER CABINETS SHALL BE 13" DEEP, AND TALL STORAGE UNITS BE 24" DEEP, U.N.O. PROVIDE FILLERS AND FINISHED END PANELS AS REQUIRED.
12. AT CASEWORK WHERE ELECTRICAL OUTLETS ARE SPECIFICALLY NOTED INSIDE CABINETS, OUTLETS TO BE FLUSH MOUNTED ON INSIDE FACE OF CASEWORK PANEL.
13. PROVIDE CONTINUOUS SEALANT AT GAPS BETWEEN BACKSPLASH AND WALL - COLOR TO BE CLEAR.
14. ELECTRICAL OUTLETS ARE SHOWN AS THEY RELATE TO CASEWORK. COORDINATE LOCATIONS WITH ELECTRICAL DRAWINGS.
15. CASEWORK GENERAL NOTES APPLY TO ALL CASEWORK SHEETS.
16. TOILET ACCESSORIES LISTED ON A-400 SERIES, ALL OTHER EQUIPMENT IS TAGGED ON EITHER ENLARGED PLANS OR FURNITURE/EQUIPMENT PLAN. REFER TO **G-008** FOR MOUNTING HEIGHTS.
17. PROVIDE CONTINUOUS WALL BASE ALONG CABINETS, ALONG EXPOSED SIDES, AND END PANELS.



DEWBERRY


8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

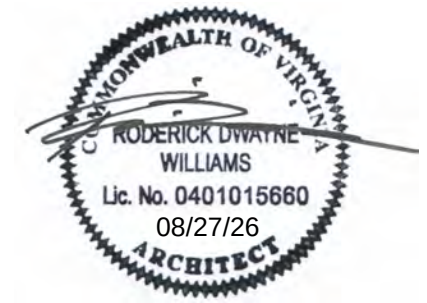

KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JU
APPROVED BY RW
CHECKED BY Checker
DATE 08.26.2026

TITLE

MILLWORK
DETAILS

PROJECT NO. 50165756

A-431

SHEET NO.

F


E

D

C

B

A

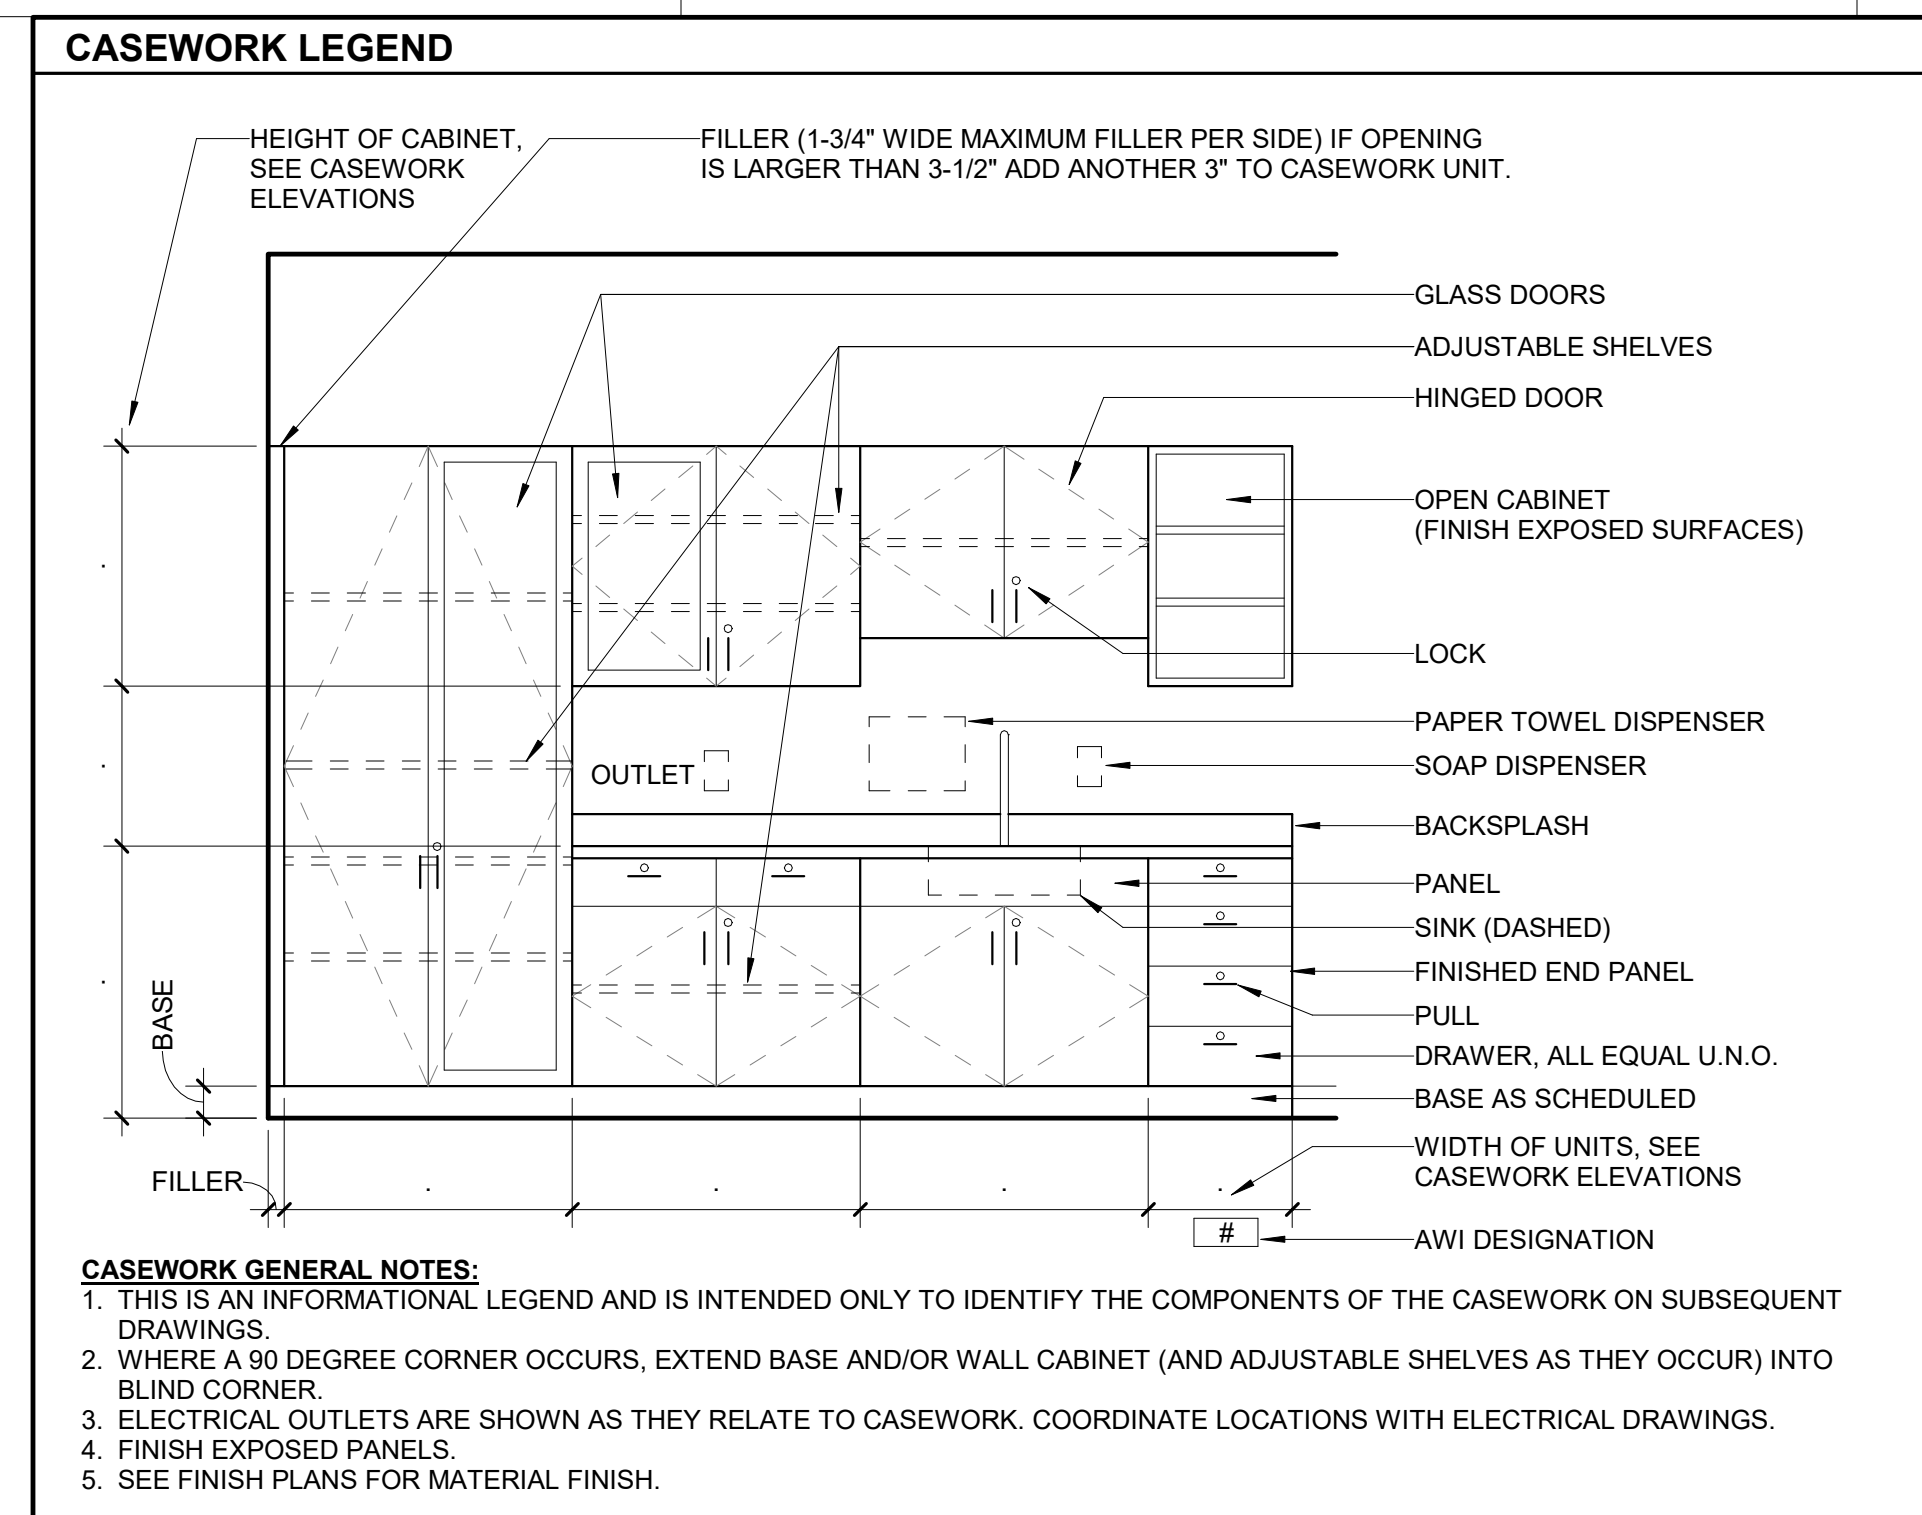

CASEWORK GENERAL NOTES.






1. DETAILS ARE INTENDED TO SHOW DESIGN INTENT AND DIMENSIONAL INFORMATION. ACTUAL CASEWORK FABRICATION MUST MEET OR EXCEED STANDARD MANUFACTURING TOLERANCES AND FINISHES.
2. SEE CASEWORK ELEVATIONS FOR FINISHES.
3. FINISH ALL EXPOSED SURFACES.
4. SEE SHEET A-431 FOR FINISHES.
5. SEE SHEET A-431 FOR STANDARD CASEWORK DETAILS.
6. PROVIDE WALL BLOCKING FOR TOILET ACCESSORIES (GRAB BARS, PARTITION, ETC.) AND CABINET.
7. DO NOT SCALE DRAWINGS. REPORT ANY DISCREPANCIES TO THE ARCHITECT IN WRITING.
8. REFER TO SHEET A-432 FOR ADA STANDARDS AND MOUNTING HEIGHTS.
9. FIELD VERIFY ALL DIMENSIONS BEFORE FABRICATING CASEWORK.
10. COUNTERTOPS ARE 24" U.O. 1.25" THICK WITH 4" BACKSPLASH, U.N.O. ALL CASEWORK SETS MUST BE 24" U.O. ALL UPPER CABINETS SHALL BE 12" DEEP, AND TALL STORAGE UNITS BE 24" DEEP, U.N.O. PROVIDE FINISHES AND FINISHED END PANELS AS REQUIRED.
11. CASEWORK WHERE ELECTRICAL PANELS ARE SPECIFICALLY NOTED INSIDE CABINETS, OUTLETS TO BE FLUSH MOUNTED ON INSIDE FACE OF CASEWORK PANEL.
12. PROVIDE CONTINUOUS SEALANT AT GAPS BETWEEN BACKSPLASH AND WALL - COORDINATE TO BE CLEAR.
13. ELECTRICAL OUTLETS SHALL BE SHOWN AS THEY RELATE TO CASEWORK. COORDINATE LOCATIONS WITH ELECTRICAL DRAWINGS.
14. CASEWORK GENERAL NOTES APPLY TO ALL CASEWORK SHEETS.
15. TOILET ACCESSORIES WHERE ELECTRICAL A-440 SERIES. ALL OTHER EQUIPMENT TAGGED ON EITHER ENLARGED PLANS OR FURNITURE / EQUIPMENT PLAN REFER TO G-006 FOR MOUNTING HEIGHTS.
16. PROVIDE CONTINUOUS SEALANT BASE ALL BASE CABINETS, ALL EXPOSED SIDES, AND END PANELS.




DEWBERRY

TOWN OF STRASBURG

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

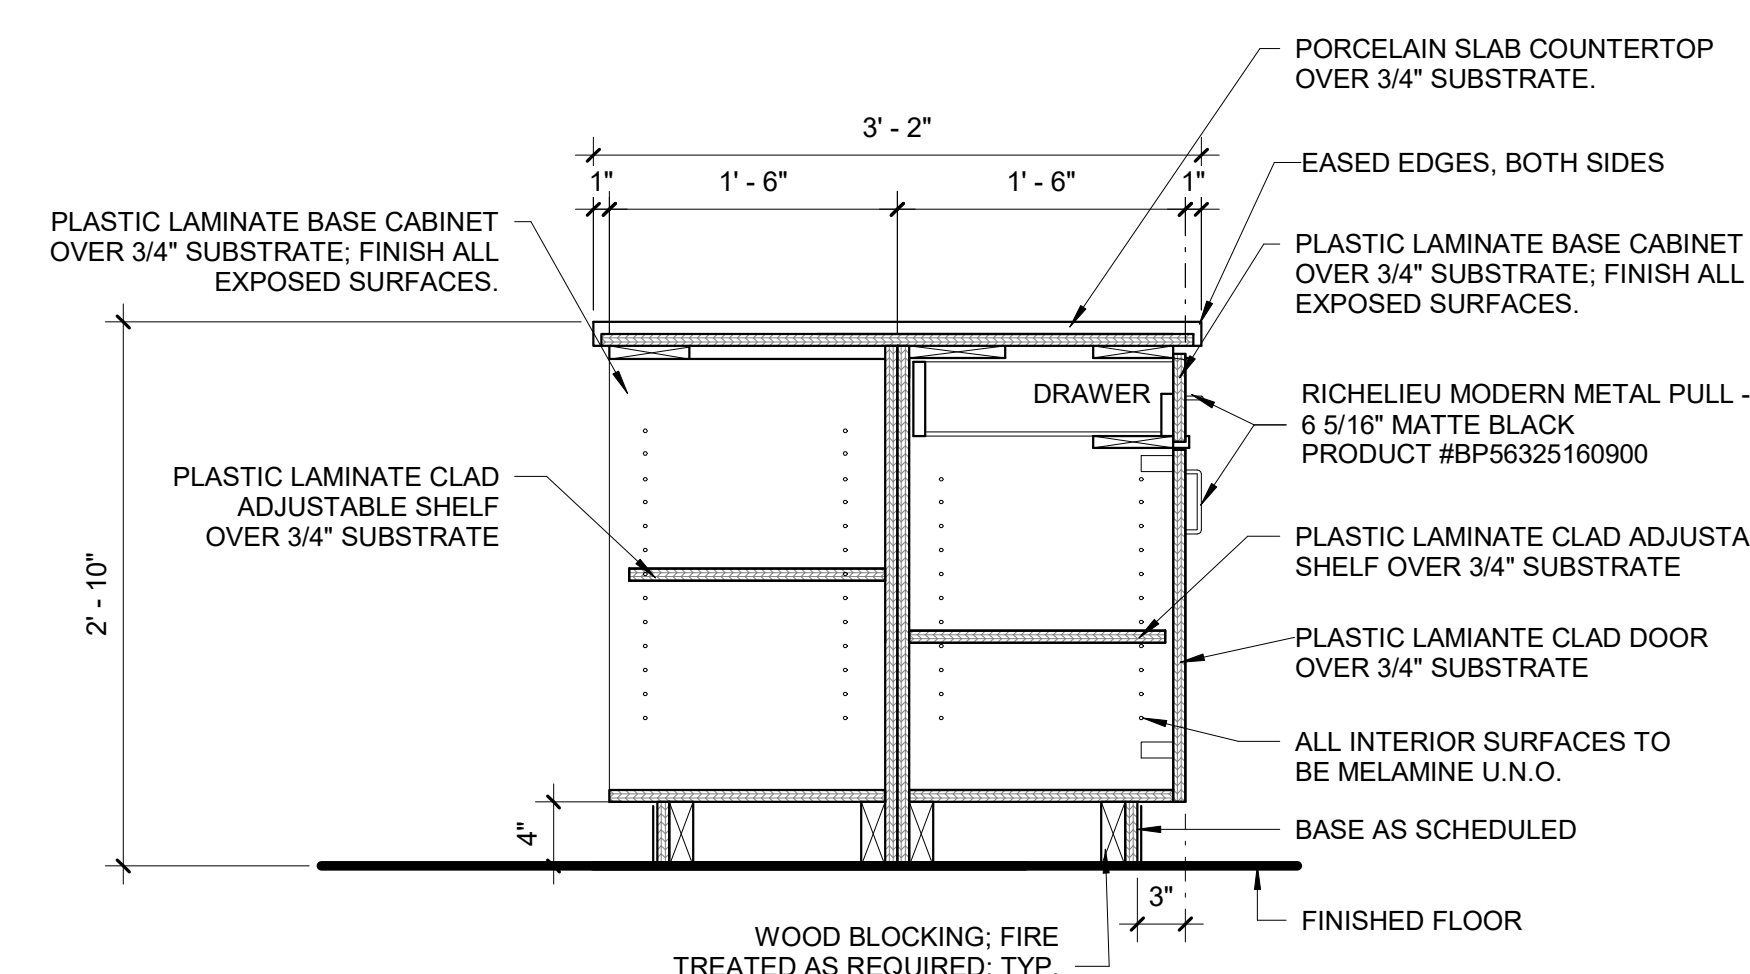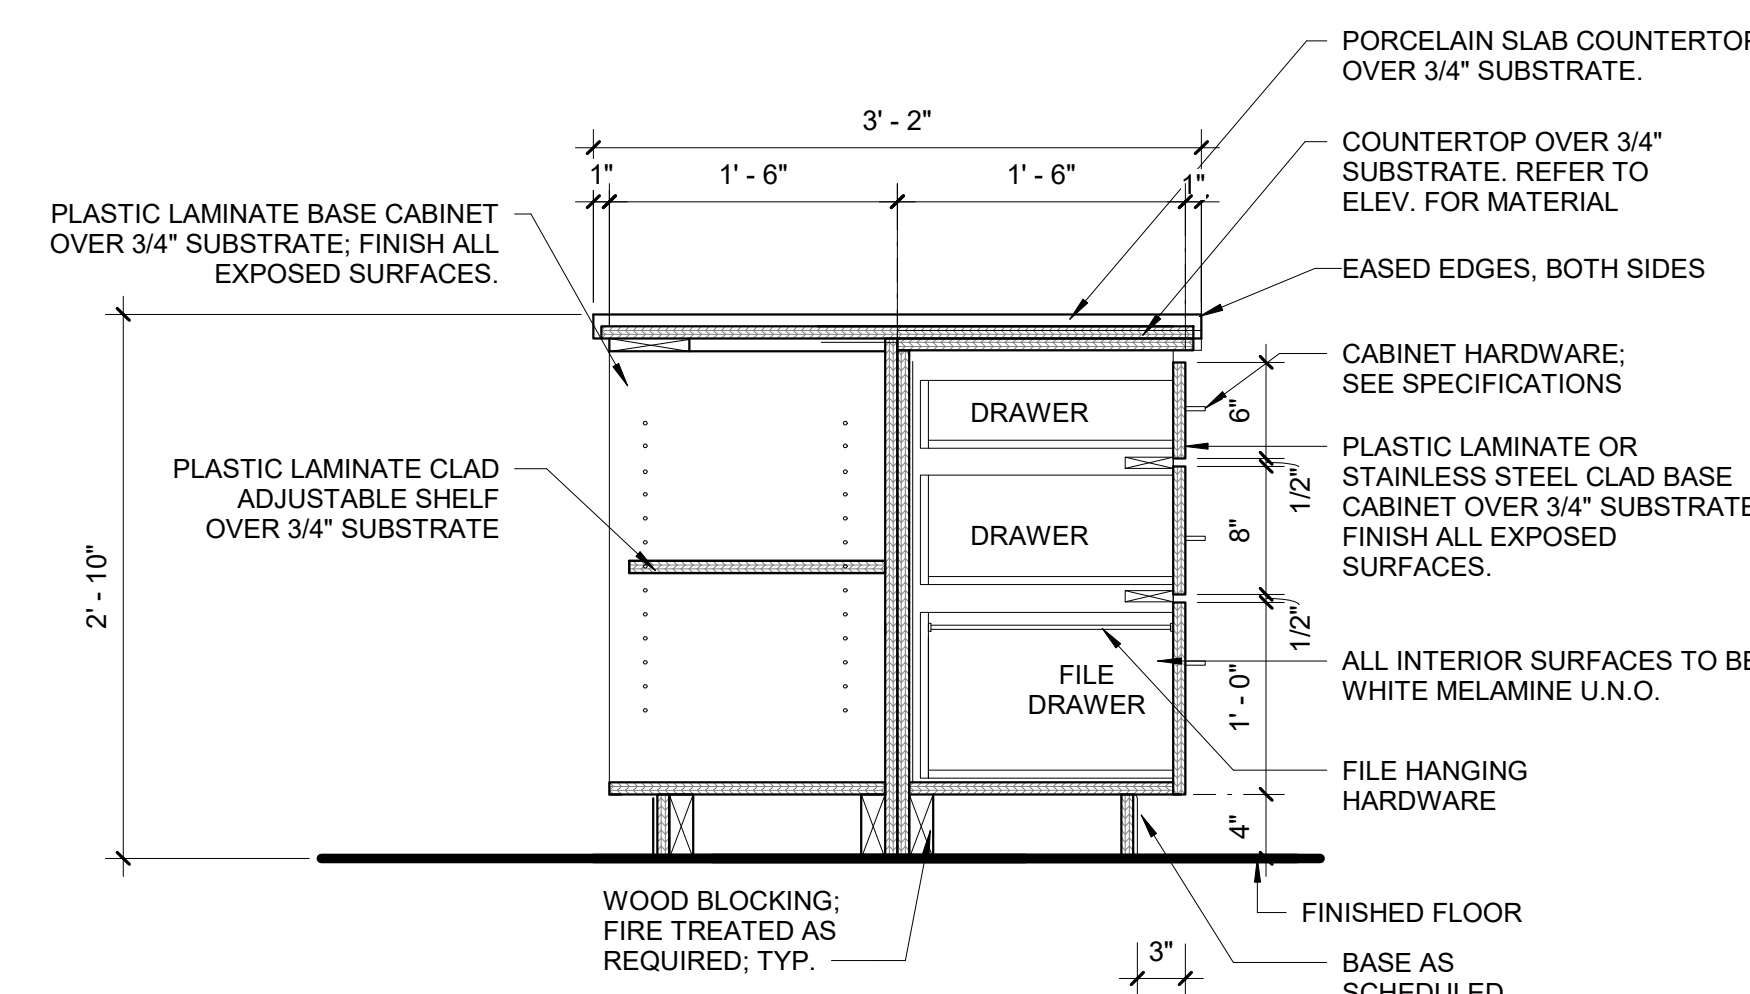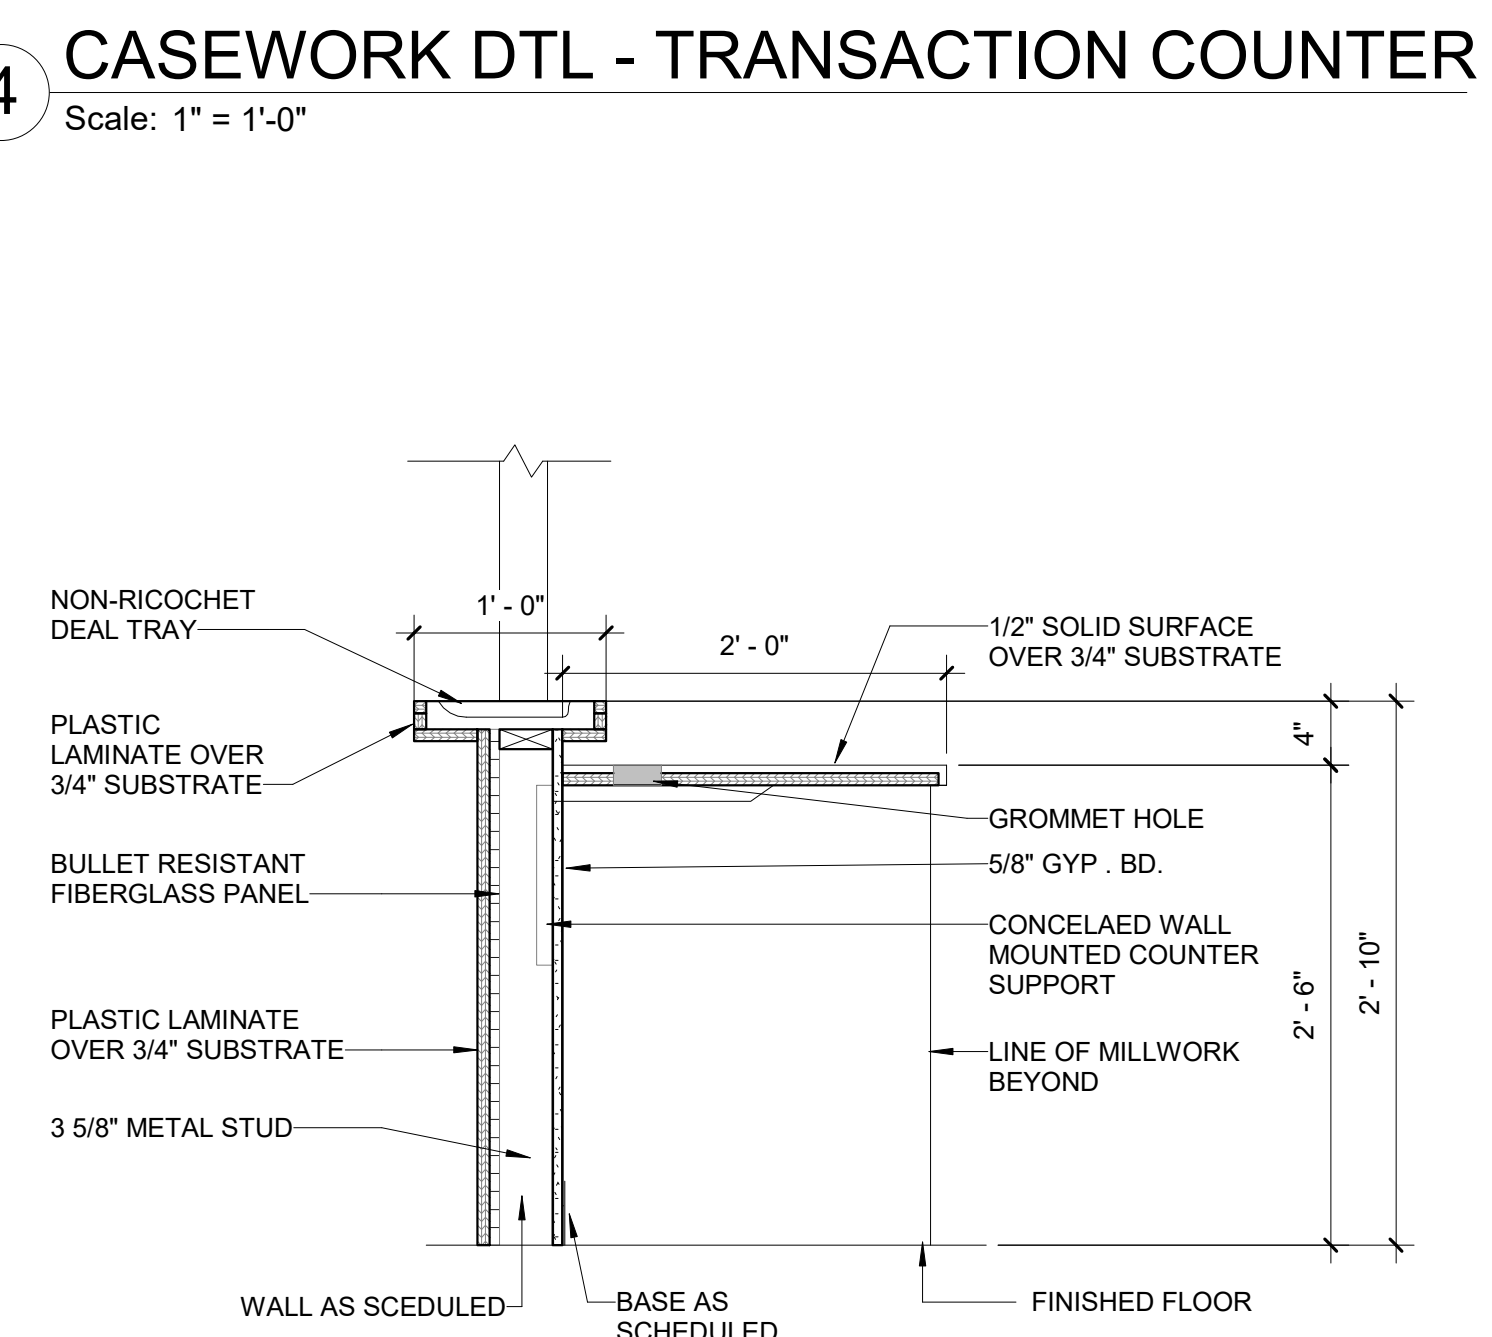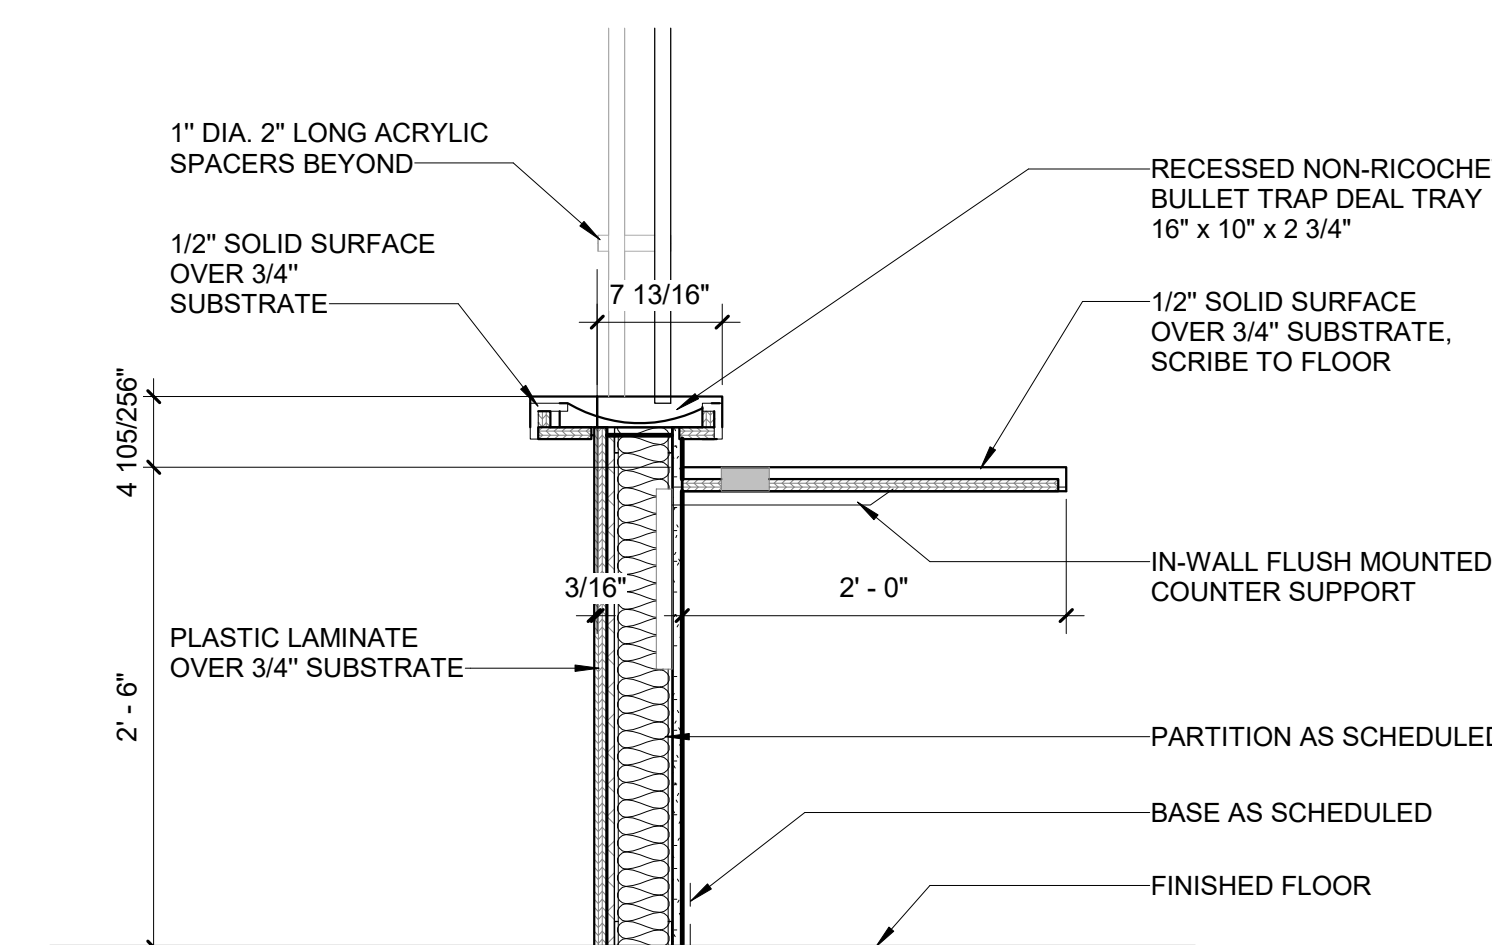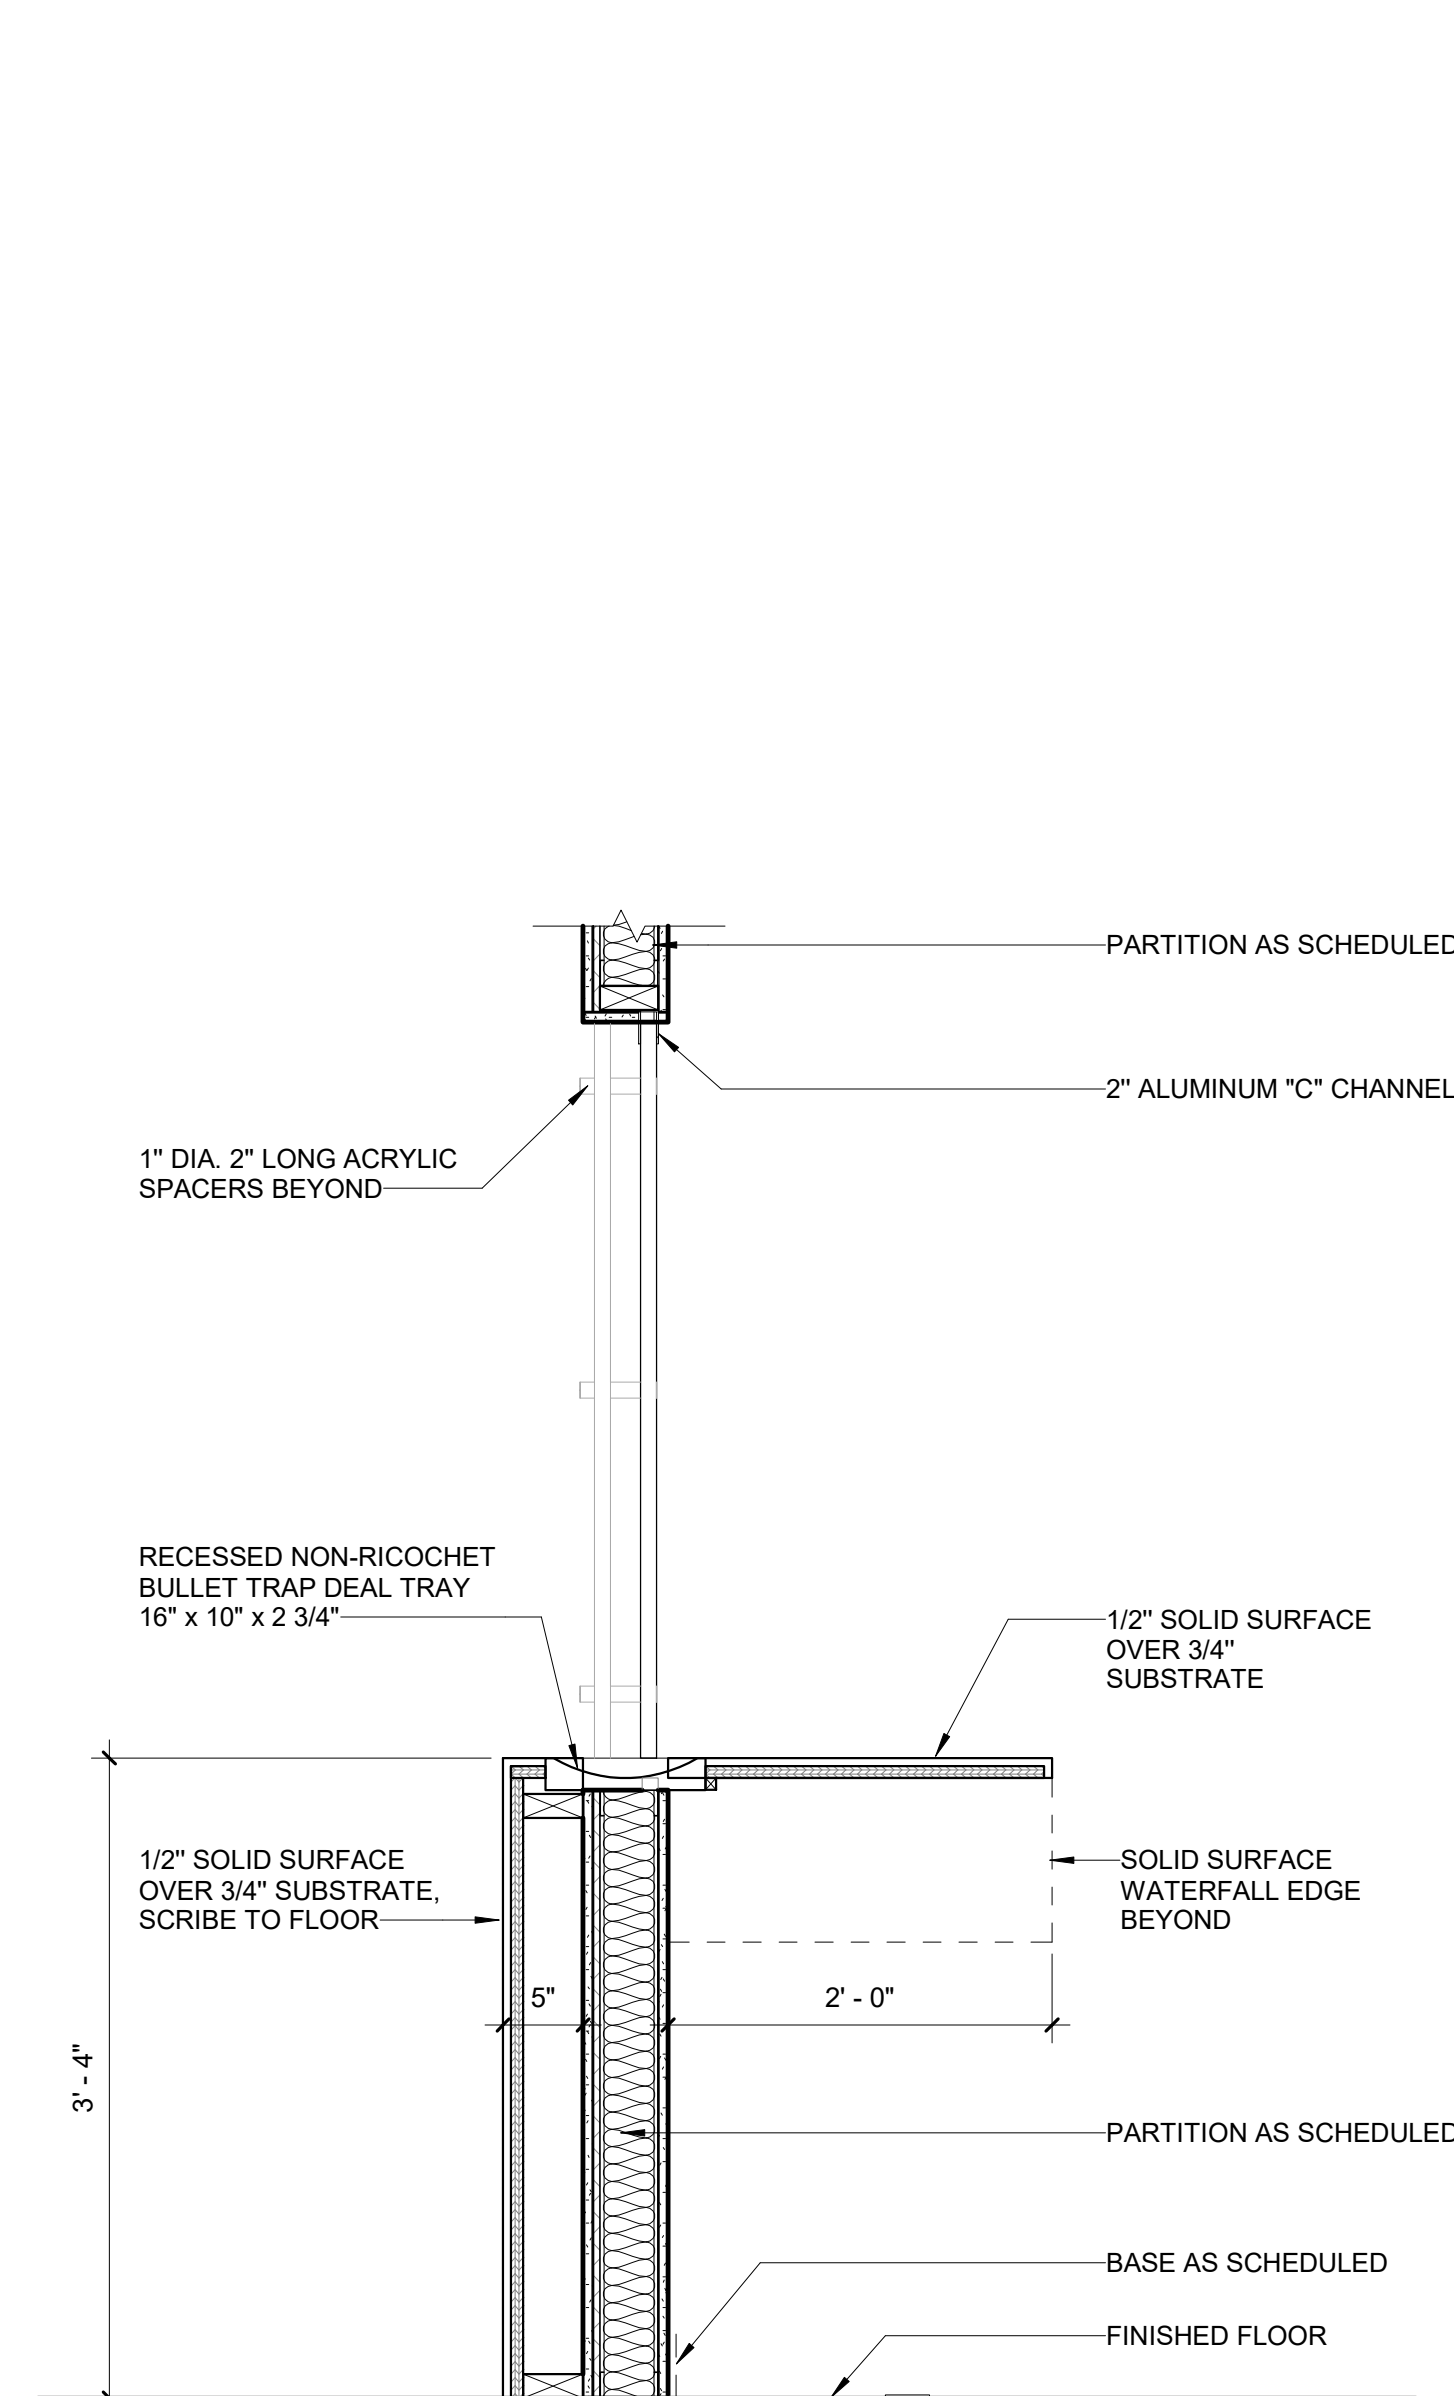

SEARCH

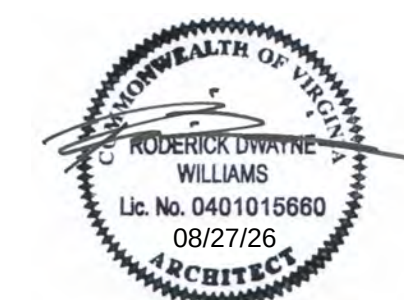

KEY PLAN

SCALE

REVISIONS

[illegible]

NO.	DESCRIPTION	DATE
DRAWN BY		JU
APPROVED BY		RW
CHECKED BY		Checker
DATE		08.26.2026

TITLE


MILLWORK DETAILS

PROJECT NO.	50165756
-------------	----------

A-432

SHEET NO.

SEAL

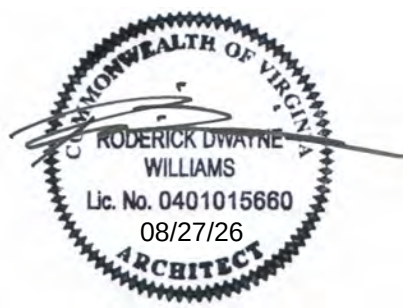

KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ TF
APPROVED BY _____ RW
CHECKED BY _____ Checker
DATE _____ 08.26.2026


TITLE

ENLARGED STAIR
AND RAMP
DETAILS


PROJECT NO. _____ 50165756

A-450


SHEET NO.

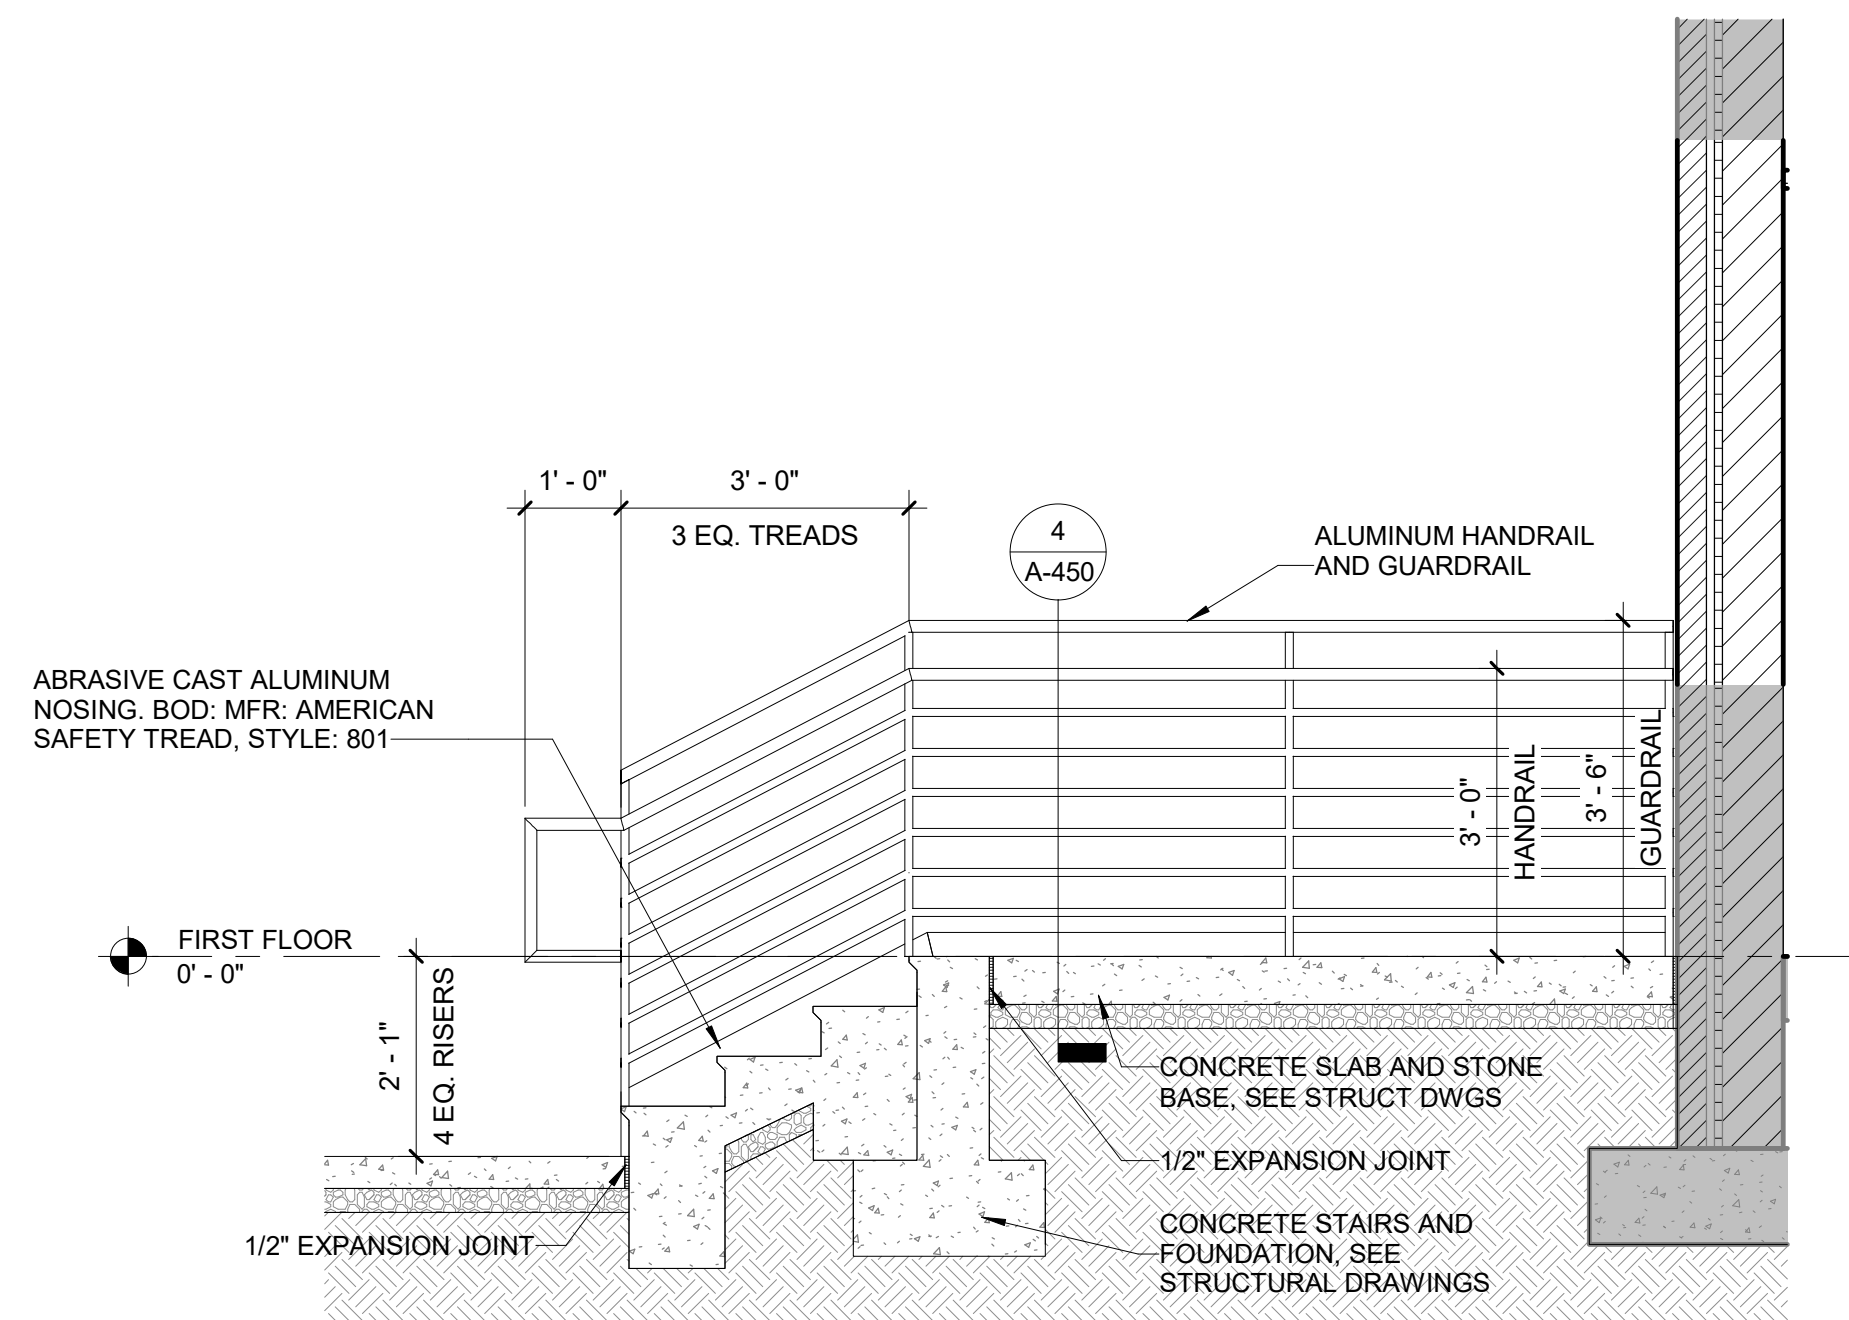


2 SECTION - STAIR @ STAFF LOBBY
Scale: 1/2" = 1'-0"

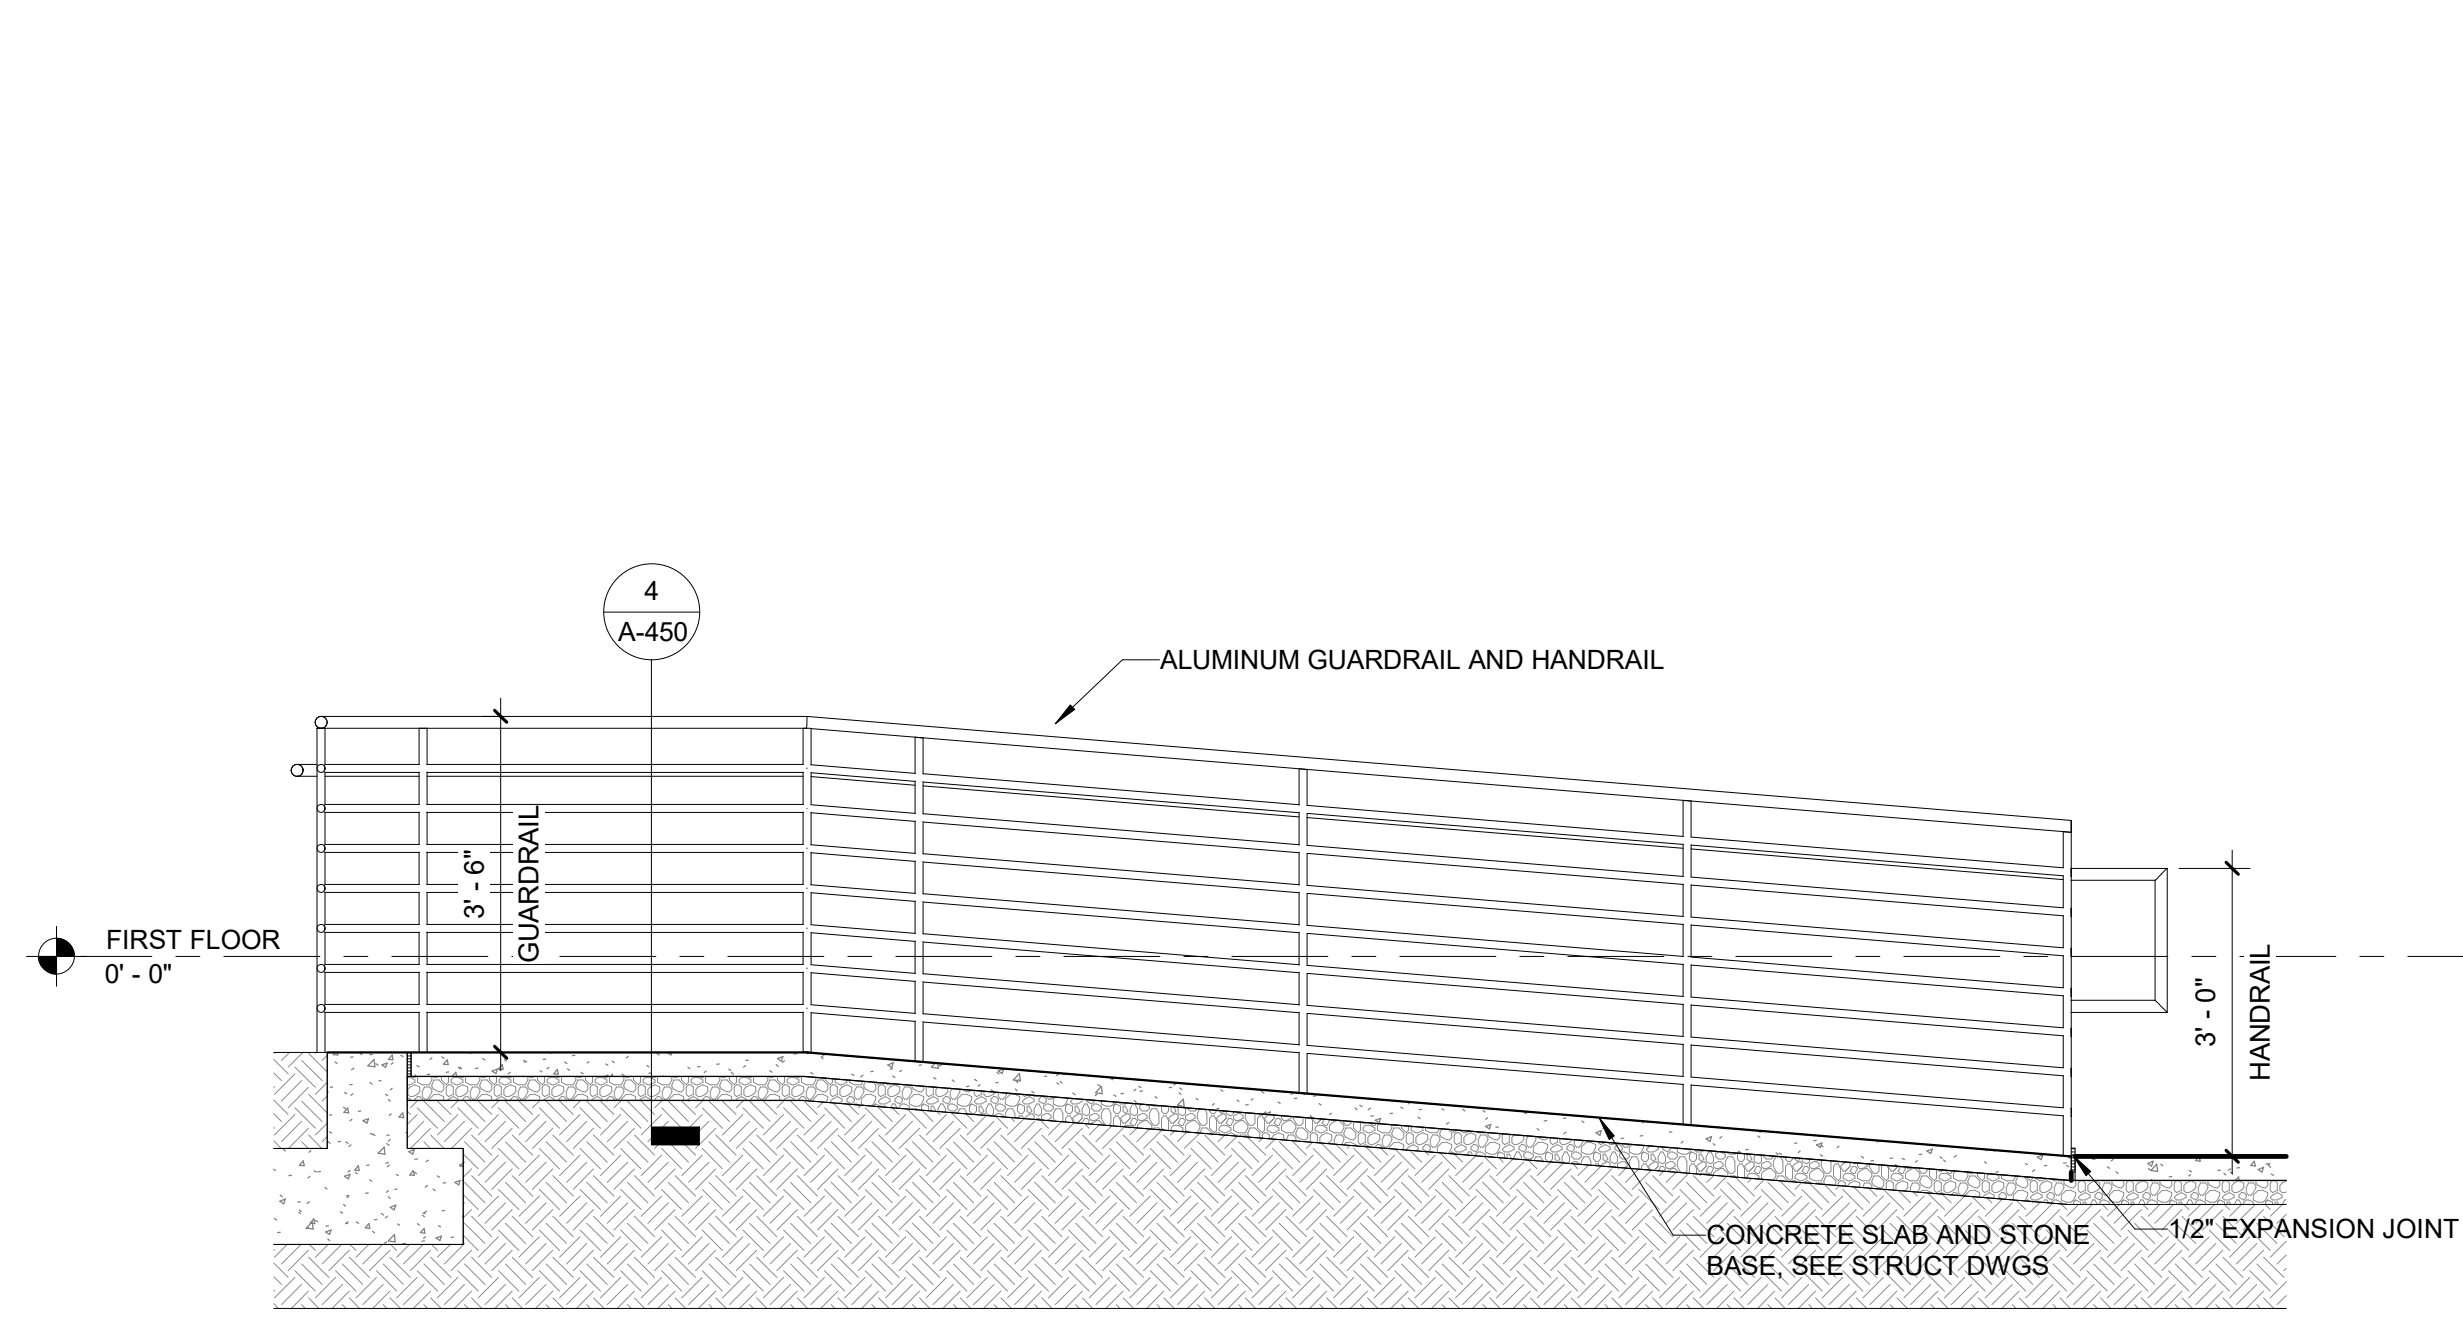

3 SECTION - RAMP @ STAFF LOBBY
Scale: 1/2" = 1'-0"

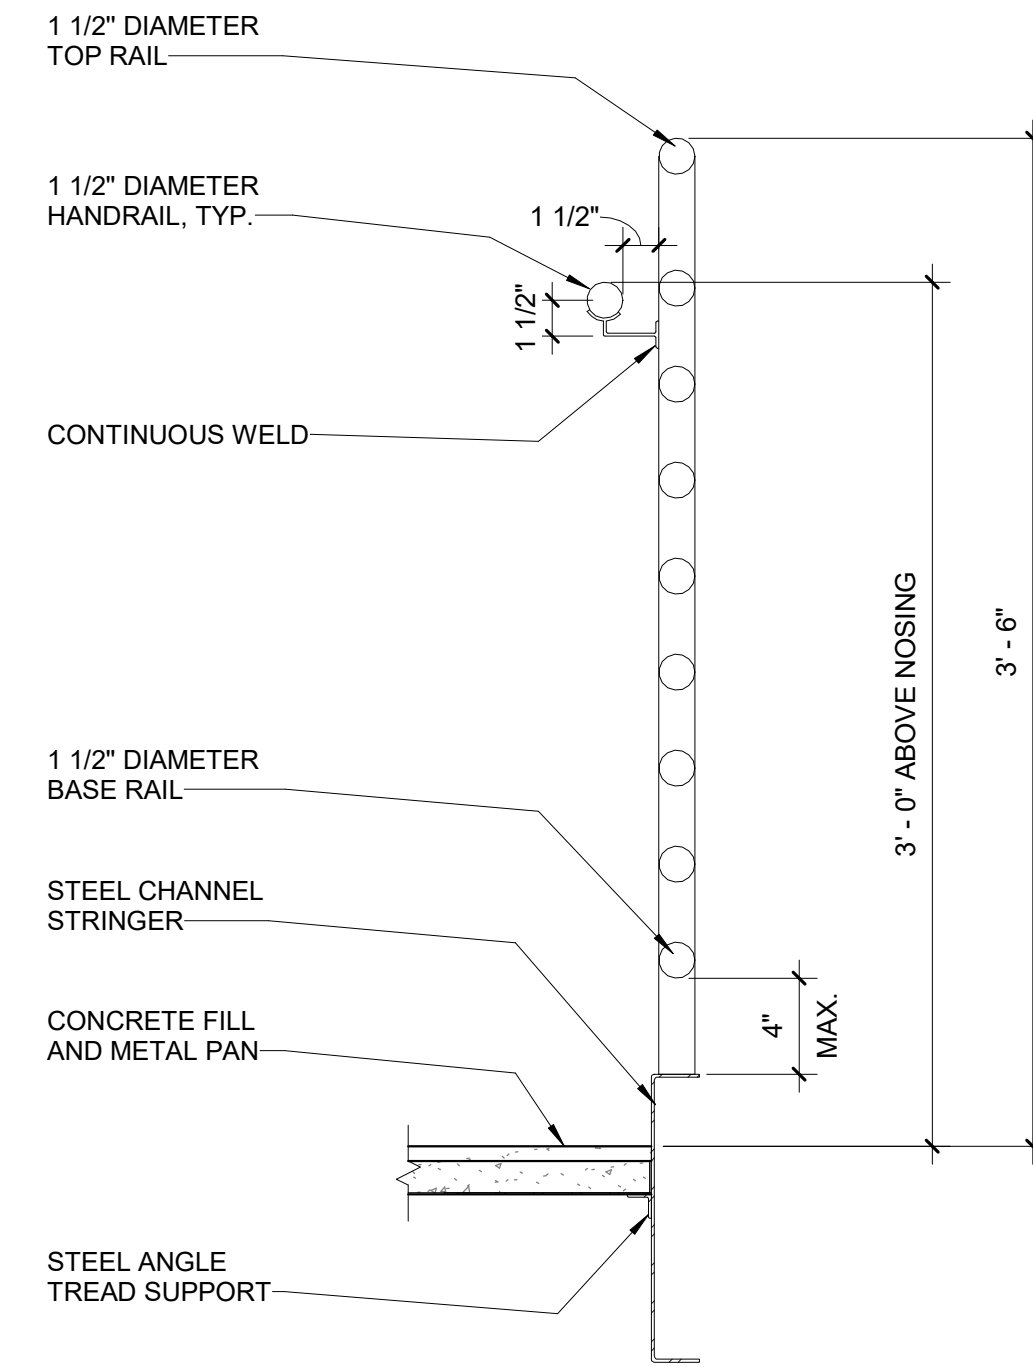


4 STAIR DETAIL - GUARDRAIL W HANDRAIL
Scale: 1 1/2" = 1'-0"

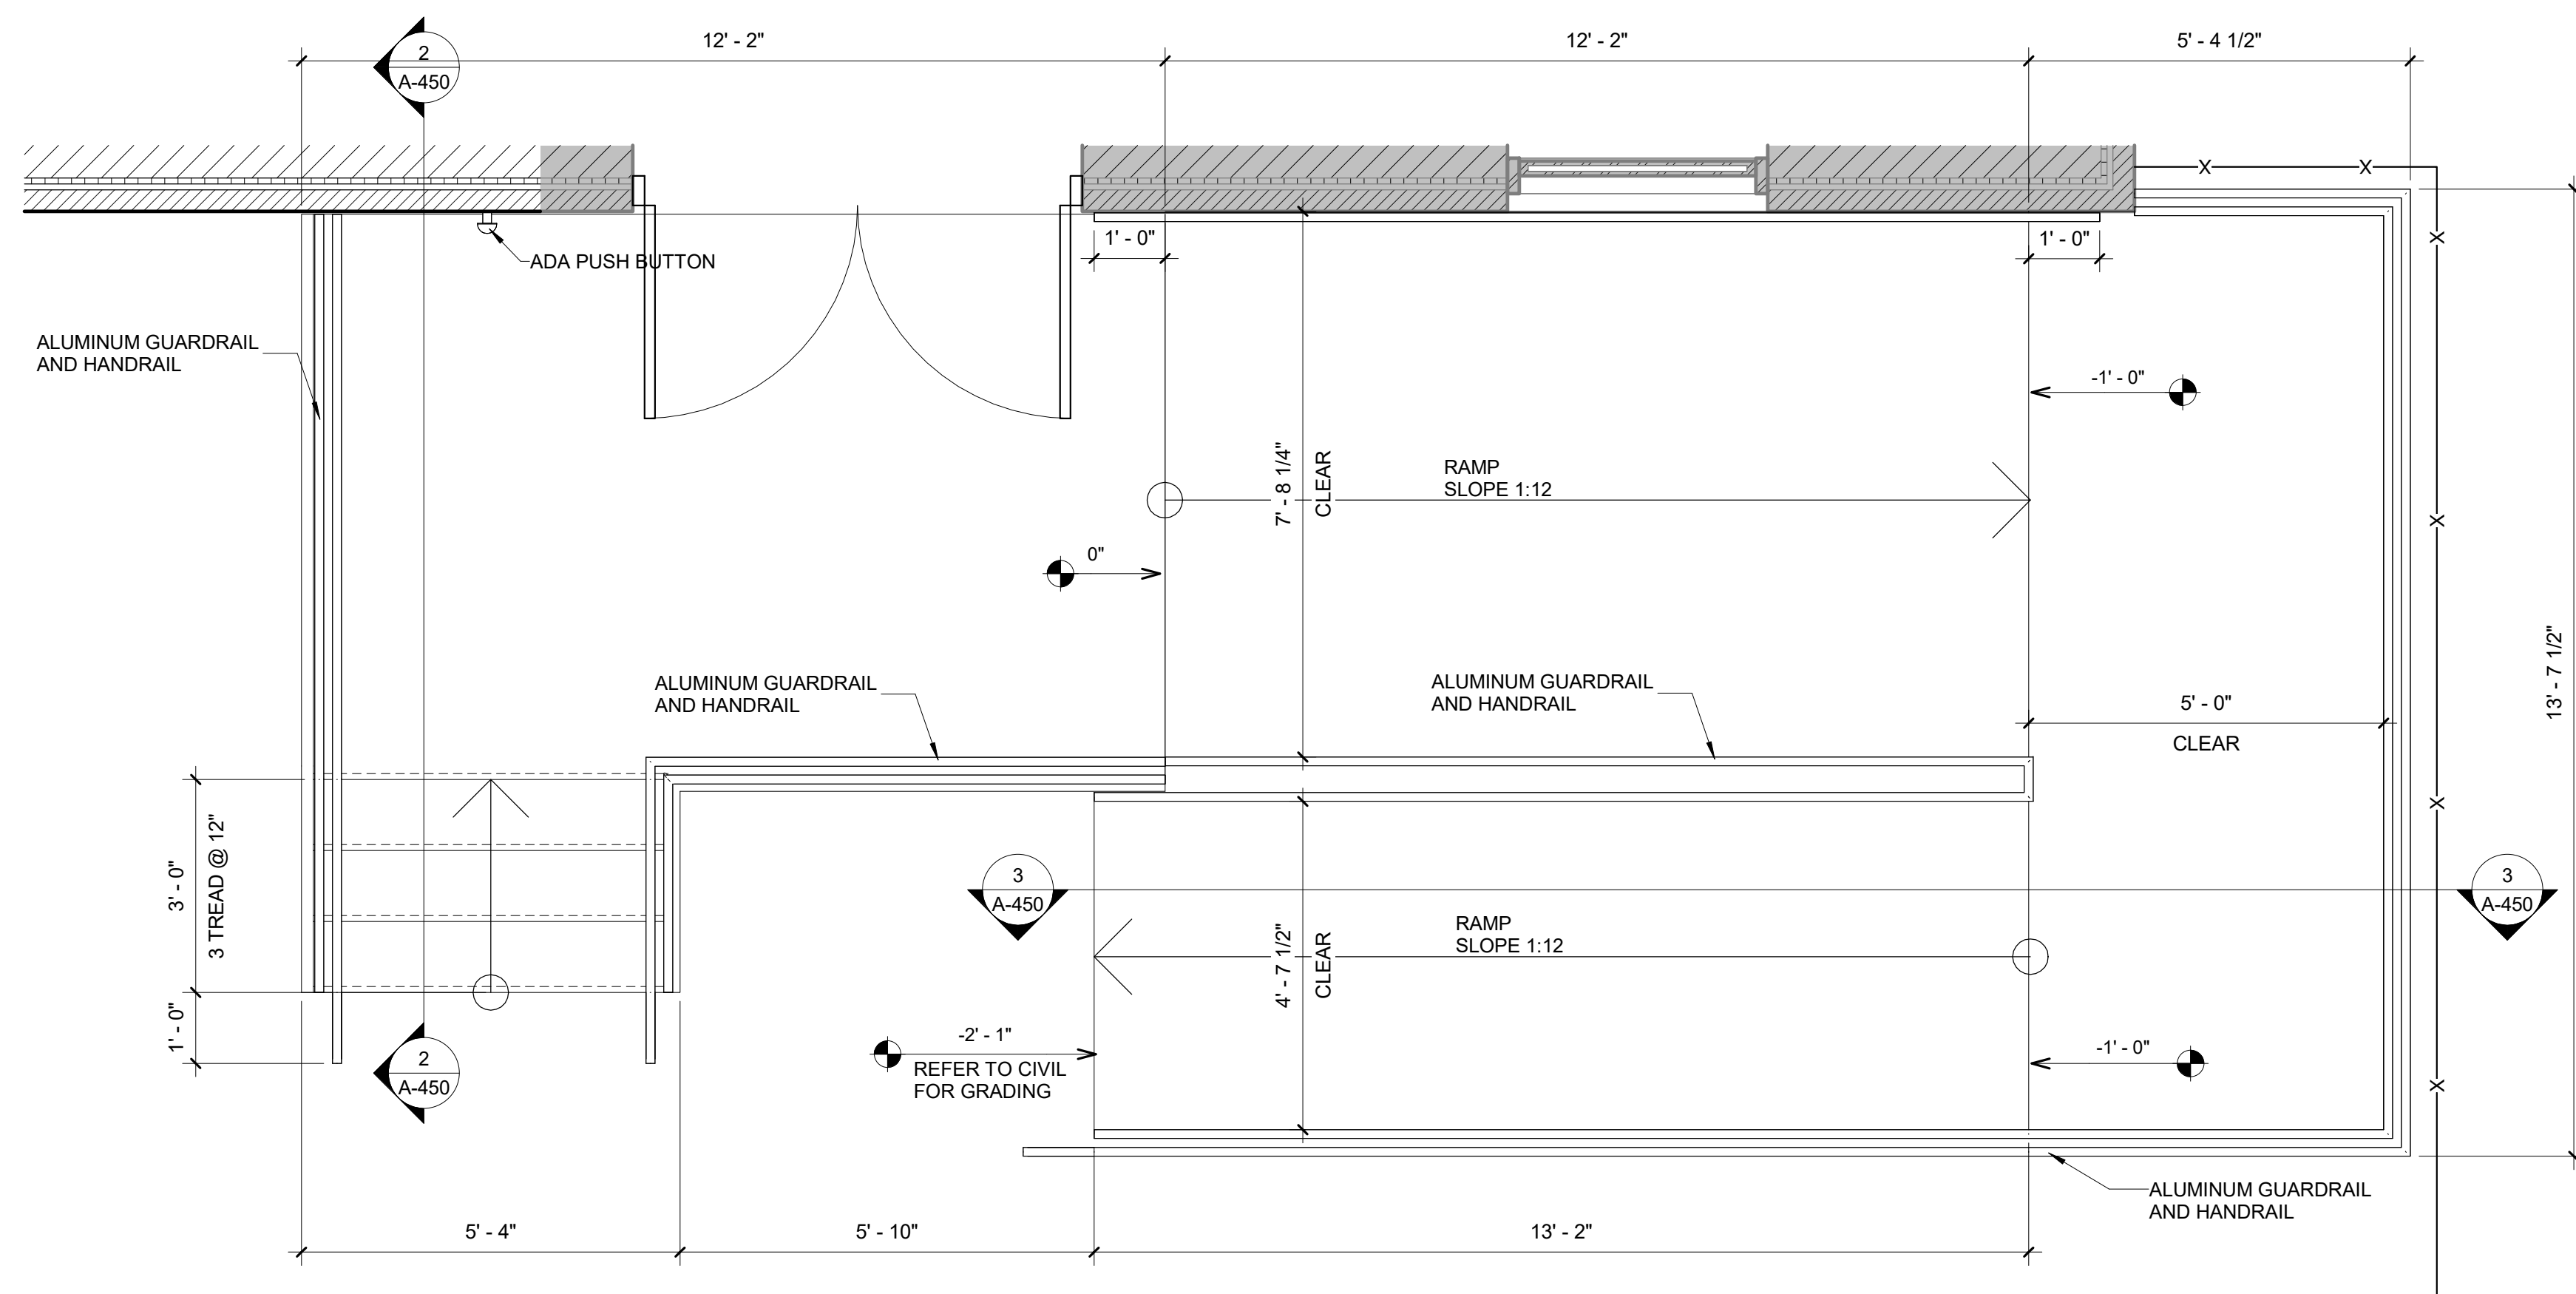


1 ENLARGED RAMP PLAN
Scale: 1/2" = 1'-0"


F
E
D
C
B
A

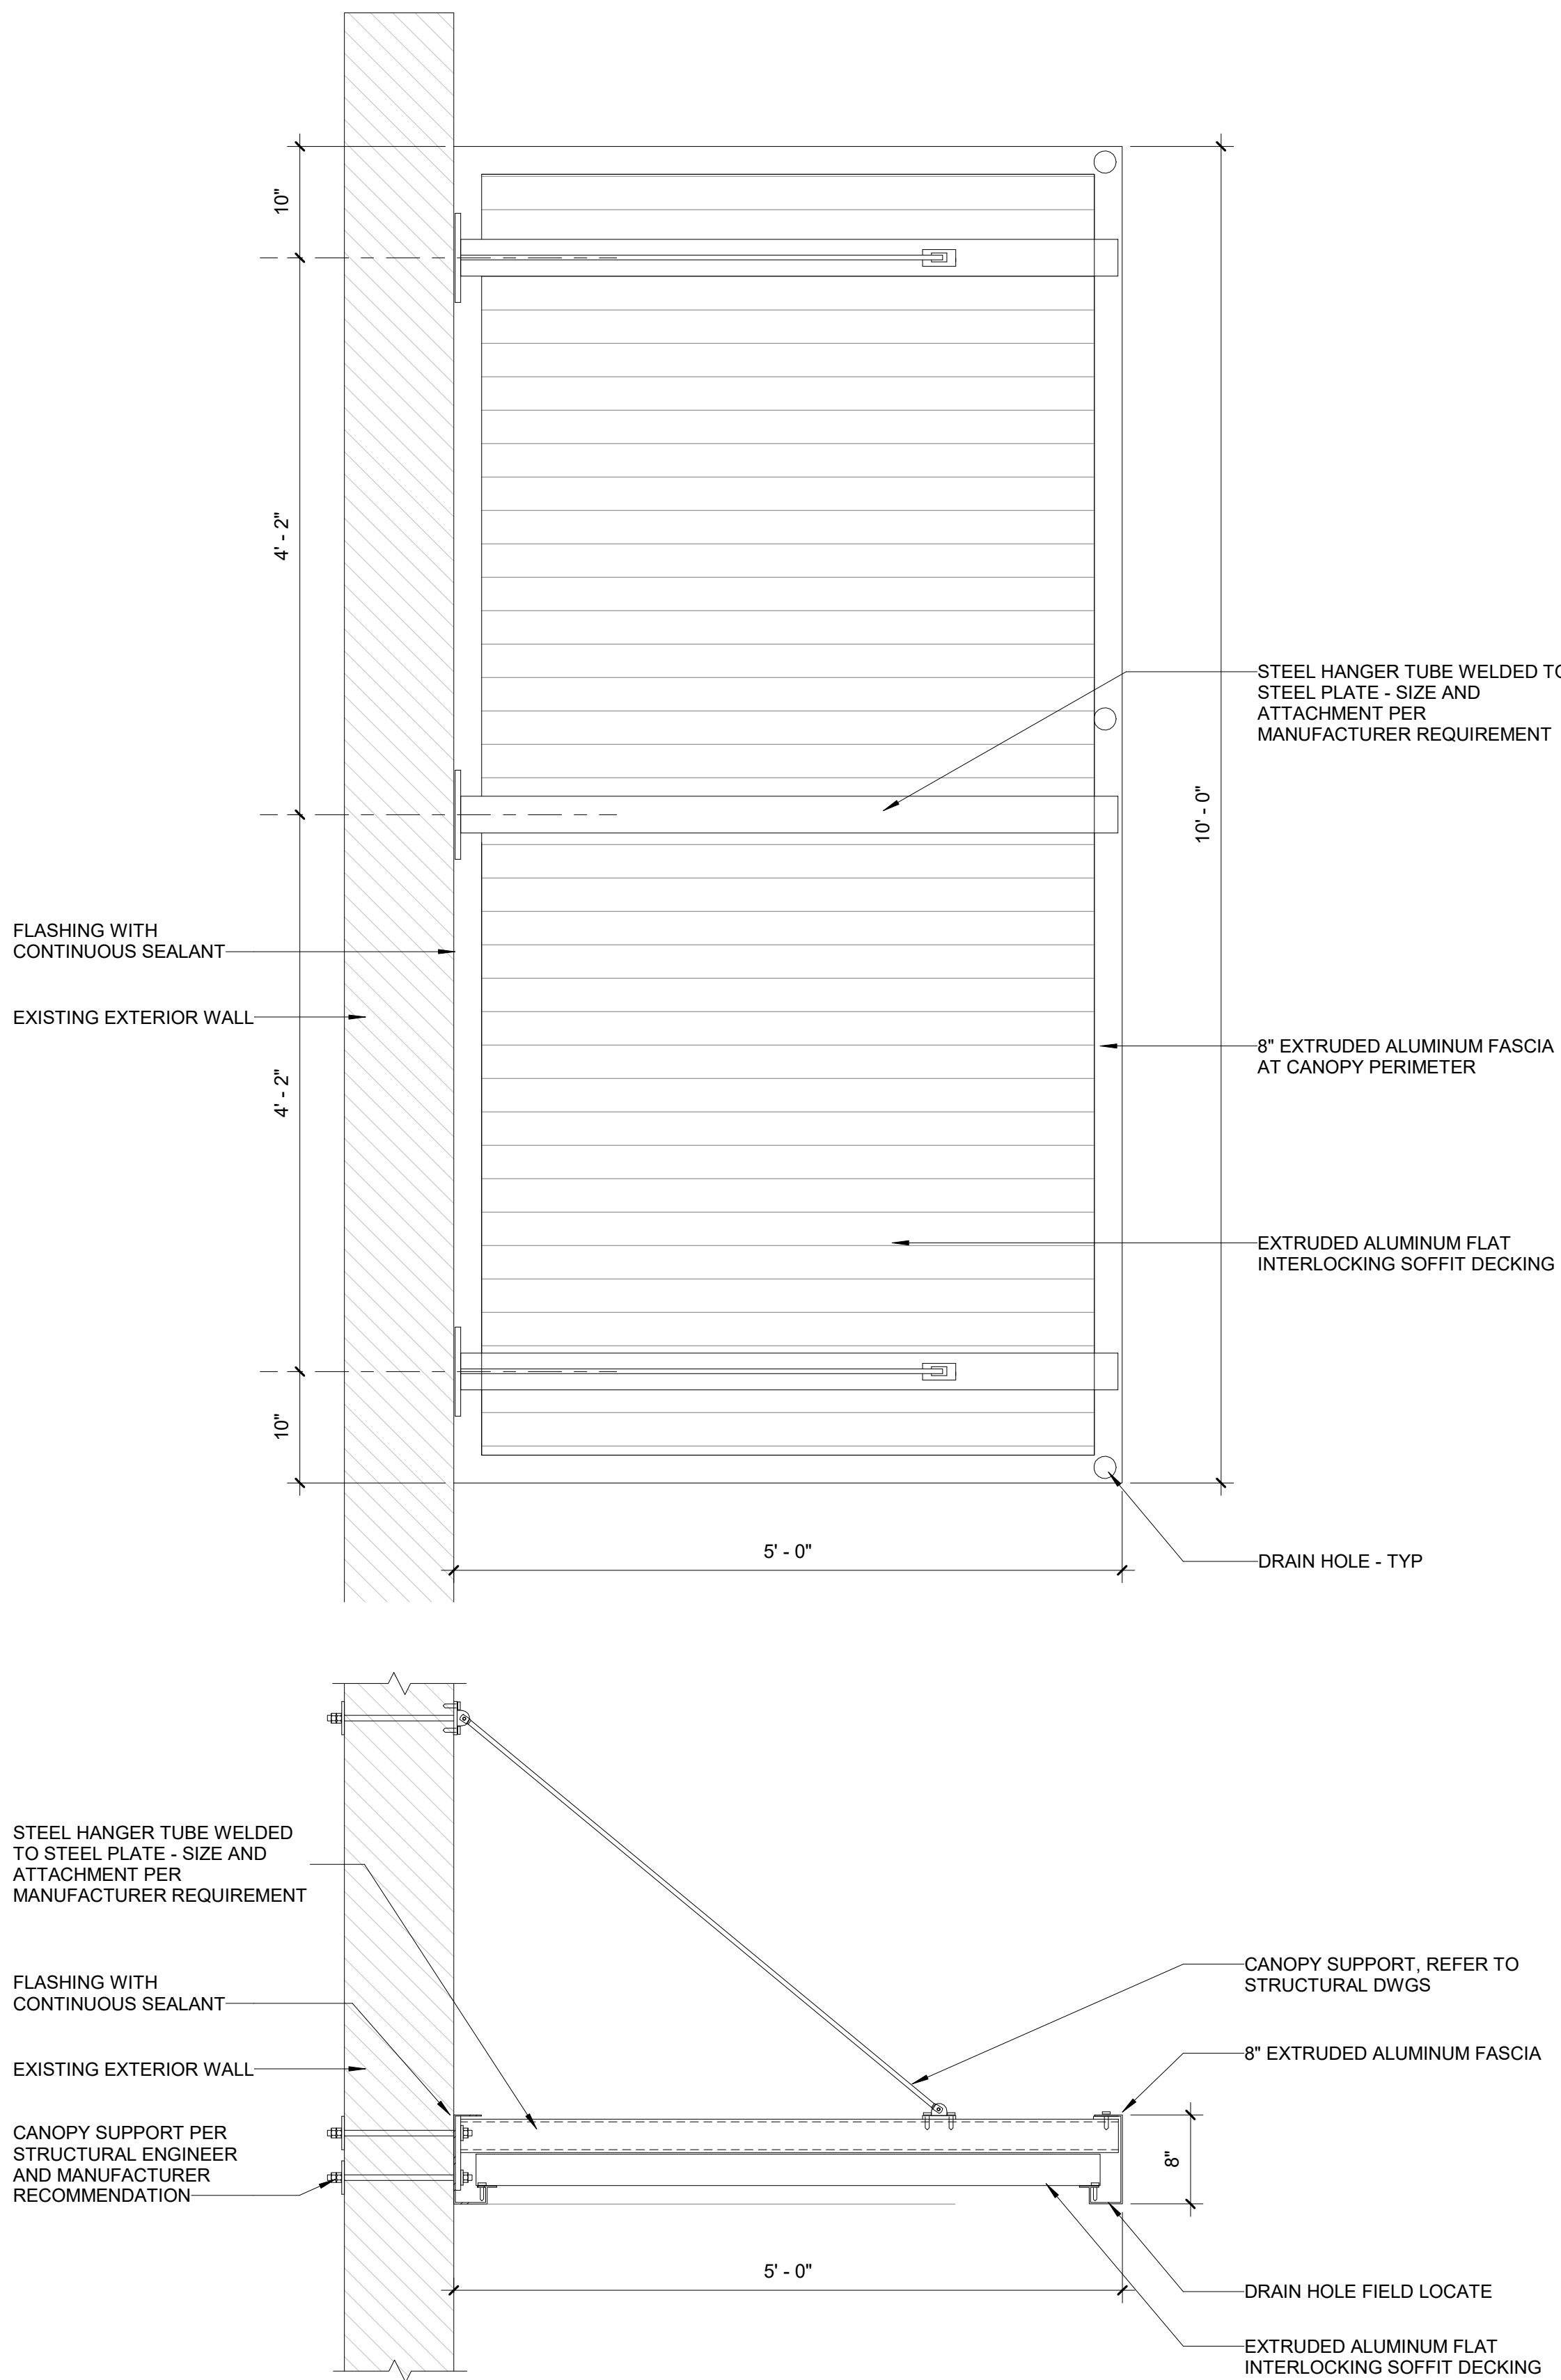


1 CANOPY DETAIL
Scale: 1" = 1'-0"

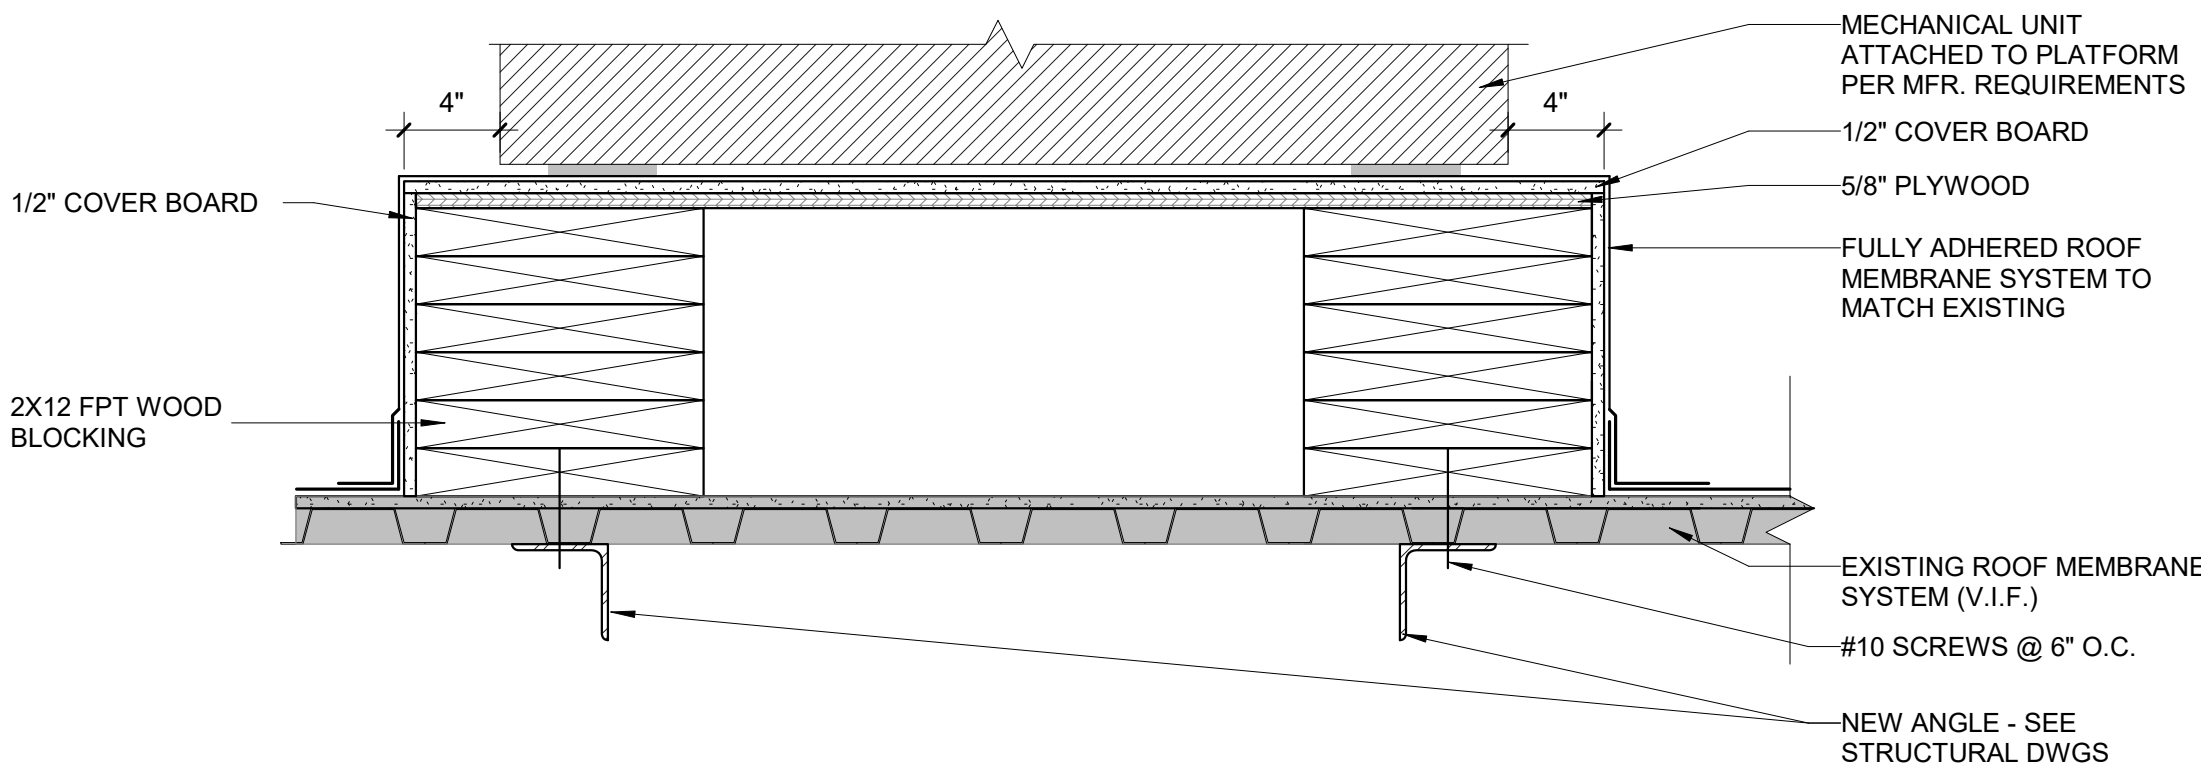

2 TYP. ROOF EQUIPMENT CURB DETAIL
Scale: 1 1/2" = 1'-0"

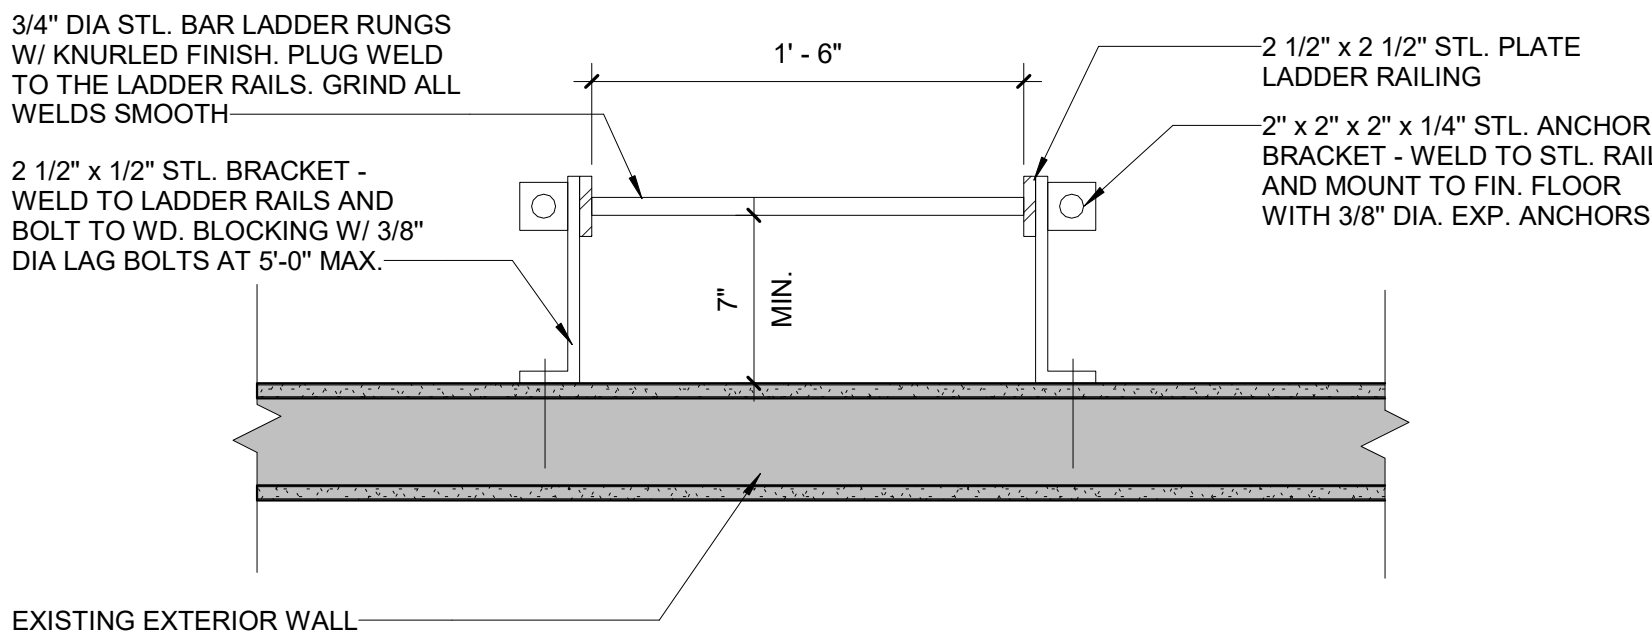

3 ROOF LADDER PLAN
Scale: 1 1/2" = 1'-0"

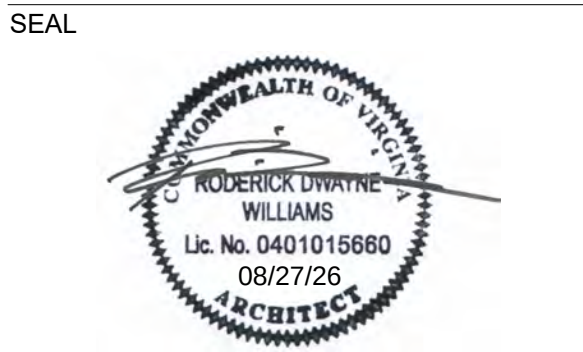

KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY JU
APPROVED BY RW
CHECKED BY Checker
DATE 08.26.2026

TITLE
ROOF DETAILS

PROJECT NO. 50165756

A-501

SHEET NO.

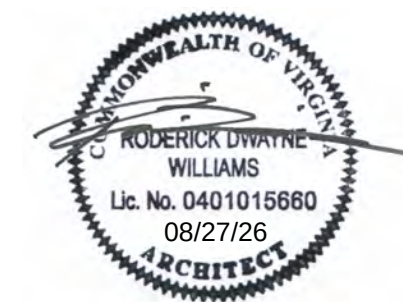
[illegible]

DOOR SCHEDULES, ELEVATIONS, AND DETAILS

DOOR REMARK SCHEDULE	
REMARK NO.	REMARK
1	ALUMINUM STOREFRONT SYSTEM
2	To add/remove rows, click "New" or "Delete" in Ribbon.

DOOR NUMBER	DOOR SCHEDULE															FIRE LABEL	HARDWARE	REMARKS	DOOR NUMBER
	DOOR					FRAME					DETAILS								
	LEAF QTY	WIDTH	WIDTH (IF UNEVEN)	HEIGHT	THICKNESS	TYPE	MATERIAL	GLAZING	TYPE	MATERIAL	GLAZING	SIDELIGHT WIDTH	TRANSOM HEIGHT	HEAD	JAMB				


001A	2	3'-0"		7'-0"	1 3/4"	FG	AL	GL-1		AL		H-5	J-5		01	1	001A
001B	2	3'-0"		7'-0"	1 3/4"	FG / HG	HM			HM		H-5	J-5		02	1	001B
002	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-6	J-6		03		002
003A	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		04		003A
003B	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-6	J-6		05		003B
102	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		102
104	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		104
105	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		07		105
106	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		106
107	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		107
109	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		08		109
110	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		110
111	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		06		111
113	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		09		113
114	1	2'-8"		6'-10"	1 3/4"	F	HM		02	HM					45	10	114
115	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		11		115
116	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		12		116
119	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		13		119
120	1	3'-0"		7'-0"	1 3/4"	F	HM		02	HM					45	10	120
121	2	3'-0"		7'-0"	1 3/4"	HG	AL			AL					15		121
125	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		16		125
127	1	2'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		17		127
130	1	3'-6"		7'-0"	1 3/4"	F	HM			HM		H-1	J-1		45	18	130
001B	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		60	19	131
132	1	2'-0"		4'-4"	1 3/4"	F	WD		01	HM		H-3	J-3		60	20	132
133	1	2'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		60	17	133
201A	1	3'-0"		6'-8"	1 3/4"	F	HM		01	HM		H-3	J-3		60	21	201A
201B	1	3'-0"		6'-8"	1 3/4"	F	HM		02	HM		H-3	J-3		22		201B
201C	1	3'-0"		7'-0"	1 3/4"	F	WD		01	HM		H-3	J-3		23		201C
202	1	3'-0"		6'-8"	1 3/4"	F	HM		01	HM		H-3	J-3		24		202
203	1	3'-0"		6'-8"	1 3/4"	F	HM		01	HM		H-3	J-3		25		203
205	1	3'-0"		6'-8"	1 3/4"	F	HM		01	HM		H-3	J-3		26		205
206	1	3'-0"		6'-8"	1 3/4"	F	WD		01	HM		H-3	J-3		12		206
207	1	3'-0"		6'-8"	1 3/4"	F	WD		01	HM		H-7	J-7		14		207
209	1	3'-0"		6'-8"	1 3/4"	F	WD		01	HM		H-3	J-3		28		209
210	1	3'-0"		6'-8"	1 3/4"	F	HM		02	HM		H-2	J-2		45	27	210
E130	1	3'-0"		6'-10"	1 3/4"	EXIST	EXIST	EXIST	EXIST	EXIST					28	1	E130

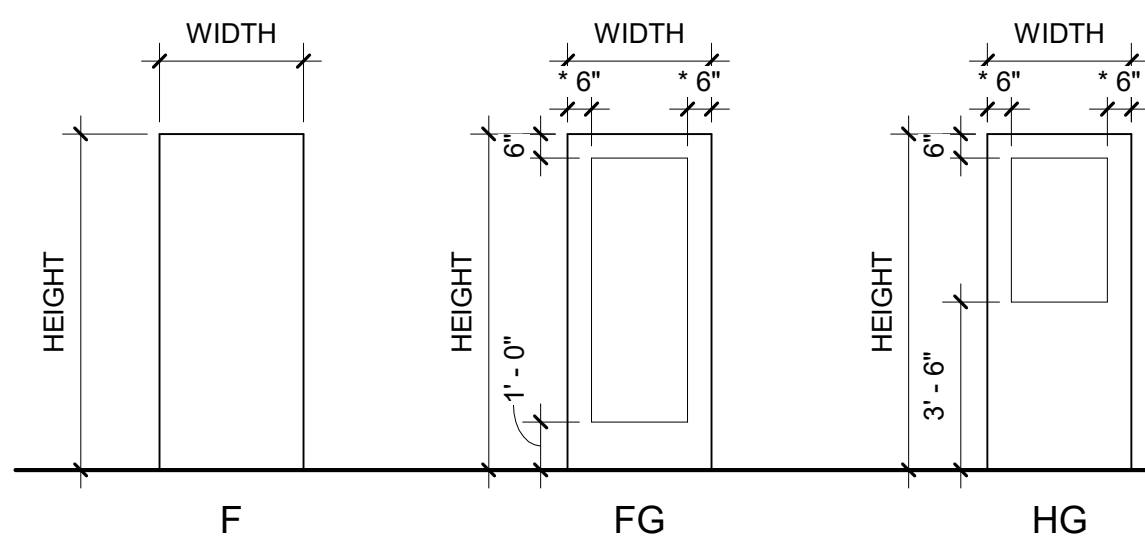

*LITE LOCATION TO BE 6" OR AS REQUIRED BY DOOR MFR FOR
EDGE DISTANCE TO HARDWARE CUTOUTS. COORDINATE WITH
DOOR AND HARDWARE SUPPLIERS.

B1 DOOR PANEL TYPES

Scale: 1/4" = 1'-0"





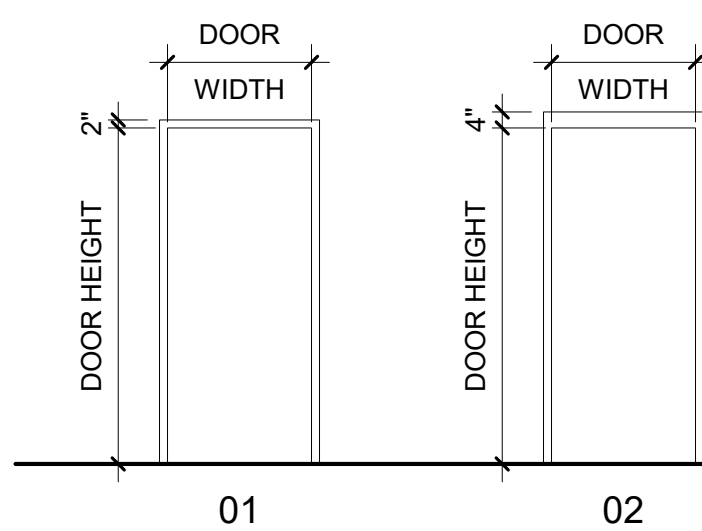


ALL FRAMES TO BE 2" WIDE UNLESS NOTED OTHERWISE.


SOME OF THE FRAME TYPES SHOWN IN THIS LEGEND MAY NOT BE USED IN THIS PROJECT.

11 DOOR FRAME TYPES

Scale: 1/4" = 1'-0"

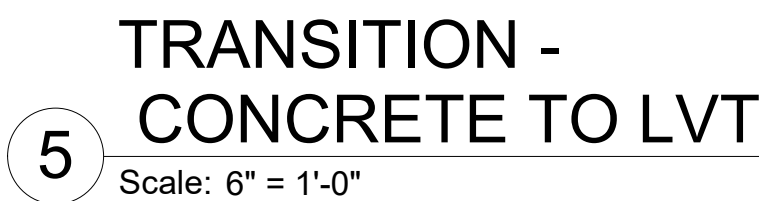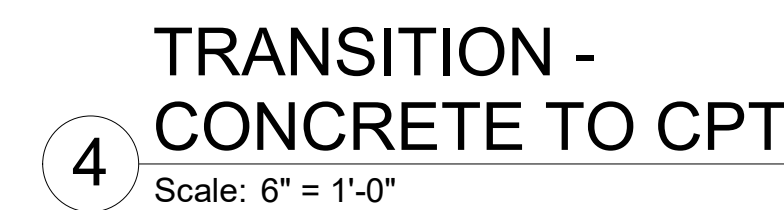

1 DOOR DETAILS

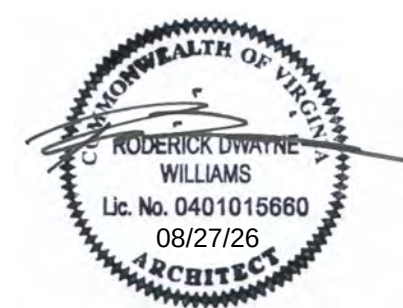[illegible]

DOOR HARDWARE SCHEDULE

Hardware Group No. 00

Provide each SGL door(s) with the following:						
QTY	EA	DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	POWER SUPPLY	PS906 900-4RL 900-4RL KL900 120/240 VAC		✓ LGR	SCE
2	EA	POWER SUPPLY	PS906 900-4RL-FA 900-4RL-FA KL900 120/240 VAC		✓ LGR	SCE
OPENINGS 102, 104, 106, 107, 109, 003A & 003B TO SHARE A PS906 900-4RL, 900-4RL POWER SUPPLY.						
OPENINGS 110, 111, 113, 114, 116, 120 & 119 TO SHARE A PS906 900-4RL-FA, 900-4RL-FA POWER SUPPLY.						
OPENINGS 201A, 201B, 203, 206, 207, 209 & 210 TO SHARE A PS906 900-4RL-FA, 900-4RL-FA POWER SUPPLY.						
OPENINGS 001A, 001B & 121 TO SHARE A PS906 900-4RL, 900-4RL POWER SUPPLY.						
OPENINGS 002, E130, 130 & 131 TO SHARE A PS906 900-4RL, 900, 4RL POWER SUPPLY.						

Hardware Group No. 03

Provide each SGL door(s) with the following:					
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5B81 4.5 X 4.5 NRP	 652	IVE
1	EA	POWER TRANSFER	EPT10 CON	 689	VON
1	EA	EU MORTISE LOCK	L9092VTEU 07A RX CON 12/24 VDC	 626	SCH
1	EA	PRIMUS CORE	20-740-XP	 626	SCH
1	EA	SURFACE CLOSER	4111 EDA	 689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS	 630	IVE
1	EA	WALL STOP	WS406/407CV	 626	IVE
3	EA	SILENCER	SR64	 GRAY	IVE
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)		VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)		VON
1	EA	CARD READER	PROVIDED BY DIV 28		
1	EA	DESK MOUNT BUTTON	660-PB	  628	SC
1	EA	DOOR CONTACT	679-05HM	  BLK	SC
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'		

Hardware Group No. 04

Provide each SGL door(s) with the following:				CATALOG NUMBER	FINISH	MFR
3	EA	HINGE		58B1 4.5 X 4.5	652	IVE
1	EA	POWER TRANSFER		EPT10 CON	689	VON
1	EA	EU MORTISE LOCK		L9092TEU 07A RX CON 12/24 VDC	626	SCH
1	EA	PRIMUS CORE		20-740-XP	626	SCH
1	EA	OH STOP		90S	689	GLY
1	EA	SURFACE CLOSER		4011	689	LCN
3	EA	SILENCER		SR64	GRY	IVE
1	EA	WIRE HARNESS		CON-XXX (LOCK/EXIT TO HINGE FRAME)		VON
1	EA	WIRE HARNESS		CON-XXP (FRAME TO POWER SUPPLY)		VON
1	EA	CARD READER		PROVIDED BY DIV 28		
1	EA	DESK MOUNT BUTTON		660-PB	628	SCE
1	EA	DOOR CONTACT		679-05HM	BLK	SCE
1	EA	POWER SUPPLY		REFER TO HARDWARE SET '00'		

Hardware Group No. 07

Provide each SGL door(s) with the following:

QTY	DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA HINGE	5BB1 4.5 X 4.5		652 IVE
1	EA STOREROOM LOCK	L9080T 07A		626 SCH
1	EA PRIMUS CORE	20-740-0P		626 SCH
1	EA SURFACE CLOSER	4011		689 LCN
1	EA KICK PLATE	8400 10" X 2" LDW B-CS		630 IVE
1	EA WALL STOP	WS406/407CCV		626 IVE
3	EA SILENCER	SR64		GRY IVE

Hardware Group No. 10

Provide each SGL door(s) with the following:						
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	POWER TRANSFER	EPT10 EON	 	689	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX LX CON 12/24 VDC	 	626	SCH
1	EA	PRIMUS CORE	20-740-XP		626	SCH
1	EA	OH STOP	90S		689	GLY
1	EA	SURFACE CLOSER	4011		689	LCN
1	EA	KICK PLATE	8402 10" X 2" LDW B-CS		630	IVE
1	EA	GASKETING	488SBK PSA		BK	ZER
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON
1	EA	CARD READER	PROVIDED BY DIV 28			
1	EA	DOOR CONTACT	679-05HM	 	BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'			

Hardware Group No. 01

QTY	PR	DOOR(S) WITH THE FOLLOWING:	DESCRIPTION	CATALOG NUMBER		FINISH	MFR
2	EA		CONT. HINGE	112XY EPT		628	IVE
2	EA		POWER TRANSFER	EPT10 CON		689	VON
1	EA		ELEC PANIC HARDWARE	LX-RX-QEL-9847-EO-CON 24 VDC		626	VON
1	EA		ELEC PANIC HARDWARE	LX-RX-QEL-9847-NL-OP-110MD-CON 24 VDC		626	VON
1	EA		RIM CYLINDER	20-057 ICX		626	SCH
1	EA		PRIMUS CORE	20-740-XP		626	SCH
2	EA		90 DEG OFFSET PULL	8190HD 10" O		630	IVE
1	EA		OH STOP	100SE		689	GLY
1	EA		SURFACE CLOSER	MOUNT ON RHR DOOR LEAF. 4111 SCUSH		689	LCN
1	EA		SURF. AUTO OPERATOR	MOUNT ON LHR DOOR LEAF. 4642 TBWMS 120 VAC		689	LCN
1	EA		WEATHER RING	8310-801			LCN
2	EA		ACTUATOR, TOUCH	8310-853T			LCN
1	EA		MOUNT BOX	8310-867S			LCN
1	EA		BOLLARD POST	B-4X6-FT-PC-SM-RT9		630	WIK
2	EA		KICK PLATE	8400 10" X 1" LDW B-C		630	IVE
1	EA		GASKETING/SEALS	PROVIDED BY DOOR & FRAME MANUFACTURER			
2	EA		DOOR SWEEP	8198AA		AA	ZER
1	EA		THRESHOLD	655A		A	ZER
2	EA		WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON
2	EA		WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON
1	EA		CARD READER	PROVIDED BY DIV 28			
1	EA		PUSH-TO-LOCK COVER W. RELAY SWITCH	STI-13230CR			
2	EA		DOOR CONTACT	679-05HM		BLK	SCE
1	EA		PUSH-TO-LOCK PUSH BUTTON	SS2-009-LD-EN			
1	EA		POWER SUPPLY	REFER TO HARDWARE SET '00'			

Hardware Group No. 05

Provide each SGL door(s) with the following:						
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5B81 4.5 X 4.5 NRP		652	IVE
1	EA	POWER TRANSFER	EPT10 CON		689	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC		626	SCH
1	EA	PRIMUS CORE	20-740-XP		626	SCH
1	EA	SURFACE CLOSER	40 11		689	LCN
1	EA	WALL STOP	WS406/407CCV		626	IVE
3	EA	SILENCER	SR64		GRY	IVE
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON
1	EA	WIRE HARNESS	CON-XXF (FRAME TO POWER SUPPLY)			VON
1	EA	CARD READER	PROVIDED BY DIV 28			
1	EA	DOOR CONTACT	679-05HM		BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'			

Hardware Group No. 08

Provide each SGL door(s) with the following:						
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5B81 4.5 X 4.5 NRP		652	IVE
1	EA	POWER TRANSFER	EPT10 CON		689	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC		626	SCH
1	EA	PRIMUS CORE	20-740-XP		626	SCH
1	EA	SURFACE CLOSER	4111 EDA		689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE
1	EA	FLOOR STOP	FS436		626	IVE
3	EA	SILENCER	SR64		GRY	IVE
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON
1	EA	CARD READER	PROVIDED BY DIV 28			
1	EA	DESK MOUNT BUTTON	660-PB		628	SCE
1	EA	DOOR CONTACT	679-05HM		BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'			

Hardware Group No. 11

Provide each SGL door(s) with the following:						
QTY	EA	DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	PASSAGE SET	L9010 07A		626	SCH
1	EA	SURFACE CLOSER	4111 SCUSH		689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-C		630	IVE
3	EA	SILENCER	SR64		GRY	IVE

Hardware Group No. 02

Provide each PR door(s) with the following:			CATALOG NUMBER	FINISH	MFR
QTY		DESCRIPTION			
2	EA	CONT. HINGE	112XY EPT	628	IVE
2	EA	POWER TRANSFER	EPT10 CON	689	VON
1	EA	ELEC PANIC HARDWARE	LX-RX-QEL-9847-EO-CON 24 VDC	626	VON
1	EA	ELEC PANIC HARDWARE	LX-RX-QEL-9847-NL-OP-110MD-CON 24 VDC	626	VON
1	EA	RIM CYLINDER	20-057 ICX	626	SCH
1	EA	PRIMUS CORE	20-740-XP	626	SCH
2	EA	90 DEG OFFSET PULL	8190HD 10" O	630	IVE
1	EA	OH STOP	100SE	689	GLY
1	EA	SURFACE CLOSER	MOUNT ON RHR DOOR LEAF. 4111 SCUSH	689	LCN
1	EA	SURF. AUTO OPERATOR	MOUNT ON LHR DOOR LEAF. 4642 TBWMS 120 VAC	689	LCN
2	EA	ACTUATOR, TOUCH	8310-853T		LCN
2	EA	MOUNT BOX	8310-867S		LCN
2	EA	KICK PLATE	8400 10" X 1" LDW B-CS	630	IVE
2	EA	SILENCER	SR64	GRY	IVE
2	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)		VON
2	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)		VON
1	EA	CARD READER	PROVIDED BY DIV 28		
1	EA	DESK MOUNT BUTTON	660-T4	628	SCE
2	EA	DOOR CONTACT	679-05HM	BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'		

Hardware Group No. 06

Provide each SGL door(s) with the following:					
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	652	IVE
1	EA	POWER TRANSFER	EPT10 CON	689	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC	626	SCH
1	EA	PRIMUS CORE	20-740-XP	626	SCH
1	EA	WALL STOP	WS406/407CCV	626	IVE
3	EA	SILENCER	SR64	GRY	IVE
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)		VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)		VON
1	EA	CARD READER	PROVIDED BY DIV 28		
1	EA	DOOR CONTACT	679-05HM	BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'		

Hardware Group No. 09

Provide each SGL door(s) with the following:							
QTY	EA	DESCRIPTION	CATALOG NUMBER		FINISH	MF	
3	EA	HINGE	5BB1 4.5 X 4.5 NRP		652	IVE	
1	EA	STOREROOM W/DEADBOLT	L9480T 07A 09-544 RX		626	SC	
1	EA	PRIMUS CORE	20-740-XP		626	SC	
1	EA	ELECTRIC STRIKE	6216 FS 12/16/24/28 VAC/VDC		630	VO	
1	EA	SURFACE CLOSER	4111 EDA		689	LC	
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE	
1	EA	WALL STOP	WS406/407CCV		626	IVE	
3	EA	SILENCER	SR64		GRY	IVE	
1	EA	CARD READER	PROVIDED BY DIV 28				
1	EA	DOOR CONTACT	679-05HM		BLK	SC	
1	EA	MOTION SENSOR	SCANII 12/24 VDC		WHT	SC	
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'				

Hardware Group No. 12

Provide each SGL door(s) with the following:							
QTY	EA	DESCRIPTION	CATALOG NUMBER		FINISH	MFR	
3	EA	HINGE	5B81 4.5 X 4.5		652	IVE	
1	EA	POWER TRANSFER	EPT10 CON		689	VON	
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC		626	SCH	
1	EA	PRIMUS CORE	20-740-XP		626	SCH	
1	EA	SURFACE CLOSER	4011		689	LCN	
1	EA	WALL STOP	WS406/407CCV		626	IVE	
3	EA	SILENCER	SR64		GRY	IVE	
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON	
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON	
1	EA	CARD READER	PROVIDED BY DIV 28				
1	EA	DOOR CONTACT	679-05HM		BLK	SCE	
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'				


Hardware Group No. 25									
Provide each SGL door(s) with the following:									
	QTY	EA	DESCRIPTION	CATALOG NUMBER		FINISH	MFR		
	3	EA	HINGE	5BB1 4.5 X 4.5 NRP		652	IVE		
	1	EA	POWER TRANSFER	EPT10 CON		689	VON		
	1	EA	EU MORTISE LOCK	L9095TEU 07A RX LX CON 12/24 VDC		626	SCH		
	2	EA	PRIMUS CORE	20-740-XP		626	SCH		
	1	EA	OH STOP	100S		689	GLY		
	1	EA	SURFACE CLOSER	4011 ST-1544		689	LCN		
	1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE		
	3	EA	SILENCER	SR64		GRY	IVE		
	1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON		
	1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON		
	2	EA	CARD READER	PROVIDED BY DIV 28					
	1	EA	DOOR CONTACT	679-05HM		BLK	SCE		
	1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'					

Hardware Group No. 22					
Provide each SGL door(s) with the following:					
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	682	IVE
1	EA	POWER TRANSFER	EPT10 CON	659	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC	626	SCH
1	EA	PRIMUS CORE	20-740-XP	626	SCH
1	EA	SURFACE CLOSER	4111 SCUSH	689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS	630	IVE
3	EA	SILENCER	SR64	GRY	IVE
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)		VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)		VON
1	EA	CARD READER	PROVIDED BY DIV 28		
1	EA	DOOR CONTACT	679-05HM	BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'		

Hardware Group No. 27						
Provide each SGL door(s) with the following:						
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	POWER TRANSFER	EPT10 CON		689	VON
1	EA	EU MORTISE LOCK	L9092TEU 07A RX CON 12/24 VDC		626	SCH
1	EA	PRIMUS CORE	20-740-XP		626	SCH
1	EA	SURFACE CLOSER	4011		689	LCN
1	EA	WALL STOP	WS406/407CCV		626	IVE
1	EA	GASKETING	488SBK PSA		BK	ZER
1	EA	WIRE HARNESS	CON-XXX (LOCK/EXIT TO HINGE FRAME)			VON
1	EA	WIRE HARNESS	CON-XXP (FRAME TO POWER SUPPLY)			VON
1	EA	CARD READER	PROVIDED BY DIV 28			
1	EA	DOOR CONTACT	679-05HM		BLK	SCE
1	EA	POWER SUPPLY	REFER TO HARDWARE SET '00'			

Hardware Group No. 26						
Provide each SGL door(s) with the following:						
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5 NRP		652	IVE
1	EA	STOREROOM LOCK	L9080T 07A		626	SCH
1	EA	PRIMUS CORE	20-740-XP		626	SCH
1	EA	SURFACE CLOSER	4111 SCUSH		689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE
3	EA	SILENCER	SR64		GRY	IVE

F
E
D
C
B
A

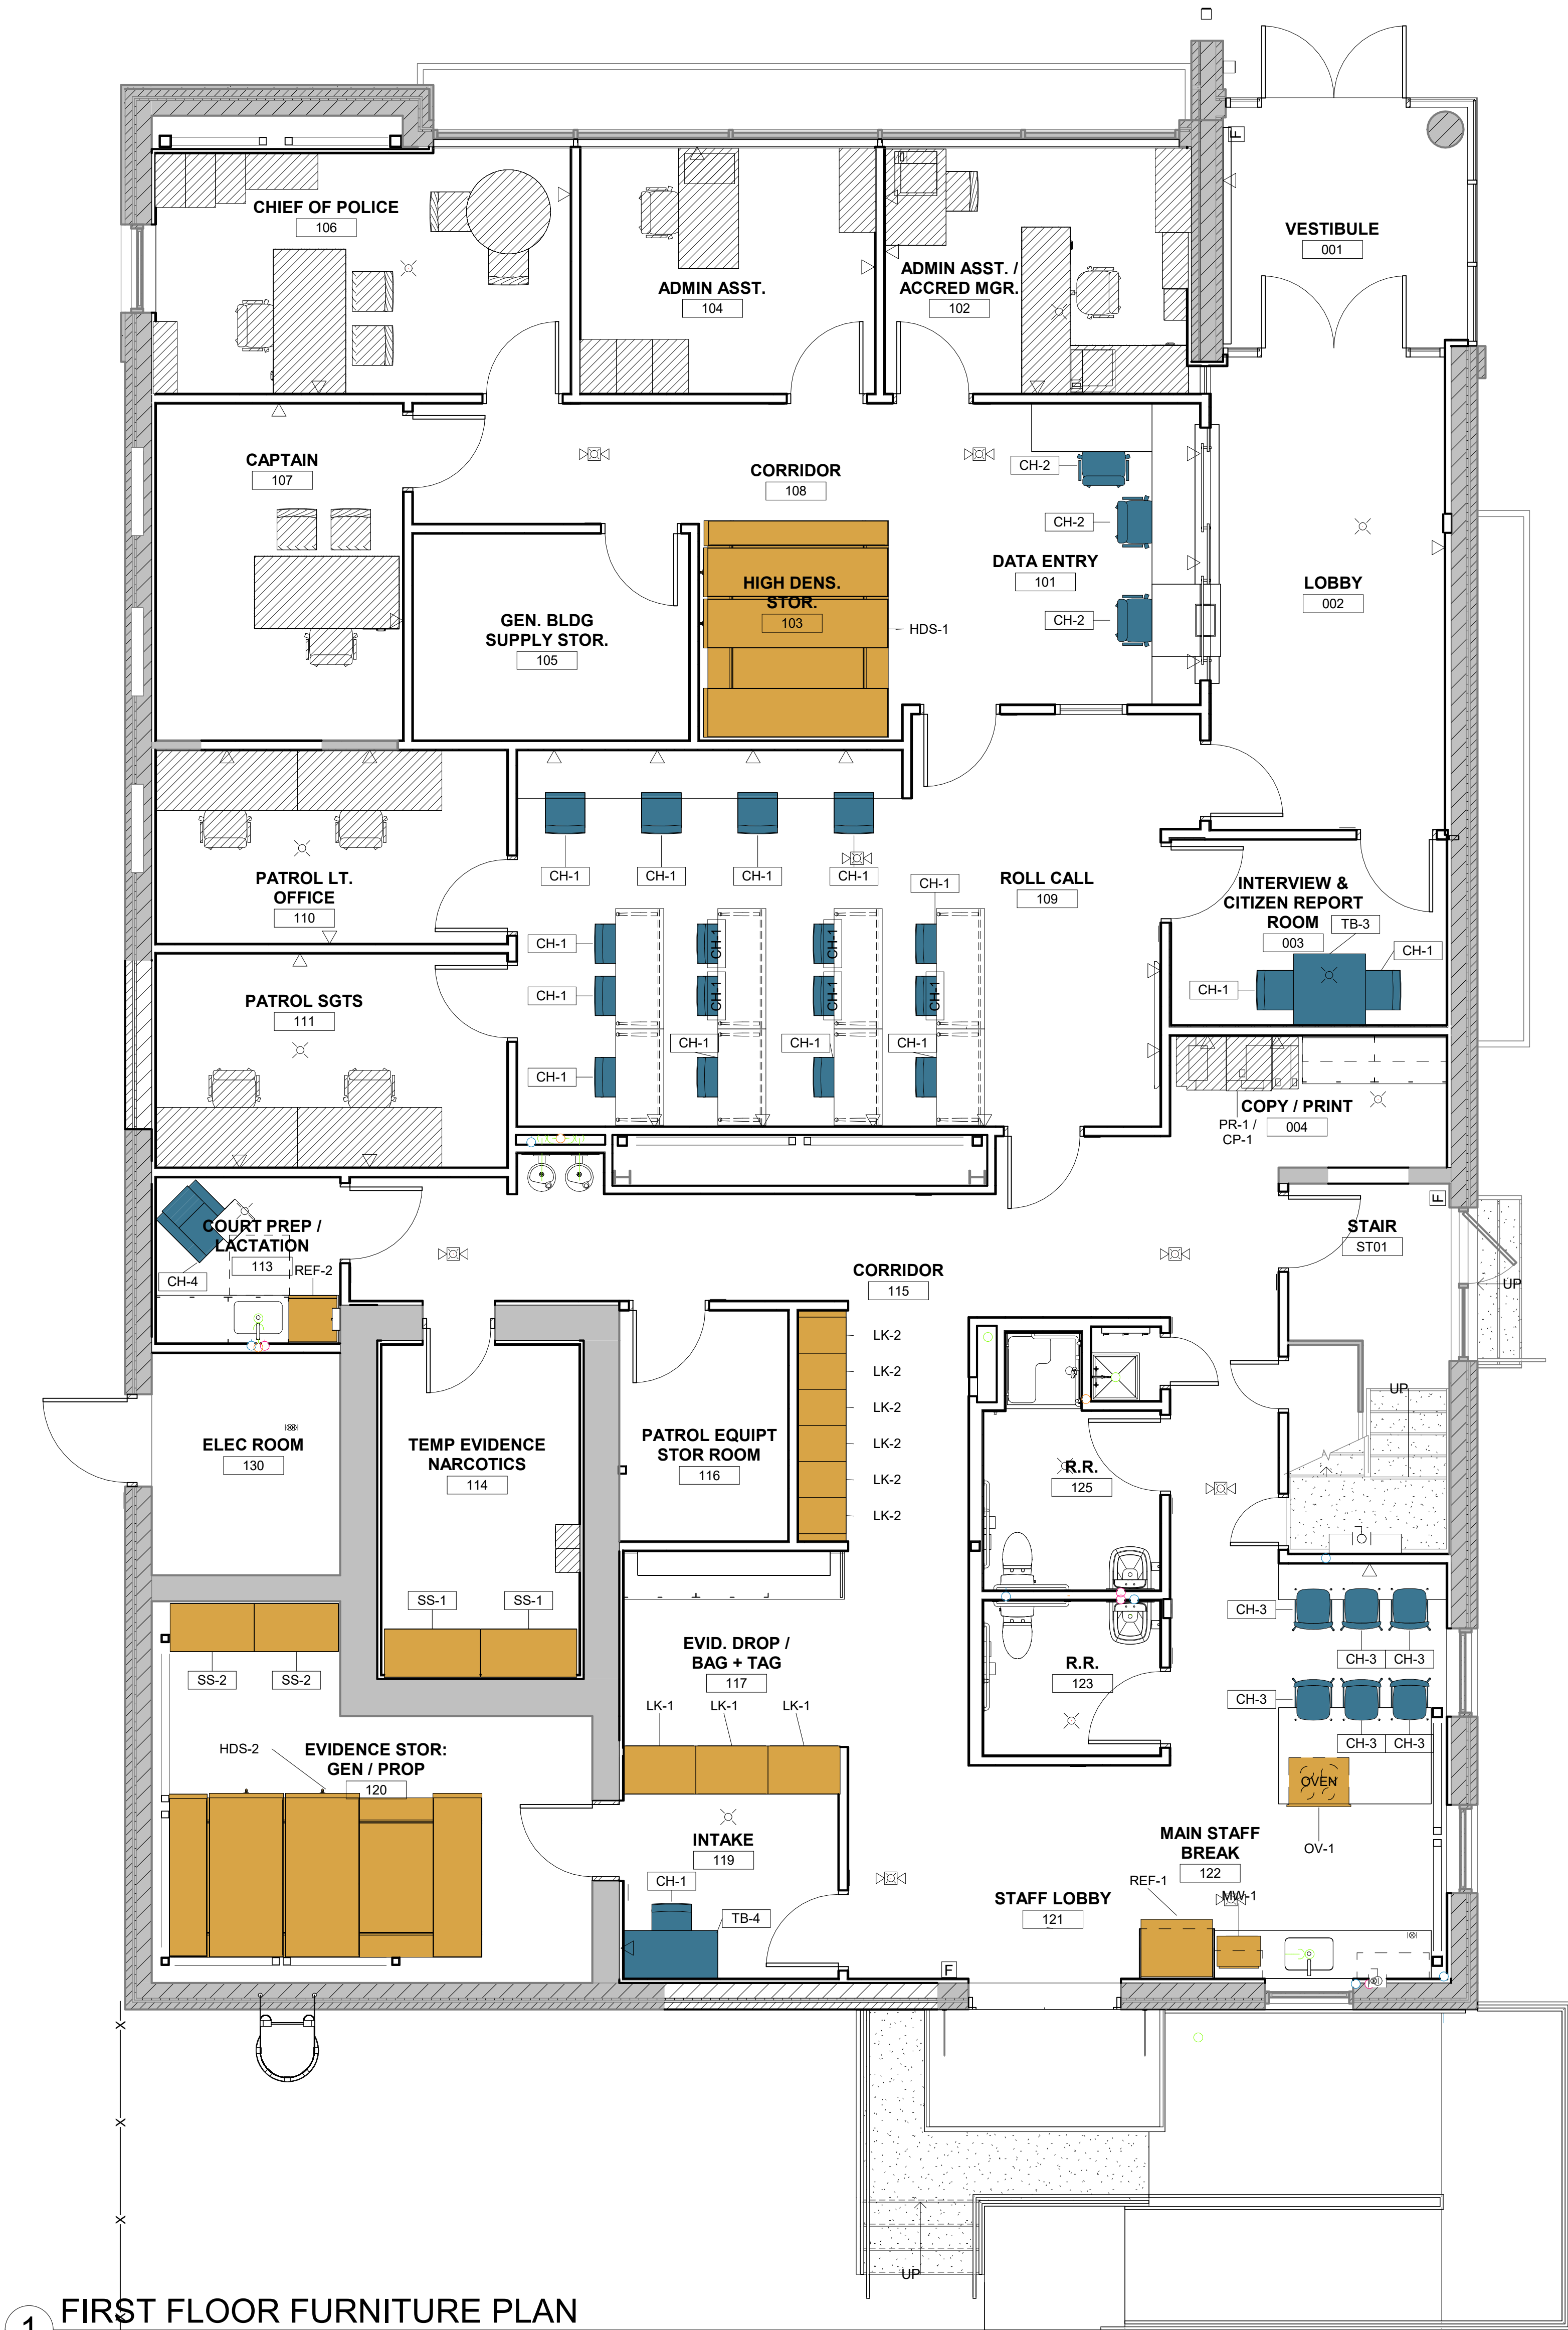

1 FIRST FLOOR FURNITURE PLAN
Scale: 1/4" = 1'-0"

EQUIPMENT SCHEDULE					
TYPE MARK	DESCRIPTION	MANUFACTURER	MODEL	COMMENTS	RESPONSIBILITY
HDS-1	HIGH DENSITY STORAGE	SPACESAVER			
HDS-2	HIGH DENSITY STORAGE	SPACESAVER			
LK-1	36"W X 24"D LOCKER	SPACESAVER			CFCI
LK-2	16.5"H X 22.5"W X 24"D LOCKER	SPACESAVER		DUTY BAGS	CFCI
MW-1	MICROWAVE	G.E. APPLIANCES	PCWK15C1WSS		CFCI
OV-1	RANGE	G.E. APPLIANCES	JD630ST/DT		CFCI
PR-1	COPY MACHINE				OFOI
REF-1	REFRIGERATOR	G.E. APPLIANCES	GYE21JYMFS		CFCI
REF-2	UNDER COUNTER REFRIGERATOR	SUMMIT	AL54PLHD		CFCI

FURNITURE SCHEDULE					
TYPE MARK	DESCRIPTION	MANUFACTURER	MODEL	COMMENTS	RESPONSIBILITY
BK4	STORAGE UNIT			CID LIEUTENANT	OFOI
CH-1	STACKING CHAIR			ROLL CALL ROOM	OFOI
CH-2	EXECUTIVE CHAIR			DATA ENTRY	OFOI
CH-3	SOFT EDGE LOW STOOL W POLYPROPYLENE SEAT BACK 4 LEG METAL FRAME NON UPHOLSTERED			MAIN STAFF BREAK AREA	OFOI
CH-4	LOUNGE CHAIR			LACTATION ROOM	OFOI
CH-5	WORK CHAIR NEW AERON B SIZE STD-HGT RANGE ADJ TLT LIM HGT ADJ ARMS NON-UPHST ARMPADS			CID ROOM	OFOI
GC1	GUEST CHAIR ARMLESS			CID LIEUTENANT	OFOI
SS-1	STATIC SHELF 48"W X 24"D X 88"H	SPACESAVER	4 POST AND CASE-TYPE SHELVING SYSTEMS	EVIDENCE NARCOTICS	CFCI
SS-2	STATIC SHELF 42"W X 24"D X 88"H	SPACESAVER	4 POST AND CASE-TYPE SHELVING SYSTEMS	EVIDENCE GEN.	CFCI
TB-3	INTERVIEW TABLE			INTERVIEW AN CITIZEN REPORT ROOM	OFOI
TB-4	DESK			INTAKE	OFOI
TC1	TASK CHAIR			CID LIEUTENANT	OFOI
WKU3	"U" SHAPED DESK			CID LIEUTENANT	OFOI
WKU4	WORK STATION			CID ROOM	OFOI

FURNITURE AND EQUIPMENT LEGEND

- EXISTING TO BE RELOCATED
- OWNER FURNISHED OWNER INSTALLED
- CONTRACTOR FURNISHED CONTRACTOR INSTALLED

1. ALL FURNITURE SHOWN WITH DIAGONAL HATCH IS EXISTING TO REMAIN. THE OWNER/POLICE WILL BE RESPONSIBLE FOR RELOCATING AND REINSTALLING THIS FURNITURE FOLLOWING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH OWNER FOR SCHEDULING AND ACCESS AS REQUIRED



DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100



Greenman-Pedersen, Inc.
Engineering and Construction Services

GREENMAN-PEDERSEN, INC.


8001 BRADDOCK ROAD
SUITE 300
SPRINGFIELD, VA 22151
703.978.0100

TOWN OF STRASBURG


STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID


SEAL

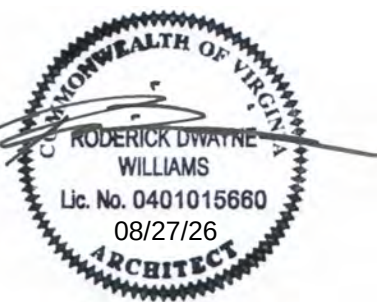

KEY PLAN

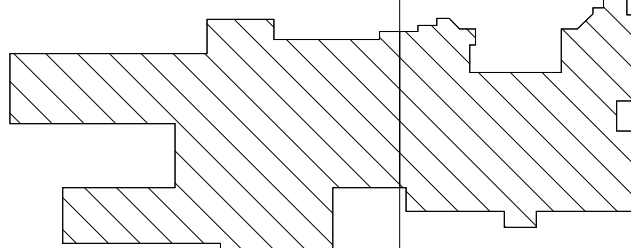

SCALE

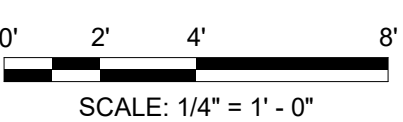

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JU / DN
APPROVED BY AV
CHECKED BY AV
DATE 08.26.2026

TITLE


FIRST FLOOR
FURNITURE &
EQUIPMENT

PROJECT NO. 50165756

I-101

SHEET NO.

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

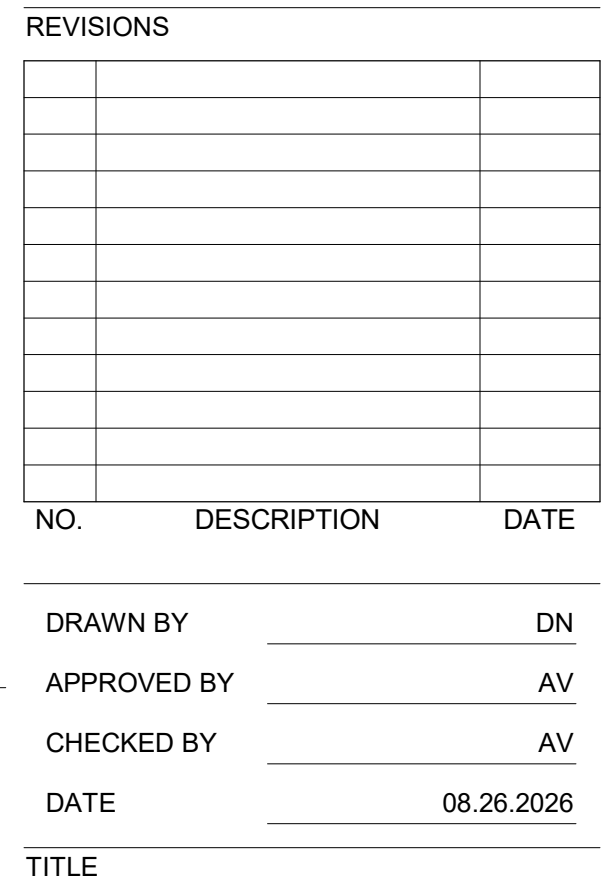


SHEET NO.



F
E
D
C
B
A

1 2 3 4 5 6

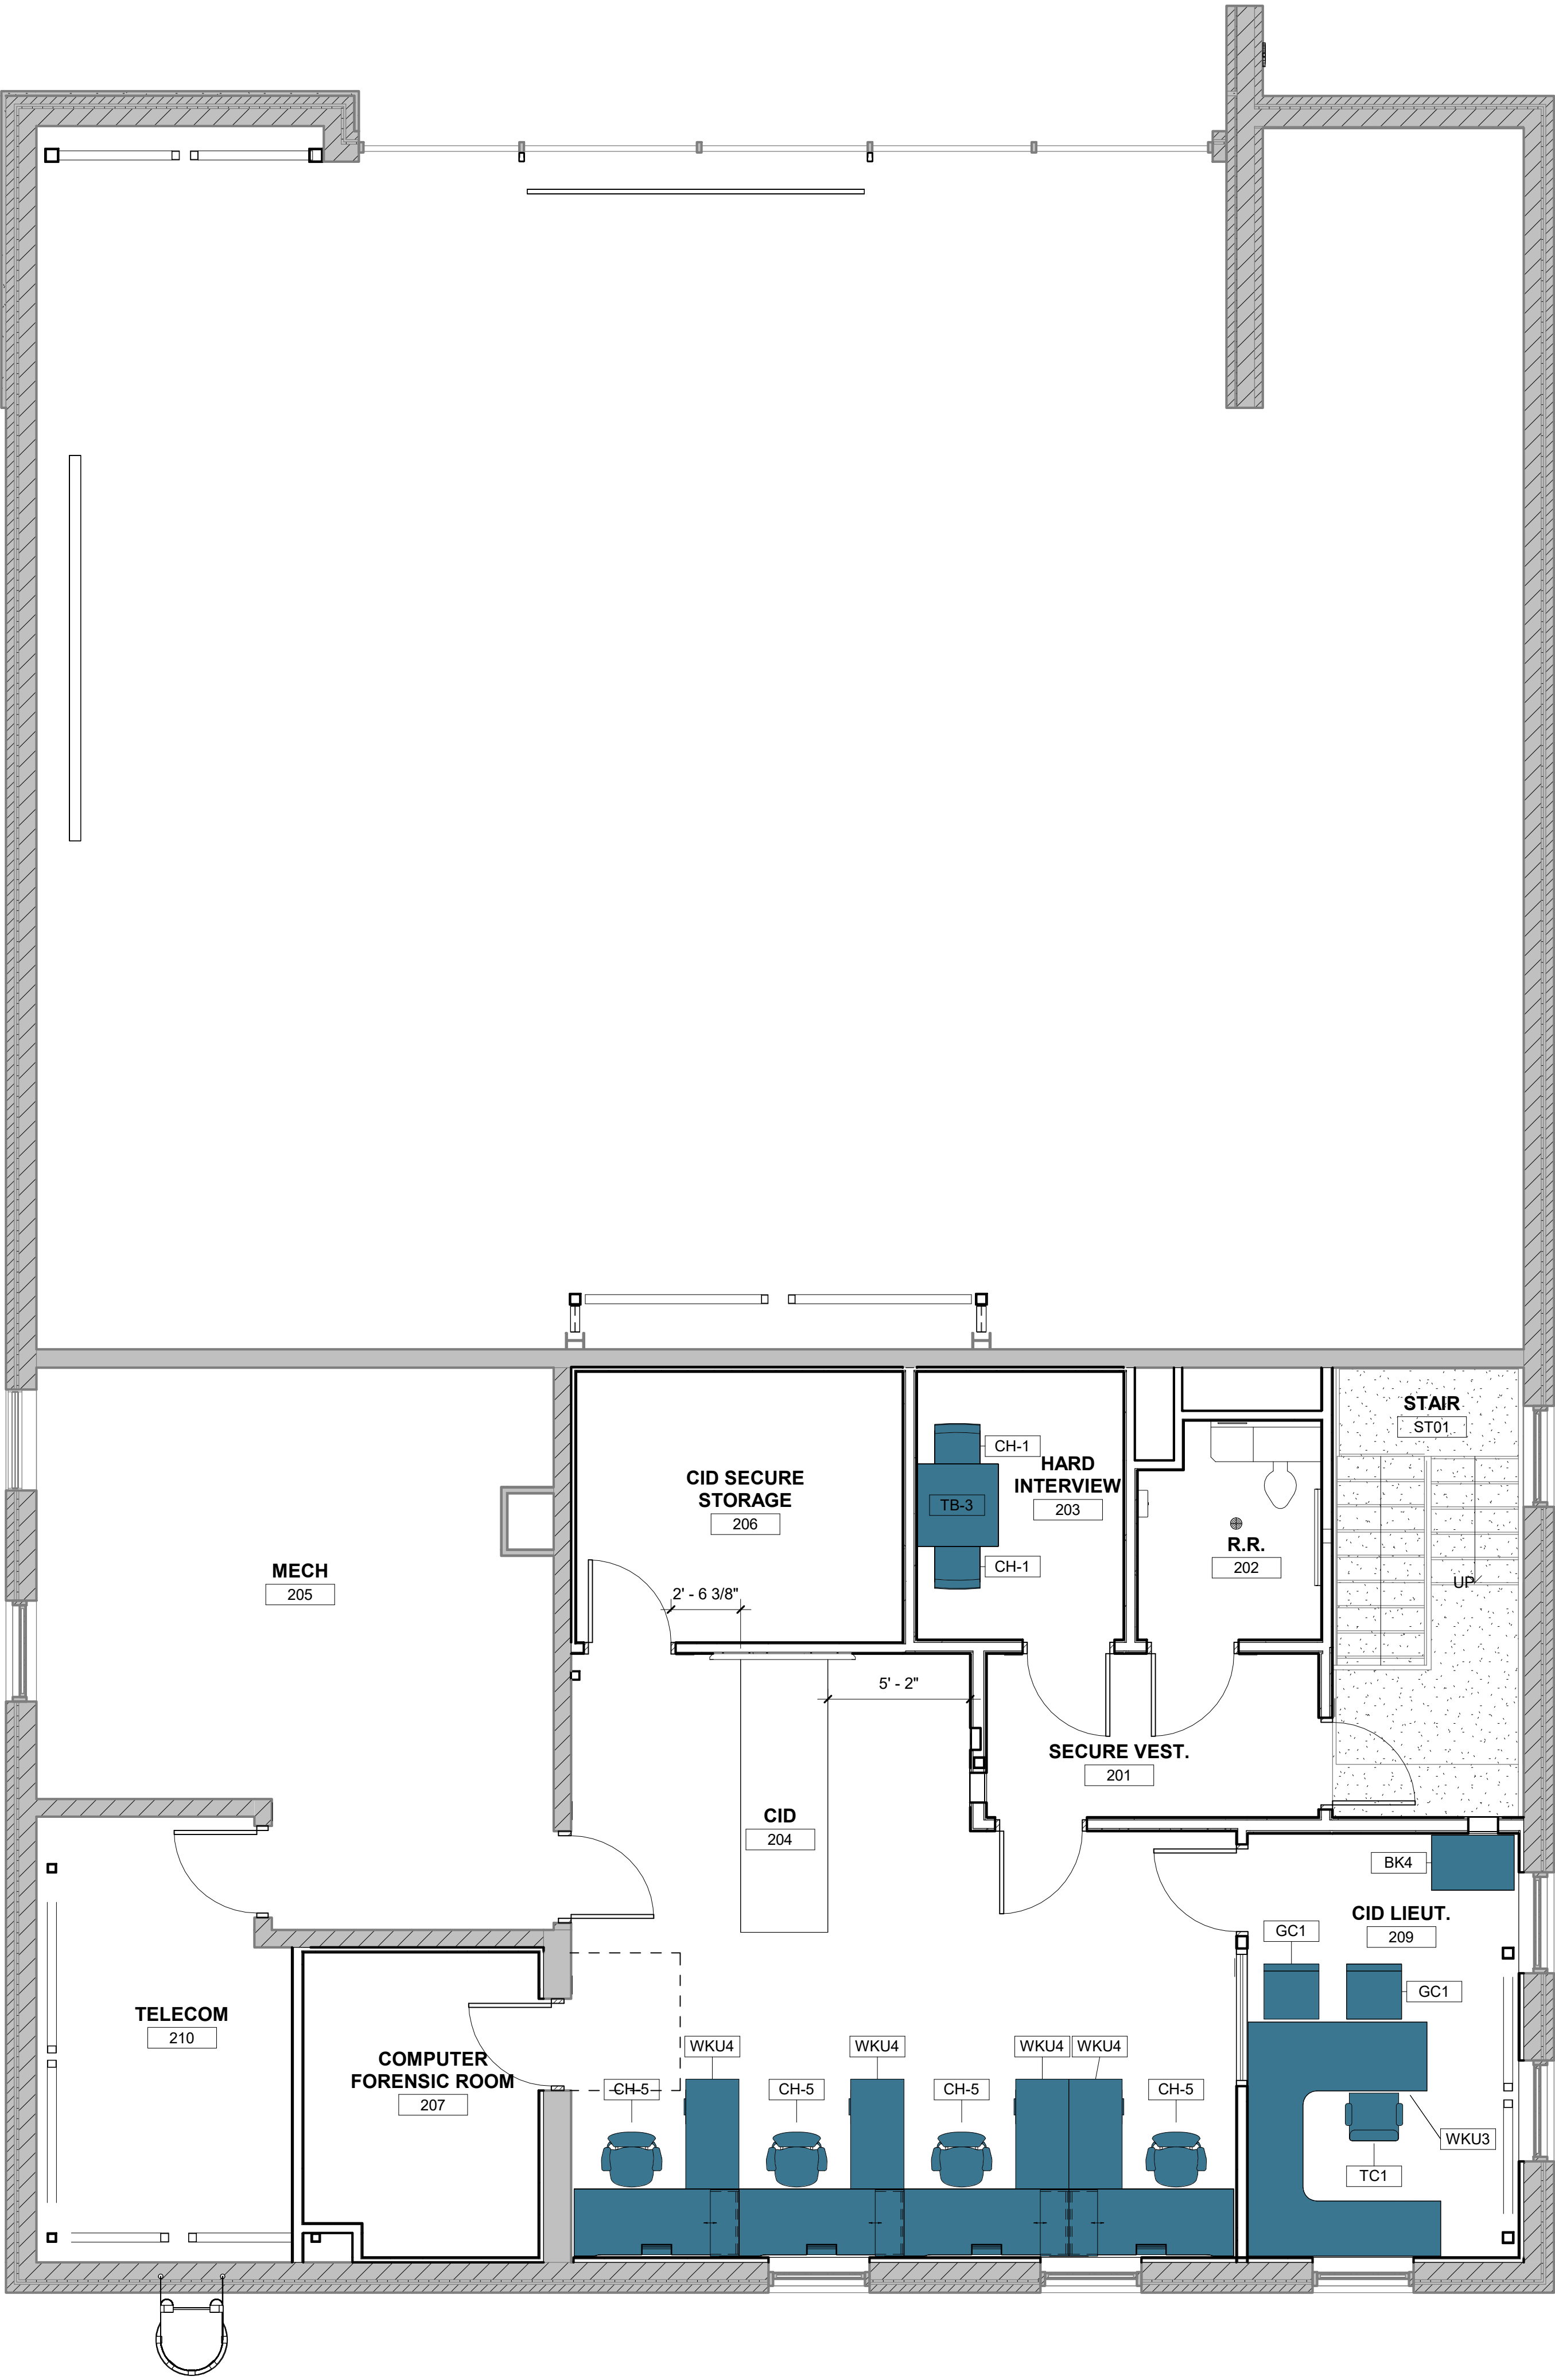

FURNITURE AND EQUIPMENT LEGEND

EXISTING TO BE RELOCATED

OWNER FURNISHED OWNER INSTALLED

CONTRACTOR FURNISHED CONTRACTOR INSTALLED

1. ALL FURNITURE SHOWN WITH DIAGONAL HATCH IS EXISTING TO REMAIN. THE OWNER/POLICE WILL BE RESPONSIBLE FOR RELOCATING AND REINSTALLING THIS FURNITURE FOLLOWING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH OWNER FOR SCHEDULING AND ACCESS AS REQUIRED

DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100

Greenman-Pedersen, Inc.

Engineering and Construction Services

GREENMAN-PEDERSEN, INC.

8001 BRADDOCK ROAD
SUITE 300
SPRINGFIELD, VA 22151
703.978.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

KEY PLAN

SCALE

0' 2' 4' 8'

SCALE: 1/4" = 1' - 0"

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY

JU / DN

APPROVED BY

Approver

CHECKED BY

Checker

DATE

08.26.2026

TITLE

SECOND FLOOR FURNITURE & EQUIPMENT

PROJECT NO.

50165756

I-111

SHEET NO.

8/24/2026 12:01:29 PM

A

B

C

D

E

F

1


2

3

4

5

6

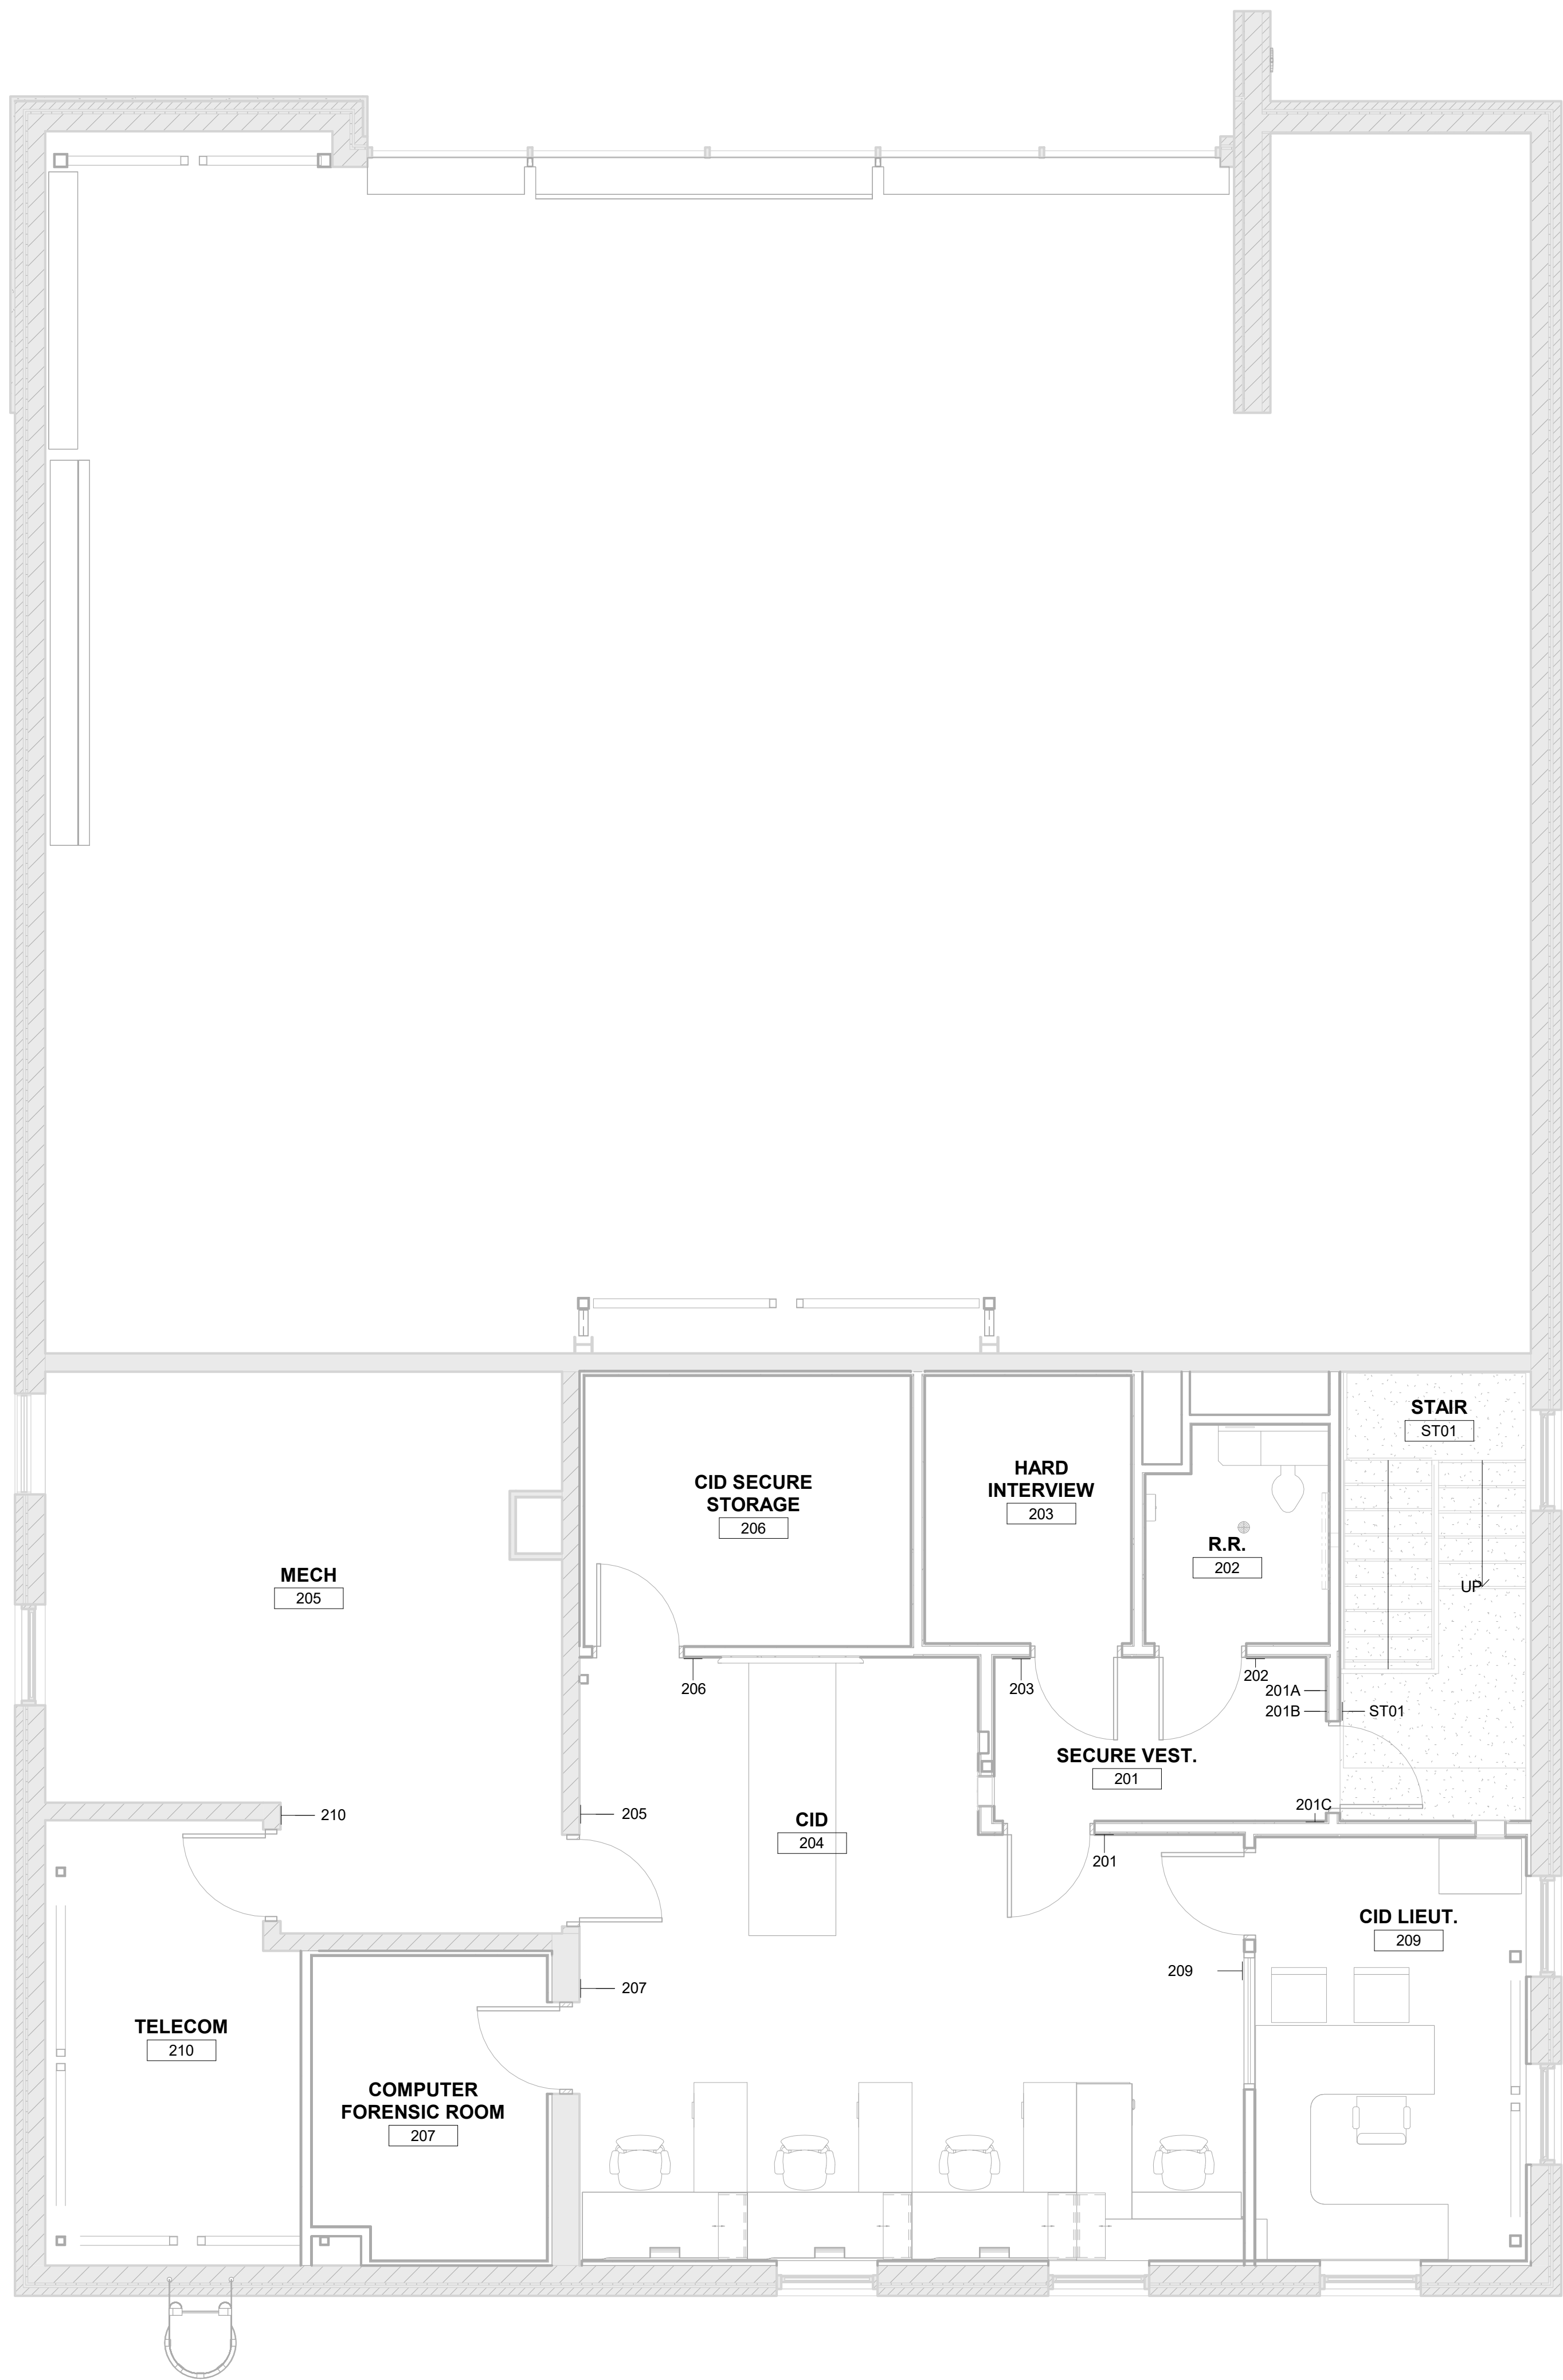

1 SECOND FLOOR SIGNAGE PLAN

Scale: 1/4" = 1'-0"



DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100



Greenman-Pedersen, Inc.
Engineering and Construction Services

GREENMAN-PEDERSEN, INC.


8001 BRADDOCK ROAD
SUITE 300
SPRINGFIELD, VA 22151
703.878.0100

TOWN OF STRASBURG


STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID


SEAL

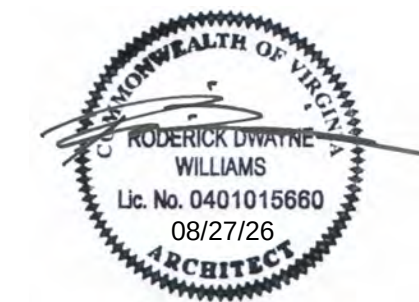

KEY PLAN

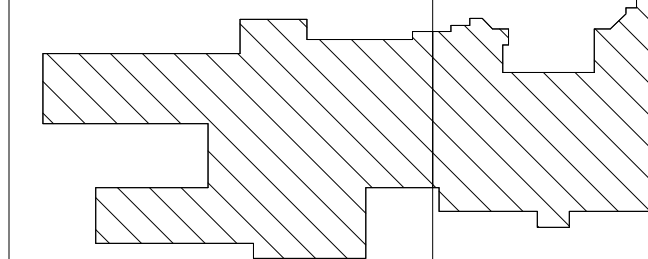

SCALE

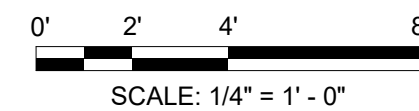

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ DN
APPROVED BY _____ AV
CHECKED BY _____ AV
DATE _____ 08.26.2026

TITLE

SECOND FLOOR
SIGNAGE PLAN

PROJECT NO. 50165756

I-112

SHEET NO.

F


E

D


C

B


A

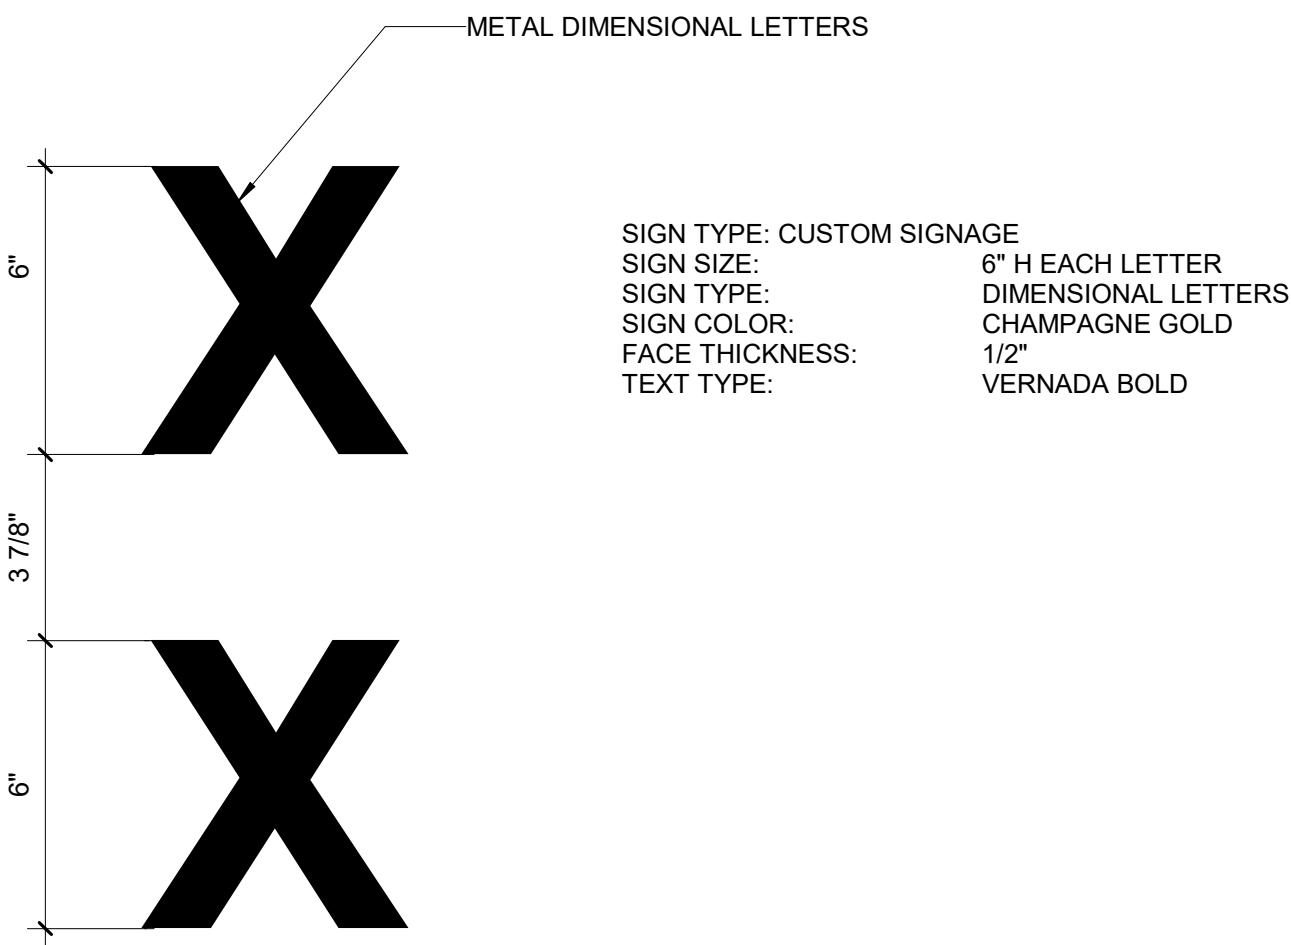


9 SIGN TYPE 1.9
Scale: 3" = 1'-0"

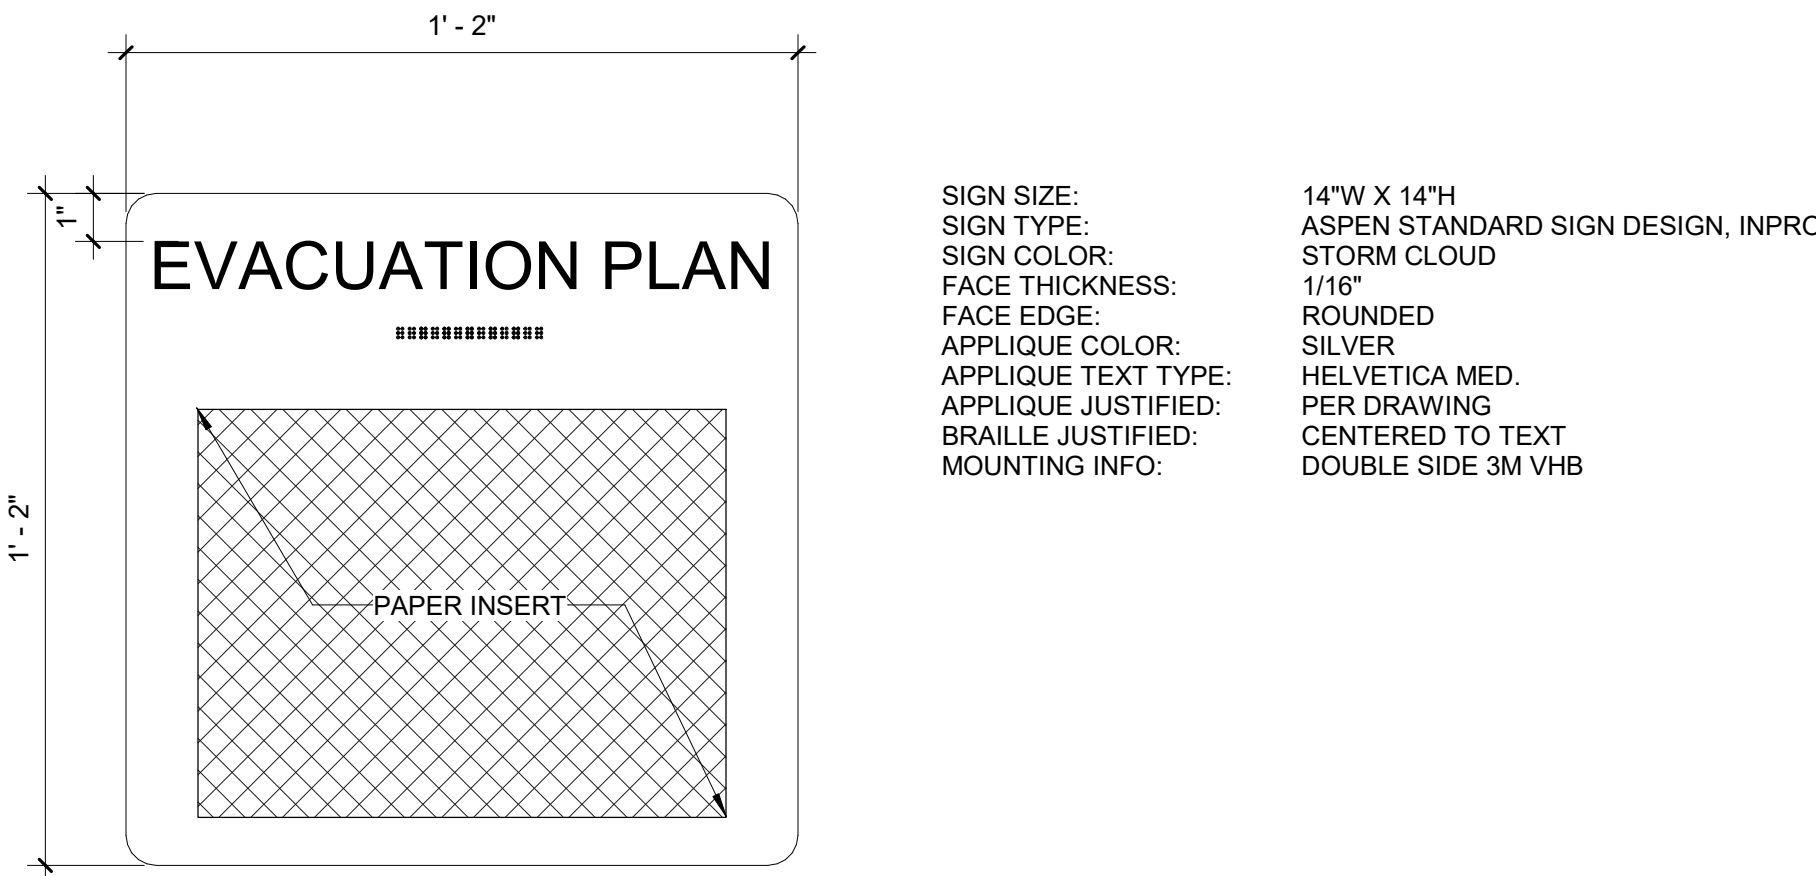


7 SIGN TYPE 1.7
Scale: 3" = 1'-0"

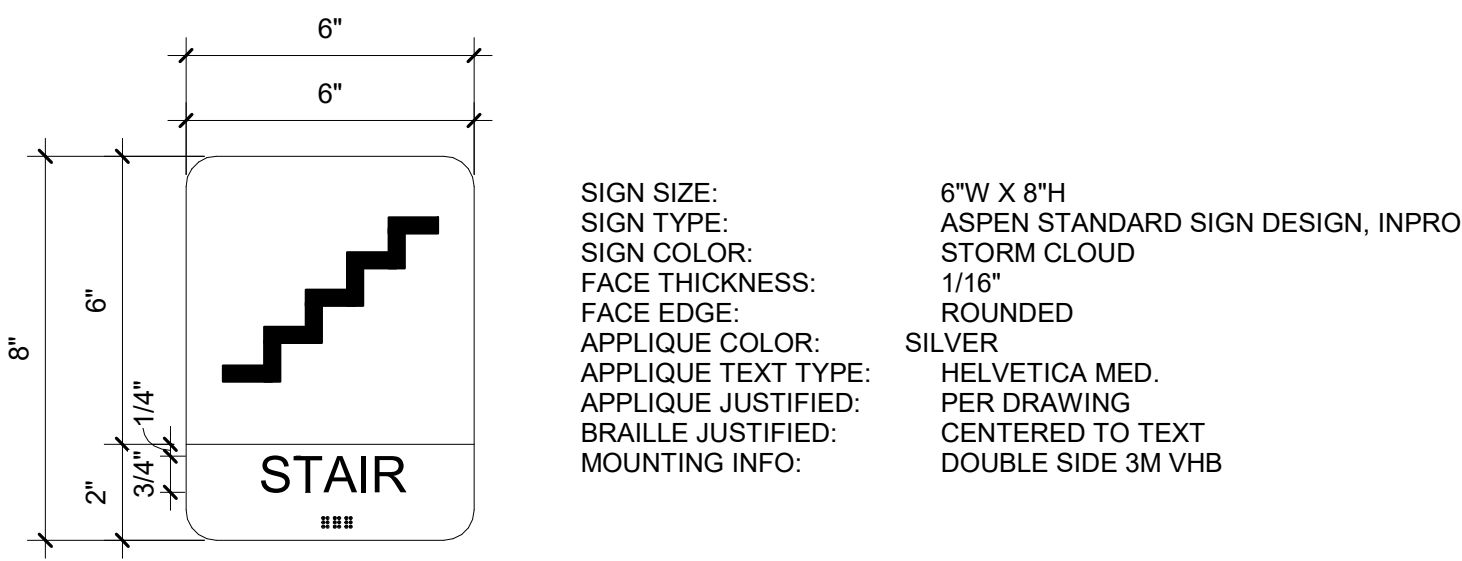


4 SIGN TYPE 1.4
Scale: 3" = 1'-0"

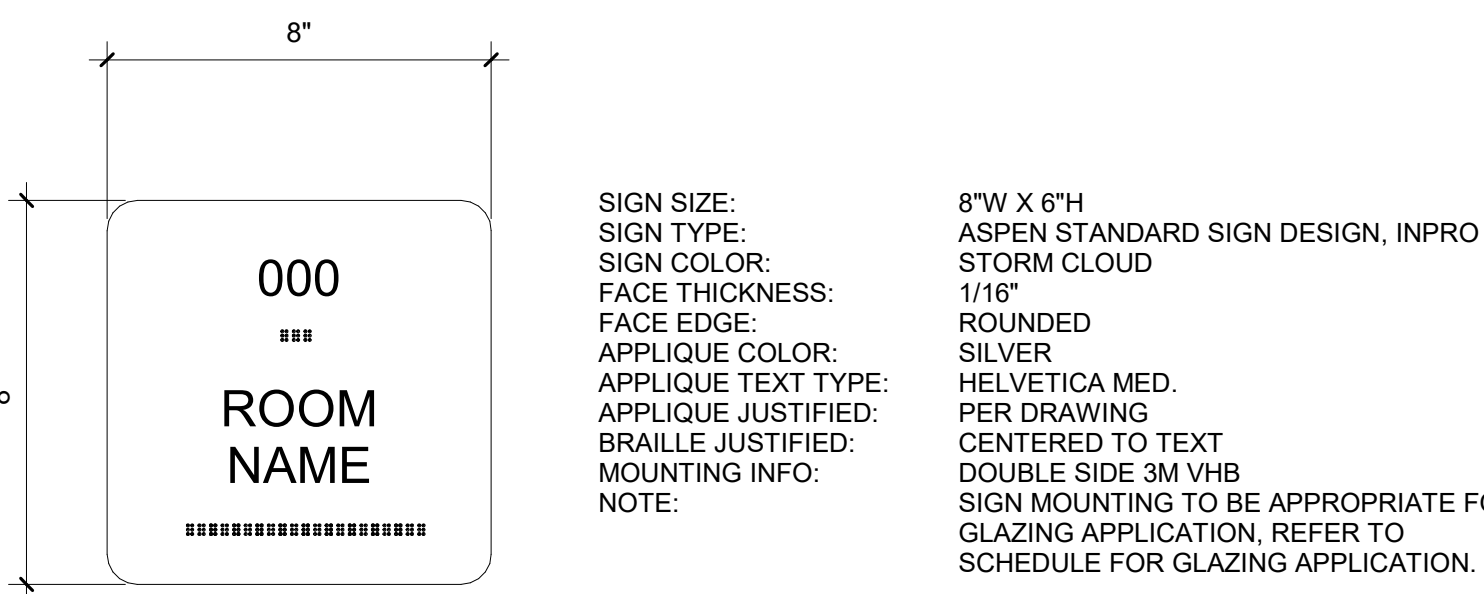


1 SIGN TYPE 1.1
Scale: 3" = 1'-0"

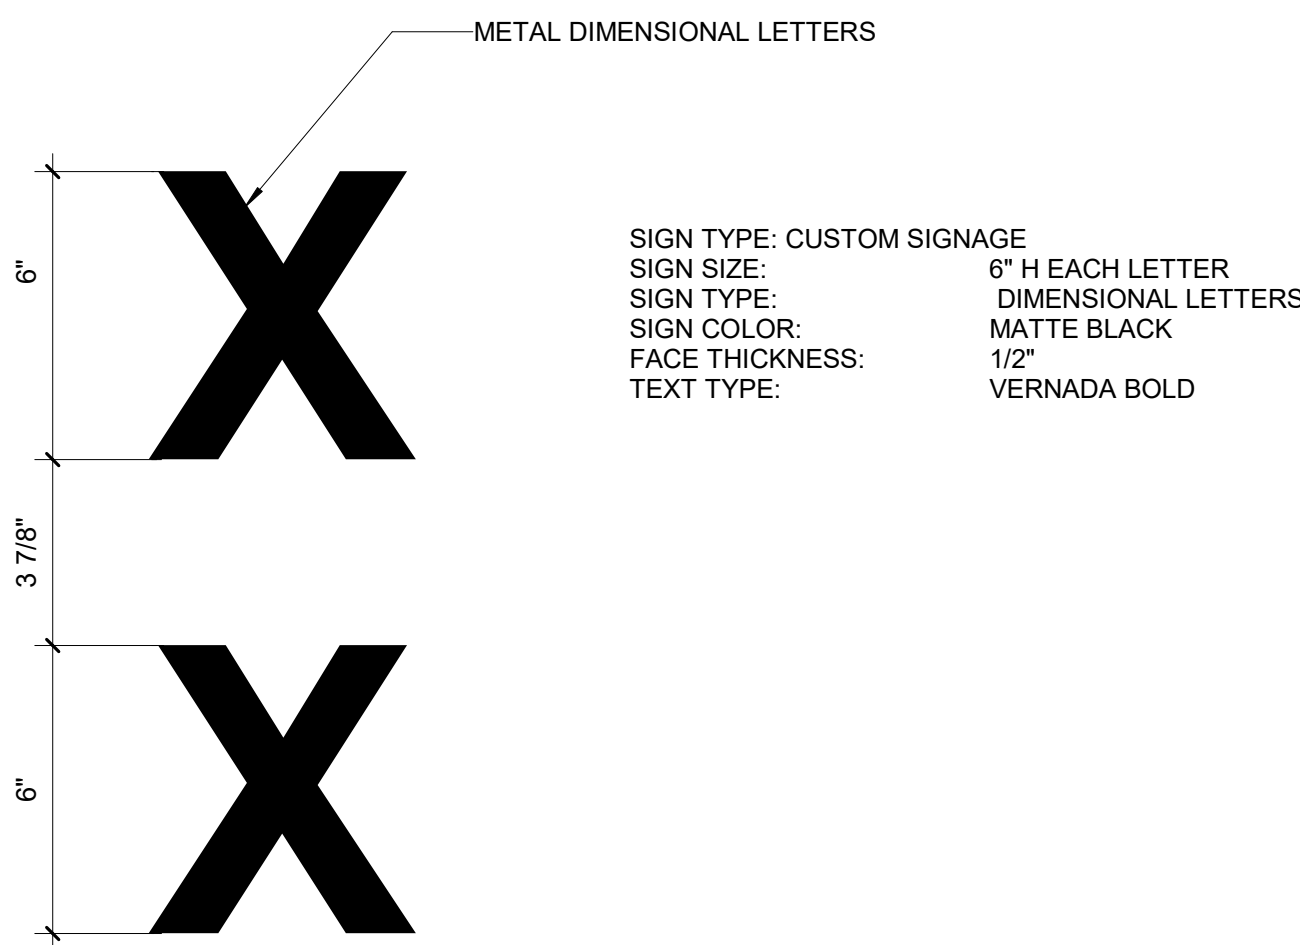


8 SIGN TYPE 1.8
Scale: 3" = 1'-0"

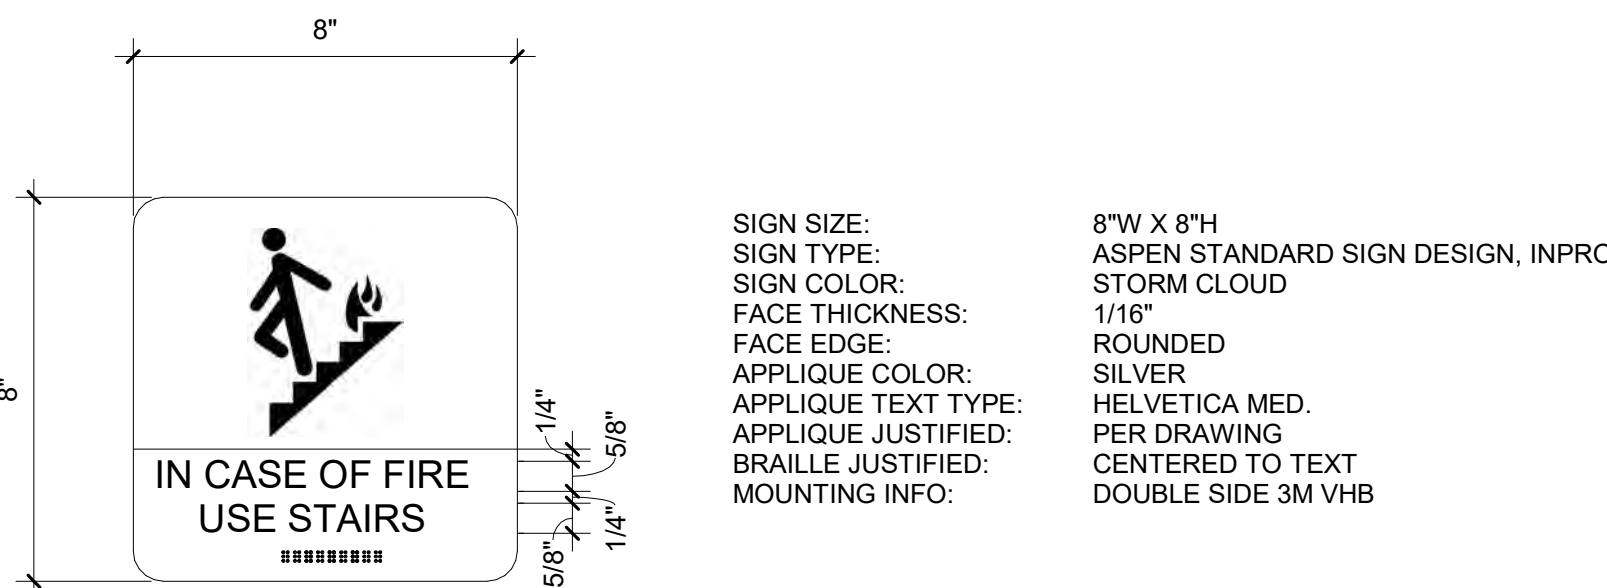


5 SIGN TYPE 1.5
Scale: 3" = 1'-0"

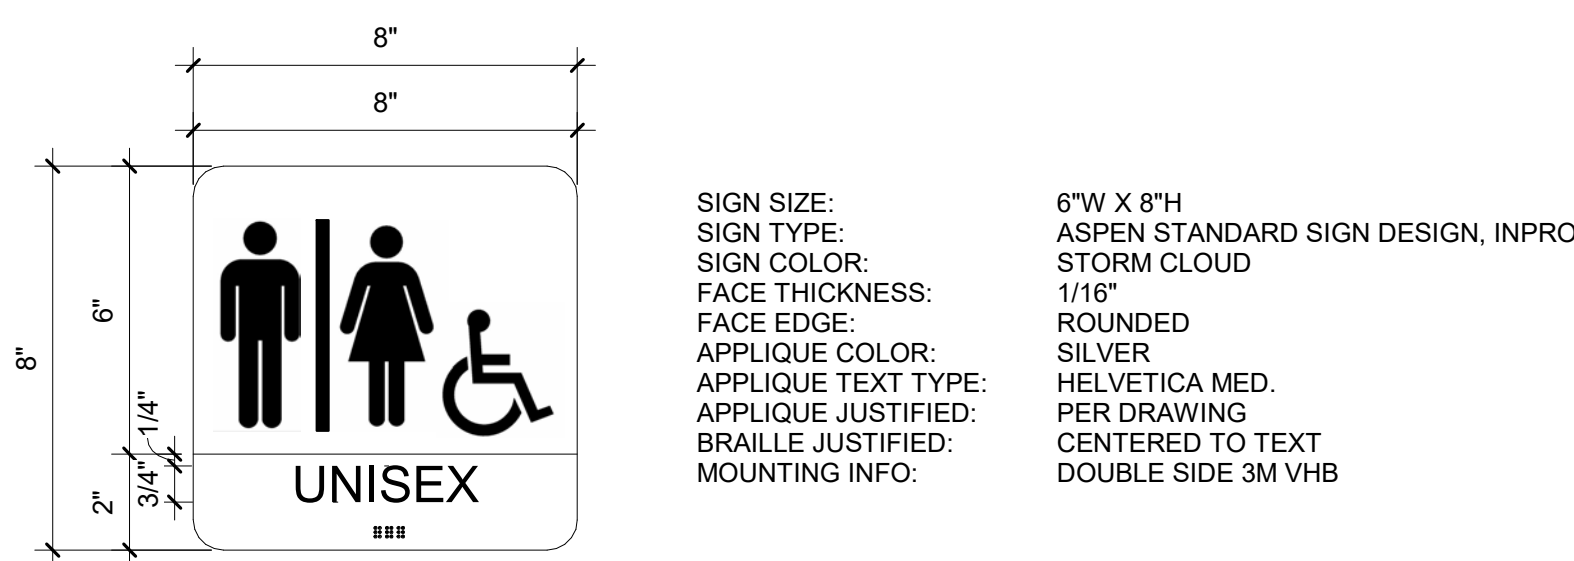

2 SIGN TYPE 1.2
Scale: 3" = 1'-0"

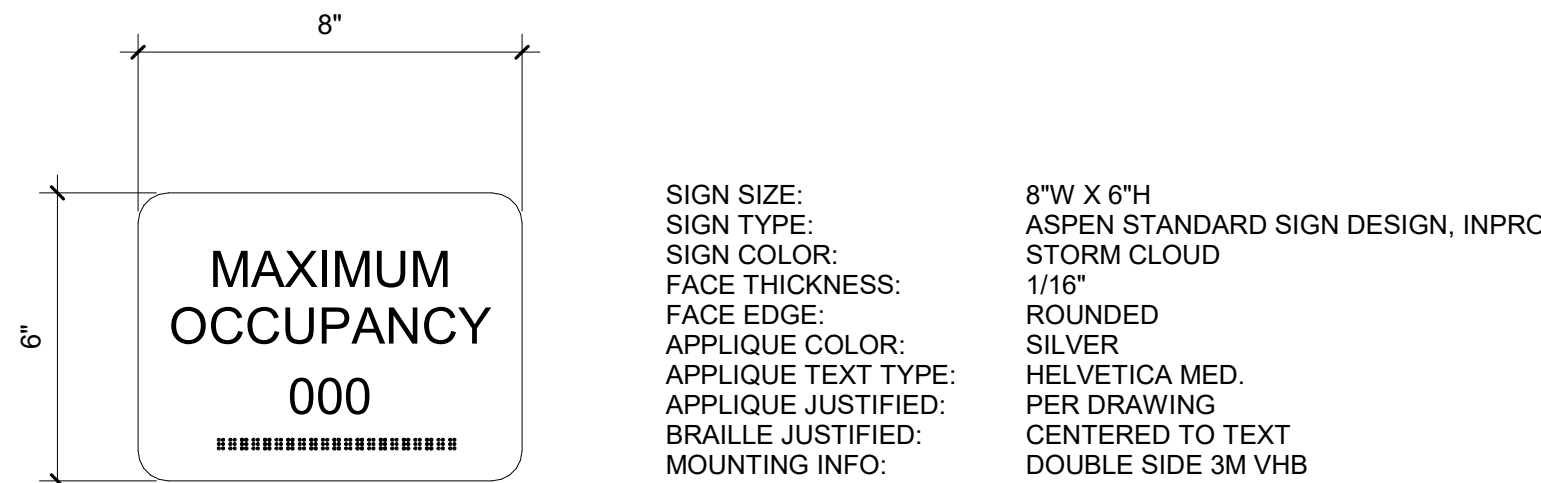

6 SIGN TYPE 1.6
Scale: 3" = 1'-0"

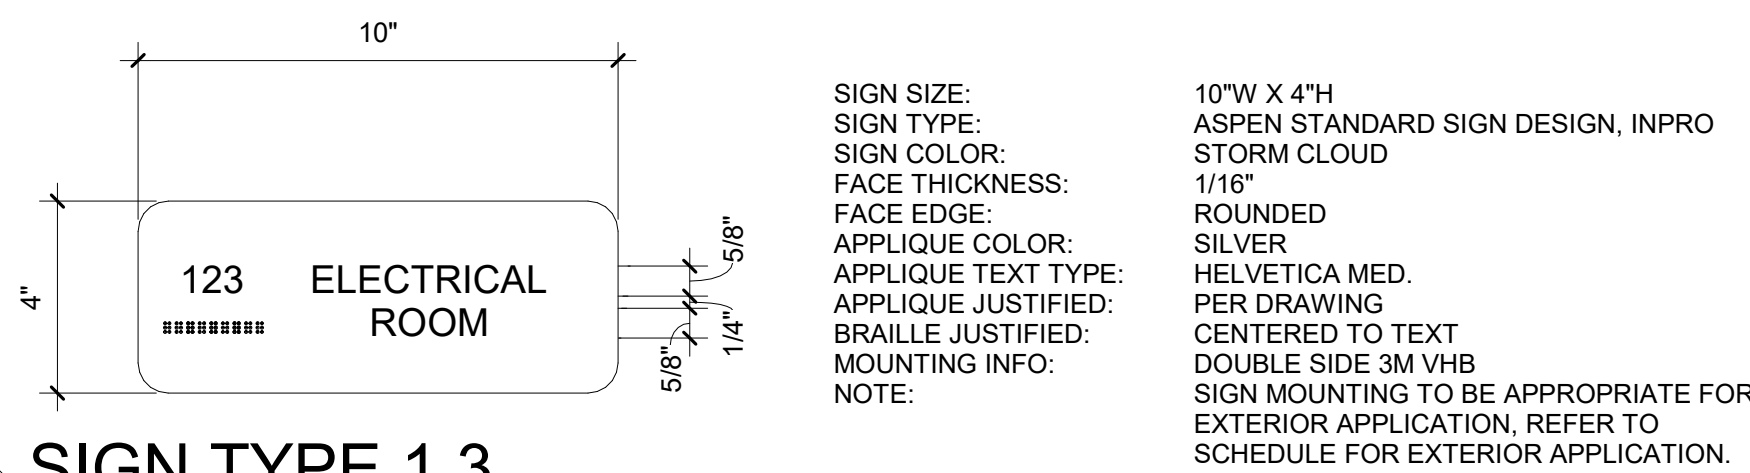

3 SIGN TYPE 1.3
Scale: 3" = 1'-0"

Signage Schedule				
ROOM NUMBER	SIGN TYPE	ROOM NAME	SIGNAGE TEXT	Comments
003A	1.1	INTERVIEW & CITIZEN REPORT ROOM	INTERVIEW & CITIZEN REPORT ROOM	
003B	1.1	INTERVIEW & CITIZEN REPORT ROOM	INTERVIEW & CITIZEN REPORT ROOM	
101	1.1	DATA ENTRY	DATA ENTRY	
102	1.1	ADMIN ASST. / ACCRED MGR.	ADMIN ASSISTANT / ACCRED MANAGER	
104	1.1	ADMIN ASST.	ADMINISTRATIVE ASSISTANT	
105	1.1	GEN. BLDG SUPPLY STOR.	STORAGE	
106	1.1	CHIEF OF POLICE	CHIEF OF POLICE	
107	1.1	CAPTAIN	CAPTAIN	
109	1.1	ROLL CALL	ROLL CALL	
109	1.1	ROLL CALL	ROLL CALL	
109A	1.6	ROLL CALL	MAXIMUM OCCUPANCY 25	
109B	1.8	ROLL CALL	CUSTOM SIGNAGE	
110	1.1	PATROL LT. OFFICE	PATROL LIEUTENANT	
111	1.1	PATROL SGTs	PATROL SERGEANTS	
115	1.1	COURT PREP / LACTATION	WELLNESS ROOM	
114	1.1	TEMP EVIDENCE NARCOTICS	NARCOTICS	
ST01	1.4	STAIR	STAIR	
115A	1.8	CORRIDOR	CUSTOM SIGNAGE	
116	1.1	PATROL EQUIPT STOR ROOM	EQUIPMENT STORAGE	
119	1.1	INTAKE	INTAKE	
120	1.1	EVIDENCE STOR. GEN / PROP	EVIDENCE	
121	1.9	STAFF LOBBY	CUSTOM SIGNAGE	
123	1.2	R.R.	UNISEX	
125	1.2	R.R.	UNISEX	
127	1.1	JC	JANITORS CLOSET	
130	1.3	ELEC ROOM	ELECTRICAL ROOM	EXTERIOR MOUNTING
201	1.1	SECURE VEST.	SECURE VESTIBULE	
201A	1.5	SECURE VEST.	IN CASE OF FIRE USE STAIRS	
201B	1.4	SECURE VEST.	STAIR	
201C	1.7	SECURE VEST.	EVACUATION PLAN	
202	1.2	R.R.	UNISEX	
203	1.1	HARD INTERVIEW	HARD INTERVIEW	
205	1.3	MECH.	MECHANICAL ROOM	
206	1.1	CID SECURE STORAGE	CID SECURE STORAGE	
207	1.1	COMPUTER FORENSIC ROOM	COMPUTER FORENSIC ROOM	
209	1.1	CID LIEUT.	CID LIEUTENANT	GLASS MOUNTING, PROVIDE OPAQUE BACKER
210	1.3	TELECOM	TELECOM	
ST01	1.5	STAIR	IN CASE OF FIRE USE STAIRS	

DEWBERRY

8401 Arlington Blvd
Fairfax, VA 22031
703.849.0100


GREENMAN-PEDERSEN, INC.

8001 BRADDOCK ROAD
SUITE 200
SPRINGFIELD, VA 22151
703.978.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

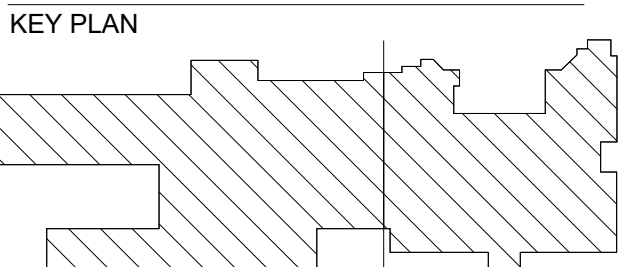

SCALE

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY _____ DN

APPROVED BY _____ AV

CHECKED BY _____ AV

DATE _____ 08.26.2026

TITLE

SIGNAGE SCHEDULE

PROJECT NO. 50165756

I-301

SHEET NO.

	DCW - DOMESTIC COLD WATER PIPING
	DHW - DOMESTIC HOT WATER PIPING
	DHWR - DOMESTIC HOT WATER RETURN PIPING
	V - SANITARY VENT PIPING
	SAN - SANITARY SEWER PIPING
	(EX)SAN - EXISTING SANITARY SEWER PIPING
	(EX)V - EXISTING SANITARY VENT PIPING
	(EX)SAN - EXISTING SANITARY SEWER PIPING
	(EX)DCW - EXISTING DCW PIPING
	EXISTING PIPING TO BE REMOVED

 DETAIL REF	 SHEET REF	CALLOUT
DETAIL NUMBER DETAIL NAME Scale: AS INDICATED	DETAIL TITLE	
COLUMN GRID ID NUMBER LINE		GRID LINE
PLAN NORTH TRUE NORTH		NORTH ARROW
ROOM NUMBER		ROOM TAG
REVISION NUMBER		REVISION TAG
KEYNOTE NUMBER		KEYNOTE TAG
	CONNECT NEW TO EXISTING	

AAV	AIR ADMITTANCE VALVE
BFP	BACKFLOW PREVENTER
CO	CLEANOUT
CP	CIRCULATING PUMP
CV	CHECK VALVE
DCV	DOUBLE CHECK VALVE
DCW	DOMESTIC COLD WATER
DHW	DOMESTIC HOT WATER
DHWR	DOMESTIC HOT WATER RETURN
DN	DOWN
EWC	ELECTRIC WATER COOLER
(EX)	EXISTING
FCO	FLOOR CLEANOUT
FD	FLOOR DRAIN
GPM	GALLON PER MINUTE
HB	HOSE BIB
IW	INDIRECT WASTE
L	LAVATORY
MB	MOP BASIN
PDI	PLUMBING DRAINAGE INSTITUTE
SAN	SANITARY
SF	SQUARE FOOT
SK	SK
ST	STORM
V	VENT
WC	WATER CLOSET
WCO	WALL CLEANOUT

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID



REVISIONS

1	Revision 1	Date 1
NO.	DESCRIPTION	DATE

DRAWN BY	KS
APPROVED BY	SC
CHECKED BY	SH
DATE	08.26.2026
TITLE	

PLUMBING SYMBOLS, ABBREVIATIONS & NOTES

PROJECT NO.

P-001 PLUMBING SYMBOLS, ABBREVIATIONS & NOTES
P-101 FIRST FLOOR PLUMBING PLAN
P-102 SECOND FLOOR PLUMBING PLAN
P-501 PLUMBING DETAILS
TOTAL SHEETS: 4

P-001

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ KS
APPROVED BY _____ SC
CHECKED BY _____ SH
DATE _____ 08.26.2026

TITLE

FIRST FLOOR
PLUMBING PLAN

PROJECT NO.

P-101

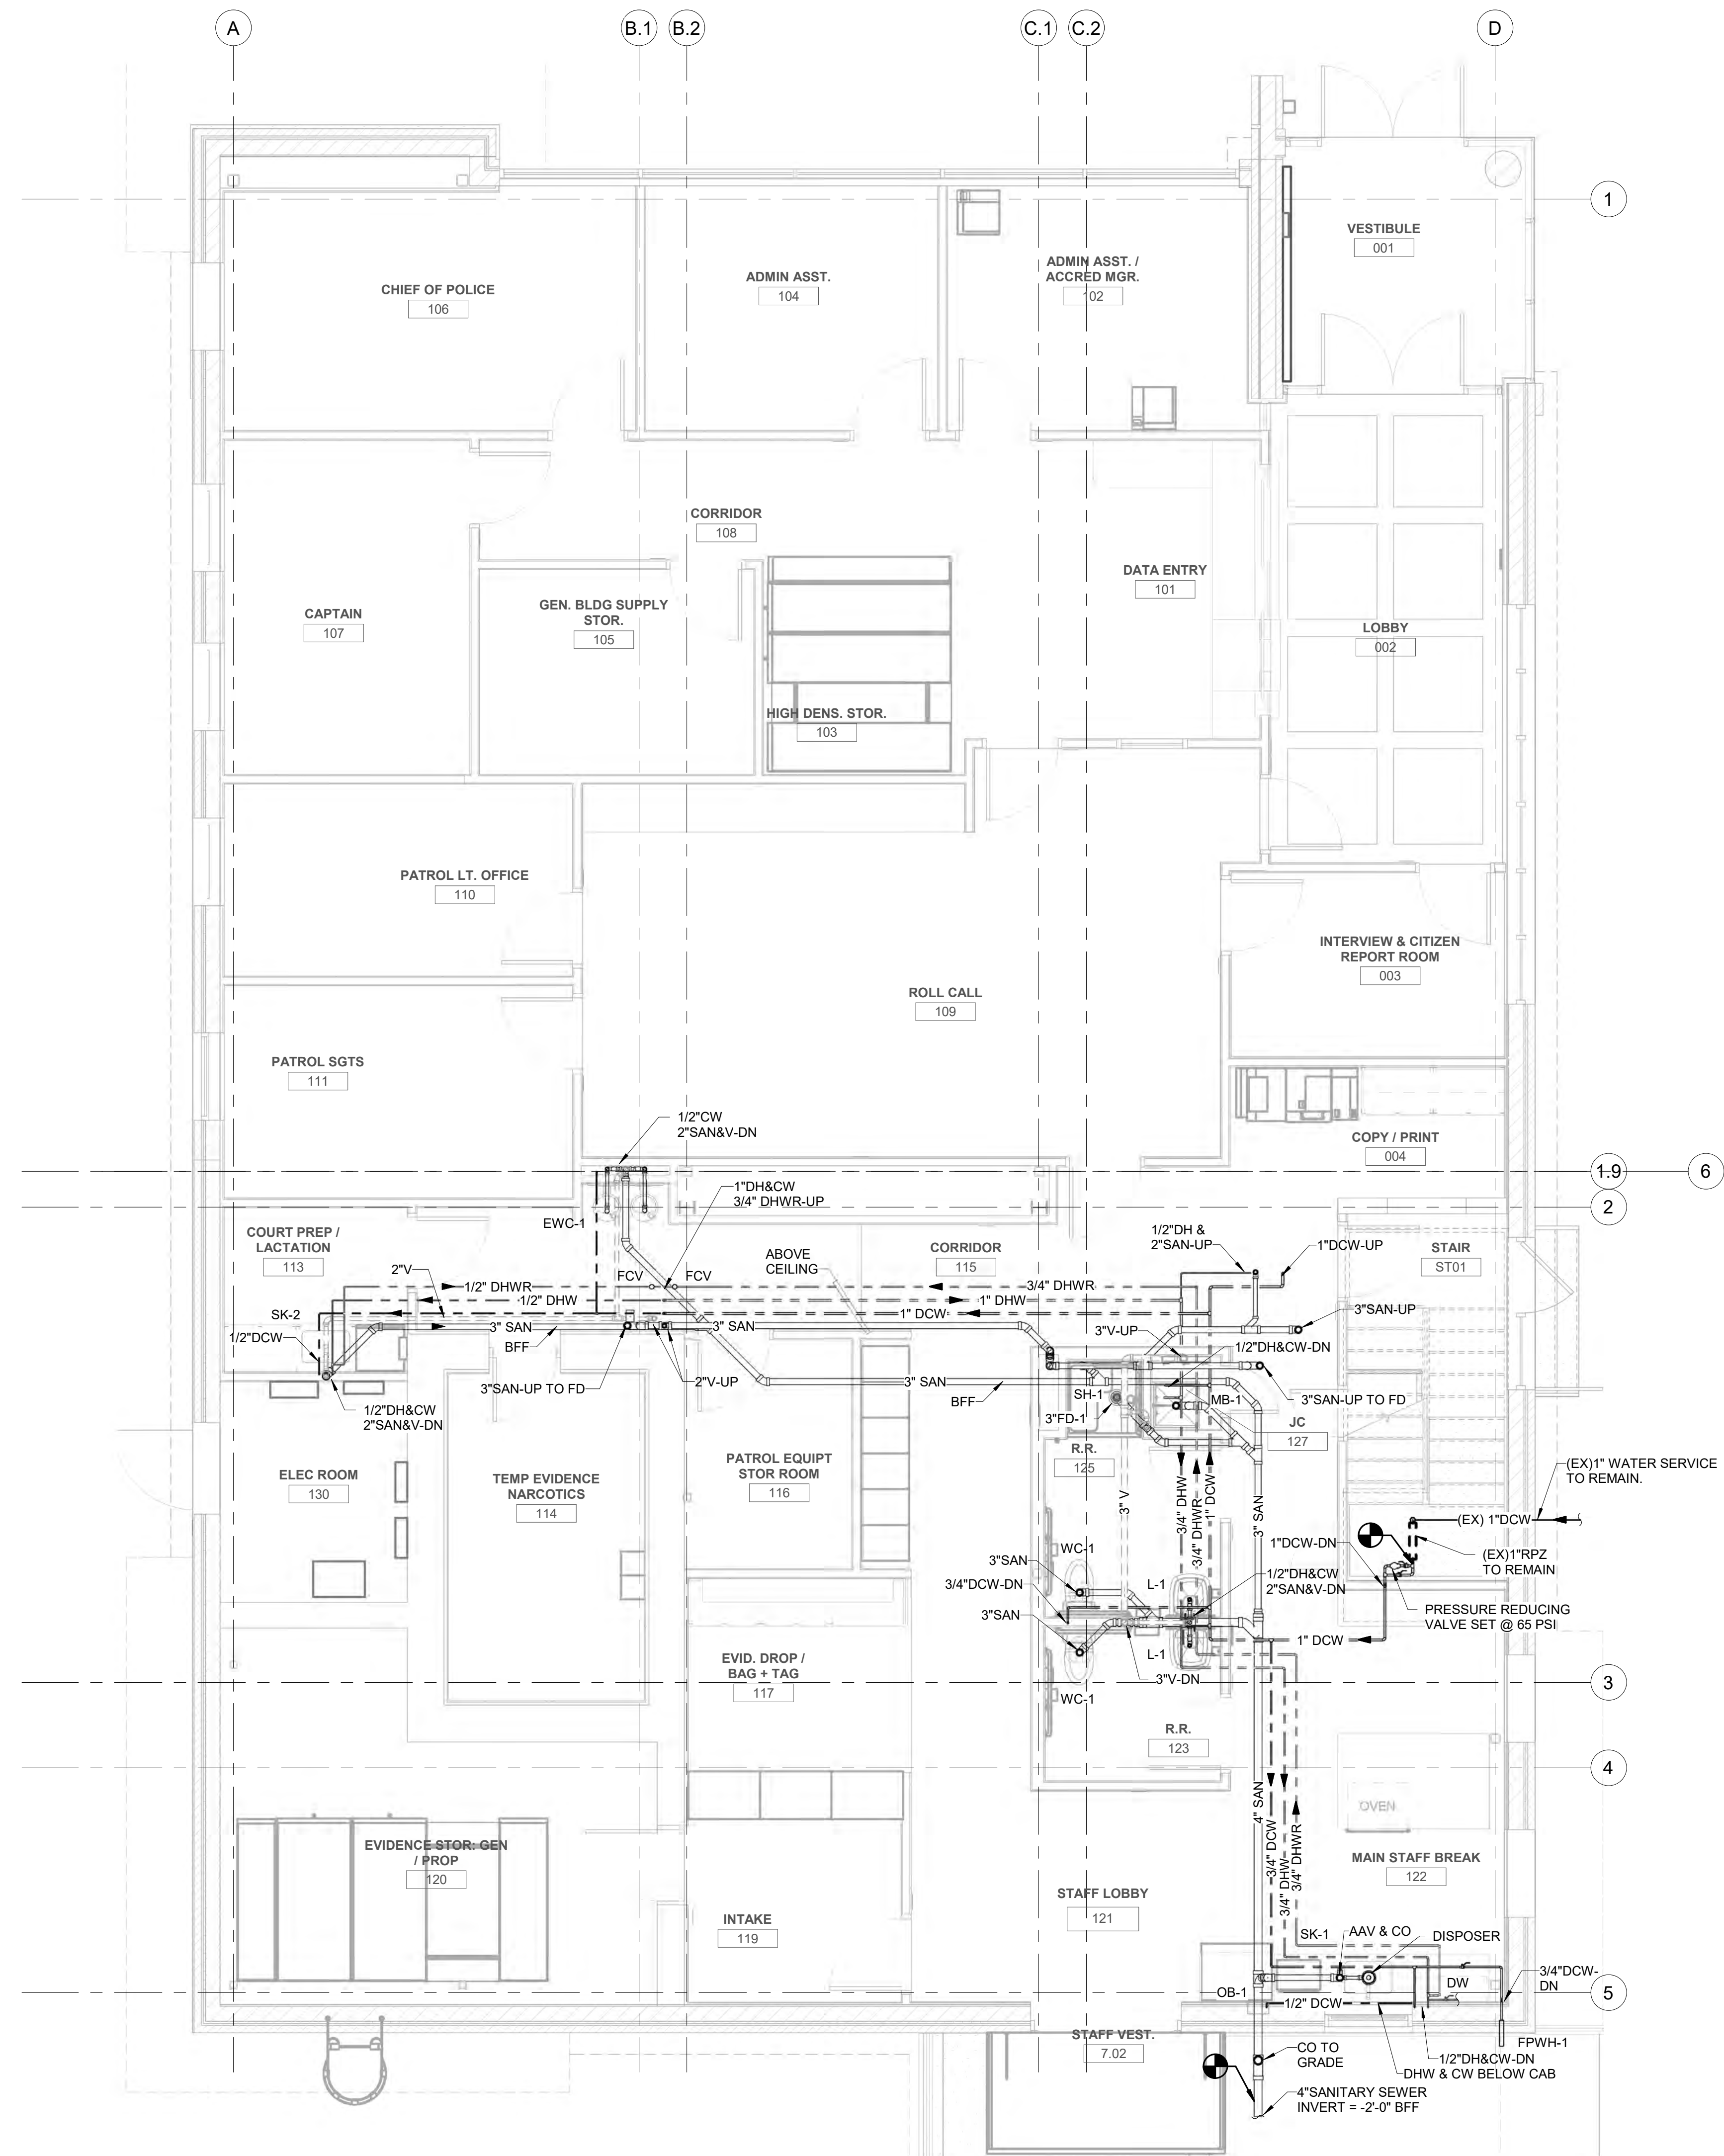

1 FIRST FLOOR PLUMBING PLAN
Scale: 1/4" = 1'-0"

1

2

3

4

5

6

F


E

D


C

B

A

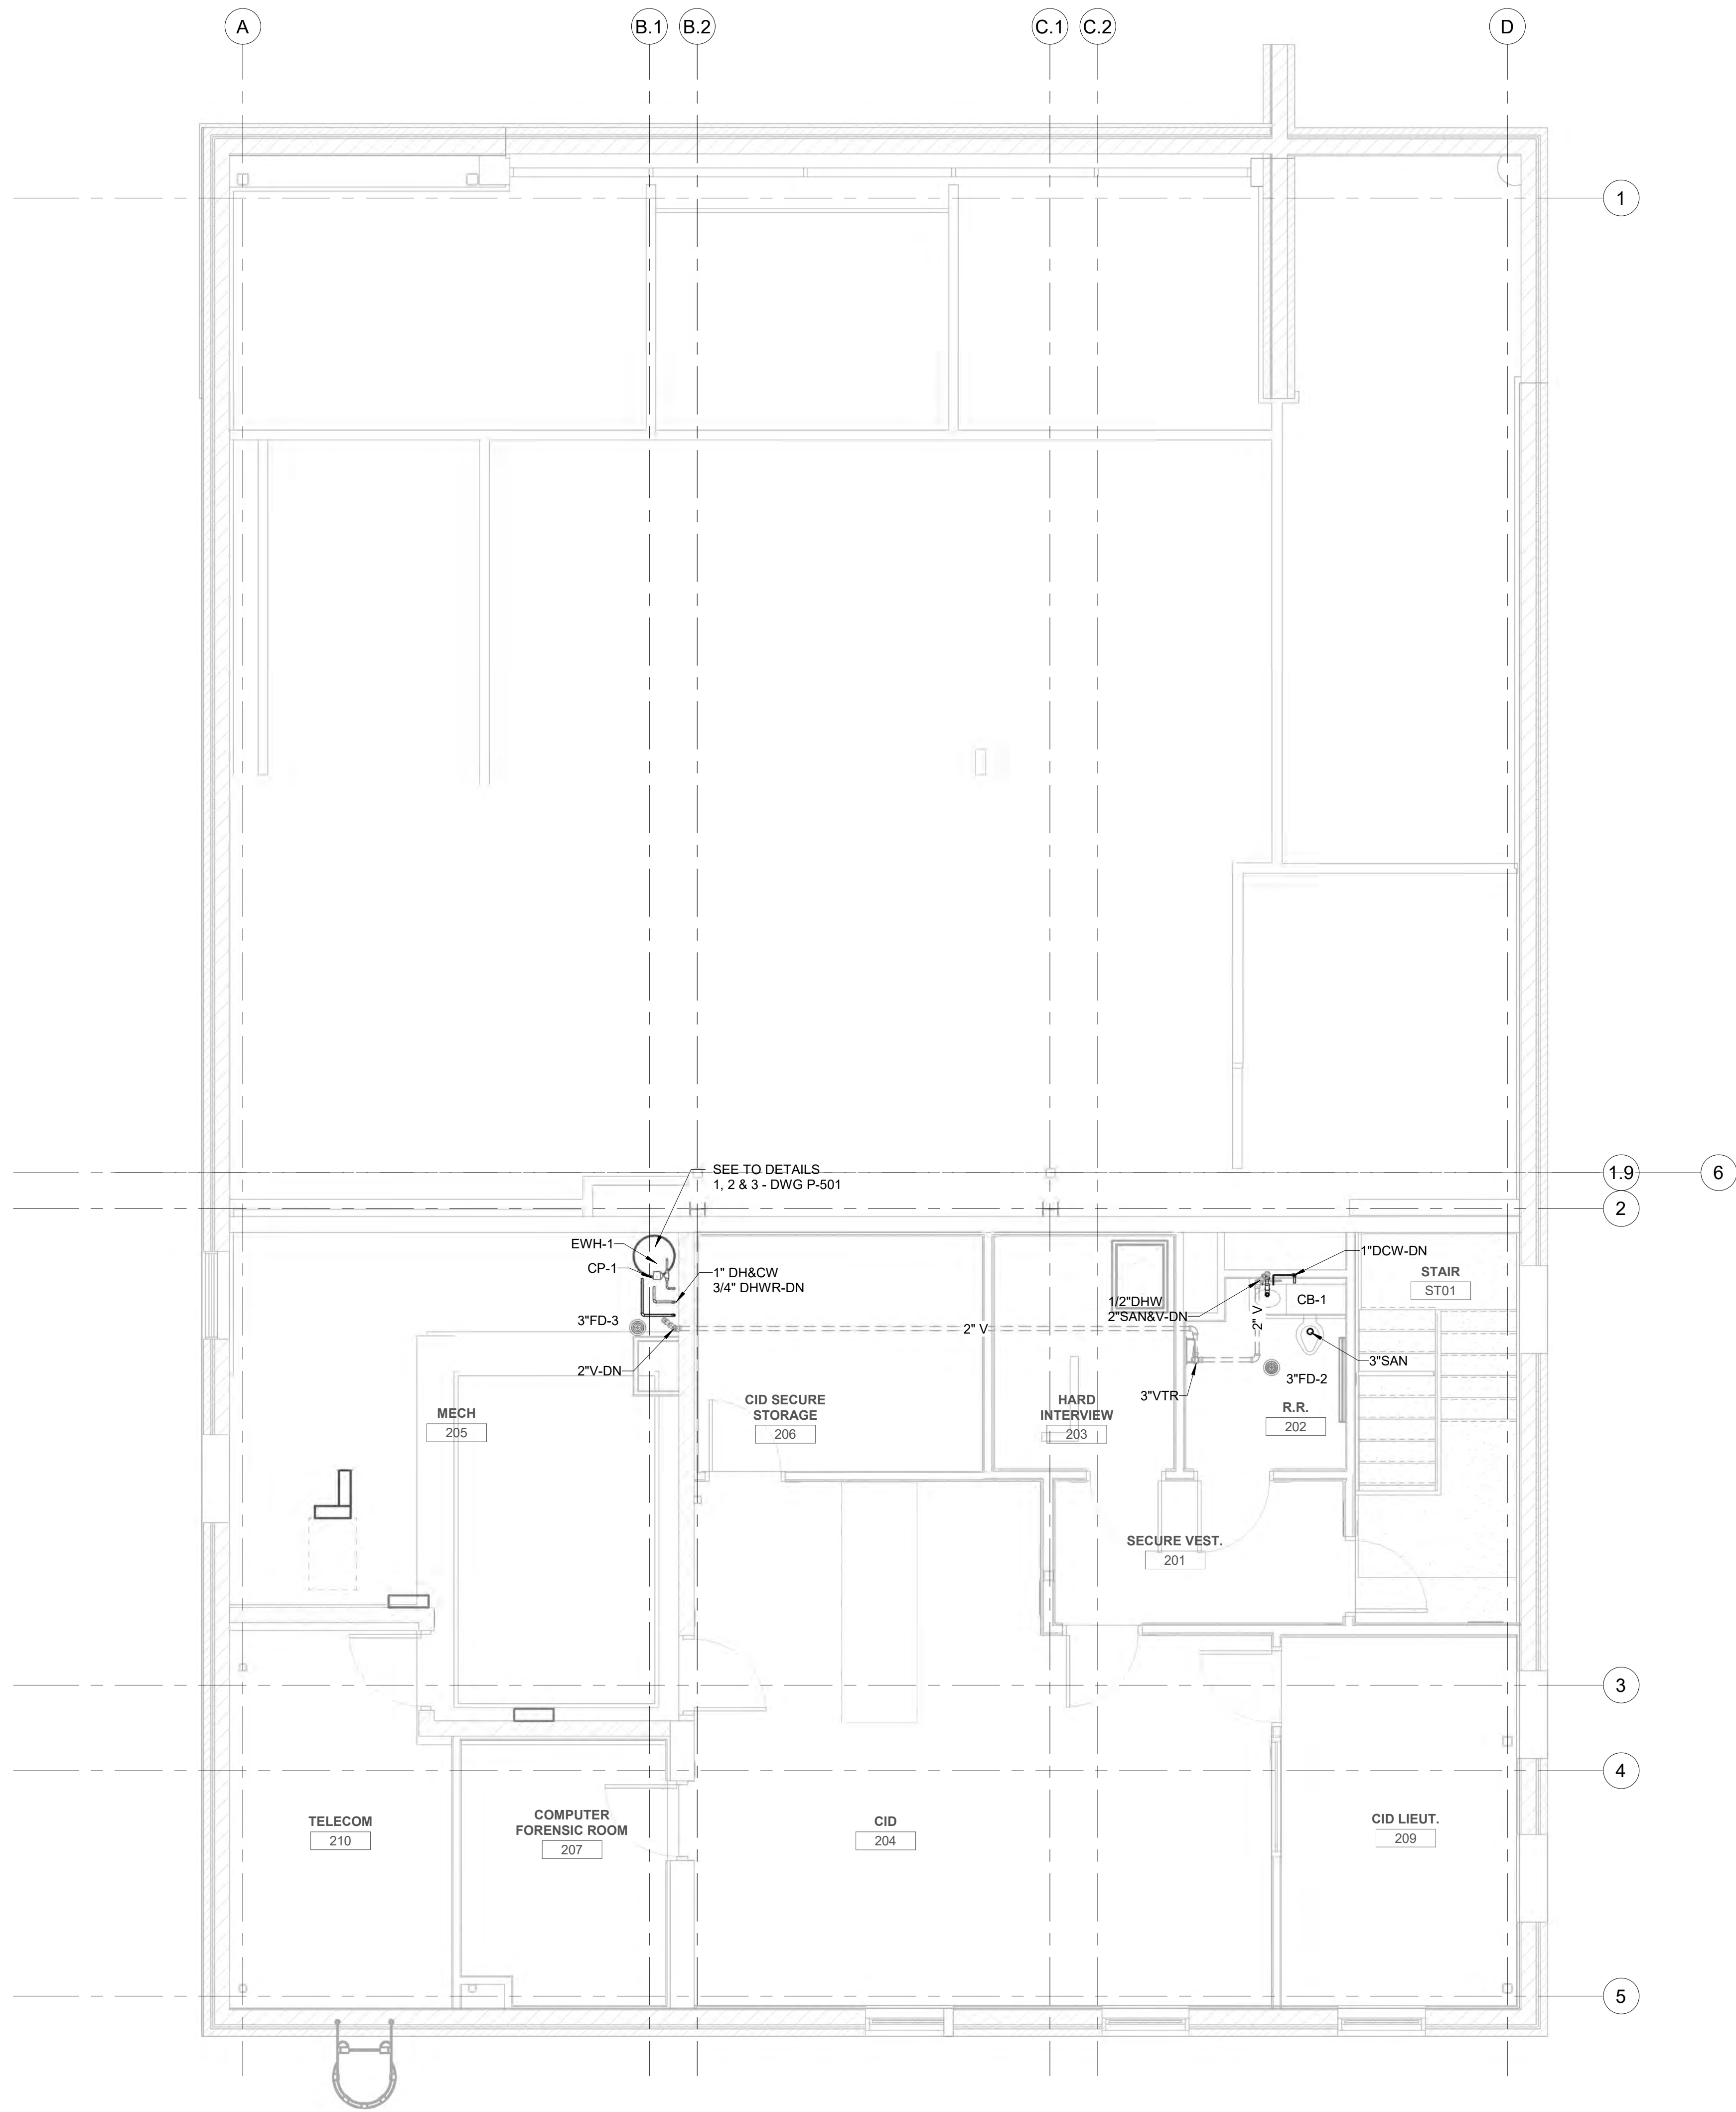

1 SECOND FLOOR PLUMBING PLAN
Scale: 1/4" = 1'-0"



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ KS
APPROVED BY _____ SC
CHECKED BY _____ SH
DATE _____ 08.26.2026

TITLE
**SECOND FLOOR
PLUMBING PLAN**

PROJECT NO.

P-102

F

PLUMBING FIXTURE CONNECTIONS AND EQUIPMENT SELECTIONS										
MARK	DESCRIPTION	SAN	VENT	DHW	DCW	FIXTURE BASED ON:		TRIM BASED ON:		ACCESSORIES
						MANUFACTURER	MODEL NUMBER	MANUFACTURER	MODEL NUMBER	
WC-1	WATER CLOSET	3"	2"	--	1"	KOHLER	K-26077-0	--	--	KOHLER K-4731-SC SEAT
CB-1	COMBI-FIXTURE	3"	2"	1/2"	1"	WILLOUHY	3696-FA-ECF	--	--	24V FLUSH VALVE AND FAUCET; 1.28 GPF
L-1	LAVATORY	1-1/2"	1-1/2"	1/2"	1/2"	KOHLER	K-1999-SS1	KOHLER	K-104S36-SANA	BATTERY POWERED, SENSOR ACTIVATED
SH-1	SHOWER	2"	2"	1/2"	1/2"	DELTA	T13H333	--	--	HANDHELD WAND AND DIVERTER
SK-1	BREAK ROOM SINK	1-1/2"	1-1/2"	1/2"	1/2"	ELKAY	ECTRUAD241755	ELKAY	LK1410	INSINKERATOR BADGER 5 DISPOSER
SK-2	MOTHER'S ROOM SINK	1-1/2"	1-1/2"	1/2"	1/2"	ELKAY	ELUHAD121255PD	ELKAY	LKD2223C	GOOSENECK, LEVER HANDLE
OB-1	OUTLET SUPPLY BOX	--	--	--	1/2"	OATEY	37679	--	--	1/4 TURN BALL VALVE; SHOCK ABSORBER
MB-1	MOP BASIN	3"	2"	1/2"	1/2"	PROFLO	PFMB2424S	AMER. STD.	8344-212	PAIL HOOK; MOP HANGER; VACUUM BREAKER
EWC-1	ELECTRIC WATER COOLER	--	--	--	1/2"	ELKAY	LZWS-LRPBM28K	--	--	BOTTLE FILLER
FPWH-1	FREEZE PROOF WALL HYDRANT	--	--	--	3/4"	ZURN	Z-1321XL	ZURN	WALL CLAMP	INTEGRAL VACUUM BREAKER
FD-1	FLOOR DRAIN	3"	2"	--	--	ZURN	Z-415-ZN-TSP	--	--	SAME AS FD-1 BUT VANDAL PROOF TOP
FD-2	FLOOR DRAIN	3"	2"	--	--	ZURN	Z-415-ZN-TSP-VP	--	--	SAME AS FD-1 BUT VANDAL PROOF TOP
FD-3	FLOOR DRAIN	3"	2"	--	--	ZURN	Z4001-71-TSP-SB	--	--	BRONZE STRAINER - RECESSED GRATE


E

PUMP SCHEDULE							
MARK	SERVICE	PUMP TYPE	DESIGN CONDITIONS GPM HEAD - FT	WORKING PSIG	MAX MOTOR - HP/1W	VOLTAGE PHASE	MANUFACTURER MODEL
CP-1	DHWR	IN-LINE CIRCULATOR	3	12	150	1/40	GRUNDFOS UPS 15-55 SFC
NOTES:							
1. REFER TO THE ELECTRICAL PLANS FOR ELECTRICAL SERVICE CONFIGURATIONS.							
CIRCULATING PUMP SHALL BE LEAD-FREE BRONZE WET ROTOR CIRCULATOR. THE PUMPS SELECTIONS AND MANUFACTURERS LISTED ARE PROVIDED AS A GUIDE FOR THE CONTRACTOR. THE PUMPS LISTED WILL BE USED AS THE BASIS FOR "APPROVED EQUAL".							
3. PROVIDE AUTOMATIC TIMER KIT MODEL # TC-1 AND AQUASTAT MODEL # AQS-1/2. 115-120 V/60HZ/1PH							

D


ELECTRIC WATER HEATER SCHEDULE								
DESIGNATION	SERVICE	STORAGE CAPACITY GALLONS	RECOVERY RATE GPH/GPM	KW INPUT	NO. OF ELEMENTS	VOLTAGE/ PHASE	WEIGHT FULL	MANUFACTURER MODEL
CP-1	GENERAL	40	21 GPH	4.5	1	208/1	360 LBS	A.O. SMITH DEL-40
NOTES:								
1. THE WATER HEATER SELECTIONS AND MANUFACTURERS LISTED ARE PROVIDED AS A GUIDE FOR THE CONTRACTOR. THE HEATERS LISTED WILL BE USED AS THE BASIS FOR "APPROVED EQUAL". REFER TO ELECTRICAL E SERIES DRAWINGS FOR ADDITIONAL ELECTRICAL SERVICE REQUIREMENTS								
2. EWH-1 RECOVERY RATE IS BASED ON A 80°F RISE IN WATER TEMPERATURE.								
3. "ET-1" PROVIDE ANSINSF 61 STANDARD AMTROL MODEL ST-5-VC, 2 GALLON ACCEPTANCE OR APPROVED EQUAL EXPANSION TANK.								
7. HEATER SHALL INCLUDE FACTORY-WIRED TEMPERATURE CONTROL. SET WATER HEATER AT 120°F TEMPERATURE.								
5. WATER HEATERS SHALL MEET OR EXCEED THE CURRENT ASHRAE 90.1								

C

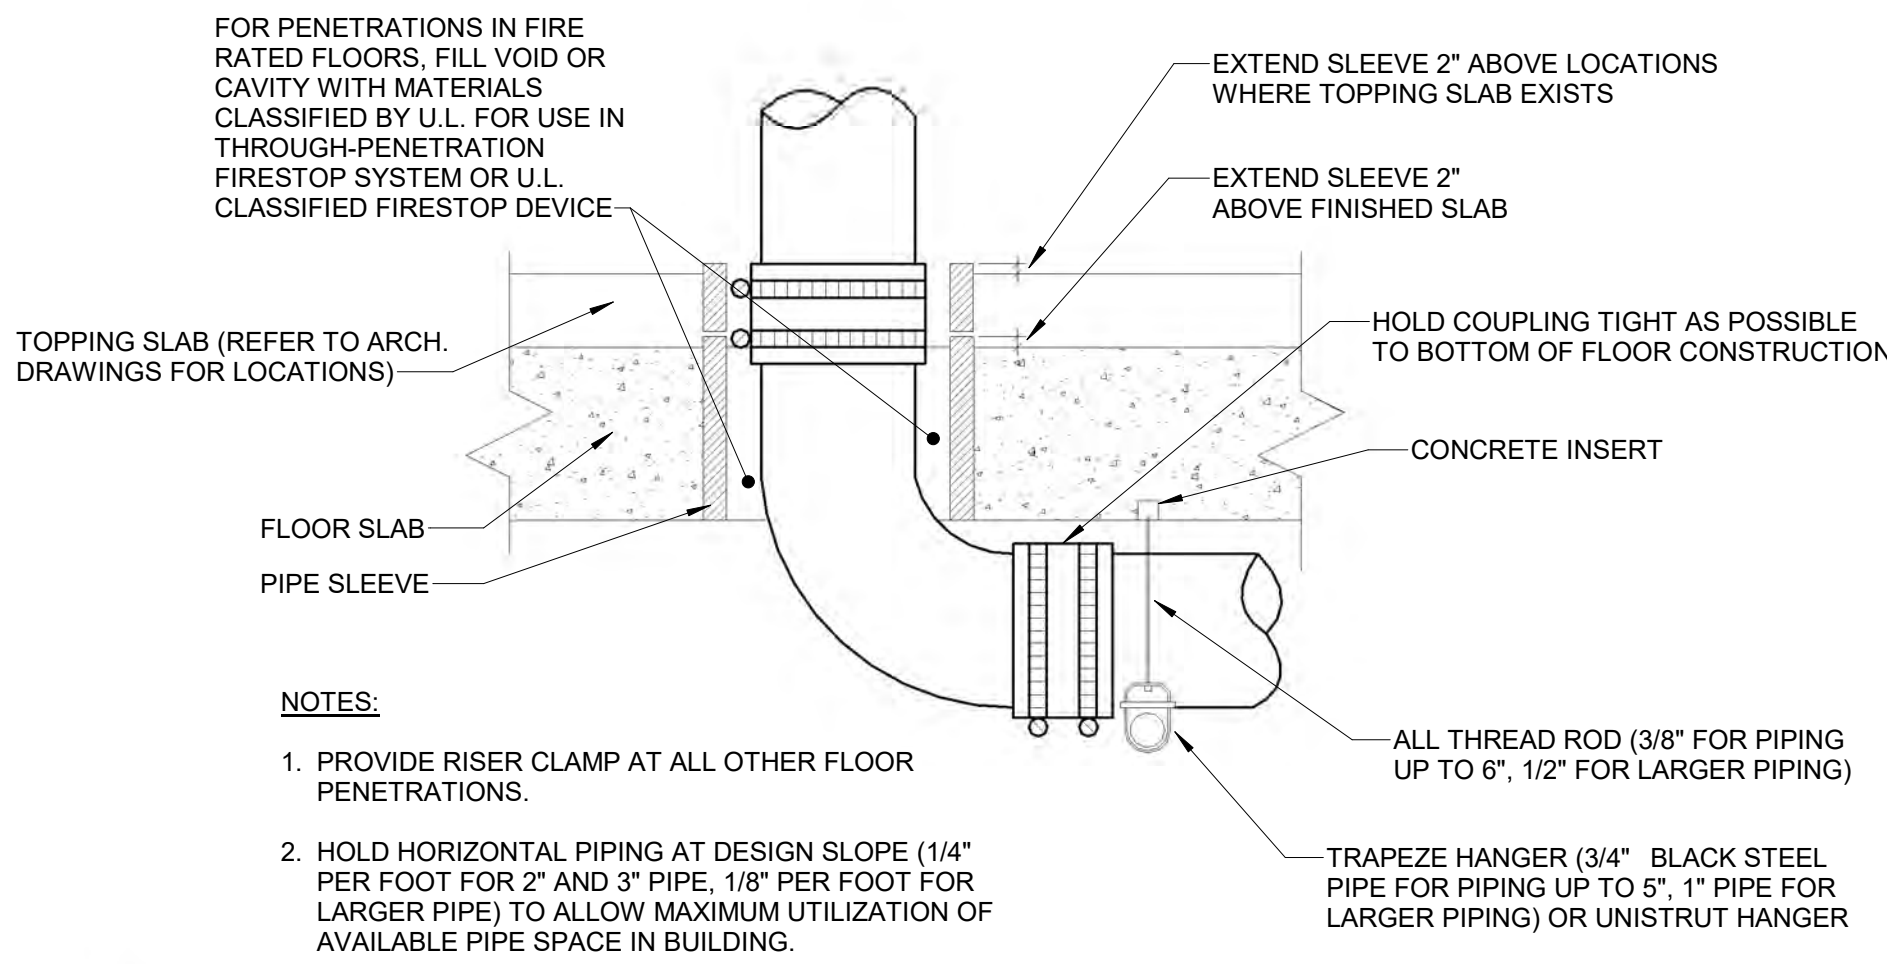

6 MAX HEADROOM FLOOR PENETRATION DETAIL
Scale: N.T.S.


B

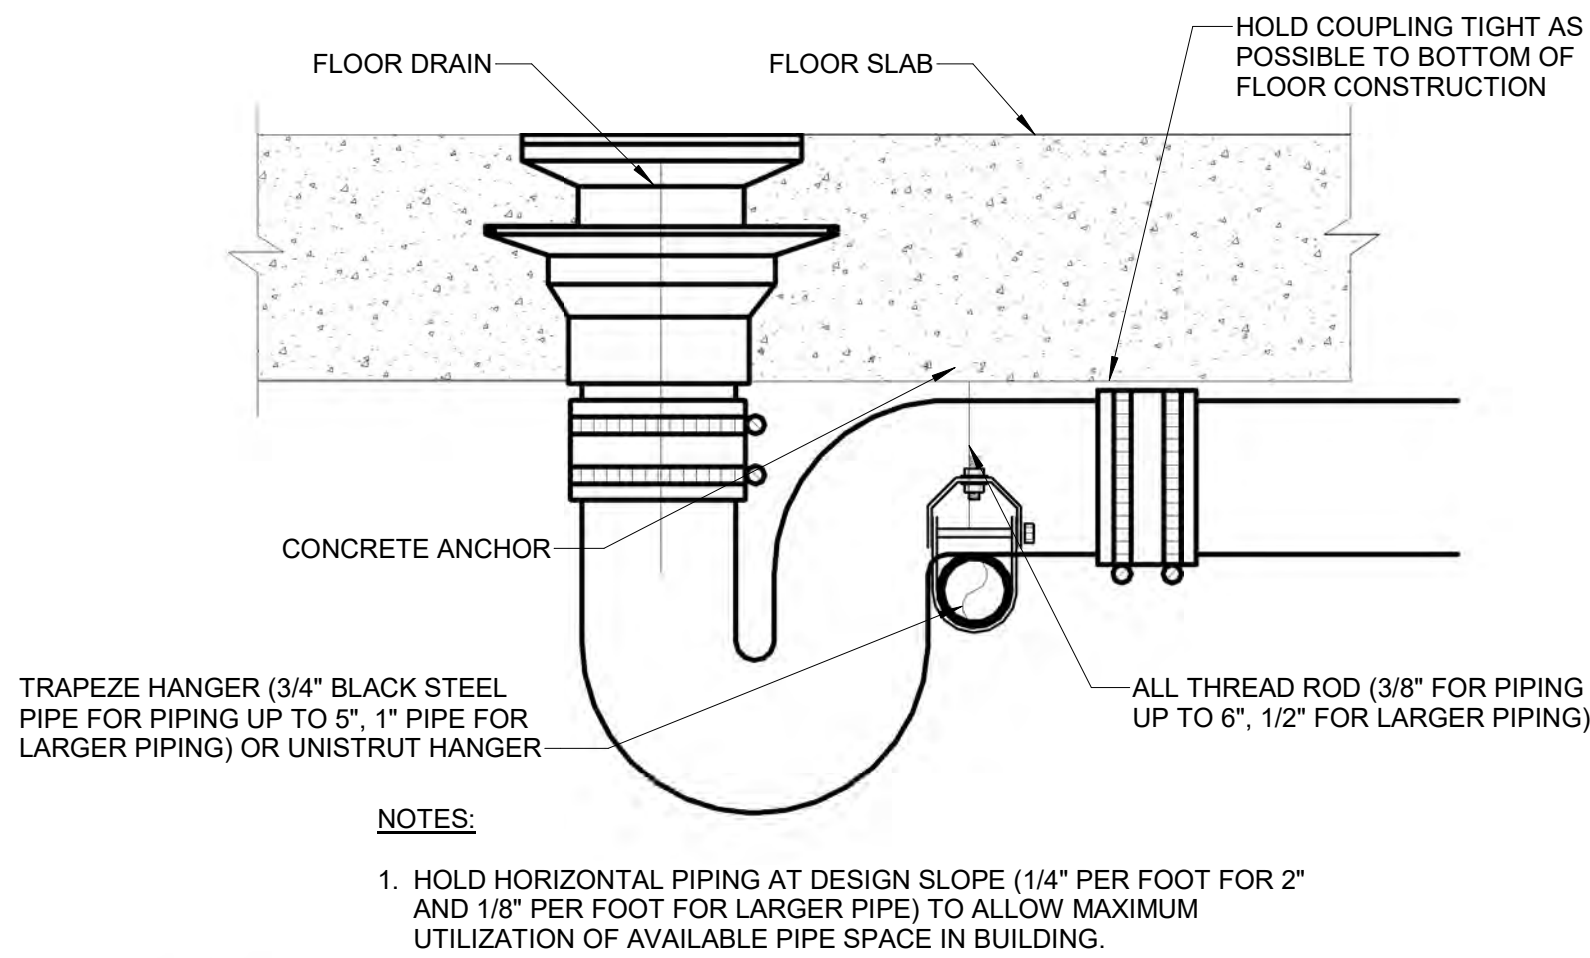


7 MAX HEADROOM FLOOR DRAIN DETAIL
Scale: N.T.S.

A


9 HANDWASHING MIXING VALVE DETAIL
Scale: N.T.S.

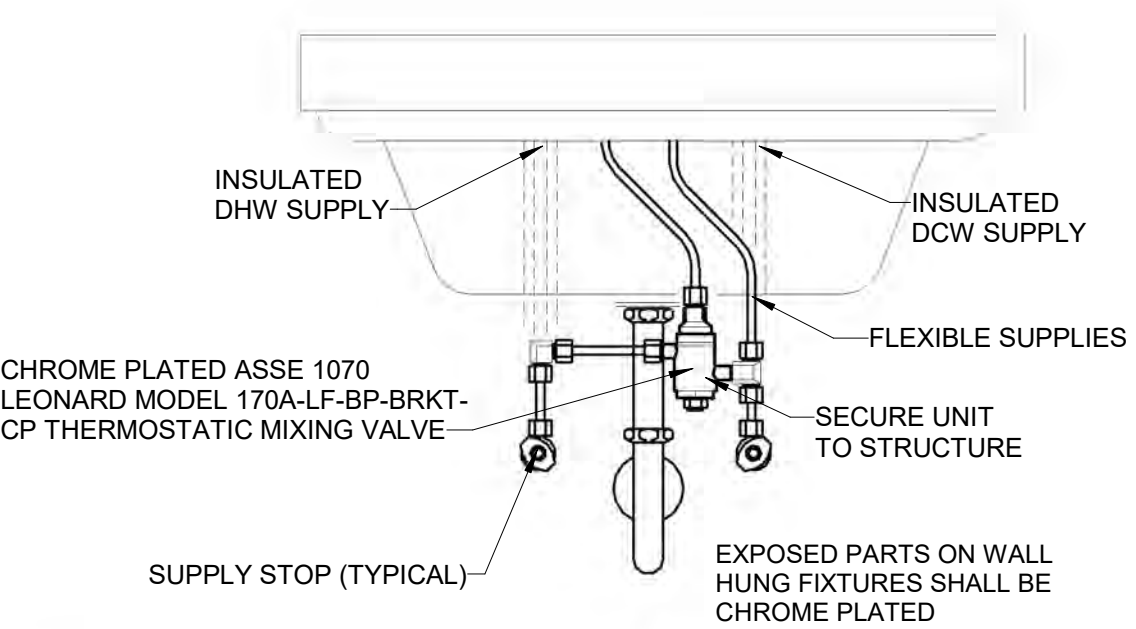


5 WATER SERVICE ENTRANCE DETAIL
Scale: N.T.S.

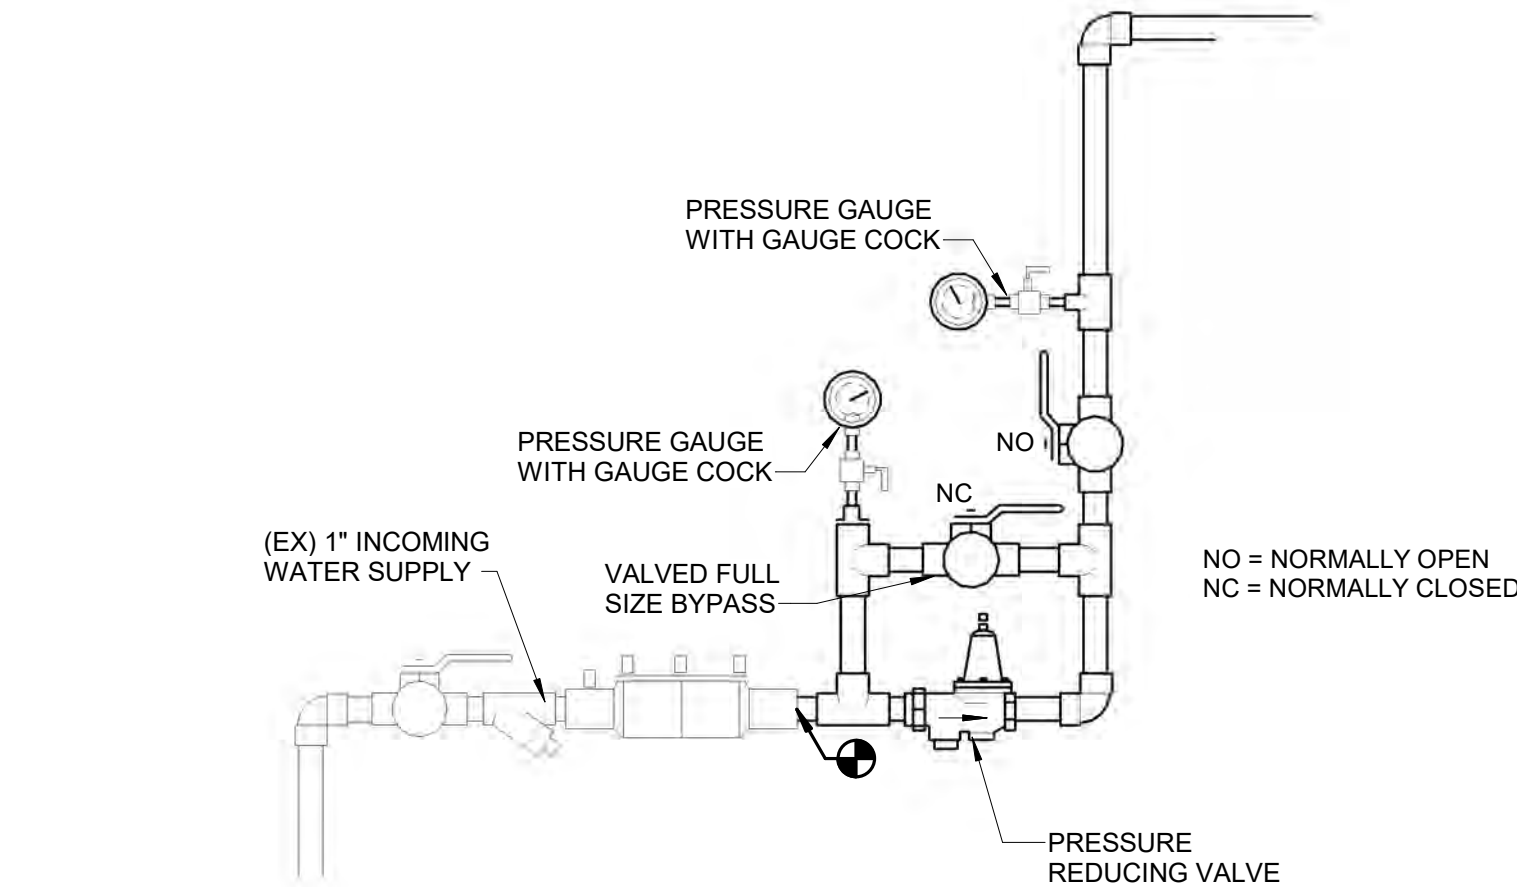


8 SANITARY & VENT RISER DIAGRAM
Scale: N.T.S.

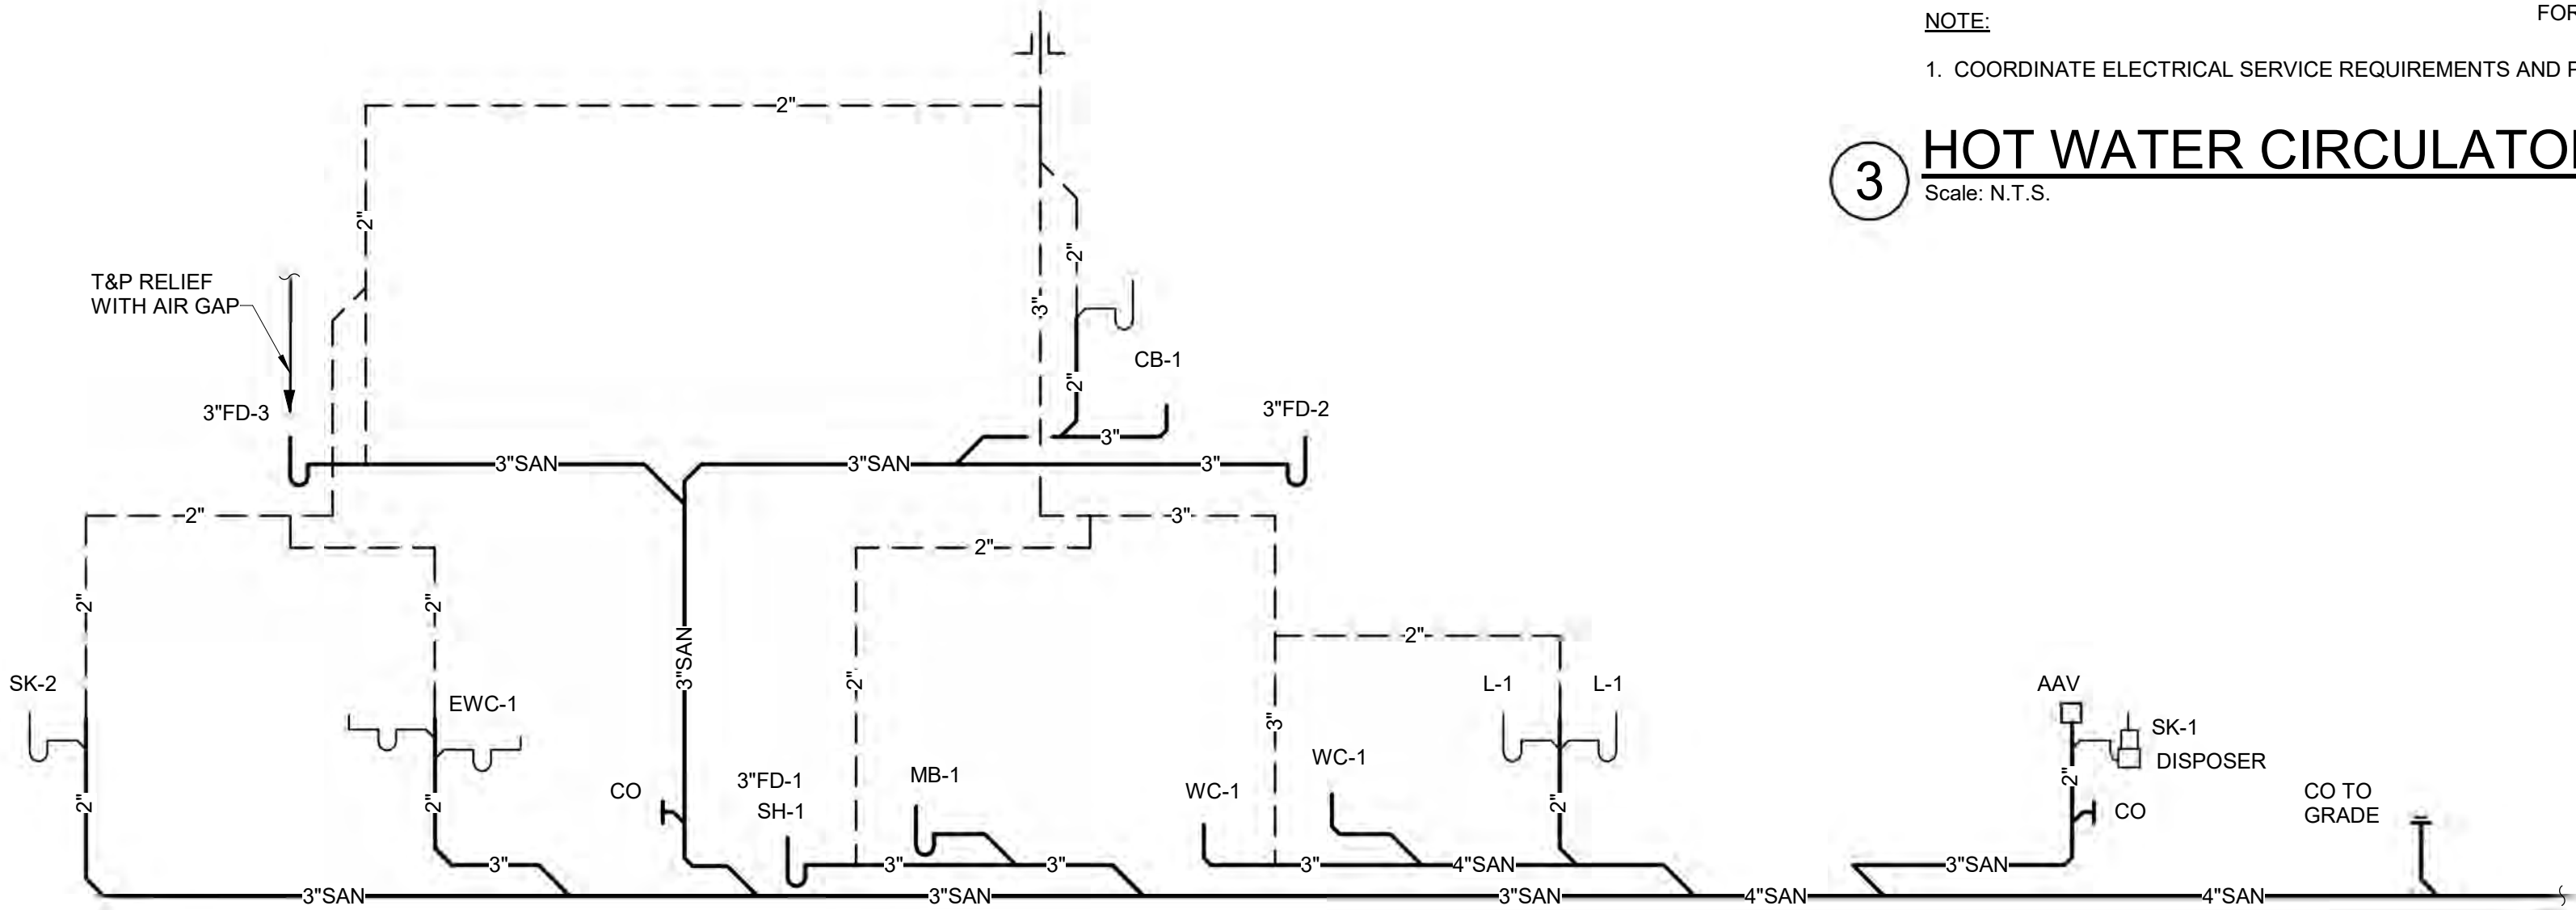


10 DOMESTIC WATER RISER DIAGRAM
Scale: N.T.S.

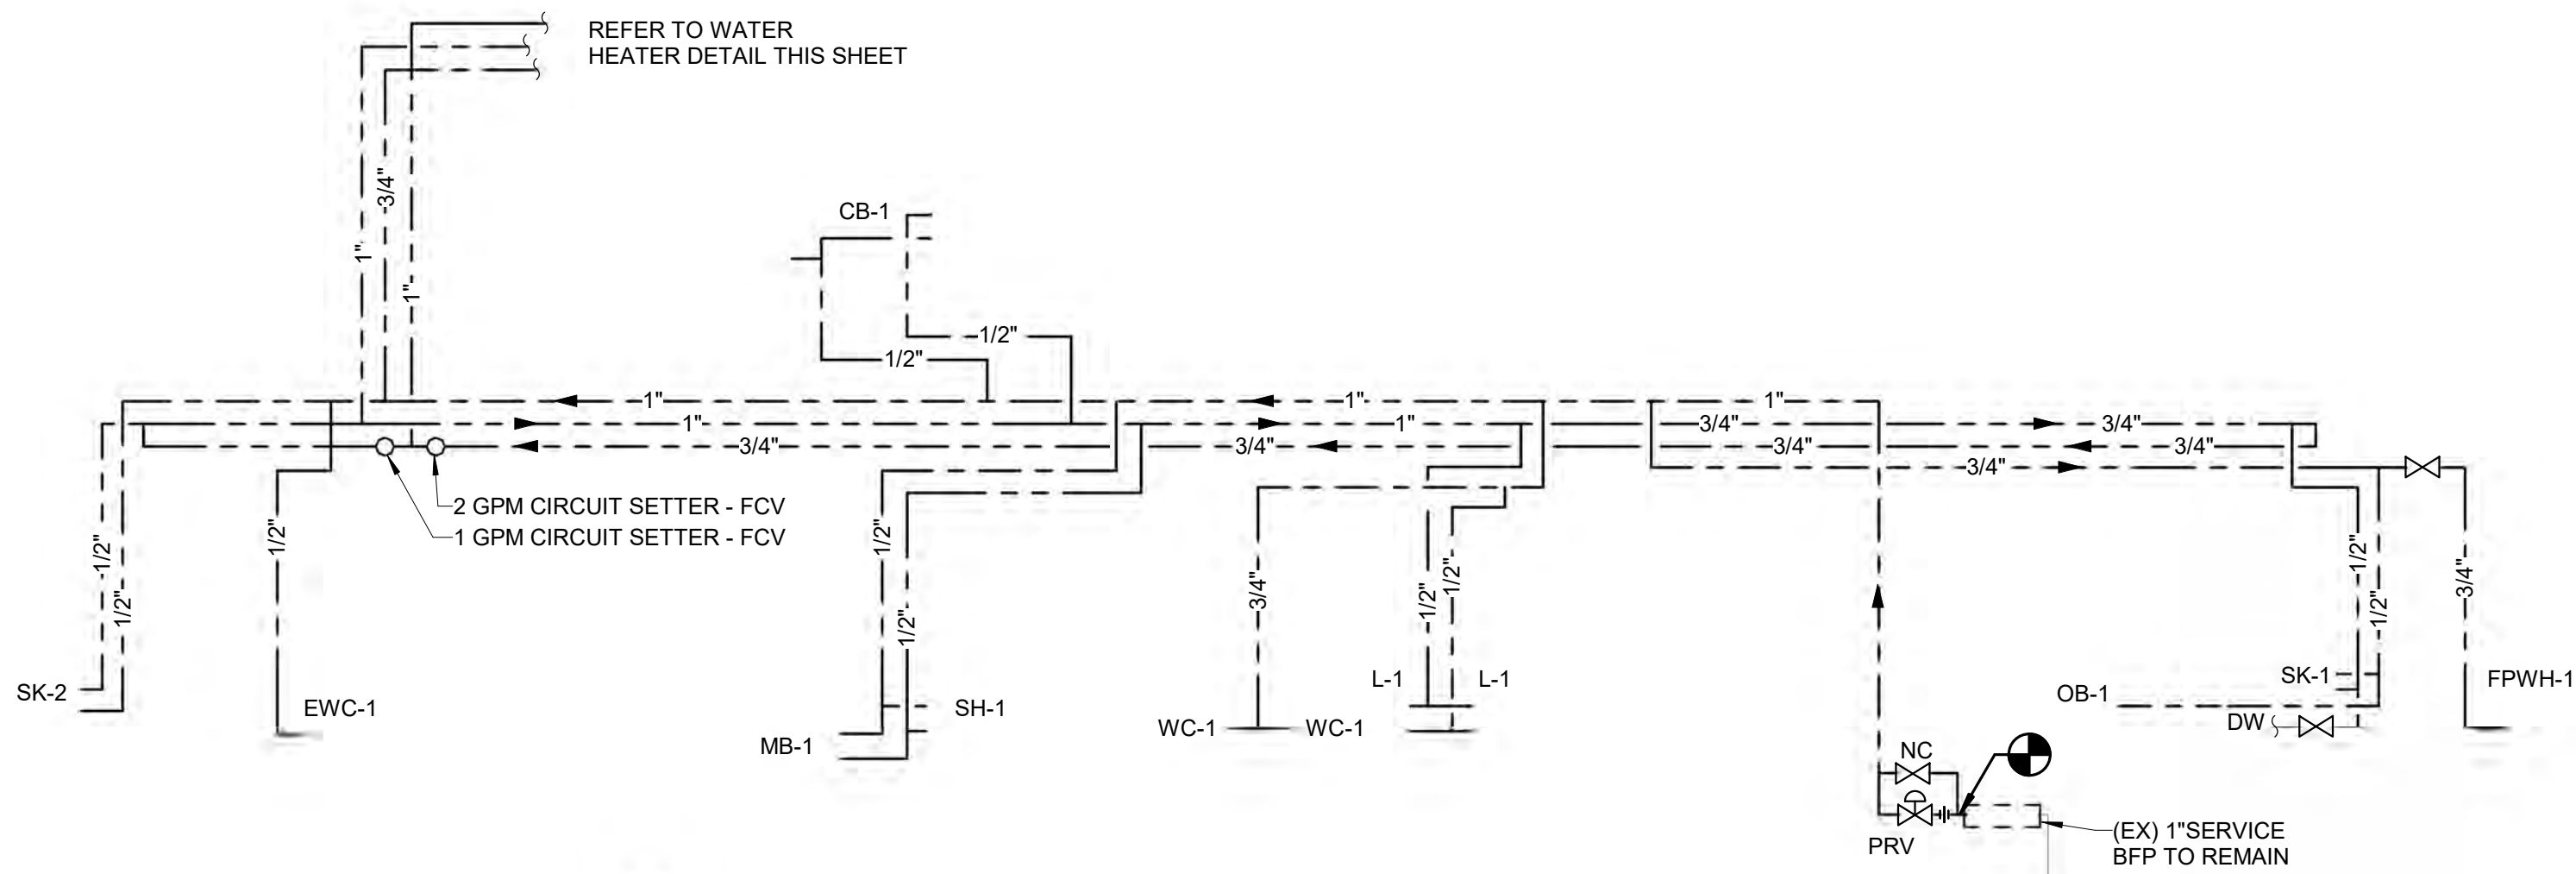


4 BALL VALVE INSULATION DETAIL
Scale: N.T.S.

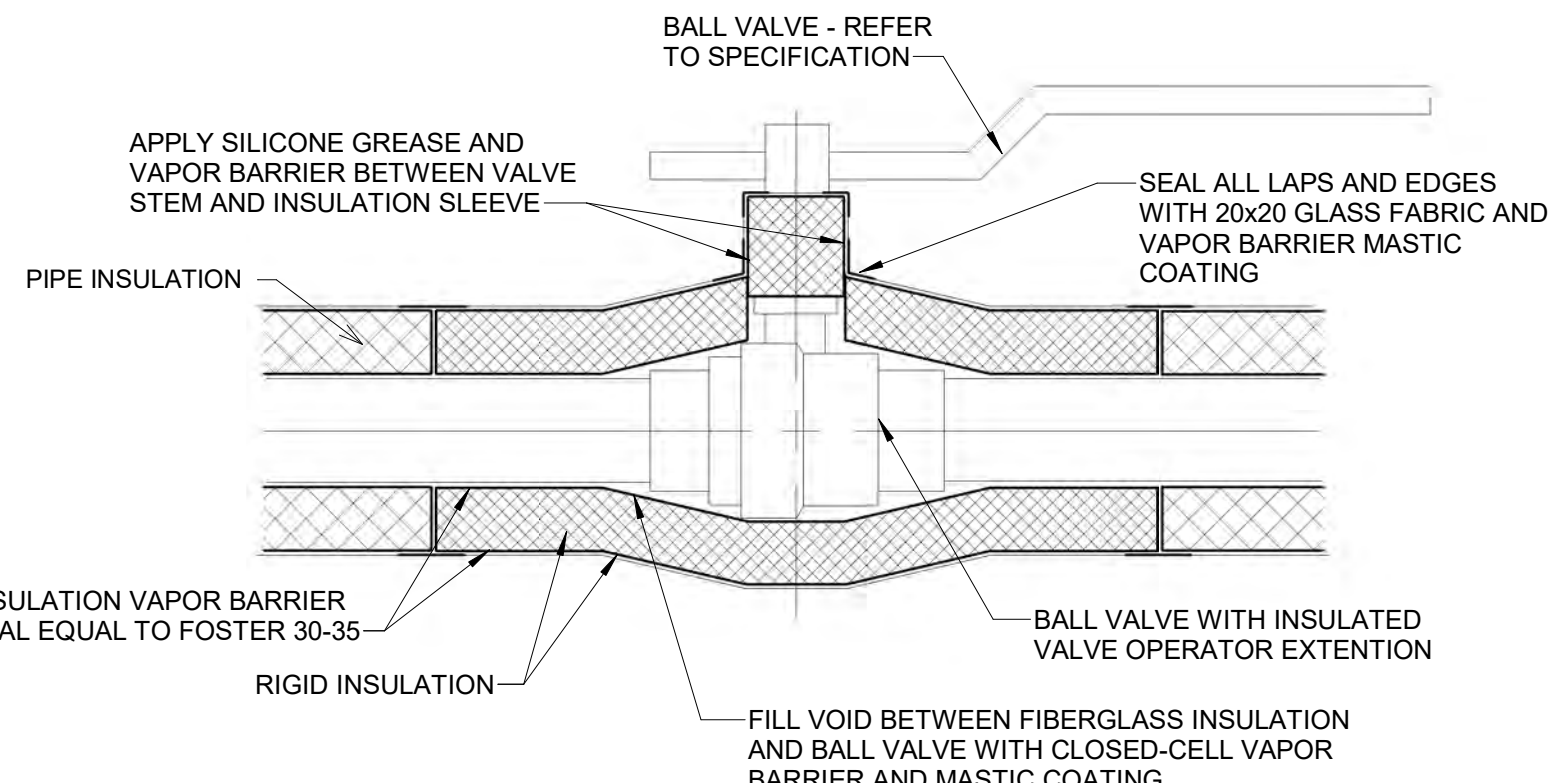


1 WATER HEATER PIPING DETAIL
Scale: N.T.S.

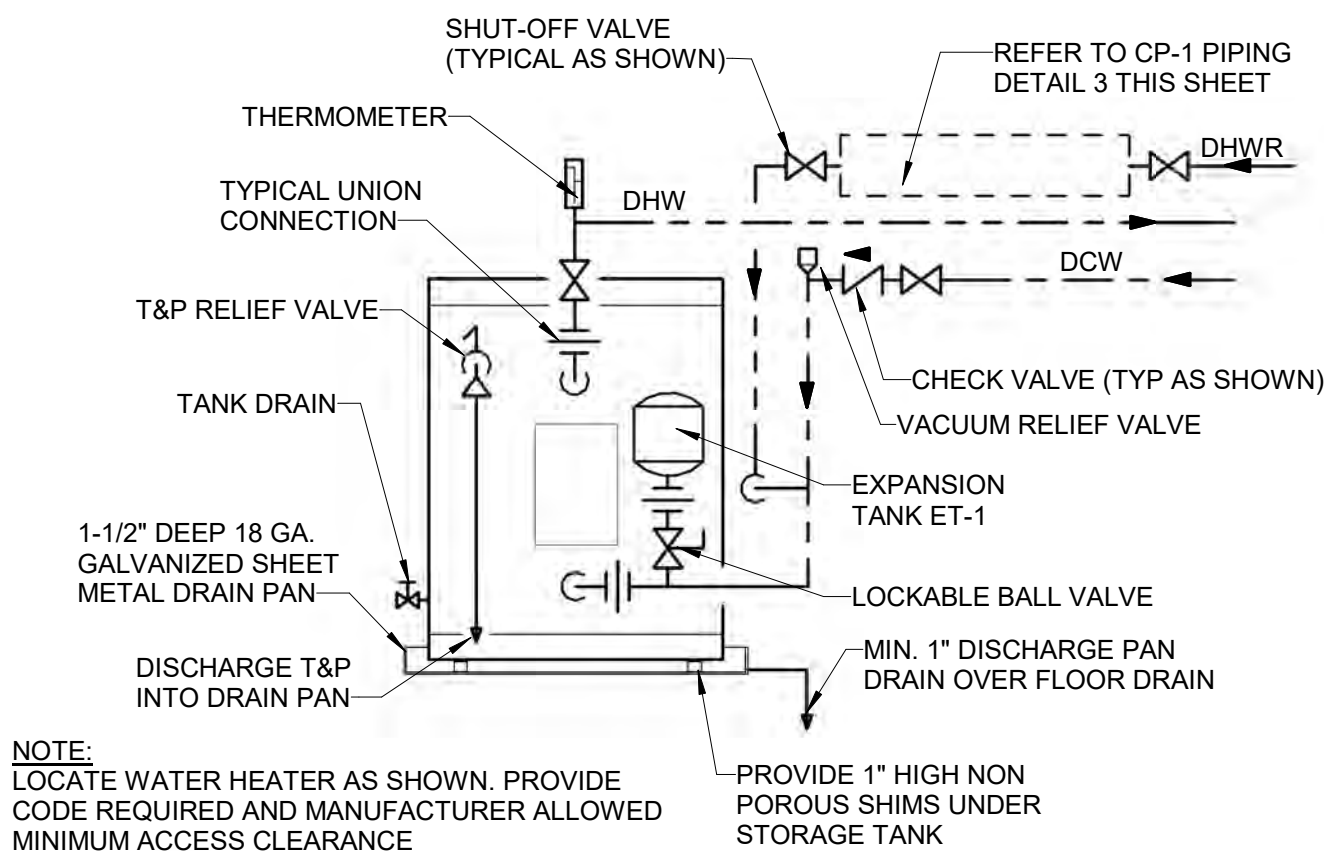

2 WATER HEATER SUPPORT DETAIL
Scale: N.T.S.

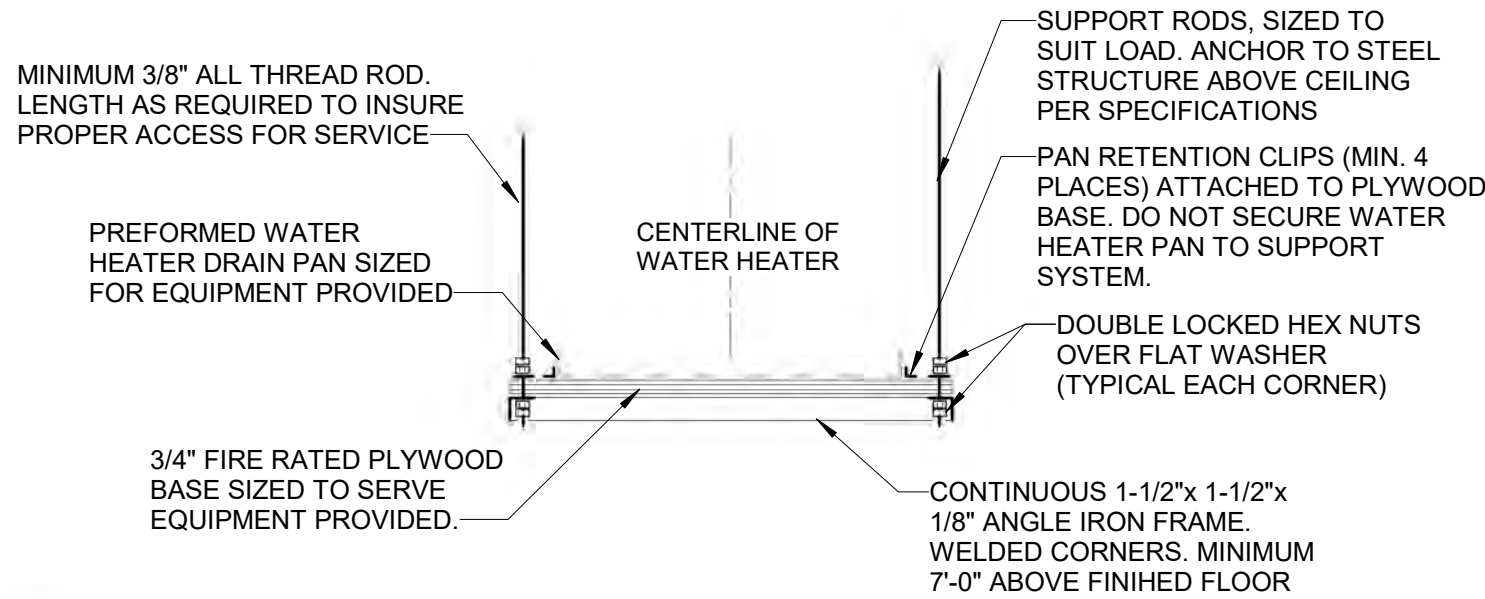

3 HOT WATER CIRCULATOR PIPING DETAIL
Scale: N.T.S.

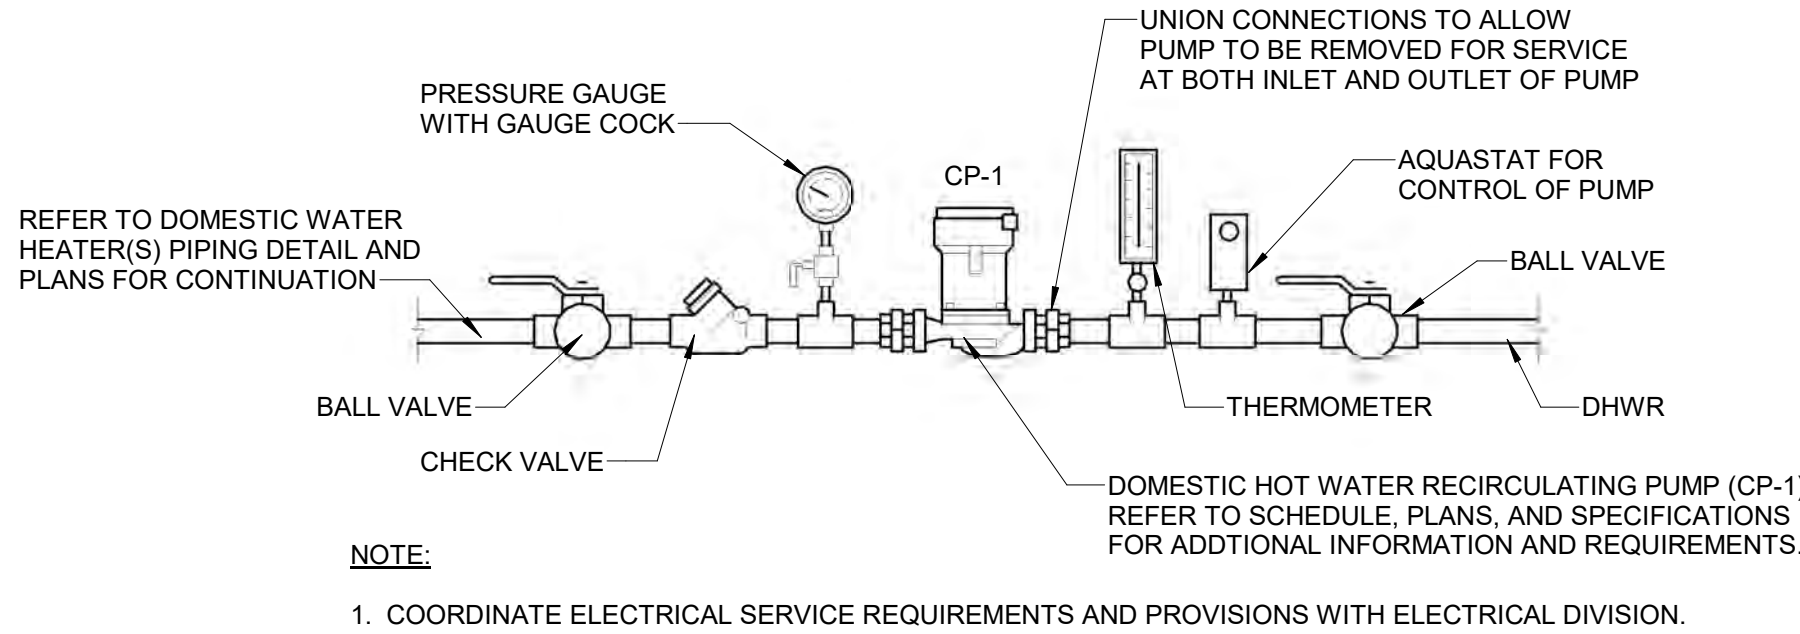

NO.	DESCRIPTION	DATE


DRAWN BY	KS
APPROVED BY	SC
CHECKED BY	SH
DATE	08.26.2026

ABBREVIATIONS - MECHANICAL

THIS IS A MASTER ABBREVIATIONS LIST. SOME ABBREVIATIONS MAY NOT
APPLY TO THIS PROJECT

AC	AIR CONDITIONING
ACCU	AIR COOLED CONDENSING UNIT
AD	ACCESS DOOR
ADJ	ADJUSTABLE
AF	AIRFLOW
AFF	ABOVE FINISHED FLOOR
AHU	AIR HANDLING UNIT
AI	ANALOG INPUT
AO	ANALOG OUTPUT
ARCH	ARCHITECTURAL
ASHRAE	AMERICAN SOCIETY OF HEATING, REFRIGERATING, AND AIR-CONDITIONING ENGINEERS
ATC	AUTOMATIC TEMPERATURE CONTROL
BAS	BUILDING AUTOMATION SYSTEM
BHP	BRAKE HORSEPOWER
BT	BINARY INPUT
BMS	BUILDING MANAGEMENT SYSTEM
BO	BINARY OUTPUT
BTU	BRITISH THERMAL UNIT
BTU/H	BRITISH THERMAL UNIT PER HOUR
CD	CONDENSATE DRAIN
CFM	CUBIC FEET PER MINUTE
CO ₂ , CO	CARBON DIOXIDE
CO, CM	CARBON MONOXIDE
CONT	CONTROLS, CONTINUED
CU	CONDENSING UNIT
CUH	CABINET UNIT HEATER
C _v	VALVE COEFFICIENT
D	DROP
DB	DRY BULB
DBL	DOUBLE
DEG	DEGREE
DI	DIGITAL INPUT
DIA	DIAMETER
DMSS	DUCTLESS MINI-SPLIT SYSTEM
DN	DOWN
DO	DIGITAL OUTPUT
DP	DIFFERENTIAL PRESSURE (SENSOR)
DP	DEW POINT
DWG	DRAWING
DX	DIRECT EXPANSION
EA	EXHAUST AIR
EAT	ENTERING AIR TEMPERATURE
EBH	ELECTRIC BASEBOARD HEATER
ECM	ELECTRONICALLY COMMUTATED MOTOR
EHC	EXHAUST FAN
EHC	ELECTRIC HEATING COIL
ELEC	ELECTRICAL
EMCS	ENVIRONMENTAL MANAGEMENT CONTROL SYSTEM
ESP	EXTERNAL STATIC PRESSURE
ETC	ETCETERA
EUH	ELECTRIC UNIT HEATER
EW	ELECTRIC WATER HEATER
EWT	ENTERING WATER TEMPERATURE
DEG F	DEGREE FAHRENHEIT
FL	FIRE DAMPER OR FLOOR DRAIN
FLA	FULL LOAD AMPS
FLEX	FLEXIBLE
FFM	FEET PER MINUTE
FS	FLOW SWITCH
FT	FOOT/FEET
GA	GAUGE
GAL	GALLONS
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GPH	GALLONS PER HOUR
GPM	GALLONS PER MINUTE
GR	GRAINS
H	HUMIDIFIER OR HEIGHT
H ₂ O	WATER
HD	HEAD
HP	HORSEPOWER
HVAC	HEATING, VENTILATION, AND AIR-CONDITIONING
IN	INCH
INW	KILOWATT
LAT	LEAVING AIR TEMPERATURE
LBS	POUNDS
LF	LINEAR FEET
LWT	LEAVING WATER TEMPERATURE
M	MOTOR OR MOTORIZED DAMPER OR METER
MA	MIXED
MAT	MIXED AIR TEMPERATURE
MBH	1,000 BRITISH THERMAL UNITS PER HOUR
MCA	MINIMUM CRITICAL AMPS
MERV	MINIMUM EFFICIENCY REPORTING VALUE
MFR	MANUFACTURER
MOCP	MULTI-PHASE OVERCURRENT PROTECTION
NO	NORMALLY CLOSED OR NOISE CRITERIA
NO	NORMALLY OPEN OR NUMBER
NPSH	NET POSITIVE SUCTION HEAD
NTS	NOT TO SCALE
OA	OUTDOOR AIR
OAF	OUTSIDE AIR FAN
OAT	OUTSIDE AIR TEMPERATURE
OD	OUTSIDE DIAMETER
OS	OCCUPANCY SENSOR
P	PRESSURE OR PRESSURE SENSOR
PD	PRESSURE DROP
PH	PHASE
PHC	PREHEAT COIL
PICV	PRESSURE INDEPENDENT CONTROL VALVE
PPM	PARTS PER MILLION
PRV	PRESSURE REDUCING VALVE
PSI	POUNDS PER SQUARE INCH
PSIA	POUNDS PER SQUARE INCH ABSOLUTE
PSIG	POUNDS PER SQUARE INCH GAUGE
QTY	QUANTITY
R	RADIATION, RISE, OR REMOVE
RA	RETURN AIR
RAT	RETURN AIR TEMPERATURE
REF	REFLECTED CEILING FAN
REC	RELIEF AIR FAN
RF	RETURN AIR FAN
RH	RELATIVE HUMIDITY, REHEAT
RHC	REHEAT COIL
RP	REVOLUTIONS PER MINUTE
SA	SUPPLY AIR
SAT	SUPPLY AIR TEMPERATURE
SCH	SCHEDULE
SEC	SECONDS
SF	SUPPLY FAN OR SQUARE FOOT
SF	SUPPLY AIR FAN
SP	STATIC PRESSURE
SS	SPLIT SYSTEM OR STAINLESS STEEL
T&P	TEMPERATURE AND PRESSURE
T, TEMP	TEMPERATURE
T-STAT	THERMOSTAT
T-EXF	TOILET EXHAUST FAN
TON	COOLING TONS (12,000 BTU/H)
TSP	TOTAL STATIC PRESSURE
TY	TYPICAL
UH	UNIT HEATER
V, VOLT	VOLTAGE
VEL	VELOCITY
VF	VENTILATION FAN
VFD	VARIABLE FREQUENCY DRIVE
W	WIDTH OR WATTS
WB	WET BULB

STANDARD DETAILING SYMBOLS

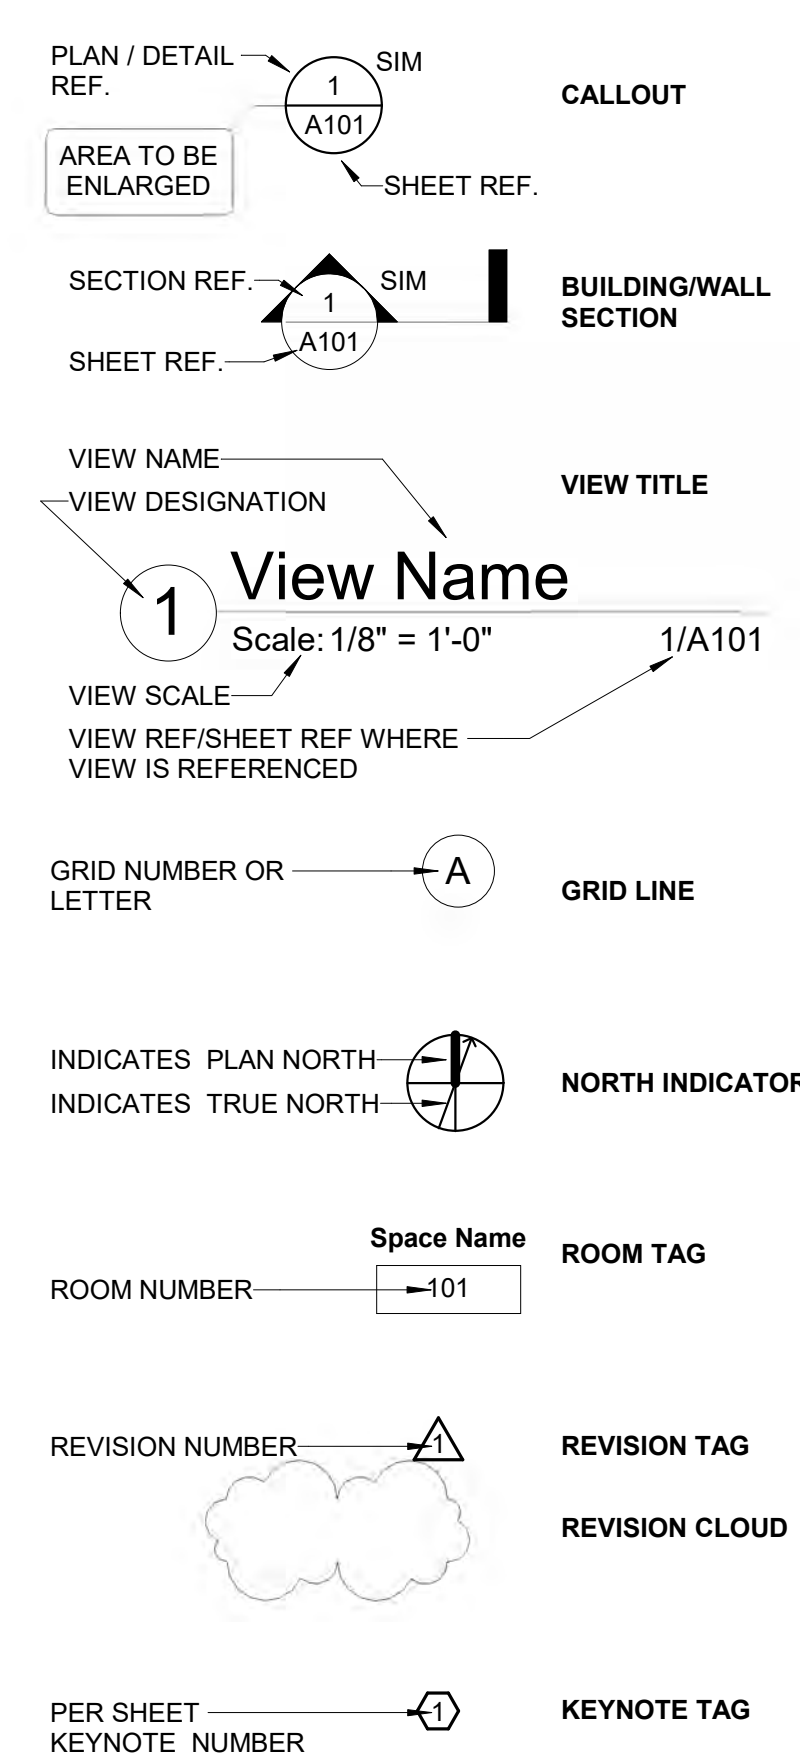

HVAC SYMBOLS

SYMBOL	DESCRIPTION
	DAMPER
	MANUAL DAMPER
	AUTOMATIC DAMPER (MOTORIZED)
	FIRE DAMPER
	SPLITTER DAMPER
	TURNING VANES AT MITERED ELBOW
	EXTRACTOR WITH ADJUSTABLE OPERATOR
	DUCTWORK & SIZE
	DUCT ACCESS DOOR (ON BOTTOM)
	DUCT ACCESS DOOR (ON SIDE)
	SUPPLY DUCT VIEW INTO DUCT
	RETURN DUCT VIEW INTO DUCT
	EXHAUST DUCT VIEW INTO DUCT
	SUPPLY DUCT VIEW HEEL OF ELBOW
	RETURN DUCT VIEW HEEL OF ELBOW
	EXHAUST DUCT VIEW HEEL OF ELBOW
	DUCTWORK TO RISE IN ELEVATION
	DUCTWORK TO DROP IN ELEVATION
	FLEXIBLE DUCTWORK
	FLEXIBLE CONNECTOR
	SUPPLY SQUARE CEILING DIFFUSER
	RETURN SQUARE CEILING DIFFUSER
	EXHAUST SQUARE CEILING DIFFUSER
	SUPPLY ROUND CEILING DIFFUSER
	SIDEWALL SUPPLY REGISTER OR GRILLE
	SIDEWALL RETURN/EXHAUST REGISTER OR GRILLE
	LINEAR DIFFUSER WITH PLENUM ON TOP
	SUPPLY SLOT DIFFUSER
	THERMOSTAT
	HUMIDISTAT
	CARBON DIOXIDE SENSOR

DRAWING LIST - MECHANICAL

M-001	MECHANICAL SYMBOLS, ABBREVIATIONS & NOTES
M-002	MECHANICAL CALCULATIONS
M-101	FIRST FLOOR MECHANICAL PLAN
M-102	SECOND FLOOR MECHANICAL PLAN
M-103	ROOF MECHANICAL PLAN
M-401	MECHANICAL ENLARGED PLANS AND SECTIONS
M-501	MECHANICAL DETAILS
M-502	MECHANICAL DETAILS
M-601	MECHANICAL SCHEDULES
TOTAL: 9	

CODES

MECHANICAL SYSTEMS SHALL BE DESIGNED AND INSTALLED IN ACCORDANCE WITH THE FOLLOWING CODES.

2021 VIRGINIA CONSTRUCTION CODE
2021 VIRGINIA ENERGY CONSERVATION CODE
2021 VIRGINIA MECHANICAL CODE

GENERAL NOTES

1. THROUGH-PENETRATION FIRESTOP MATERIAL SHALL BE TESTED, MANUFACTURED AND INSTALLED IN ACCORDANCE WITH UL 1479.
2. IN ACCORDANCE WITH MECHANICAL CODE, ALL PRODUCTS, COMPONENTS, MATERIALS AND COMPOSITE MATERIALS WITHIN SUPPLY, RETURN, EXHAUST, RELIEF AND VENTILATION AIR PLenums SHALL BE NON-COMBUSTIBLE OR BE LISTED CLASSIFIED AND LABELED AS HAVING A FLAME SPREAD INDEX OF NOT MORE THAN 25 AND A SMOKE DEVELOPMENT INDEX OF NOT MORE THAN 50 WHEN TESTED IN ACCORDANCE WITH ASTM E84 OR UL 723.
3. ALL DUCT DIMENSIONS SHOWN ARE INSIDE DIMENSIONS. REFER TO SPECIFICATIONS FOR INTERNALLY INSULATED/UNDUCTWORK REQUIREMENTS.
4. ALL DUCTWORK AND PIPING SHALL BE TIGHT TO BOTTOM OF STRUCTURE UNLESS OTHERWISE INDICATED.
5. REFER TO THE ARCHITECTURAL DRAWINGS FOR THE EXACT LOCATION AND SIZE OF ALL WALL OR FLOOR OPENINGS.
6. VALVES, JUNCTION BOXES, CLEAN-OUTS, FUTURE CONNECTIONS AND OTHER ITEMS THAT WILL REQUIRE ACCESS PANELS IN DRYWALL CEILINGS SHALL NOT BE LOCATED WITHIN THE MAIN LOBBY AND ELEVATOR SHAFTS. ACCESS PANELS LOCATED IN OTHER AREAS SHALL NOT BLOCK ACCESS TO JUNCTION BOXES, VALVES AND CLEAN-OUTS.
7. REFER TO ARCHITECTURAL DRAWINGS FOR LOCATION OF ALL VISIBLE CEILING AND WALL MOUNTED DEVICES.

ROUND BRANCH DUCTWORK SCHEDULE

AIRFLOW (CFM)	ROUND DIAMETER (IN)
0 - 150	6
151 - 250	8
251 - 350	10
351 - 550	12
551 - 700	14

FLEXIBLE AND RIGID ROUND BRANCH DUCTWORK FOR DIFFUSER TAKE-OFFS OR RUNOUTS SHALL BE SIZED IN ACCORDANCE WITH THE FOLLOWING SCHEDULE UNLESS NOTED OTHERWISE ON FLOOR PLANS.

WHERE THE DEPTH OF THE DUCTWORK WILL NOT PERMIT A ROUND SPIN COLLAR FITTING, PROVIDE AN EQUIVALENT FLAT OVAL CONNECTION WITH MANUAL VOLUME DAMPER AND AN OVAL TO ROUND TRANSITION FOR EACH TAP. SEE FLAT OVAL DUCTWORK SCHEDULE FOR EQUIVALENT FLAT OVAL SIZES. THIS SCHEDULE DOES NOT APPLY FOR DUCTWORK SERVING PERIMETER SLOT DIFFUSERS SD-A AND SD-B. REFER TO FLOOR PLANS FOR ADDITIONAL INFORMATION.

FLAT OVAL DUCTWORK SCHEDULE

THE FOLLOWING SCHEDULE SHALL BE USED BY THE CONTRACTOR FOR ROUND TO FLAT OVAL DUCTWORK SIZE EQUIVALENTS UNLESS NOTED OTHERWISE.

ROUND DIAMETER (IN)	EQUIVALENT FLAT OVAL (IN - H x W)
6	3 x 11, 4 x 9, 5 x 8
8	4 x 15, 5 x 12, 6 x 11
10	6 x 15, 7 x 13, 8 x 11, 9 x 12
12	7 x 20, 8 x 17, 9 x 15, 10 x 13
14	9 x 20, 10 x 18, 11 x 17, 12 x 15

Dewberry

Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

[illegible]

DRAWN BY AC

APPROVED BY SC

CHECKED BY SC

DATE 08.26.2026

TITLE

MECHANICAL SYMBOLS, ABBREVIATIONS & NOTES

PROJECT NO.

M-001

A

B

C

D

E

F

Multi-Zone Ventilation Calculation

System Name and Number: AHU-5
Condition Analyzed: Heating for perimeter and cooling for interior zones
All zones are included in the calculation: Yes

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U				
Zone Name and Number	Occupancy Category	Zone Floor Area Az (sf)	Default Occupancy	Zone Population Pz (people)	People Outdoor Air Rate Rp (cfm/person)	Area Outdoor Air Rate Ra (cfm/sf)	Occupant Outdoor Air Ra x Pz (cfm)	Area Outdoor Air Ra x Az (cfm)	Breathing Zone Outdoor Airflow Vbz (cfm)	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow Voz (cfm)	Zone Discharge Airflow Vdz (cfm)	Zone Primary Airflow Vpz (cfm)	Primary Outdoor Air Fraction Zpz	Secondary Recirculation Fraction Er	Primary Air Fraction Ep	Supply Air Fraction Fa	Mixed Air Fraction Fb	Outdoor Air Fraction Fc	Zone Ventilation Efficiency Evz				
COURT PRELITACATION	113	Office space	55	Yes	1.00	5	0.06	5	3	6	0.8	10	180	0.06	0.75	1.00	1.00	1.00	1.00	1.00				
INTAKE	119	Office space	85	Yes	1.00	5	0.06	5	16	0.8	13	180	0.07	0.75	1.00	1.00	1.00	1.00	1.00	0.98				
EVIDENCE DROP/STORAGE	120	Occupable storage room	240	Yes	1.00	5	0.06	5	14	19	0.3	24	570	0.04	0.75	1.00	1.00	1.00	1.00	1.01				
ELEC ROOM	130	Office space	70	Yes	1.00	5	0.06	5	4	9	0.8	12	180	0.06	0.75	1.00	1.00	1.00	1.00	0.99				
TEAM EVIDENCE NARCOTICS	120	Office space	120	Yes	1.00	5	0.06	5	7	12	1.0	12	80	0.0	0.75	1.00	1.00	1.00	1.00	0.99				
PATROL EQUIPMENT STORAGE RM	116	Occupable storage room	65	Yes	1.00	5	0.06	5	4	9	1.0	9	50	0.18	0.75	1.00	1.00	1.00	1.00	0.98				
EVID DROP BAG + TAG	117	Office space	125	Yes	1.00	5	0.06	5	8	13	1.0	13	60	0.21	0.75	1.00	1.00	1.00	1.00	0.95				
Total			760		7.00			35	46	81			1,300	1,300	0.21					0.85				
System Area As (sf)					760					Ev Calculation Method					Appendix A									
System Population Ps (P)					7.0					Min Zone Ventilation Efficiency					Evz					0.85				
Sum of Zone Population ZPz					7.0					Critical Zone					EVID DROP BAG + TAG.117									
Occupant Diversity D					1.0					System Ventilation Efficiency					Ev					0.85				
Unconnected Outdoor Air Intake Vou (cfm)					8.1					Outdoor Air Intake Flow					Vot (cfm)					95				
System Primary Airflow Vps (cfm)					1,300					Outdoor Air Intake Flow Provided					(cfm)					260				
Average Outdoor Air Fraction Xs - Vou/Vps					0.06																			

Multi-Zone Ventilation Calculation

System Name and Number: AHU-4
Condition Analyzed: Heating for perimeter and cooling for interior zones
All zones are included in the calculation: Yes

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U				
Zone Name and Number	Occupancy Category	Zone Floor Area Az (sf)	Default Occupancy	Zone Population Pz (people)	People Outdoor Air Rate Rp (cfm/person)	Area Outdoor Air Rate Ra (cfm/sf)	Occupant Outdoor Air Ra x Pz (cfm)	Area Outdoor Air Ra x Az (cfm)	Breathing Zone Outdoor Airflow Vbz (cfm)	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow Voz (cfm)	Zone Discharge Airflow Vdz (cfm)	Zone Primary Airflow Vpz (cfm)	Primary Outdoor Air Fraction Zpz	Secondary Recirculation Fraction Er	Primary Air Fraction Ep	Supply Air Fraction Fa	Mixed Air Fraction Fb	Outdoor Air Fraction Fc	Zone Ventilation Efficiency Evz				
1 PATROL SERGENTS	111 Office space	131	Yes	1.00	5	0.06	5	8	13	0.8	16	315	314	0.05	0.75	1.00	1.00	1.00	1.00	0.97				
2 PATROL LIEUT. OFFICE	120 Office space	110	Yes	1.00	5	0.06	5	7	12	0.8	15	290	286	0.05	0.75	1.00	1.00	1.00	1.00	0.97				
3 CAPTAIN	107 Office space	145	Yes	1.00	5	0.06	5	9	14	0.9	17	370	370	0.05	0.75	1.00	1.00	1.00	1.00	0.98				
Total				3.00				15	24	39			975	975	0.05					0.97				
System Area As (sf)					Ev Calculation Method					Appendix A														
System Population Ps (P)					Min Zone Ventilation Efficiency					Evz					PATROL SERGENTS.111									
Sum of Zone Population ZPz					Critical Zone					0.97														
Occupant Diversity D					System Ventilation Efficiency					Ev					0.97									
Unconnected Outdoor Air Intake Vou (cfm)					Outdoor Air Intake Flow					Vot (cfm)					40									
System Primary Airflow Vps (cfm)					Outdoor Air Intake Flow Provided					(cfm)					200									
Average Outdoor Air Fraction Xs - Vou/Vps																								

Multi-Zone Ventilation Calculation

System Name and Number: AHU-3
Condition Analyzed: Heating for perimeter and cooling for interior zones
All zones are included in the calculation: Yes

Zone Name and Number	Occupancy Category	Zone Floor Area Az (sf)	Default Occupancy	Zone Population Pz (people)	People Outdoor Air Rate Rp (cfm/person)	Area Outdoor Air Rate Ra (cfm/sf)	Occupant Outdoor Air Ra x Pz (cfm)	Area Outdoor Air Ra x Az (cfm)	Breathing Zone Outdoor Airflow Vbz (cfm)	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow Voz (cfm)	Zone Discharge Airflow Vdz (cfm)	Zone Primary Airflow Vpz (cfm)	Primary Outdoor Air Fraction Zpz	Secondary Recirculation Fraction Er	Primary Air Fraction Ep	Supply Air Fraction Fa	Mixed Air Fraction Fb	Outdoor Air Fraction Fc	Zone Ventilation Efficiency Evz
1. ROLL CALL	109	Office space	450	Yes	1.00	5	0.06	80	27	107	1.0	107	750	0.14	0.75	1.00	1.00	1.00	1.00	0.96
2. CORRIDOR/HIGH DENSITY STOR	108	Corridors	175	Yes	1.00	0	0.06	0	11	11	1.0	11	200	0.05	0.75	1.00	1.00	1.00	1.00	1.05
3. GEN BLDG SUPPLY STORAGE	105	Occupable storage room	100	Yes	1.00	5	0.06	5	6	11	1.0	11	170	0.08	0.75	1.00	1.00	1.00	1.00	1.04
4. DATA ENTRY	101	Office space	100	Yes	1.00	5	0.06	5	10	15	1.0	15	160	0.08	0.75	1.00	1.00	1.00	1.00	1.02
Total			885		19.00			90	53	143			1,300	1,300	0.14					0.96
System Area		As (sf)	885																	
System Area		Ps (P)	19.0																	
System Area		ZPz	19.0																	
Occupant Diversity		D	1																	
Unconnected Outdoor Air Intake		Vou (cfm)	143																	
System Primary Airflow		Vps (cfm)	1,300																	
Average Outdoor Air Fraction		Xs - Vou/Vps	0.11																	
			Ev Calculation Method																	
			Min Zone Ventilation Efficiency																	
			Evz																	
			Critical Zone																	
			ROLL CALL.109																	
			System Ventilation Efficiency																	
			Ev																	
			0.96																	
			Outdoor Air Intake Flow																	
			Vot (cfm)																	
			149																	
			Outdoor Air Intake Flow Provided																	
			(cfm)																	
			200																	

Multi-Zone Ventilation Calculation

System Name and Number: AHU-2
Condition Analyzed: Heating for perimeter and cooling for interior zones
All zones are included in the calculation: Yes

A		B		C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U			
Zone Name and Number		Occupancy Category		Zone Floor Area Az (sf)	Default Occupancy	Zone Population Pz (people)	People Outdoor Air Rate Rp (cfm/person)	Area Outdoor Air Rate Ra (cfm/sf)	Occupant Outdoor Air Ra x Pz (cfm)	Area Outdoor Air Ra x Az (cfm)	Breathing Zone Outdoor Airflow Vbz (cfm)	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow Voz (cfm)	Zone Discharge Airflow Vdz (cfm)	Zone Primary Airflow Vpz (cfm)	Primary Outdoor Air Fraction Zpz	Secondary Recirculation Fraction Er	Primary Air Fraction Ep	Supply Air Fraction Fa	Mixed Air Fraction Fb	Outdoor Air Fraction Fc	Zone Ventilation Efficiency Evz			
1. VESTIBULE	001	Main entry lobby	100	Yes	1.00	5	0.06	5	6	11	0.8	14	520	520	0.03	0.75	1.00	1.00	1.00	1.00	1.00	1.01			
2. LOBBY	002	Main entry lobby	195	Yes	1.00	5	0.06	10	12	21	0.8	27	430	430	0.06	0.75	1.00	1.00	1.00	1.00	1.00	0.97			
3. INTERVIEW + CITIZEN REPORT	003	Office space	95	Yes	1.00	5	0.06	5	6	11	0.8	13	230	230	0.06	0.75	1.00	1.00	1.00	1.00	1.00	0.98			
4. COPY PRINT	004	Office space	65	Yes	1.00	5	0.06	5	4	9	0.8	11	120	120	0.09	0.75	1.00	1.00	1.00	1.00	1.00	0.94			
Total			455		4.95				25	27	52			1,300	1,300	0.09						0.94			
System Area		As (sf)		455		Ev Calculation Method					Appendix A														
System Population		Ps (P)		5.0		Min Zone Ventilation Efficiency					Evz					0.94									
Sum of Zone Population		ΣPz		5.0		Critical Zone					COPY PRINT -004														
Occupant Density		D		1		System Ventilation Efficiency					Ev					0.94									
Unmet Outdoor Air Intake		Voa (cfm)		52		Outdoor Air Intake Flow					Vot (cfm)					52									
System Primary Airflow		Vps (cfm)		1,300																					
Average Outdoor Air Fraction		Xs - Voa/Vps		0.84		Outdoor Air Intake Flow Provided (cfm)					260														

F

E

D

C

B

A

1


2

3

4

5

6

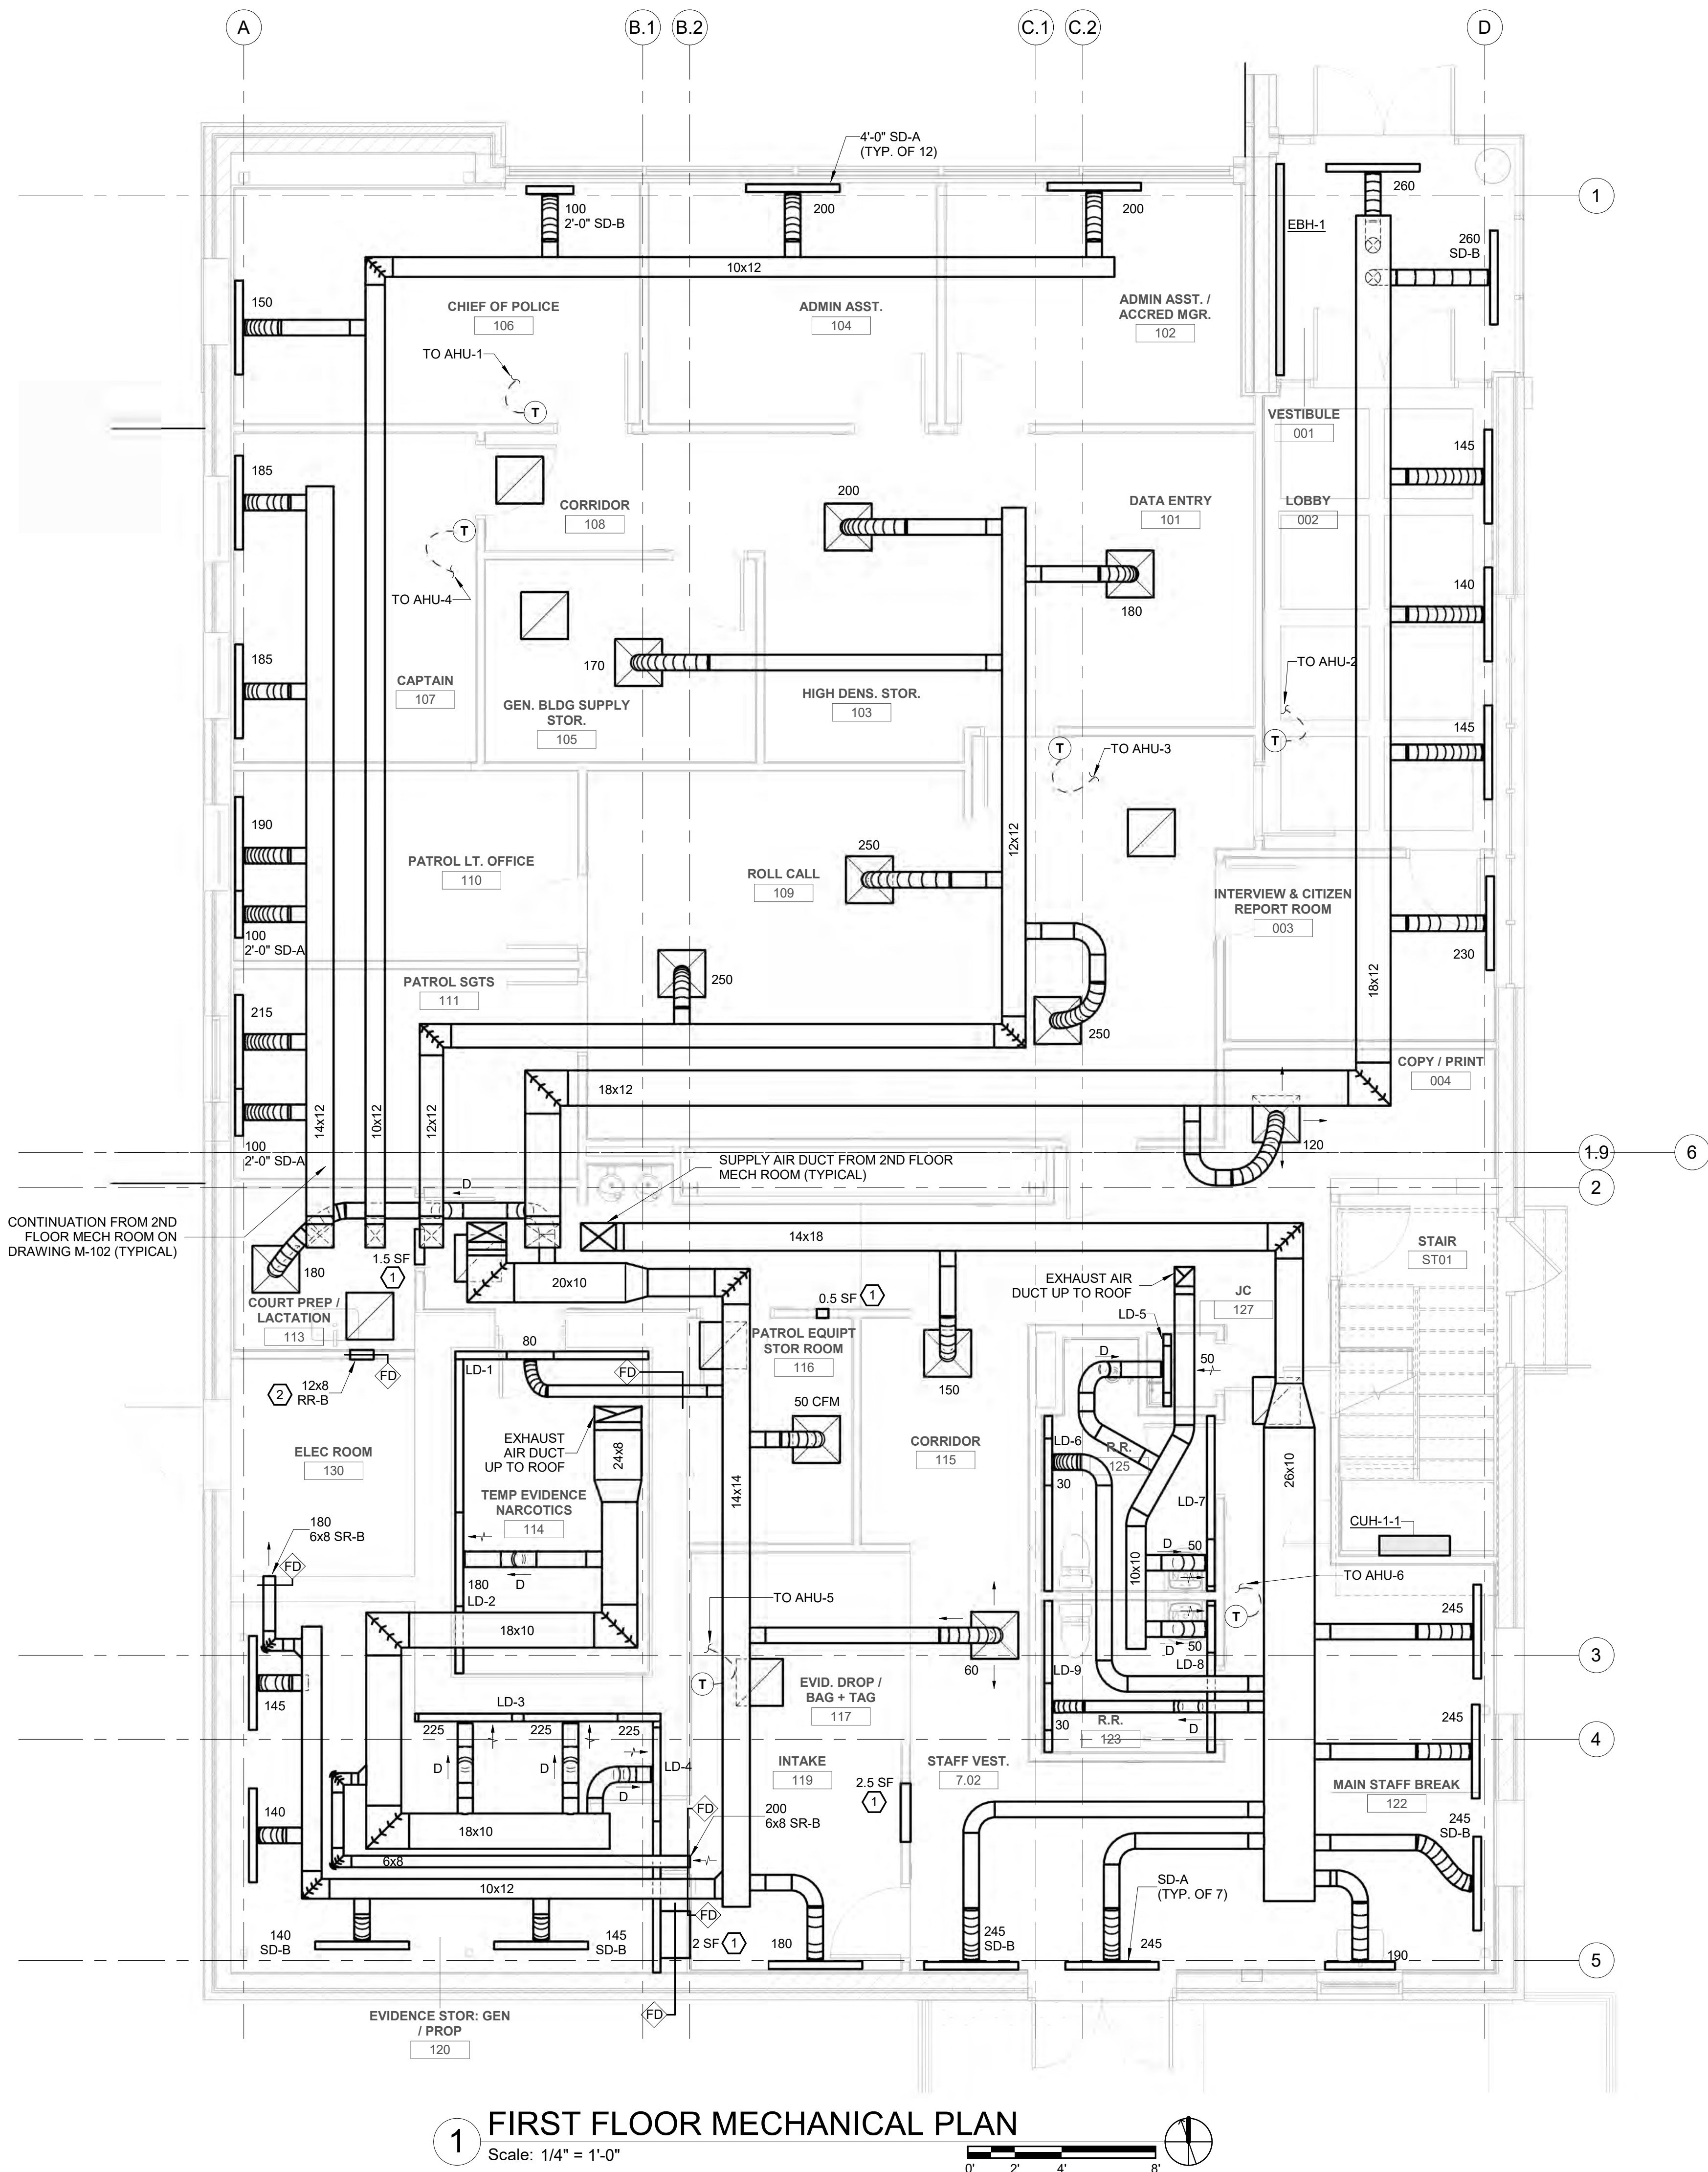

GENERAL NOTES:

- EXISTING MECHANICAL EQUIPMENTS, DUCTWORK, AIR DEVICES, THERMOSTATS, AND BASEBOARD HEATING CONVECTORS SHALL BE REMOVED AND RETURNED TO THE OWNERS STOCK UNLESS OTHERWISE INDICATED. REFER TO SPECIFICATION 23 05 30 FOR ADDITIONAL INFORMATION.
- IT IS THE INTENET OF THE MEP DESIGN TO MAXIMIZE THE HEADROOM CLEARANCE BELOW MEP SYSTEM AND TO PROVIDE INSTALLATION CLEARANCES FOR LIGHT FIXTURES. THIS REQUIREMENT APPLIES TO ALL AREAS AND TO ALL TRADES. ANY LOCATION THAT WILL NOT ACCOMMODATE LIGHT FIXTURE SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND ENGINEER.
- PRIMARY AIR TAPS SHALL BE SPIN-IN CONNECTION AS SPECIFIED IN TYPICAL SPIN COLLAR BRANCH-FITTING DETAIL IN DRAWING M-501. WHERE THE DEPTH OF THE DUCTWORK WILL NOT PERMIT A SPIN COLLAR FITTING, PROVIDE AN EQUIVALENT FLAT OVAL CONNECTION WITH MANUAL VOLUME DAMPER AND AN OVAL TO ROUND TRANSITION FOR EACH DIFFUSER TAP. FLANGED AND GASKETS STYLE OF SPIN COLLAR FITTINGS IS NOT ACCEPTABLE.
- PROVIDE REQUIRED NEC CODE CLEARANCES FOR ALL EQUIPMENT.
- DUCTWORK AND PIPING SHALL BE TIGHT TO BOTTOM OF STRUCTURE UNLESS OTHERWISE INDICATED.
- ALL DUCT DIMENSIONS SHOWN ARE INSIDE DIMINTIONS.
- BALANCE DIFFUSERS TO AIR VOLUME (CFM) INDICATED ON DRAWINGS.
- CONTRACTOR SHALL USE ROUND TO FLAT OVAL SCHEDULE ON DRAWING M001 WHERE NECESSARY.
- COORDINATE DIFFUSER INSTALLATION WITH LIGHT FIXTURES, ARCHITECTURAL CEILING TILES AND EXISTING BUILDING CONDITIONS.
- REFER TO ARCHITECTURAL DRAWINGS FOR THE EXACT LOCATION AND SIZE OF ALL STRUCTURAL PENETRATIONS AND DROP PANELS.

KEYNOTES:

- ABOVE CEILING RETURN AIR OPENING. PROVIDE FREE AREA SQUARE FOOTAGE AS INDICATED ON DRAWINGS.
- TRANSFER AIR OPENING OF SIZE INDICATED. WHERE TRASNFER AIR OPENING IS VISIBLE, AN RR-B TYPE REGISTER SHALL BE PROVIDED. REFER TO SPECIFICATION SECTION 23 37 00 FOR ADDITIONAL INFORMATION.



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ AC
APPROVED BY _____ SC
CHECKED BY _____ SC
DATE _____ 08.26.2026
TITLE

FIRST FLOOR
MECHANICAL PLAN

PROJECT NO.

M-101

F

E


D

C

B

A

8/26/2026 4:22:56 PM

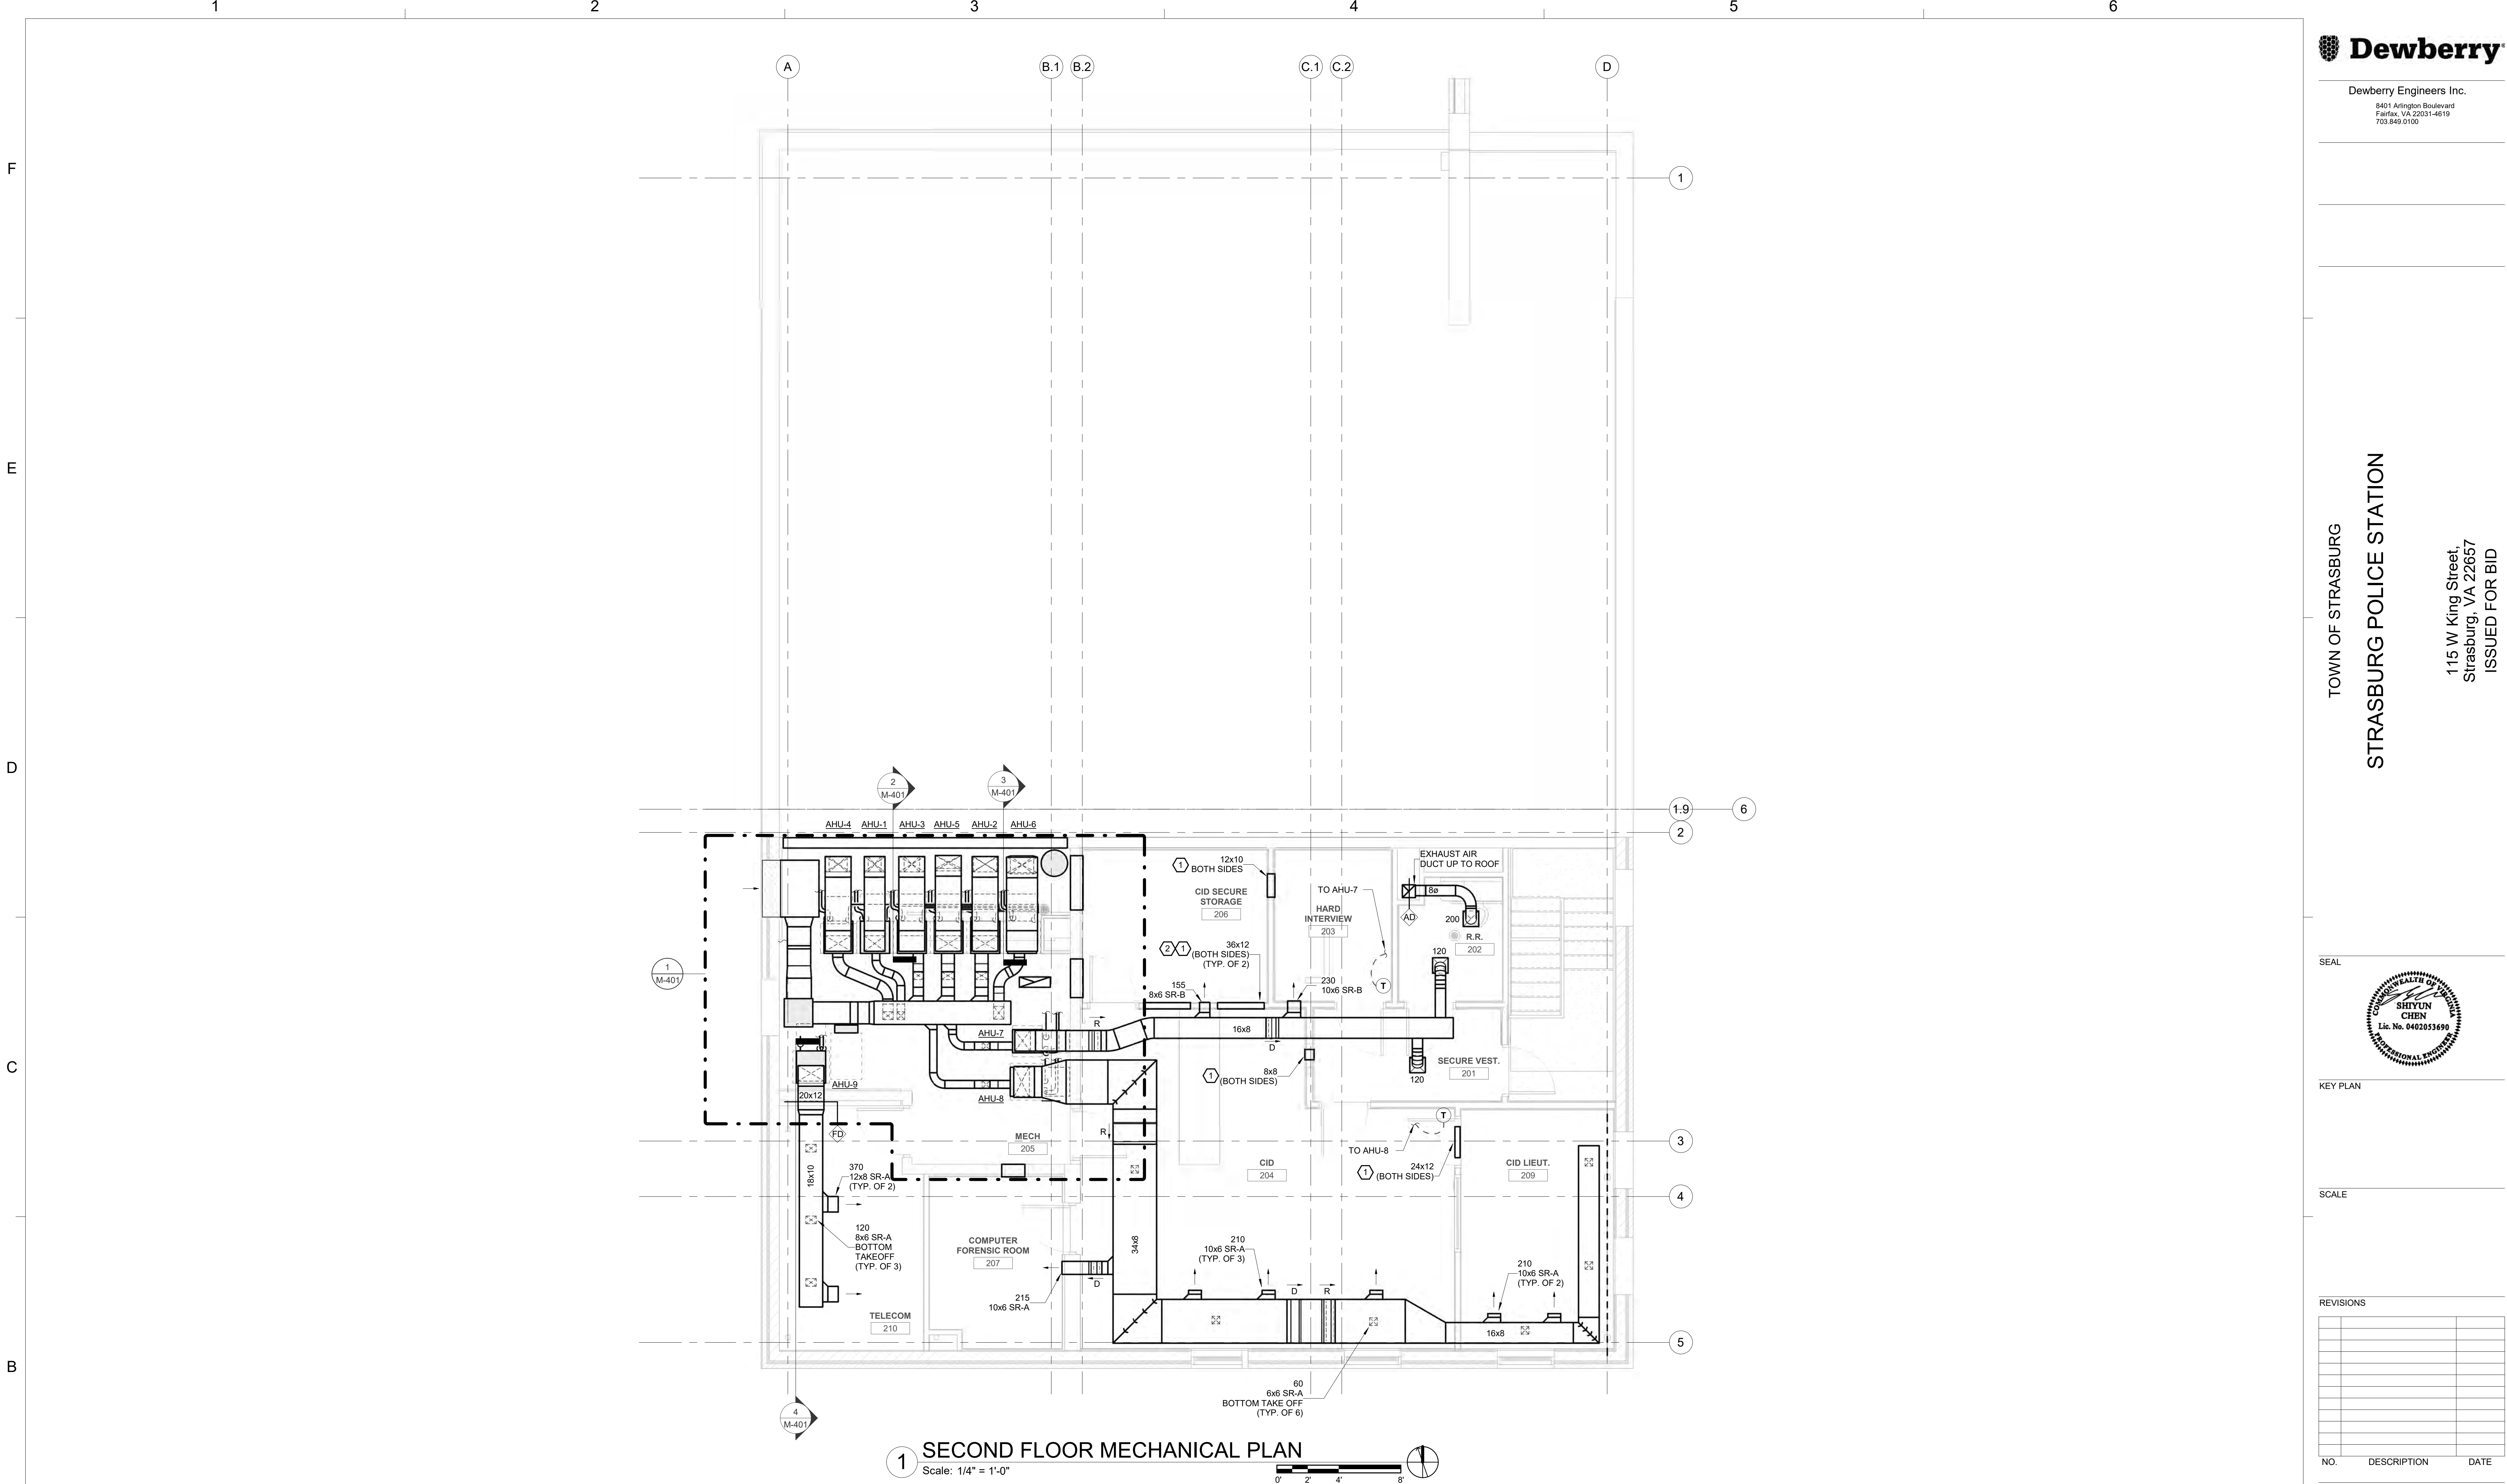

- GENERAL NOTES:**
- EXISTING MECHANICAL EQUIPMENTS, DUCTWORK, AIR DEVICES, THERMOSTATS, AND BASEBOARD HEATING CONVECTORS SHALL BE REMOVED AND RETURNED TO THE OWNERS STOCK UNLESS OTHERWISE INDICATED. REFER TO SPECIFICATION 23 05 30 FOR ADDITIONAL INFORMATION.
 - IT IS THE INTENET OF THE MEP DESIGN TO MAXIMIZE THE HEADROOM CLEARANCE BELOW MEP SYSTEM AND TO PROVIDE INSTALLATION CLEARANCES FOR LIGHT FIXTURES. THIS REQUIREMENT APPLIES TO ALL AREAS AND TO ALL TRADES. ANY LOCATION THAT WILL NOT ACCOMMODATE LIGHT FIXTURE SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND ENGINNER.
 - PRIMARY AIR TAPS SHALL BE SPIN-IN CONNECTION AS SPECIFIED IN TYPICAL SPIN COLLAR BRANCH-FITTING DETAIL IN DRAWING M-501. WHERE THE DEPTH OF THE DUCTWORK WILL NOT PERMIT A SPIN COLLAR FITTING, PROVIDE AN EQUIVALENT FLAT OVAL CONNECTION WITH MANUAL VOLUME DAMPER AND AN OVAL TO ROUND TRANSITION FOR EACH DIFFUSER TAP. FLANGED AND GASKETS STYLE OF SPIN COLLAR FITTINGS IS NOT ACCEPTABLE.
 - PROVIDE REQUIRED NEC CODE CLEARANCES FOR ALL EQUIPMENT.
 - DUCTWORK AND PIPING SHALL BE TIGHT TO BOTTOM OF STRUCTURE UNLESS OTHERWISE INDICATED.
 - ALL DUCT DIMENSIONS SHOWN ARE INSIDE DIMENSIONS.
 - CONTRACTOR SHALL USE ROUND TO FLAT OVAL SCHEDULE ON DRAWING M001 WHERE NECESSARY.
 - COORDINATE DIFFUSER INSTALLATION WITH LIGHT FIXTURES, ARCHITECTURAL CEILING TILES AND EXISTING BUILDING CONDITIONS.
 - ALL DUCTWORK ROUTING WITHIN OR VISIBLE FROM AN OPEN EXPOSED CEILING AREA SHALL BE INTERNALLY LINED. REFER TO SPECIFICATION SECTION 23 30 01 FOR ADDITIONAL INFORMATION.
 - REFER TO ARCHITECTURAL DRAWINGS FOR THE EXACT LOCATION AND SIZE OF ALL STRUCTURAL PENETRATIONS AND DROP PANELS.
 - ACCESS TO ROOFTOP EQUIPMENT TO BE PROVIDED BY ROOF LADDER. REFER TO ARCHITECTURAL DRAWING FOR ADDITIONAL INFORMATION.

- KEYNOTES:**
- TRANSFER AIR OPENING OF SIZE INDICATED. WHERE TRASFER AIR OPENING IS VISIBLE, AN RG-B TYPE GRILL SHALL BE PROVIDED. REFER TO SPECIFICATION SECTION 23 37 00 FOR ADDITIONAL INFORMATION.
 - TRASFER AIR OPENING SHOULD BE INSTALLED AS HIGH AS POSSIBLE BELOW THE BULKHEAD.



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID



KEY PLAN

SCALE

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY AC
APPROVED BY SC
CHECKED BY SC
DATE 08.26.2026

TITLE
**SECOND FLOOR
MECHANICAL PLAN**

PROJECT NO.

M-102

9/26/2026 4:23:00 PM

A

- GENERAL NOTES:**
- THE CONTRACTOR SHALL COORDINATE EXACT LOCATION OF CONDENSING UNIT TO ENSURE INSTALLATION MAINTAIN MANUFACTURER'S RECOMMENDED ACCESS AND CLERANCES.
 - PROVIDE REQUIRED NEC CODE CLEARANCE FOR ALL EQUIPMENT.
 - REFER TO ARCHITECTURAL DRAWINGS FOR THE EXACT LOCATION AND SIZE OF ALL STRUCTURAL PENETRATIONS.
 - ALL DUCT DIMENSIONS SHOWN ARE INSIDE DIMENSIONS.
 - ACCESS TO ROOFTOP EQUIPMENT TO BE PROVIDED BY ROOF LADDER. REFER TO ARCHITECTURAL DRAWING FOR ADDITIONAL INFORMATION.

- KEYNOTES:**
- ALL DUCTWORK ROOF PENETRATION LOCATIONS SHOULD BE COORDINATED WITH THE ARCHITECT AND STRUCTURAL ENGINEER PRIOR TO INSTALLATION OF EXHAUST FANS AND FABRICATION OF DUCTWORK.
 - MAINTAIN A MINIMUM OF 3'-0" CLEARANCE ON EACH SIDE OF UNIT.
 - NEW EQUIPMENT CURB SHALL BE PROVIDED. COORDINATE THE EXACT SIZE, LOCATION, OPENING SIZES AND STRUCTURAL REQUIREMENTS WITH THE UNIT MANUFACTURER.


B

C

D

E

F

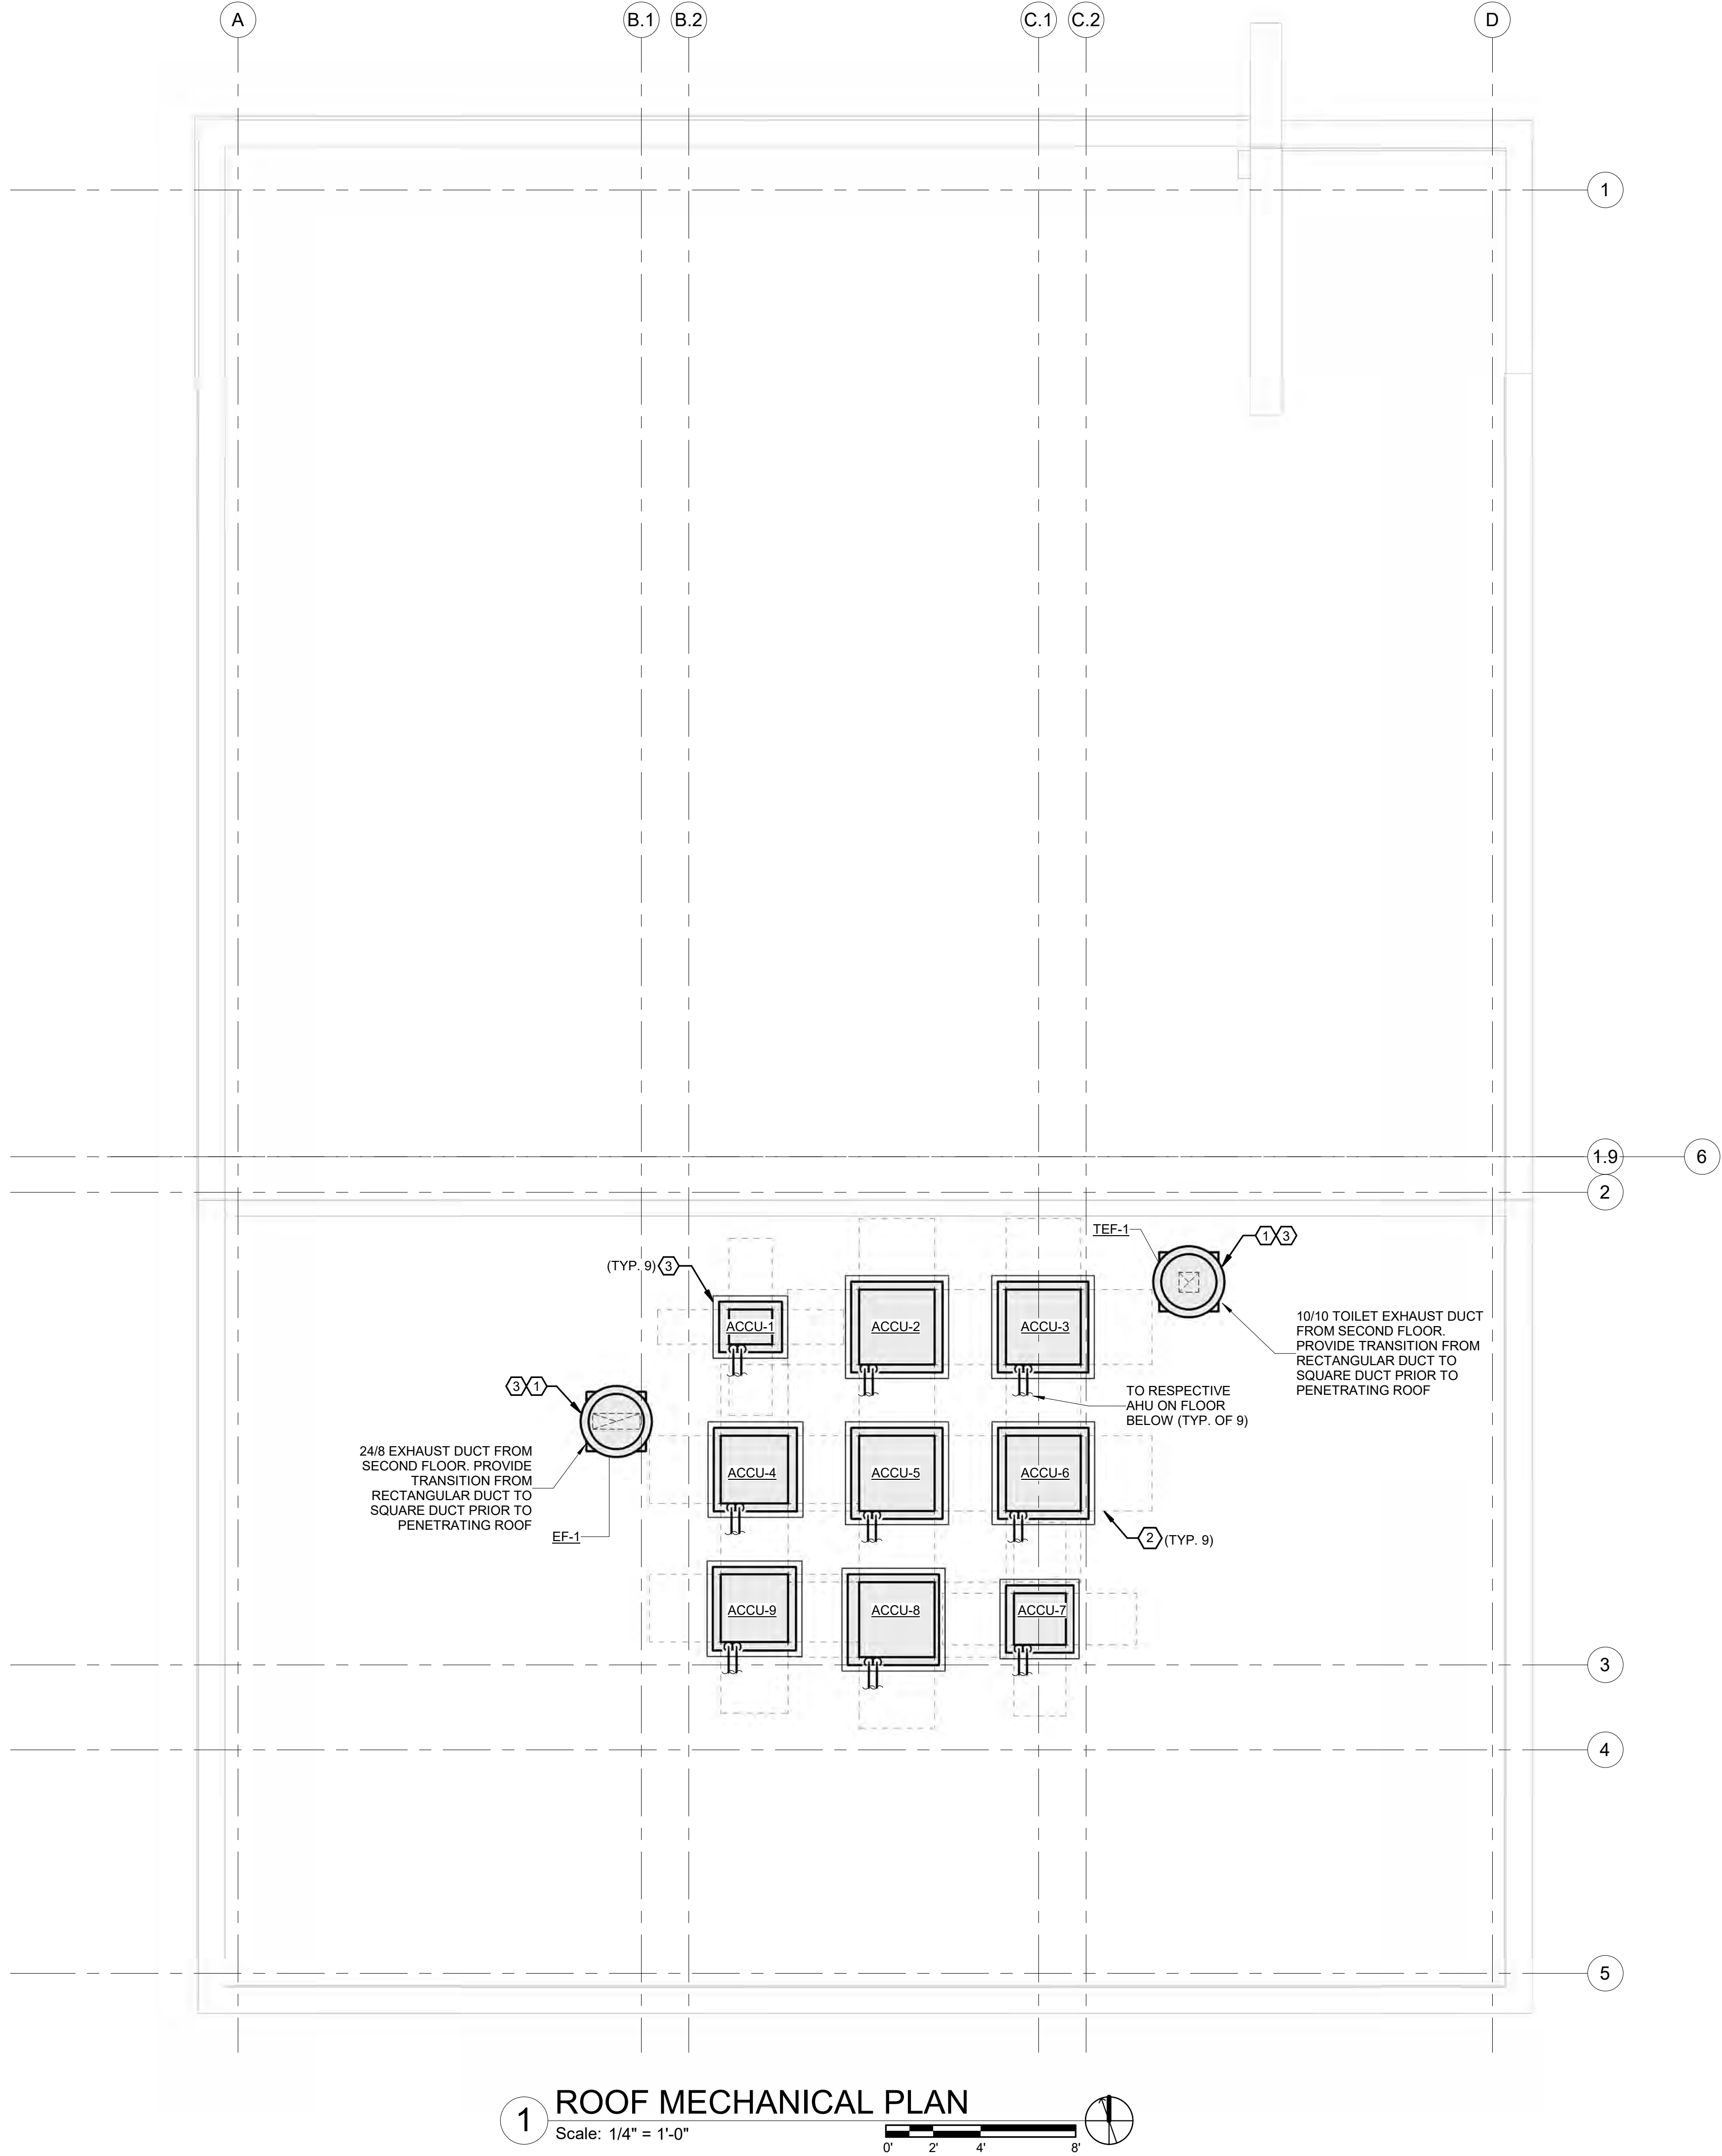

1 ROOF MECHANICAL PLAN
Scale: 1/4" = 1'-0"



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION
115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



SHIYUN CHEN
Lic. No. 0402053690

KEY PLAN

SCALE

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY AC

APPROVED BY SC

CHECKED BY SC

DATE 08.26.2026

TITLE

ROOF
MECHANICAL PLAN

PROJECT NO.

M-103

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY AC
APPROVED BY SC
CHECKED BY SC
DATE 08.26.2026
TITLE

MECHANICAL
ENLARGED PLANS
AND SECTIONS

PROJECT NO.

M-401


GENERAL NOTES:

- IT IS THE INTENT OF THE MEP DESIGN TO MAXIMIZE THE HEADROOM CLEARANCE BELOW MEP SYSTEM AND TO PROVIDE INSTALLATION CLEARANCES FOR LIGHT FIXTURES. THIS REQUIREMENT APPLIES TO ALL AREAS AND TO ALL TRADES. ANY LOCATION THAT WILL NOT ACCOMMODATE LIGHT FIXTURE SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT AND ENGINEER.
- PROVIDE REQUIRED NEC CODE CLEARANCES FOR ALL EQUIPMENT.
- DUCTWORK AND PIPING SHALL BE TIGHT TO BOTTOM OF STRUCTURE UNLESS OTHERWISE INDICATED.
- ALL DUCT DIMENSIONS SHOWN ARE INSIDE DIMENSIONS.
- CONTRACTOR SHALL USE ROUND TO FLAT OVAL SCHEDULE ON DRAWING M001 WHERE NECESSARY.
- REFER TO ARCHITECTURAL DRAWINGS FOR THE EXACT LOCATION AND SIZE OF ALL STRUCTURAL PENETRATIONS AND DROP PANELS.
- ACCESS TO ROOFTOP EQUIPMENT TO BE PROVIDED BY ROOF LADDER. REFER TO ARCHITECTURAL DRAWING FOR ADDITIONAL INFORMATION.


KEYNOTES:

- REFRIGERANT LINES SHALL BE SIZED IN ACCORDANCE WITH THE MANUFACTURING RECOMMENDATIONS.
- COORDINATE EXACT REFRIGERANT LINE ROUTING TO THE OUTDOOR UNIT LOCATED ON THE ROOF ABOVE.
- CONDENSATE PIPING SHALL SLOPE DOWN TOWARD AND SPILL OVER FLOOR DRAIN WITH AIR GAP IN THE MECHANICAL ROOM. COORDINATE EXACT CONDENSATE PIPE ROUTING. PIPE SIZE INDICATED ON DRAWING.
- TRANSFER AIR OPENING OF SIZE INDICATED. WHERE TRANSFER AIR OPENING IS VISIBLE, AN RG-8 TYPE GRILL SHALL BE PROVIDED. REFER TO SPECIFICATION SECTION 23 37 00 FOR ADDITIONAL INFORMATION.
- DUCT SIZE SHALL MATCH THE INLET OPENING OF THE OAF.
- 16" TALL SHEET METAL RETURN AIR PLENUM AT BOTTOM OF AHU. WIDTH AND LENGTH SHALL MATCH AHU FOOTPRINT. RETURN AIR PLENUM PROVIDED BY AHU MANUFACTURER. COORDINATE WITH CONTRACTOR.
- 12" TALL SHEET METAL RETURN AIR PLENUM AT BOTTOM OF AHU. WIDTH AND LENGTH SHALL MATCH AHU FOOTPRINT. RETURN AIR PLENUM PROVIDED BY AHU MANUFACTURER. COORDINATE WITH CONTRACTOR.
- PROVIDE A MINIMUM OF 3'-0" ACCESS CLEARANCE IN FRONT OF AIR HANDLING UNIT.
- OUTSIDE AIR DUCT SHALL DROP DOWN AND CONNECT TO SIDE OF RETURN AIR PLENUM.
- PROVIDE SMOKE DETECTORS AT RETURN AIR OPENING. CONTRACTOR SHALL REFER TO THE ELECTRICAL DOCUMENTS FOR EXACT QUANTITY AND SPACING REQUIREMENTS OF THE SMOKE DETECTORS.
- ARCHITECTURAL INTAKE AIR LOUVER AT A MINIMUM OF 50% FREE AREA WITH BIRDSCREEN. LOUVER AREA INDICATED ON DRAWING. REFER TO ARCHITECTURAL DRAWINGS FOR ADDITIONAL INFORMATION.


1 SECOND FLOOR ENLARGED MECHANICAL PLAN
Scale: 1/2" = 1'-0"

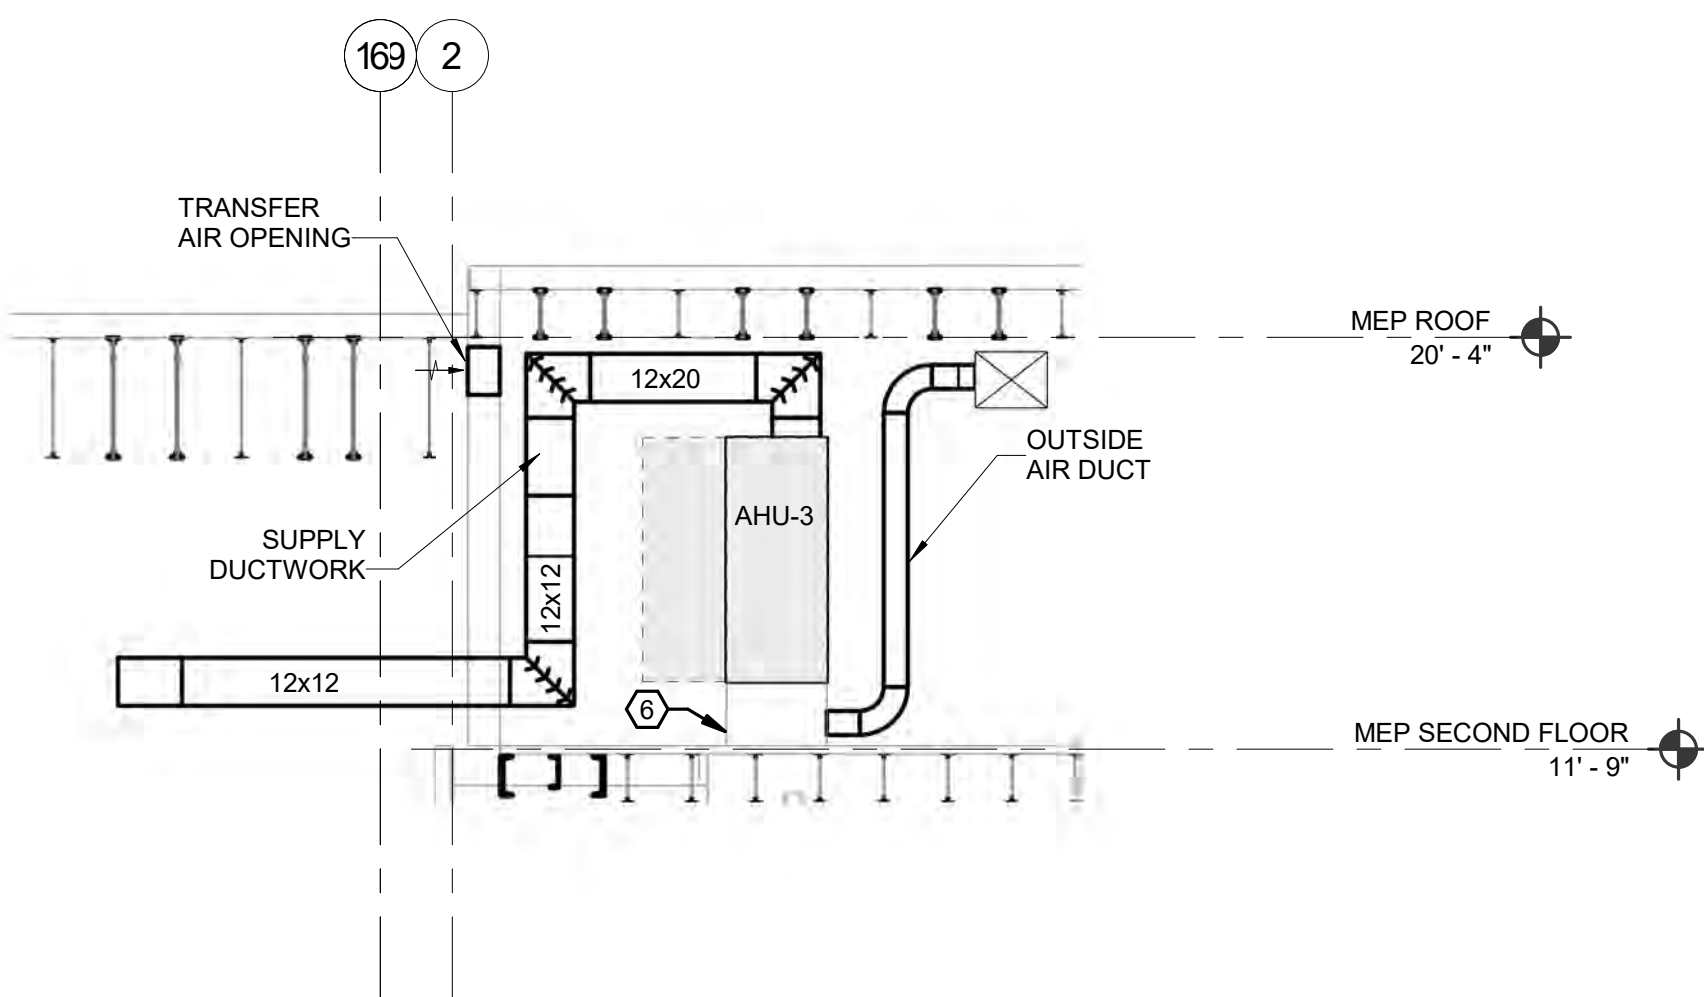


2 MECHANICAL ROOM SECTION
Scale: 1/4" = 1'-0"

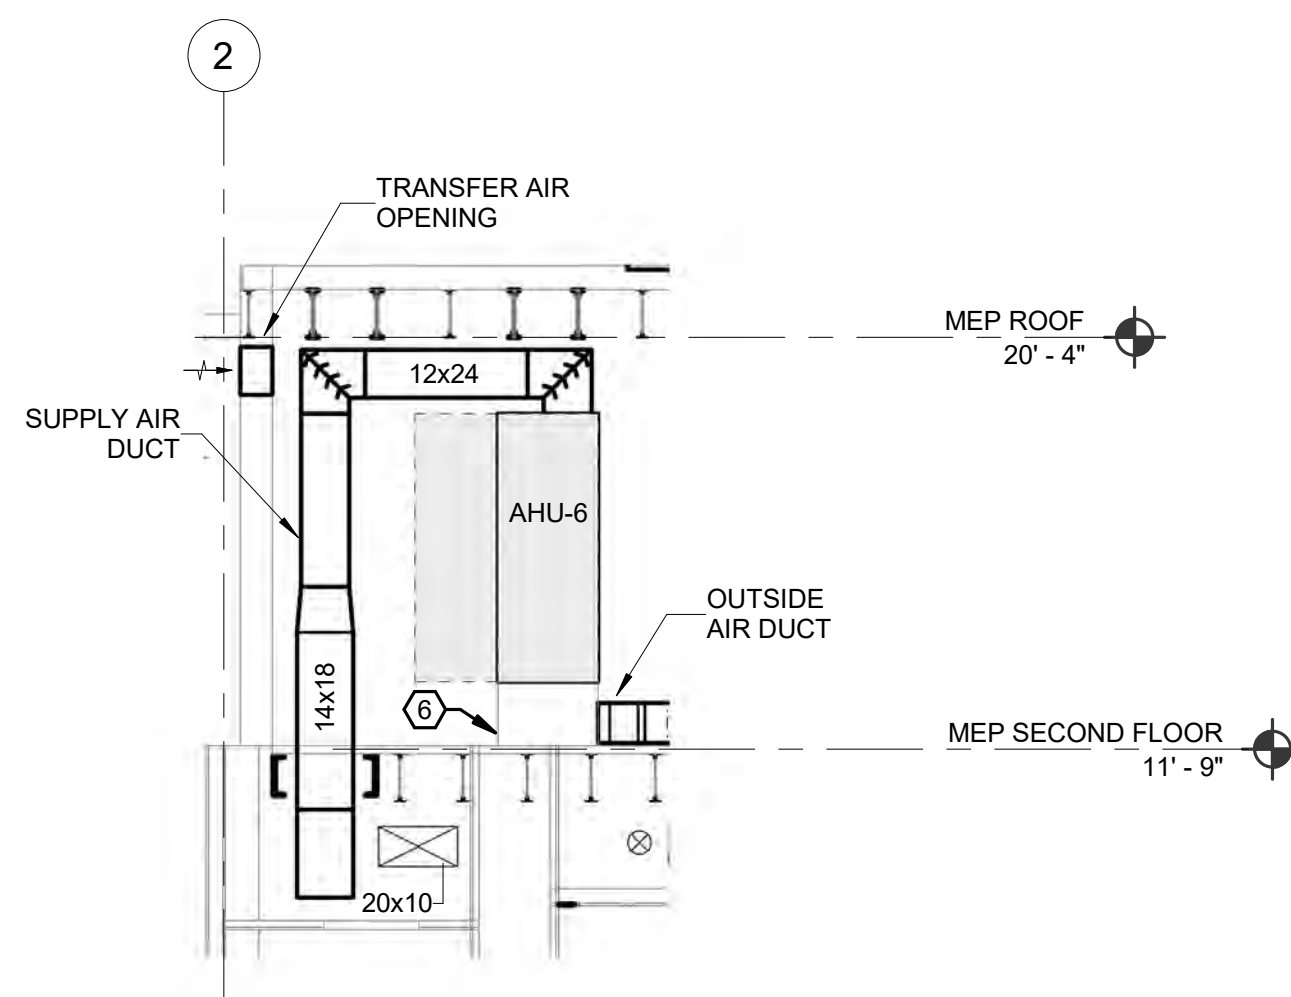

3 MECHANICAL ROOM SECTION 2
Scale: 1/4" = 1'-0"

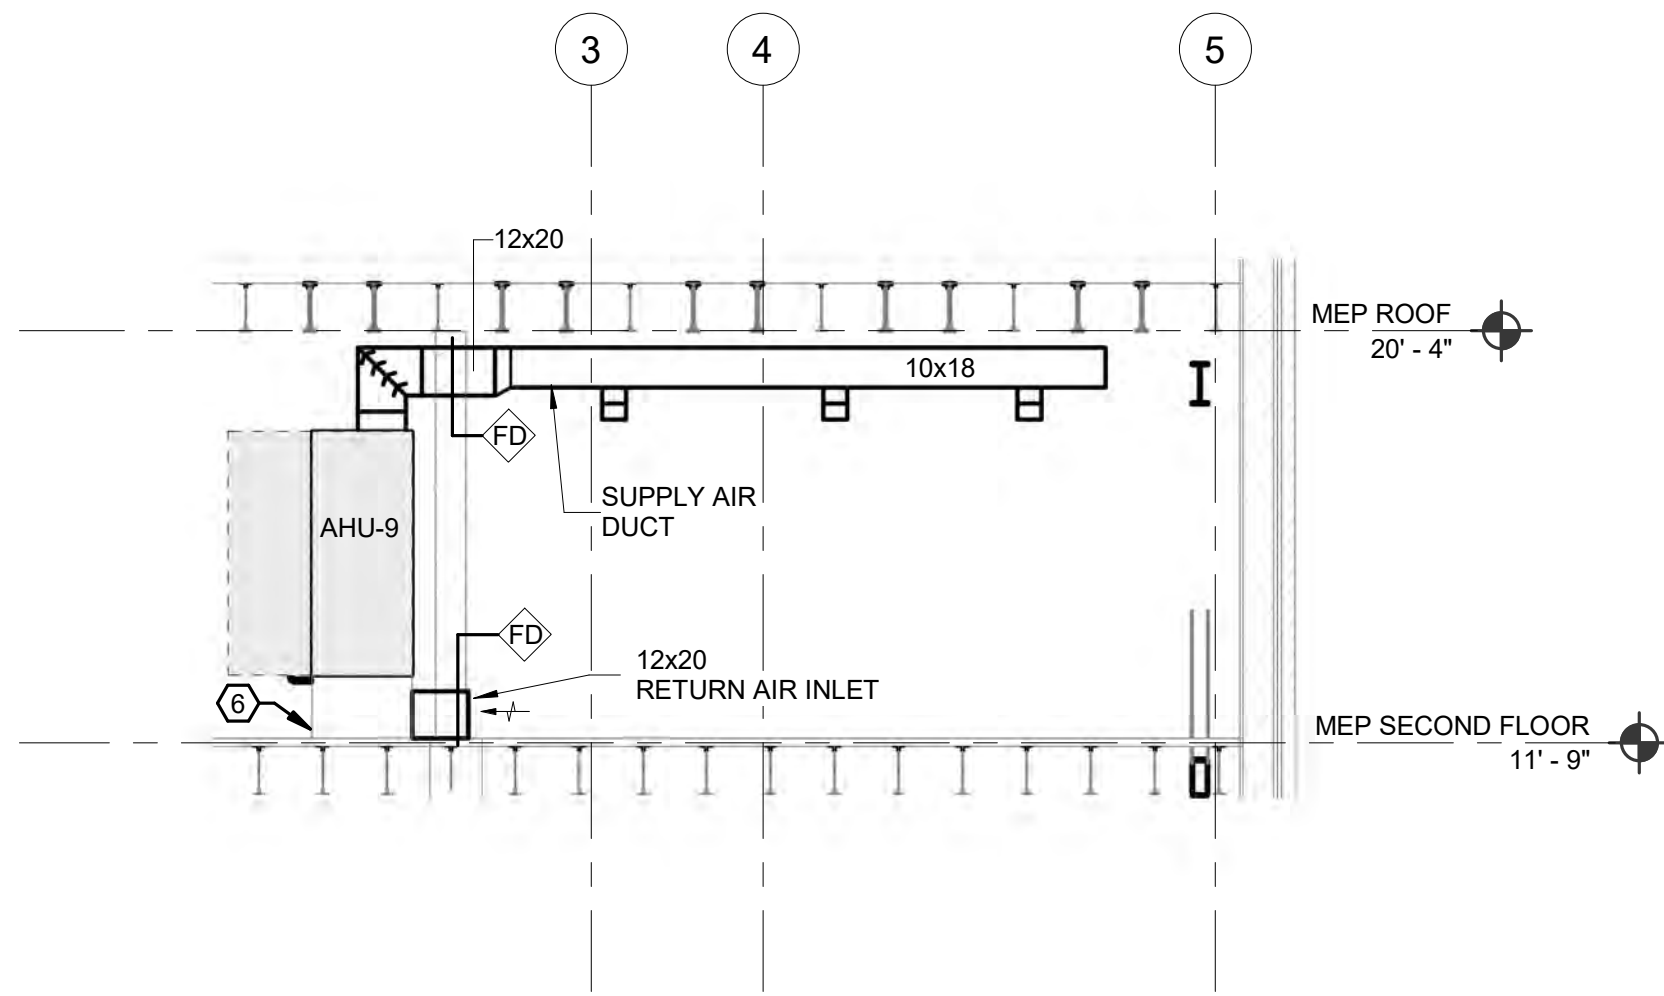

4 MECHANICAL/TELECOM ROOM SECTION
Scale: 1/4" = 1'-0"

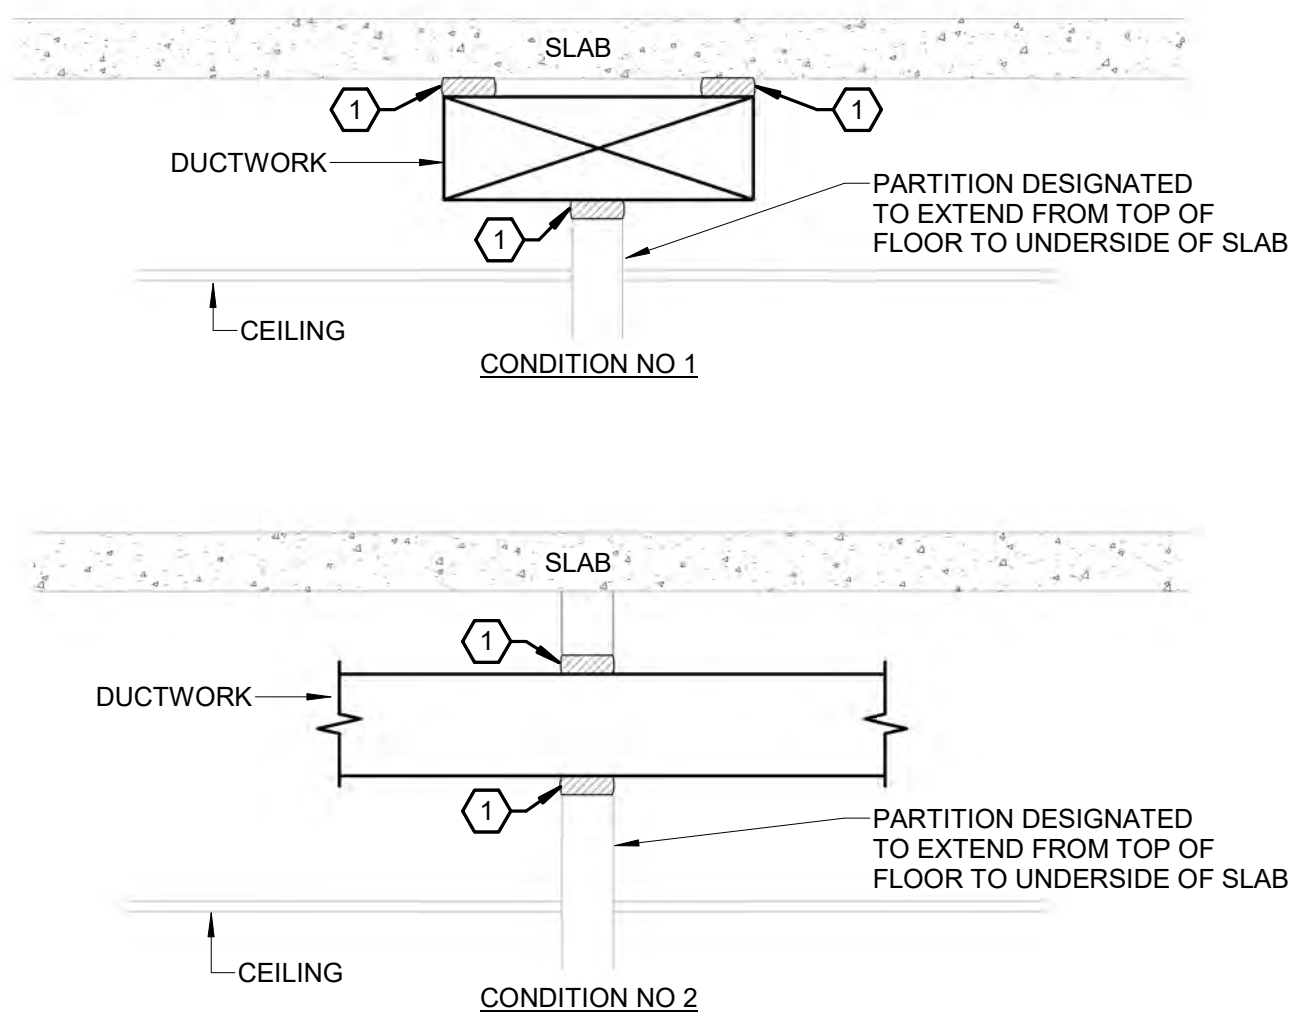


KEYNOTES:

1. FILL AREA BETWEEN DUCT AND SLAB OR PARTITION WITH ACOUSTICAL BATT INSULATION AND SEAL WITH FLEXIBLE NON-HARDENING MASTIC, MINIMUM 1" THICKNESS. FOR PENETRATIONS IN FIRE-RATED WALLS, FILL VOID OR CAVITY WITH MATERIALS CLASSIFIED BY UNDERWRITERS LABORATORIES INC. FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEM IN ACCORDANCE WITH UL 1479 AND SPECIFICATIONS. THROUGH-PENETRATION MATERIAL SHALL PROVIDE THE FIRE RESISTANCE RATING TO MAINTAIN THE REQUIRED WALL FIRE RESISTANCE RATING AND UL DESIGN NUMBER AS INDICATED IN THE ARCHITECTURAL DOCUMENTS.

GENERAL NOTES:

1. DETAILS ARE SCHEMATIC IN NATURE. REFER TO THE ARCHITECTURAL DRAWINGS FOR PARTITION TYPES AND DETAILS.
2. ALL INSULATION AND MASTIC SHALL BE RETURN AIR PLENUM RATED PER APPLICABLE UL AND NFPA REQUIREMENTS.
3. DUCTWORK SHALL NOT BE IN DIRECT CONTACT WITH PARTITION.

9 DUCTWORK PARTITION INTERFACE DETAIL
Scale: N.T.S.

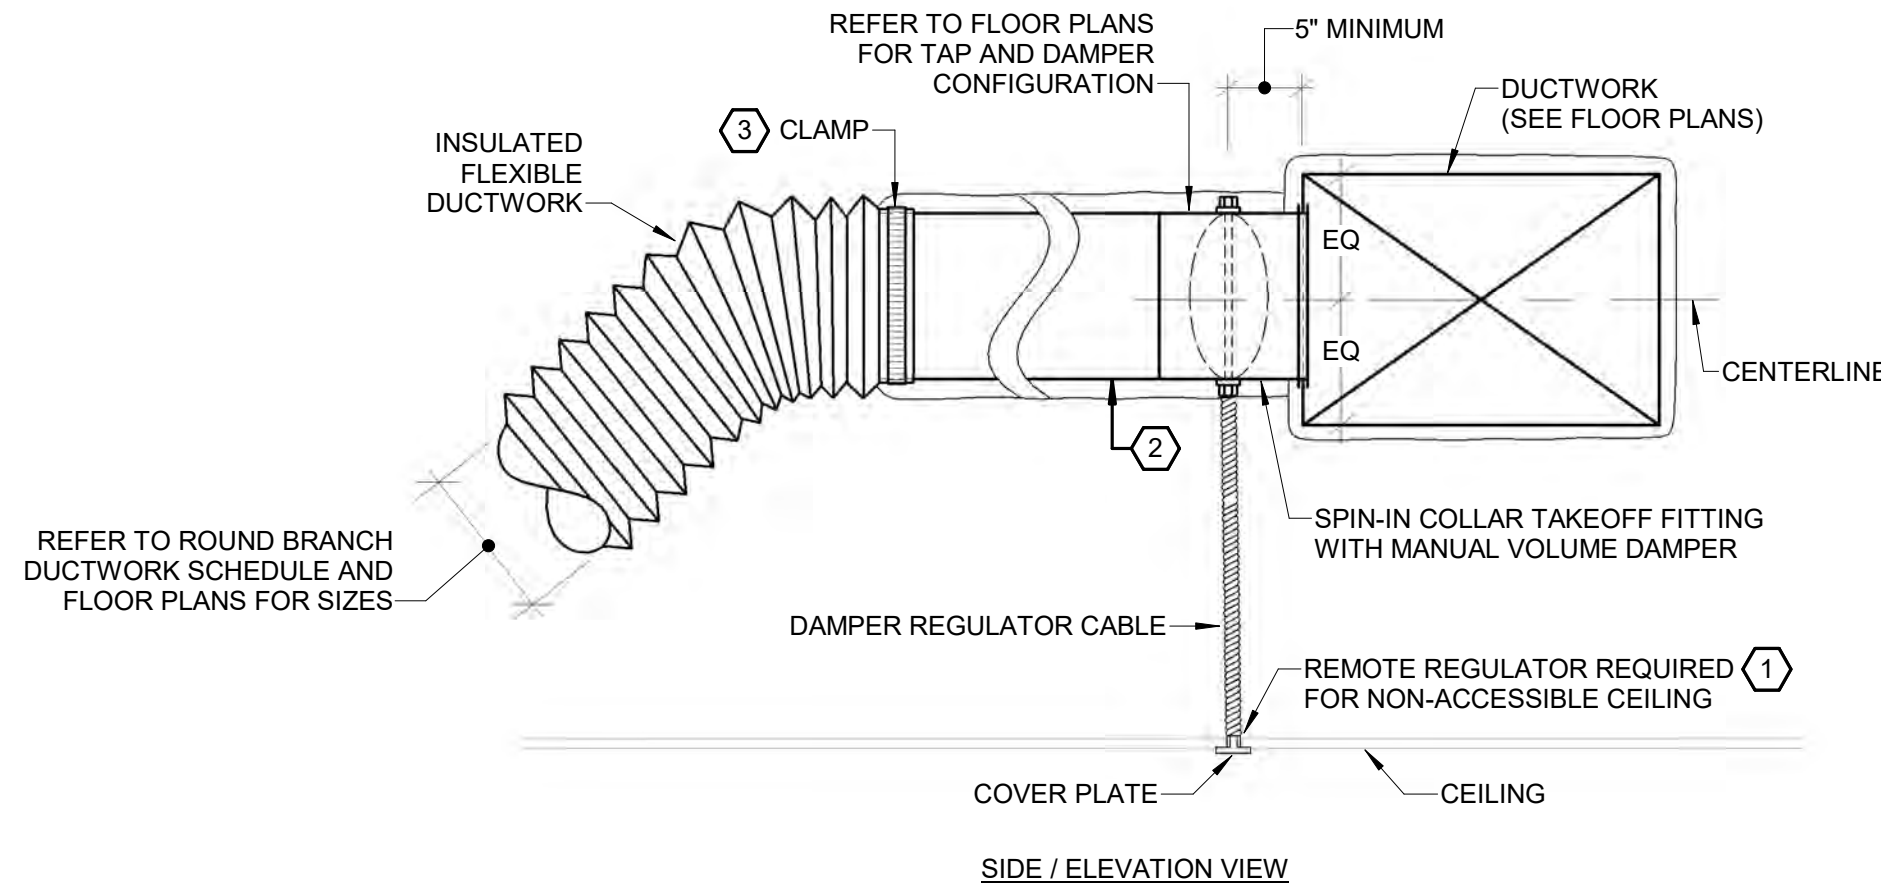


GENERAL NOTES:

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A ROUND TO FLAT OVAL TRANSITION FITTING OR SECTION OF DUCTWORK AS REQUIRED IF OVAL TAPS ARE UTILIZED.
2. REFER TO SPECIFICATIONS FOR INTERNAL DUCT LINER REQUIREMENTS.

KEYNOTES:

1. PROVIDE REMOTE VOLUME DAMPER REGULATOR AND HARDWARE AT LOCATIONS WHERE DUCTWORK TAKE-OFF TAPS AND MANUAL VOLUME DAMPERS ARE LOCATED WITHIN NON-ACCESSIBLE CEILINGS. REFER TO SPECIFICATIONS OR MECHANICAL NOTES FOR REQUIREMENTS. COORDINATE LOCATION OF COVER PLATE WITH ARCHITECTURAL DOCUMENTS.
2. PROVIDE INSULATED RIGID ROUND SHEET METAL DUCTWORK AS REQUIRED TO LIMIT FLEXIBLE DUCT LENGTH TO THE SPECIFIED MAXIMUM LENGTH.
3. REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT CLAMP TYPE.


10 SPIN-IN COLLAR BRANCH FITTING DETAIL
Scale: N.T.S.

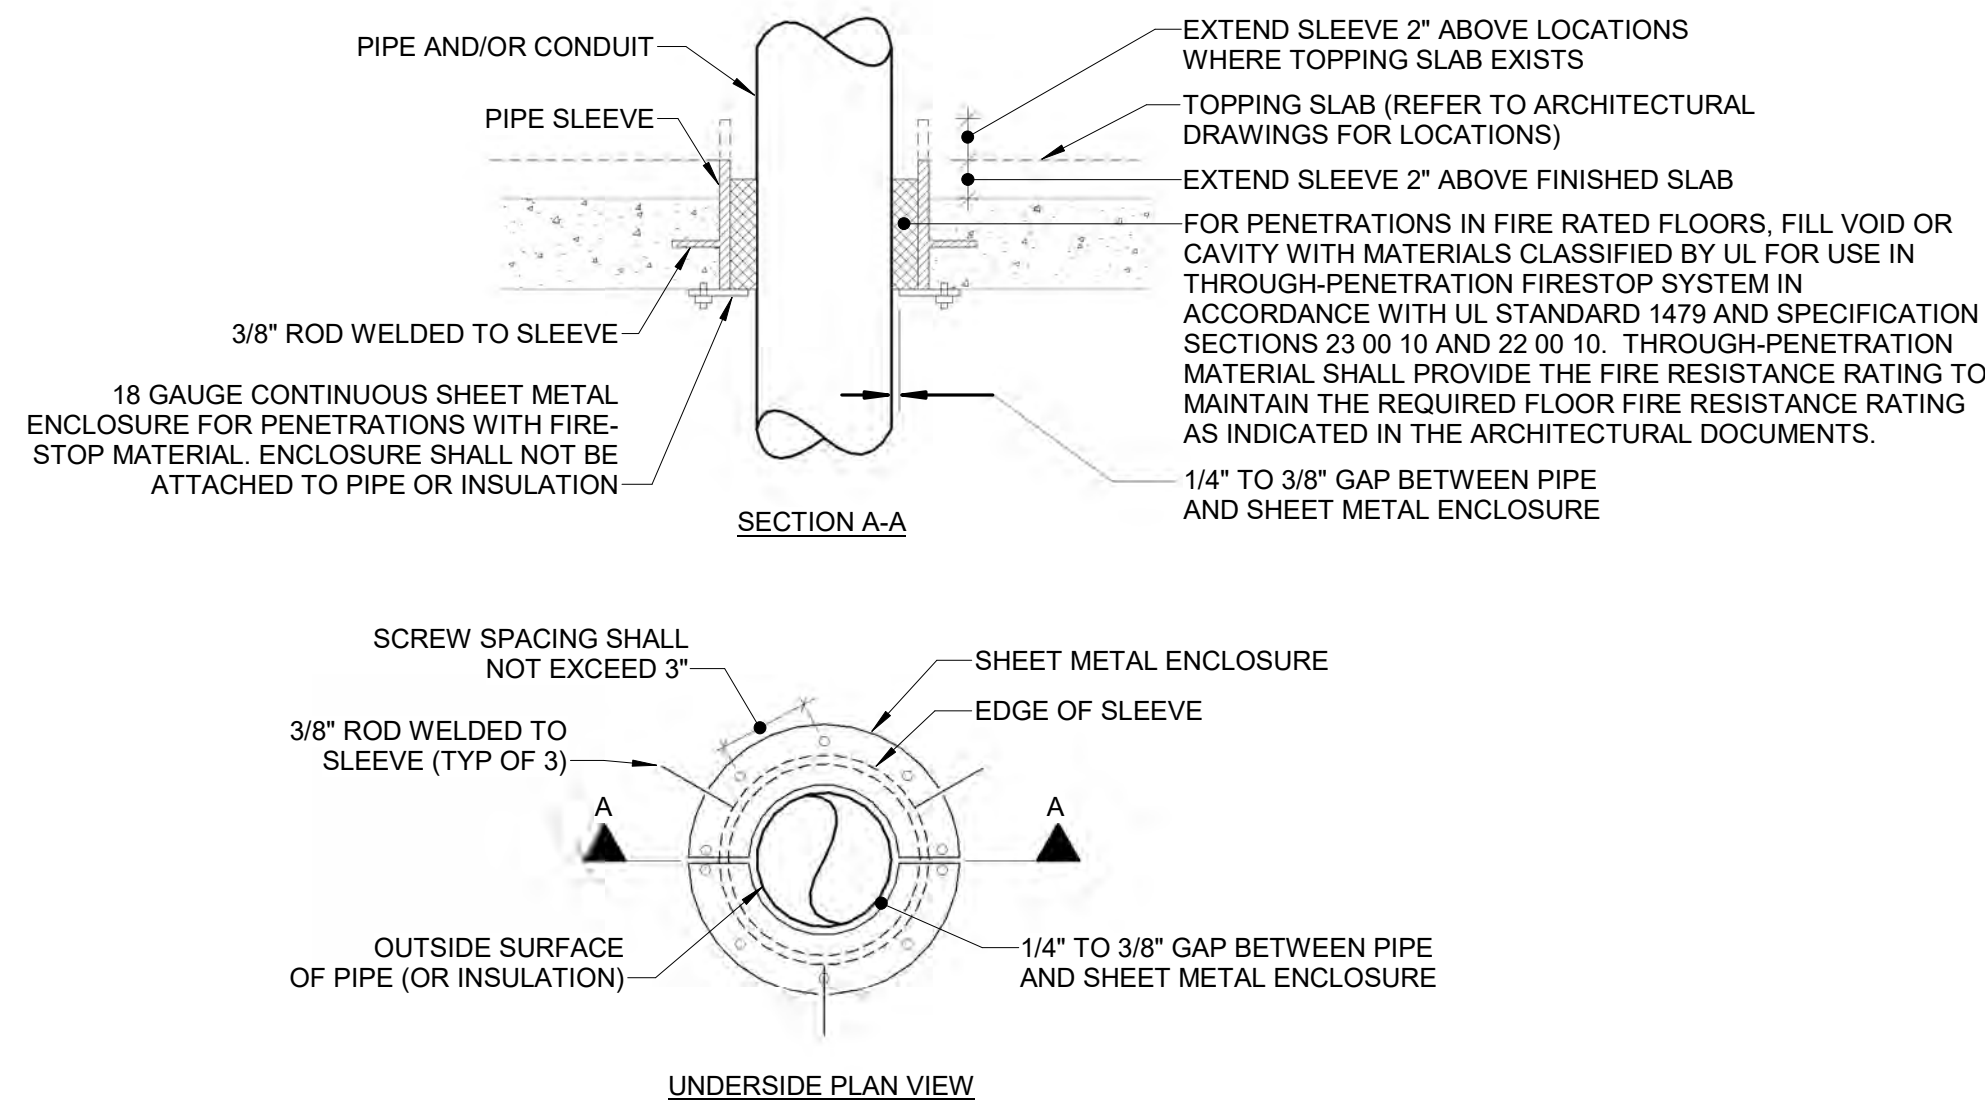



GENERAL NOTES:

1. REFER TO SPECIFICATION SECTION 23 00 10 AND 22 00 10 FOR ADDITIONAL SLEEVE REQUIREMENTS.

11 PIPE AND/OR CONDUIT FLOOR PENETRATION DETAIL
Scale: N.T.S.

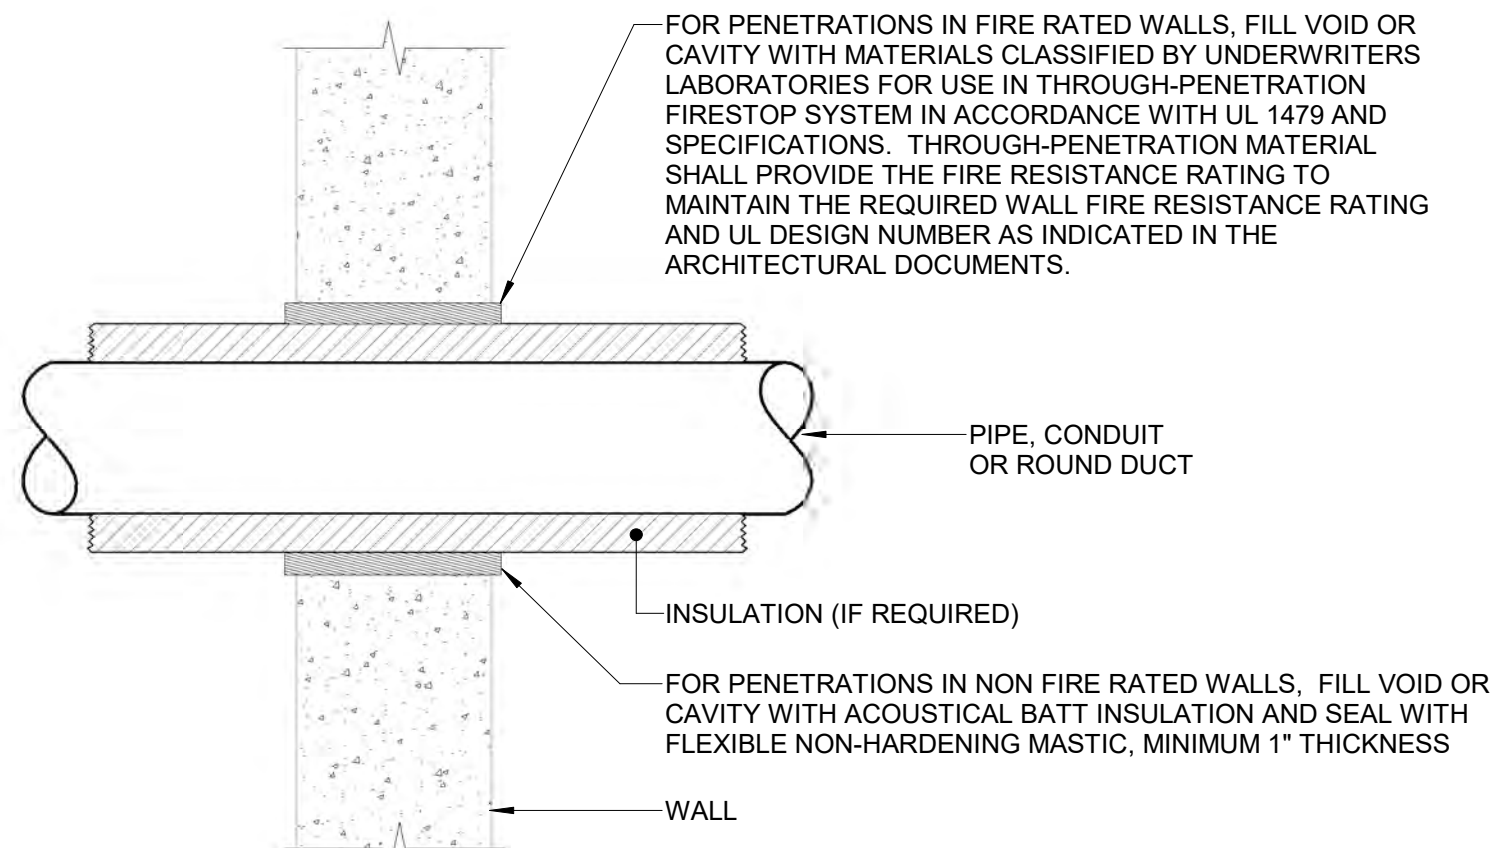


5 PIPE/CONDUIT/ROUND DUCT AND WALL INTERFACE DETAIL
Scale: N.T.S.

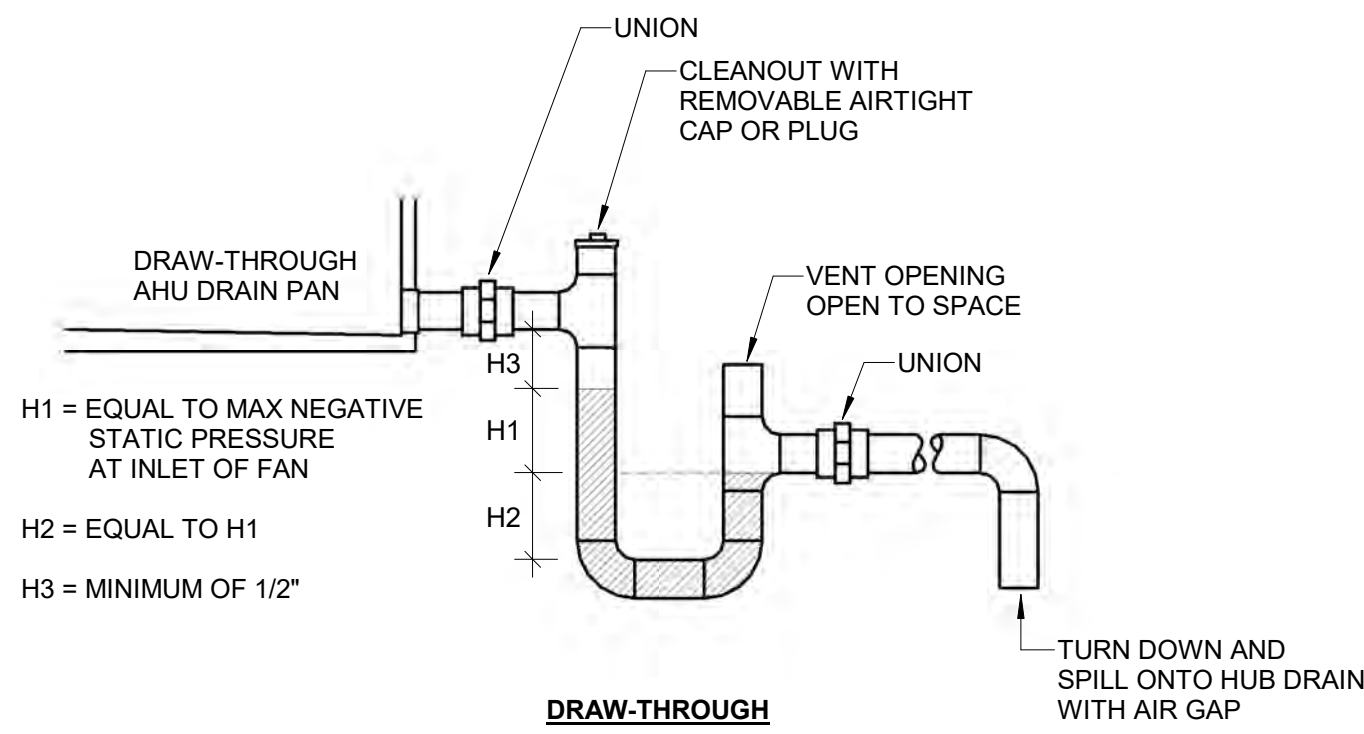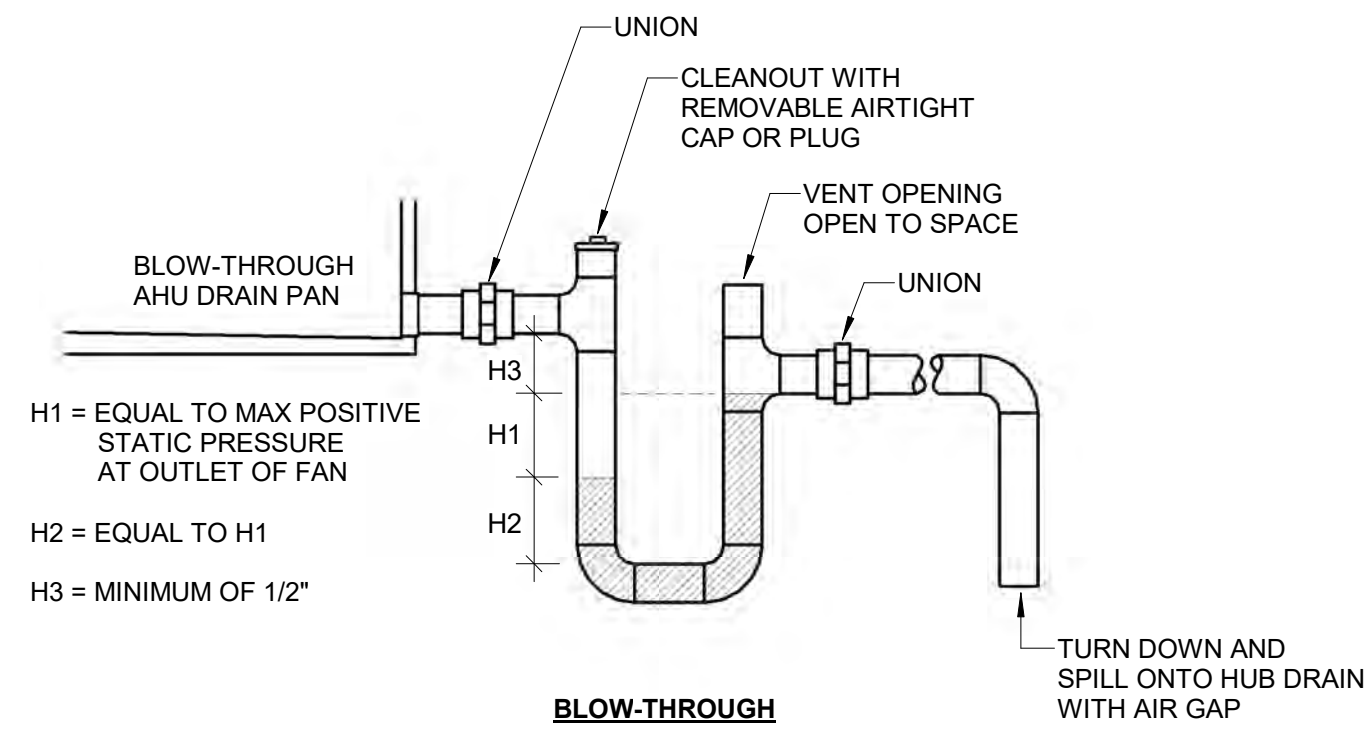

GENERAL NOTES:

1. FOR FLOOR MOUNTED EQUIPMENT, CONTRACTOR SHALL MODIFY FLOOR SLAB AS REQUIRED TO ACCOMMODATE DEPTH OF CONDENSATE DRAIN TRAP. PRIOR TO MODIFICATION OF SLAB, CONTRACTOR SHALL OBTAIN WRITTEN APPROVAL FROM ARCHITECT AND STRUCTURAL ENGINEER. FILL SLAB MODIFICATION WITH NON-HARDENING MASTIC FLUSH WITH TOP OF SURROUNDING SLAB.

6 MD 23 21 13 - 1 - CONDENSATE DRAIN
Scale: N.T.S.

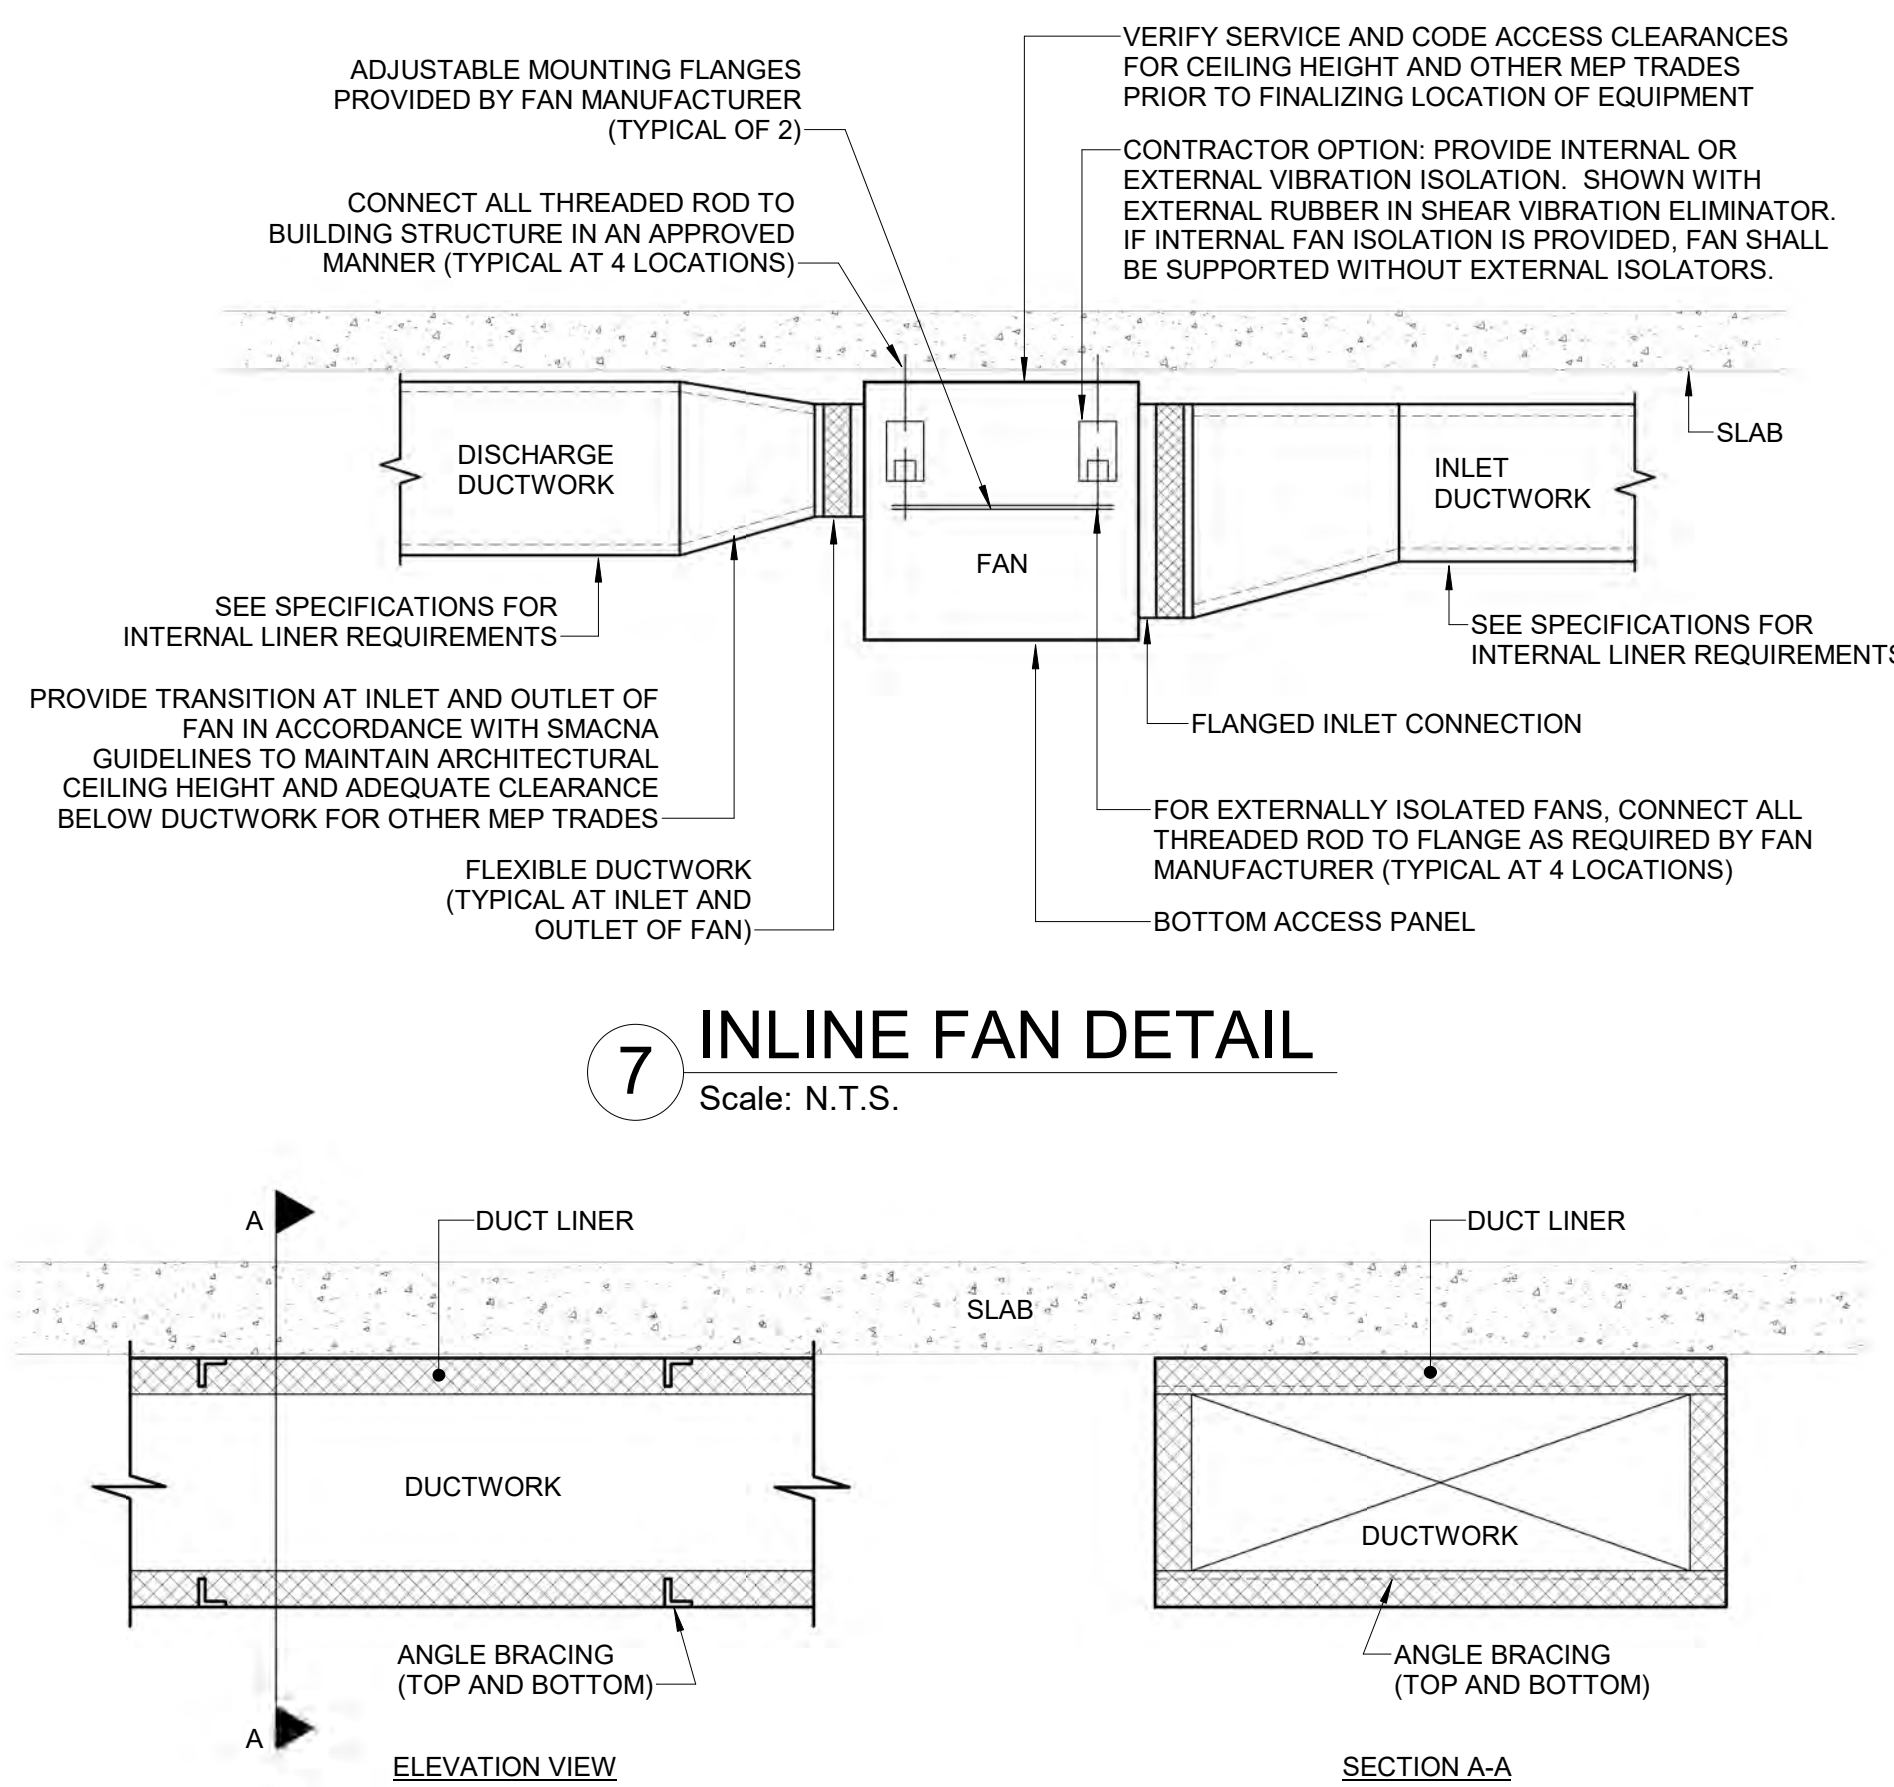


7 INLINE FAN DETAIL
Scale: N.T.S.


GENERAL NOTES:

1. THIS DETAIL APPLIES TO SLIP AND DRIVE OR "S" SLIP DUCT JOINT CONSTRUCTION.


8 MODIFIED DUCTWORK CONSTRUCTION DETAIL
Scale: N.T.S.

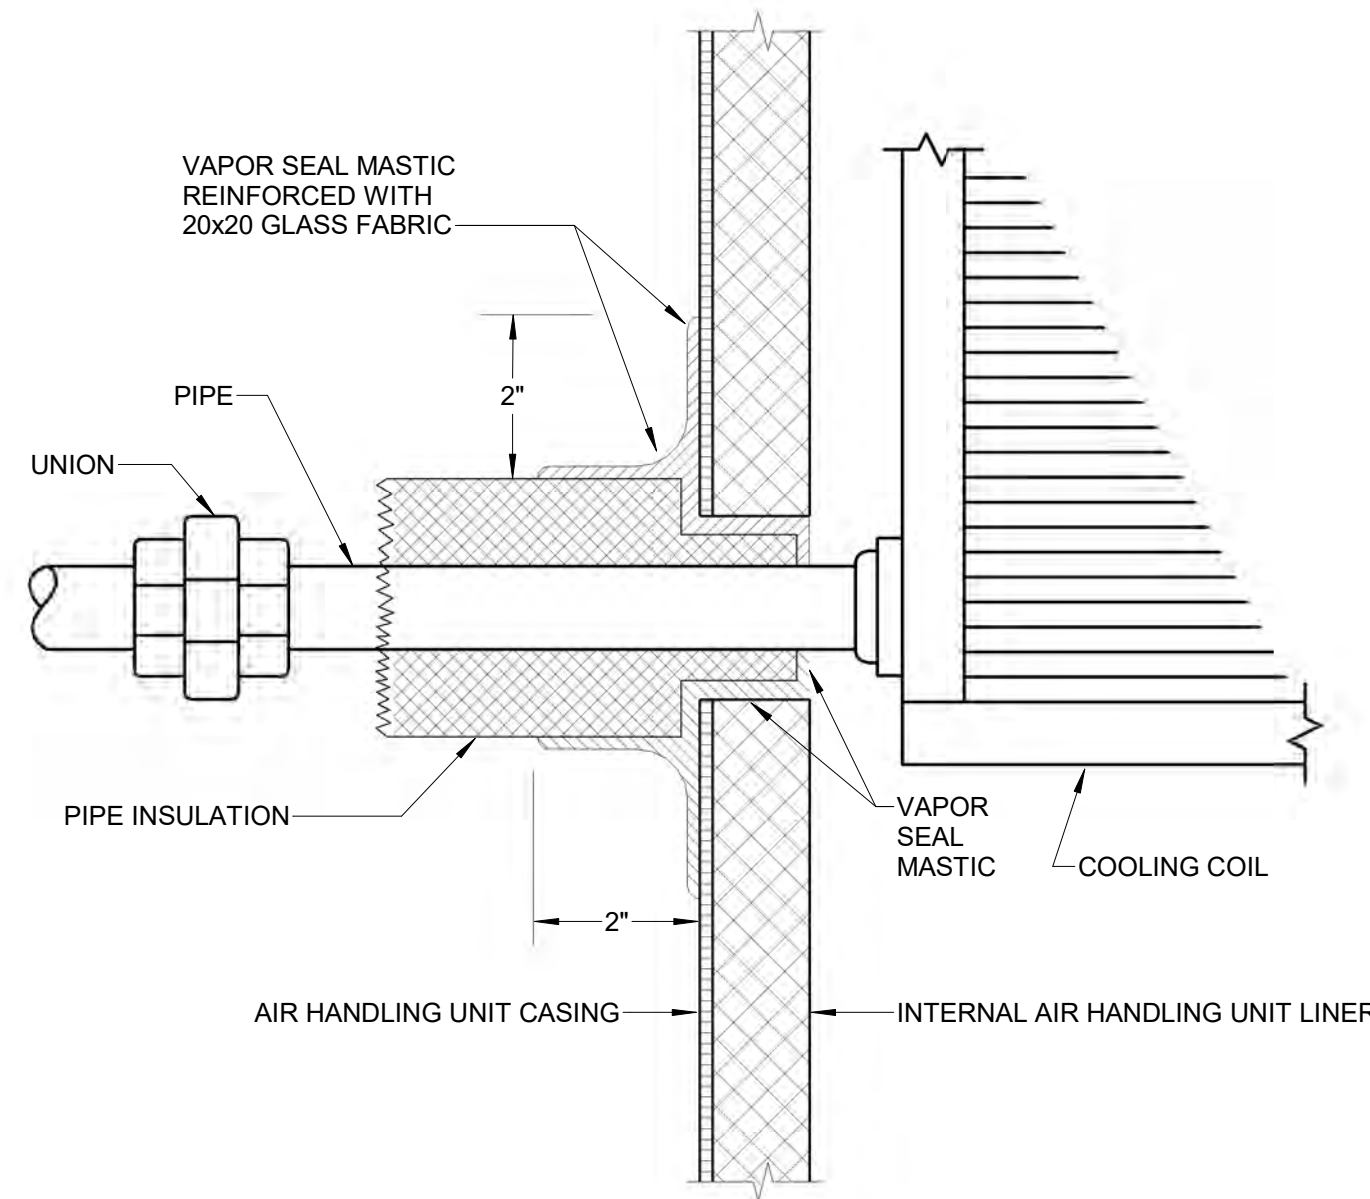

1 INSULATION REQUIREMENTS FOR PIPING AT AHU CASING DETAIL
Scale: N.T.S.

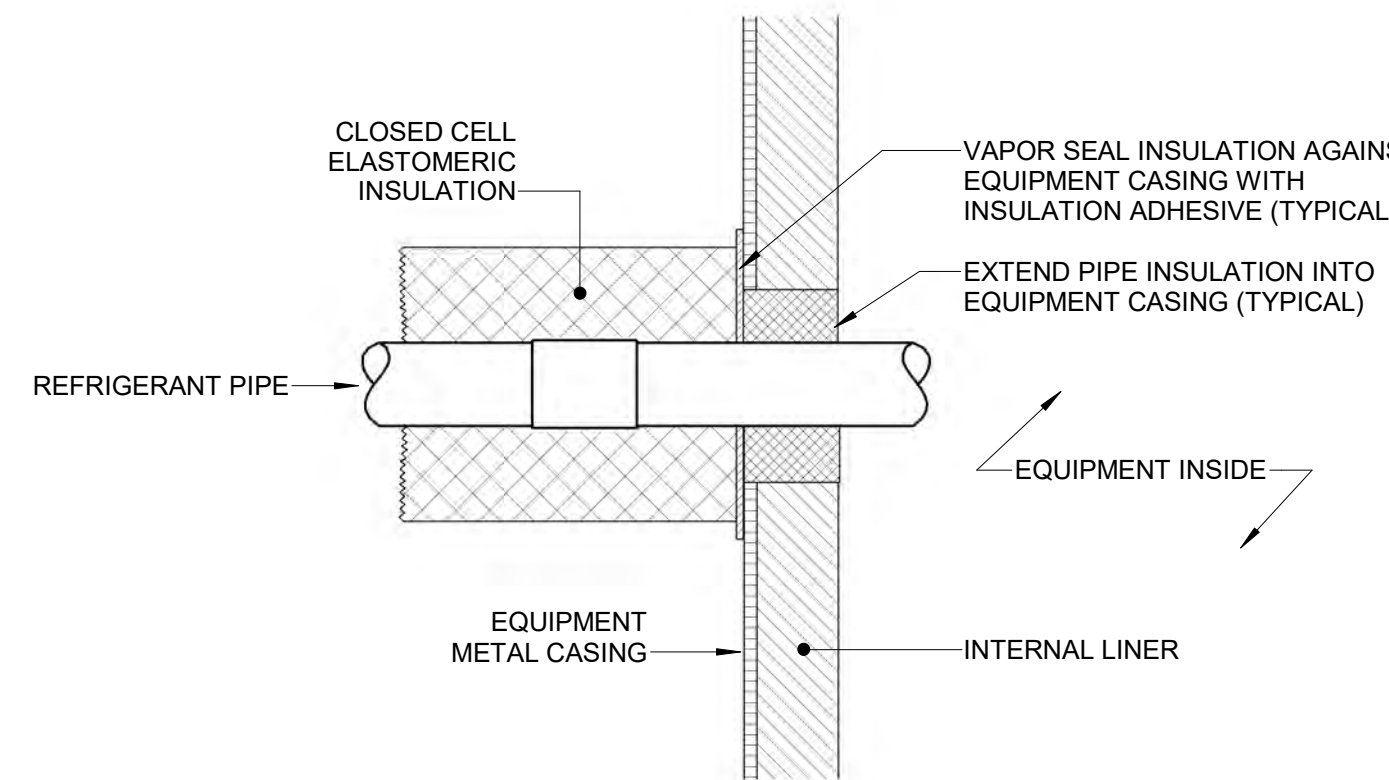


2 REFRIGERANT PIPING INSULATION AT EQUIPMENT CASING DETAIL
Scale: N.T.S.

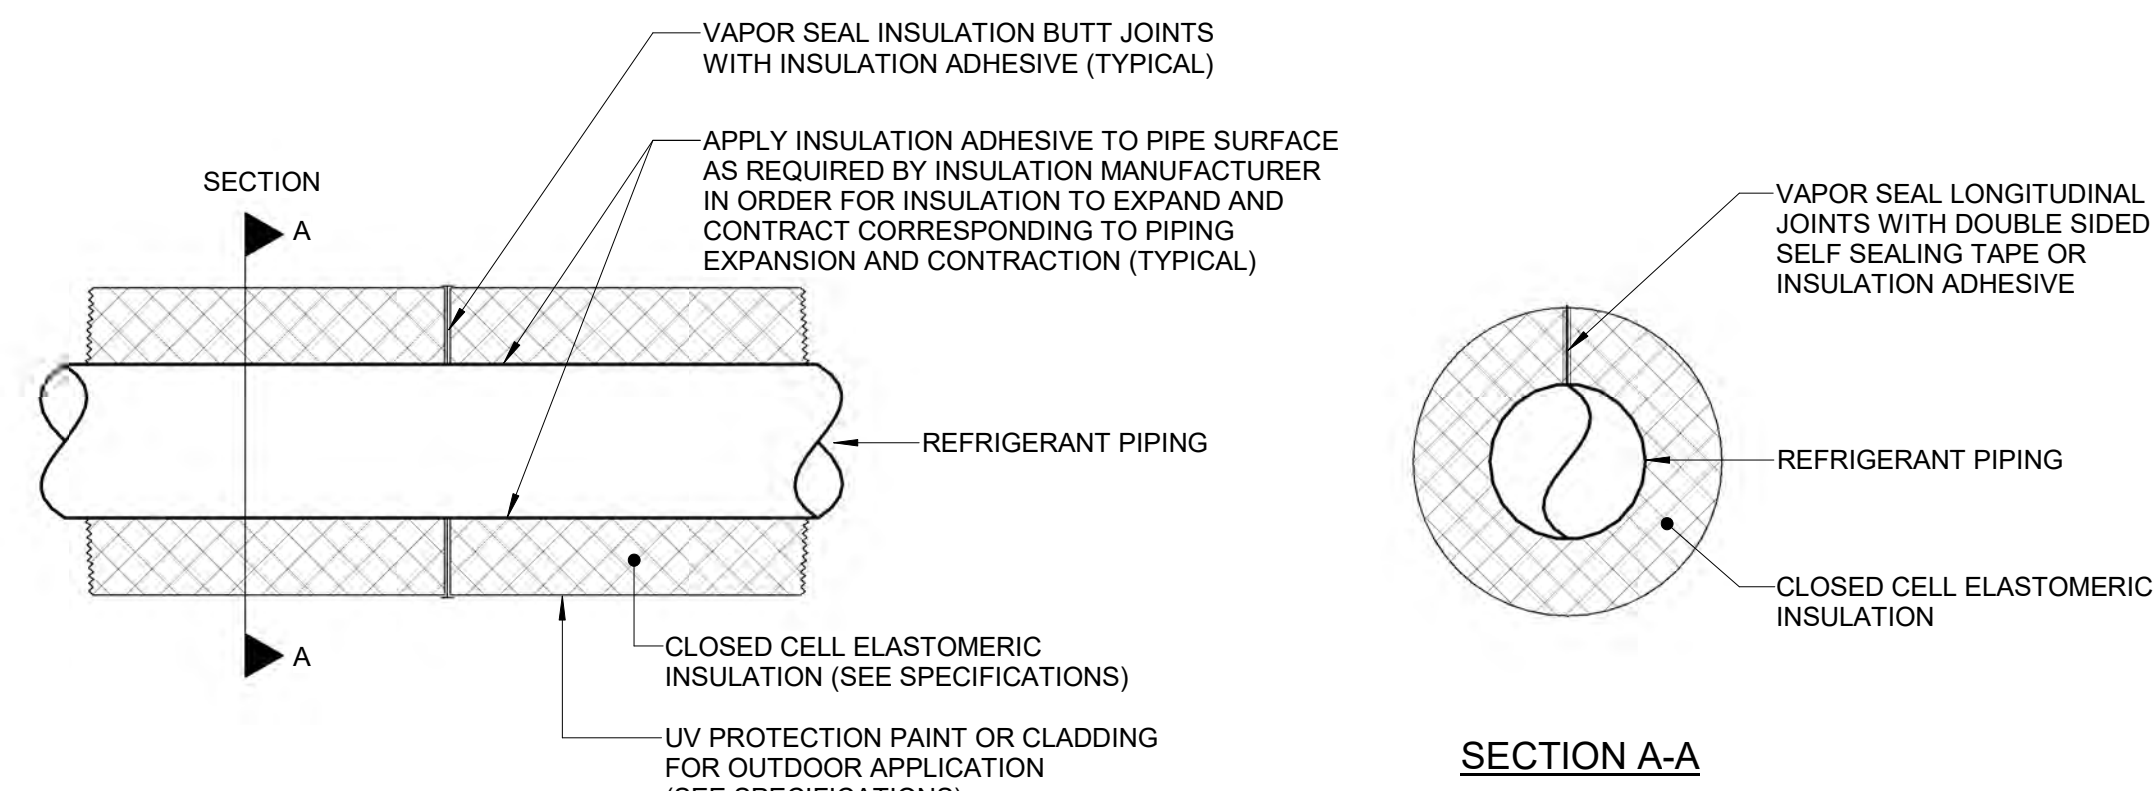

GENERAL NOTES:

1. REFER TO INSULATION MANUFACTURER'S INSTALLATION GUIDELINES, RECOMMENDATIONS, AND REQUIREMENTS SIMILAR TO ARMACELL APPLICATION MANUAL.

3 REFRIGERANT PIPING INSULATION DETAIL
Scale: N.T.S.

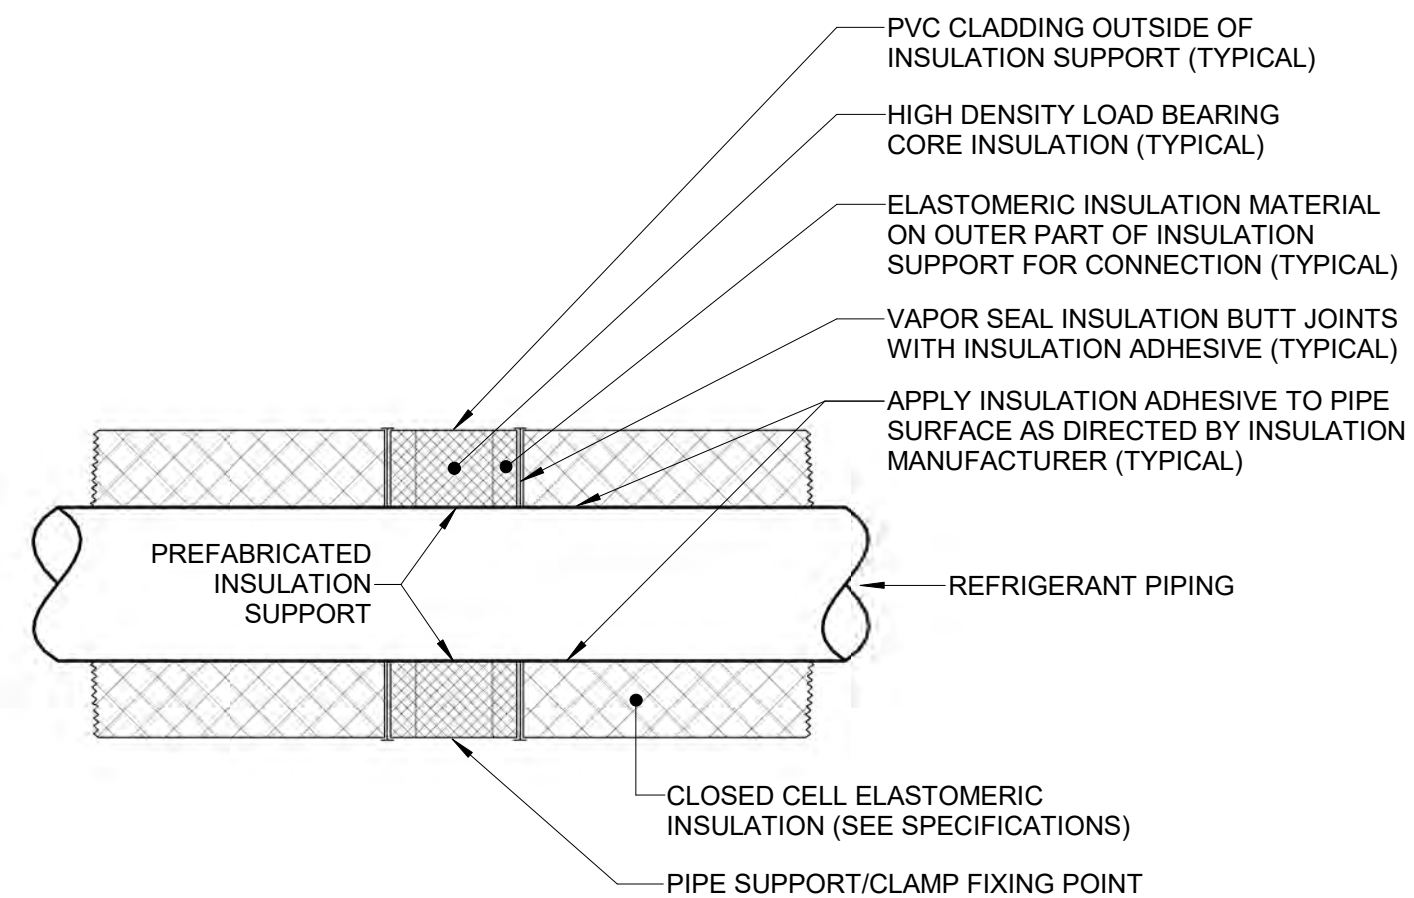

GENERAL NOTES:

1. PROVIDE LOAD BEARING HIGH DENSITY INSULATION SECTION TO SUPPORT AND PROTECT THE INSULATION FROM BEING COMPRESSED OR CRUSHED BY PIPE SUPPORT SYSTEM TO MAINTAIN THERMAL AND VAPOR INTEGRITY OF THE INSULATION.
2. ELASTOMERIC INSULATION AND HIGH DENSITY LOAD BEARING CORE INSULATION SHALL BE COMPATIBLE AND PRODUCED BY THE SAME MANUFACTURER.
3. REFER TO INSULATION MANUFACTURER'S INSTALLATION GUIDELINES, RECOMMENDATIONS, AND REQUIREMENTS SIMILAR TO ARMACELL APPLICATION MANUAL.
4. PIPE SUPPORT AND CLAMP NOT SHOWN FOR CLARITY.

4 REFRIGERANT PIPE SUPPORT/CLAMP POINT DETAIL
Scale: N.T.S.

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ AC
APPROVED BY _____ SC
CHECKED BY _____ SC
DATE _____ 08.26.2026
TITLE

MECHANICAL
DETAILS

PROJECT NO.

M-501

A

B

D

E

F

AUTOMATIC DAMPERS AND ACTUATORS

A. MANUFACTURERS: IF IT COMPLIES WITH THESE SPECIFICATIONS, ONE OF THE FOLLOWING MANUFACTURERS WILL BE ACCEPTABLE:

- 1. RUSKIN
- 2. NAILOR
- 3. GREENHECK
- 4. AMV

B. DAMPER GENERAL: AUTOMATIC DAMPERS SHALL BE FURNISHED WHEREVER SHOWN ON THE DRAWINGS OR SPECIFIED HEREIN THAT ARE NOT SPECIFIED AS PART OF A FACTORY-BUILT AIR HANDLING UNIT.

C. CONSTRUCTION: FRAME SHALL BE MADE OF MINIMUM #13 GAUGE EQUIVALENT GALVANIZED STEEL FORMED INTO CHANNELS OR AT LEAST 4.5"x1"x0.125" THICK EXTRUDED ALUMINUM. BLADES AND Baffles SHALL BE FABRICATED OF MINIMUM 16 GAUGE STEEL WITH CORROSION RESISTANT GALVANIZED FINISH OR 6"x0.08" EXTRUDED ALUMINUM. ALL DAMPERS SHALL BE PROVIDED WITH NYLON, CYCLOL, CELCON OR OILITE BEARINGS, STAINLESS STEEL, LOW LEAKAGE MECHANISM TYPE CAMBERED METAL OR ELASTOMER SIDE SEALS, AND ZINC PLATED HARDWARE AS STANDARD. AXLES SHALL BE A MINIMUM OF 1/2" DIAMETER AND BE LOCKED TO BLADE WITH RIVETS, STEEL BOLTS OR WELDED. DAMPERS SHALL BE MADE UP OF 6" OR 8" BLADES OR COMBINATION OF THE TWO. DAMPERS SHALL NOT EXCEED 48" IN LENGTH. METAL ELASTOMER BLADES SHALL BE FURNISHED ON ALL DAMPERS OPTIMIZED FOR LOW LEAKAGE PERFORMANCE. ALL DAMPERS SHALL BE CONSTRUCTED WITH OPPOSED BLADE DESIGN UNLESS OTHERWISE NOTED. IN ADDITION TO THESE REQUIREMENTS, CONSTRUCTION OF THE DAMPER, INCLUDING STRUCTURAL REINFORCEMENT, OVERALL RIGIDITY, SHALL BE ADEQUATE TO REMAIN SQUARE AND PLUMB FOR THE DUTY AND APPLICATION AS INSTALLED ON THIS PROJECT.

D. LEAKAGE: MAXIMUM LEAKAGE RATE THROUGH A 48"x48" CLOSED DAMPER SHALL NOT EXCEED 10 CFM/SF OF DAMPER FACE AREA AT 4" WG OF WATER PRESSURE DIFFERENTIAL AND 4 CFM/SF OF DAMPER FACE AREA AT 1" WG OF WATER PRESSURE DIFFERENTIAL WITH A MAXIMUM CLOSING TORQUE IN BOTH CASES OF 4 INCH-LBS/F OF DAMPER FACE AREA. DAMPER LEAKAGE RATINGS SHALL BE CERTIFIED IN ACCORDANCE WITH AMCA 500-D. IN ADDITION TO THE CONSTRUCTION REQUIREMENTS INDICATED HEREIN, DAMPERS SHALL BE CONSTRUCTED TO MEET THE LEAKAGE SPECIFICATION REQUIREMENTS FOR THE DUTY AND APPLICATION AS INSTALLED ON THIS PROJECT.

E. CONTROL REQUIREMENTS: DAMPERS USED FOR MODULATING CONTROL SHALL BE OF THE OPPOSED BLADE TYPE. TWO-POSITION DAMPERS SHALL BE OF THE OPPOSED BLADE TYPE OR PARALLEL BLADE TYPE.

F. SIZING: UNLESS THE DAMPERS ARE FOR TWO POSITION OPERATION, THEY SHALL BE SIZED TO OBTAIN LINEARIZED CHARACTERISTICS. AN APPROACH VELOCITY OF 1500 FT/MIN IS CONSIDERED ACCEPTABLE. DAMPER SIZING SHALL BE SUBJECT TO REVIEW BY THE OWNER.

G. DAMPER POSITION MONITORING: THE DAMPER BLADE OPEN/CLOSE POSITION INDICATOR SHALL SEND TWO SIGNALS TO THE EMCS FOR CONTROL, STATUS, MONITORING, AND INTERLOCK PURPOSES WHEN THE DAMPER BLADE REACHES AN OPEN POSITION AND CLOSED POSITION. THE INDICATOR SHALL CONSIST OF TWO SPST (SINGLE POLE SINGLE THROW) SWITCHES. ONE SWITCH MAKES CONTACT WHEN THE DAMPER BLADES ARE IN THE CLOSED POSITION, AND THE OTHER SWITCH MAKES CONTACT WHEN THE DAMPER BLADES ARE IN THE OPEN POSITION. THE INDICATOR DEVICE IS RATED FOR 15 AMPS AT 24, 125 OR 120VAC, AND 0.5 AMP AT 125 VDC. THE DAMPER POSITION INDICATOR SHALL BE PROVIDED FOR EACH DAMPER ASSOCIATED WITH AN OUTDOOR AIR HANDLING UNIT, A TOILET EXHAUST/RELIEF AIR FAN, A STAIRWELL PRESSURIZATION FAN, ANY LIFE SAFETY SYSTEM, OR AT ANY OTHER DAMPER LOCATION AS REQUIRED IN THE SEQUENCE OF OPERATIONS SPECIFIED HEREIN.

H. AUTOMATIC DAMPER ACTUATORS:

- PUSH PULL TYPE: PUSH PULL ACTUATORS SHALL BE EITHER TWO-POSITION OR FULLY MODULATING AS REQUIRED BY THE APPLICATION. MOTORS SHALL BE LOW VOLTAGE SYNCHRONOUS EQUIPPED WITH RACK AND PINION GEAR DRIVES AND SHALL BE NON-OVERLOADING AT A CONTINUOUS STALL. PROVIDE EACH MOTOR WITH FUSE PROTECTION. CONTROL SIGNAL SHALL BE 0-20 VDC 2-WIRE PHASE CUT, OR 3 POINT FLOATING AS REQUIRED. ACTUATORS SHALL BE EQUIPPED WITH AUXILIARY SWITCHES FOR INTERLOCK REQUIREMENTS OF THE CONTROL SEQUENCES. PROVIDE MANUAL POSITIONING DEVICES IF MAINTAINED MAXIMUM AND/OR MINIMUM POSITIONS ARE REQUIRED BY THE CONTROL SEQUENCES. ACTUATORS SHALL BE EQUIPPED WITH SPRING RETURN MECHANISMS FOR APPLICATIONS REQUIRING POSITIVE FAIL MODES OF OPERATION. AUXILIARY SWITCHES AND MINIMUM OR MAXIMUM MANUAL POSITIONERS SHALL BE PROVIDED AS REQUIRED BY THE CONTROL SEQUENCES. A MANUAL SWITCH SHALL BE PROVIDED ON THE ACTUATOR TO ALLOW THE DAMPER TO BE SET IN EITHER A "FAIL OPEN" OR "FAIL CLOSE" POSITION.
- ROTATING TYPE: ROTATING ACTUATORS SHALL BE EITHER TWO-POSITION OR FULLY MODULATING AS REQUIRED BY THE APPLICATION. WHENEVER FEASIBLE, ACTUATORS SHALL BE DIRECTLY COUPLED TO THE DAMPERS OPERATING SHAFT TO ENSURE THE RATED ACTUATOR TORQUE IS APPLIED DIRECTLY TO THE DAMPERS OPERATING SHAFT. THE USE OF LEVER ARMS, CRANK ARMS, OR LINKAGE RODS TO CONNECT THE ACTUATORS TO THE OPERATING SHAFT SHALL BE MINIMIZED AND ONLY USED FOR JOB SITE CONDITIONS THAT PROHIBIT THE USE OF DIRECT COUPLED ACTUATORS. MOTORS SHALL BE LOW VOLTAGE SYNCHRONOUS EQUIPPED WITH WORM GEAR DRIVES AND SHALL BE NON-OVERLOADING AT A CONTINUOUS STALL. PROVIDE EACH MOTOR WITH FUSE PROTECTION. CONTROL SIGNAL SHALL BE 0-10 VDC OR 3 POINT FLOATING AS REQUIRED. ACTUATORS SHALL BE EQUIPPED WITH AUXILIARY SWITCHES FOR INTERLOCK REQUIREMENTS OF THE CONTROL SEQUENCES. PROVIDE MANUAL POSITIONING DEVICES IF MAINTAINED MAXIMUM OR MINIMUM POSITIONS ARE REQUIRED BY THE CONTROL SEQUENCES. ACTUATORS SHALL BE DRIVEN BY A DC ASYNCHRONOUS MOTOR THROUGH A SPEED REDUCTION GEAR ARRANGEMENT. A 0 TO 10 VDC POSITIONING SIGNAL PROPORTIONAL TO THE ANGLE OF ROTATION SHALL BE PROVIDED FOR APPLICATIONS REQUIRING FEEDBACK OF ACTUATOR POSITION. ACTUATORS SHALL BE EQUIPPED WITH SPRING RETURN MECHANISMS FOR APPLICATIONS REQUIRING POSITIVE FAIL MODES OF OPERATION. AUXILIARY SWITCHES AND MINIMUM OR MAXIMUM MANUAL POSITIONERS SHALL BE PROVIDED AS REQUIRED BY THE CONTROL SEQUENCES. A MANUAL SWITCH SHALL BE PROVIDED ON THE ACTUATOR TO ALLOW THE DAMPER TO BE SET IN EITHER A "FAIL OPEN" OR "FAIL CLOSE" POSITION.
- TORQUE AND POWER REQUIREMENTS: ACTUATOR TORQUE, POWER INPUT, AND POWER OUTPUT REQUIREMENTS SHALL BE SELECTED AND SIZED BY THE EMCS SUPPLIER FOR THE SERVICE INTENDED. MAXIMUM TORQUE AND POWER OUTPUT REQUIREMENTS OF ACTUATORS, AS DELIVERED TO AND MEASURED AT THE DAMPER SHAFT, SHALL NOT BE LESS THAN 1.5 TIMES THE MAXIMUM ANTICIPATED DESIGN LOAD.
- ACTUATOR POSITION MONITORING: DAMPER ACTUATOR POSITION SHALL BE REMOTELY MONITORED FOR EACH AUTOMATIC DAMPER. SWITCH CONFIGURATION SHALL ALLOW THE BUILDING ENGINEER TO POSITIVELY VERIFY IF AN ACTUATOR IS IN THE OPEN OR IN THE CLOSED POSITION. CONTACTS FOR MONITORING SHALL BE PROVIDED FOR THE OPEN AND THE CLOSED POSITION.
- ENCLOSURES: AUTOMATIC DAMPER ACTUATORS SHALL HAVE A NEMA 1 ENCLOSURE WHEN USED FOR GENERAL PURPOSE INDOOR OPERATIONS, A WEATHERPROOF NEMA 4 ENCLOSURE WHERE EXPOSED TO MOIST, DAMP, OR OUTDOOR CONDITIONS, OR AN EXPLOSION-PROOF NEMA 7 ENCLOSURE WHERE EXPOSED TO EXPLOSIVE ENVIRONMENTS OR HAZARDOUS CONDITIONS.
- IF THEY MEET THE REQUIREMENTS OF THE CONTRACT DOCUMENTS, IN ADDITION TO THE MANUFACTURERS LISTED NEAR THE BEGINNING OF THIS SECTION, BELIMO MAY ALSO BE PROVIDED FOR DAMPER ACTUATORS.
- INSTALLATION: DAMPERS AND ACTUATORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. DAMPERS SHALL BE INSTALLED SQUARE AND PLUMB TO MINIMIZE THE TORQUE REQUIREMENTS AND LEAKAGE. DAMPERS INSTALLED TWISTED OR OUT-OF-SQUARE WILL NOT BE ACCEPTABLE.

AUTOMATIC TEMPERATURE CONTROL

1. PROVIDE, INSTALL, AND COMMISSION A COMPLETE SYSTEM OF AUTOMATIC TEMPERATURE CONTROLS AND BUILDING MANAGEMENT CONTROLS AS SPECIFIED HEREIN AND AS INDICATED ON THE DRAWINGS. THE CONTROL SYSTEMS PROVIDED SHALL ACHIEVE ALL FUNCTIONS AND RESULTS INDICATED IN THE CONTRACT DOCUMENTS. THE TERM "ATC" SHALL INCLUDE BOTH AUTOMATIC TEMPERATURE CONTROL SYSTEMS AND BUILDING MANAGEMENT SYSTEMS.

2. ATC CONTRACTOR AND ATC EQUIPMENT MANUFACTURER SHALL BE ONE OF THE FOLLOWING: STAFFA CONTROLS, CYLON CONTROLS, JOHNSON CONTROLS, HONEYWELL, AUTOMATED BLOC, INERTECH BUILDING SYSTEMS, ALERTON TECHNOLOGIES, TRIDUUM, RELIABLE CONTROLS, CARRIER, OR DISTECH CONTROLS. CONTROLS AND INSTRUMENTATION SHALL BE STANDARD CATALOG PRODUCTS AS MANUFACTURED BY ONE OF LISTED MANUFACTURERS.

3. THE ATC SYSTEM SHALL BE DIRECT DIGITAL CONTROL. SYSTEM SHALL INCLUDE ALL SENSORS, TRANSDUCERS, FIELD ADJUSTABLE TIME DELAYS, SET POINTS, AND DEAD BANDS; RELAYS; SWITCHES; ACTUATORS; INTERLOCK AND INTERFACE CONTACT POINTS; PERIPHERAL EQUIPMENT; MOUNTING HARDWARE; CONDUIT; WIRING; COMPUTER HARDWARE; COMPUTER SOFTWARE, AND ASSOCIATED APPURTENANCES REQUIRED TO PROVIDE A COMPLETE AND OPERATIONAL SYSTEM WITH ALL FUNCTIONS AS SPECIFIED AND AS INDICATED ON THE DRAWINGS. ALL NECESSARY ACCESSORIES AND A SYSTEM OF ELECTRIC WIRING FOR THE INTERCONNECTIONS, INCLUDING THE ELECTRICAL WIRING, SHALL BE PROVIDED FOR A COMPLETE AND OPERATIONAL SYSTEM. THESE SPECIFICATIONS OUTLINE THE MINIMUM ATC SYSTEM REQUIREMENTS. THE ATC CONTRACTOR SHALL PROVIDE ALL ADDITIONAL EQUIPMENT AND DEVICES, ABOVE AND BEYOND THE MINIMUM REQUIREMENTS SPECIFIED HEREIN, NECESSARY FOR A COMPLETE AND OPERATIONAL SYSTEM.

4. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO CONTACT AND COORDINATE WITH THE BUILDING OWNER TO DETERMINE EXACT BUILDING AUTOMATIC TEMPERATURE CONTROL REQUIREMENTS INCLUDING ANY REQUIRED INTERLOCKS WITH A BUILDING MANAGEMENT SYSTEM FOR CONTROL OR MONITORING OF AIR HANDLING UNITS, TERMINAL UNITS, EXHAUST FANS, AIR CONDITIONING UNITS, ETC. TEMPERATURE SENSORS OR THERMOSTATS SHALL MATCH BUILDING STANDARD.

5. THE ATC CONTRACTOR SHALL COORDINATE THE REQUIREMENTS OF ALL MECHANICAL AND ELECTRICAL EQUIPMENT THAT WILL BE MANAGED AND CONTROLLED BY THE ATC SYSTEMS. THE ATC CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION AND INTERFACE REQUIREMENTS BETWEEN THE ATC SYSTEMS AND THE ELECTRICAL SYSTEMS, THE FIRE ALARM SYSTEM (FAS), AND THE EXISTING CONDITIONS. ALL COORDINATION SHALL BE PERFORMED PRIOR TO THE DESIGN AND INSTALLATION OF THE ATC SYSTEMS.

6. ATC ELECTRICAL WIRING:

- ALL ELECTRICAL WORK REQUIRED FOR SYSTEM INTERLOCK, POWER, CONTROL, AND INSTALLATION SHALL BE PROVIDED BY THE ATC CONTRACTOR. ALL ELECTRICAL WORK SHALL BE IN ACCORDANCE WITH THE ELECTRICAL NOTES, SPECIFICATIONS, AND APPLICABLE CODES.
- ALL CONTROL WIRING, INCLUDING LINE VOLTAGE AND LOW VOLTAGE WIRING, REQUIRED FOR A COMPLETE AND OPERATIONAL ATC SYSTEM SHALL BE PROVIDED AND INSTALLED BY THE ATC CONTRACTOR. THIS INCLUDES THE FIELD MOUNTING AND WIRING OF CONTROL DEVICES APPLICABLE TO THE ATC SYSTEM BUT SPECIFIED ELSEWHERE TO BE FIELD INSTALLED DEVICES BY AN EQUIPMENT MANUFACTURER. ALL WIRING EXCLUDING THE WIRING OF THE ATC CONTRACTOR SHALL BE PROVIDED BY THE ATC CONTRACTOR. CONTROL WIRING, POWER WIRING TO EQUIPMENT RELATED TO THE ATC SYSTEM, AND FIELD WIRING FOR ATC INSTRUMENTATION AND COMMUNICATION SHALL BE THE RESPONSIBILITY OF THE ATC CONTRACTOR.
- POWER WIRING FOR ALL ATC EQUIPMENT INCLUDING BUT NOT LIMITED TO DAMPERS AND BRANCH CIRCUIT WIRING FROM CIRCUIT BREAKER PANELS SHALL BE THE RESPONSIBILITY OF THE ATC CONTRACTOR. THE BUILDING ENGINEER SHALL SHOW ON THE DOCUMENTS TO BE PROVIDED UNDER THE ELECTRICAL WORK.
- THE ATC CONTRACTOR SHALL BE RESPONSIBLE FOR CONDUIT AND WIRE TERMINATIONS AT THE APPROPRIATE PANELBOARDS AND/OR JUNCTION BOXES. HOWEVER, THE ATC CONTRACTOR SHALL NOT PERFORM THIS TERMINATION WORK UNTIL THE AUTHORIZED REPRESENTATIVE OF THE GENERAL CONTRACTOR, OR HIS SUBCONTRACTOR TO ACCESS THE PANELS AND/OR JUNCTION BOXES. IT IS ACCEPTABLE FOR THE ATC CONTRACTOR TO RETAIN THE SERVICES OF THE ELECTRICAL SUBCONTRACTOR TO PERFORM THE CONDUIT, WIRING AND TERMINATION SCOPE OF WORK.
- UNLESS OTHERWISE NOTED ALL WIRING SHALL BE RUN IN CONDUIT. IF APPROVED BY THE LOCAL CODE AUTHORITY PLENUM RATED LOW VOLTAGE WIRE WILL BE ACCEPTABLE IN THE FOLLOWING ACCESSIBLE LOCATIONS: CEILING PLENUMS IN AREAS WITH REMOVABLE "LAY-IN" TYPE CEILING TILES.
- EACH CONTROL/SENSOR COMBINATION SHALL BE SELECTED AND DESIGNED TO PERFORM WITHIN THE ACCURACY AND REPEATABILITY LIMITS SPECIFIED HEREIN. UNLESS NEVER SHOWN ON THE DRAWINGS, THESE DAMPERS SHALL BE INTERLOCKED WITH THEIR RESPECTIVE FAN, AIR HANDLING UNIT, OR EQUIPMENT TO OPEN WHEN THE FAN, AIR HANDLING UNIT, OR EQUIPMENT ENERGIZES AND TO CLOSE WHEN THE FAN, AIR HANDLING UNIT, OR EQUIPMENT DE-ENERGIZES. DAMPERS MAY BE REMOTELY LOCATED FROM THE FAN, AIR HANDLING UNIT, OR EQUIPMENT. WHEN A FAN, AIR HANDLING UNIT, OR EQUIPMENT IS INTERLOCKED WITH A DAMPER, THE DAMPER SHALL BE IN THE OPEN POSITION PRIOR TO THE FAN, AIR HANDLING UNIT, OR EQUIPMENT ENERGIZING. DAMPERS INTERLOCKED WITH THE OPERATION OF THE EMERGENCY GENERATOR SHALL BE ROTARY TYPE WITH SPRING RETURN SO THESE DAMPERS FULLY OPEN IMMEDIATELY UPON RECEIVING A SIGNAL THAT THE GENERATOR IS TO ENERGIZE. SLUICING ACTUATORS USED FOR DAMPERS INTERLOCKED WITH THE OPERATION OF THE EMERGENCY GENERATOR WILL NOT BE ACCEPTABLE.

- SPACE AND DUCT TEMPERATURES: $\pm 0.5^{\circ}\text{F}$
 - AIR SYSTEM STATIC PRESSURES: ± 0.1 INCHES WG
 - ELECTRICAL READINGS (V, A, KW): 2.0% OF RANGE
7. REFER TO AUTOMATIC DAMPERS AND CONTROL VALVES SPECIFIED UNDER THE MECHANICAL NOTES FOR ADDITIONAL REQUIREMENTS. THE ATC CONTRACTOR SHALL FURNISH AND WIRE THESE ITEMS. THE MECHANICAL CONTRACTOR SHALL MOUNT OR INSTALL THESE ITEMS IN COORDINATION WITH THE ATC SYSTEM REQUIREMENTS.
8. PROGRAMMABLE TIME CLOCK: FURNISH AND INSTALL PARAGON ELECTRONIC TIME CLOCK WITH SOLID STATE, MULTI-CHANNEL, 24 HOUR PER DAY, 365 DAY PER YEAR TIME-BASED CONTROL. PROGRAMMABLE FOR EACH DAY OF THE WEEK, WITH A DIFFERENT PROGRAM FOR EACH CHANNEL. UP TO 16 HOLIDAY DURATIONS SHALL BE AVAILABLE. CONTROL SHALL BE LEAP YEAR CORRECTED TO THE YEAR 2100 A.D. AND FOR DAYLIGHT SAVINGS TIME ADJUSTMENT. CONTROL SHALL HAVE TIME OVERRIDE FROM 1 TO 99 MINUTES AND DUTY CYCLING CAPABILITY WITH ON AND OFF TIMES PROGRAMMABLE FROM 1 TO 99 MINUTES. KEYBOARD SHALL PROVIDE ACCESS TO ALL PROGRAMMING, PROGRAM REVIEW AND OUTPUT OVERRIDE. LED DISPLAY SHALL DISPLAY TIME-OF-DAY WITH ONE MINUTE RESOLUTION AND OUTPUT STATUS. CONTROL SHALL HAVE SUFFICIENT ON OR OFF EVENTS PER CHANNEL TO PERFORM THE SPECIFIED SEQUENCES OF OPERATION. CONTROL SHALL INCLUDE SPST RELAYS WITH NORMALLY OPEN CONTACTS ON 24 VAC MODEL RATED 10 A RESISTIVE OR 40 VA PILOT DUTY AT 24 VAC. (CONTACTS ON 120/240 VAC MODEL RATED 4 A RESISTIVE AT 120 VAC, 2 A RESISTIVE AT 240 VAC, AND 200 VA PILOT DUTY AT 120/240 VAC). DURING POWER OUTAGES, CONTROL IS TO MAINTAIN PROGRAM AND TIME-OF-DAY FOR A MINIMUM OF 4 MONTHS OF ACCUMULATED POWER OUTAGES WITH A REPLACEABLE LITHIUM BATTERY. PRODUCT SHALL BE UL AND CSA APPROVED.

9. PROGRAMMABLE THERMOSTAT: FURNISH AND INSTALL A PROGRAMMABLE SPACE THERMOSTAT TO SERVE THE AIR HANDLING UNIT. SPACE THERMOSTAT SHALL BE REMOTE MOUNTING PROGRAMMABLE TAMPER PROOF AND LOCKABLE WITH 30°F RANGE EITHER FROM 60°F TO 90°F OR FROM 55°F TO 85°F AND AN ACCURACY OF $\pm 1.0^{\circ}\text{F}$ FROM SENSING TO CONTROL OF THE DEVICE. THERMOSTAT SHALL CONTAIN 24 HOUR PER DAY, 365 DAYS PER YEAR TIME-BASED PROGRAMMING CAPABILITIES PROGRAMMABLE FOR EACH DAY OF THE WEEK INCLUDING HOLIDAY AND WEEKEND TIME SCHEDULES. THERMOSTAT SHALL BE MANUAL CHANGEOVER TYPE WITH INTEGRAL OFF/COOL/HEAT AND FAN ON/AUTO SWITCHES (AUTOMATIC CHANGEOVER TYPE). CONTRACTOR SHALL SET AND CALIBRATE THERMOSTAT TO MAINTAIN A SPACE TEMPERATURE OF 73°F $\pm 1^{\circ}\text{F}$ PRIOR TO TENANT OCCUPANCY.

- PROVIDE A MINIMUM OF SEVENTY FIVE FEET OF TEMPERATURE SENSOR CONTROL WIRING OR TUBING FOR THE TYPE OF CONTROL SYSTEM INDICATED FOR EQUIPMENT WITH SPACE THERMOSTAT NOT LOCATED ON THE DRAWINGS. CONTRACTOR AND ENGINEER WILL DETERMINE LOCATION OF THERMOSTAT PRIOR TO CONSTRUCTION.
 - ZONE THERMOSTATS LOCATED ON PERIMETER WALLS SHALL HAVE INSULATED MOUNTING BASES TO PREVENT FALSE ROOM TEMPERATURE READINGS. INSULATED MOUNTING BASE SHALL BE INTEGRAL WITH THE THERMOSTATS HOUSING OR FIELD FABRICATED INSERTS INSTALLED INTEGRAL WITH THE WALL CONSTRUCTION. IN OCCUPIED AND NON-EQUIPMENT ROOM AREAS FABRICATED INSULATED BASE SHALL NOT MODIFY APPEARANCE OF WALL.
 - PROVIDE INTEGRAL FAN ON/OFF/AUTO SWITCH FOR PROGRAMMABLE THERMOSTAT SERVING AIR HANDLING UNIT.
10. AFTER ALL SYSTEMS HAVE BEEN INSTALLED AND BALANCED, AND PRIOR TO OCCUPANCY BY THE OWNER, THE CONTROL SYSTEM SHALL BE TESTED TO ENSURE THAT ALL CONTROL ELEMENTS ARE CALIBRATED, ADJUSTED, AND IN PROPER WORKING CONDITION. THE CONTRACTOR SHALL VERIFY THAT THE SEQUENCES OF OPERATION ARE ACHIEVED FOR EACH PIECE OF EQUIPMENT.

SEQUENCE OF OPERATION

- MOST AIR HANDLING UNITS AND FANS WILL BE PROVIDED WITH SMOKE DETECTORS TYPICALLY FURNISHED AND INSTALLED UNDER THE ELECTRICAL SCOPE OF WORK. HOWEVER, SMOKE DETECTORS THAT ARE MOUNTED WITHIN OR ON DUCTWORK OR EQUIPMENT SHALL BE FURNISHED, WIRED AND TESTED BY THE ELECTRICAL CONTRACTOR AND MOUNTED UNDER THE MECHANICAL SCOPE OF WORK. IN GENERAL, UNLESS OTHERWISE NOTED IN A PARTICULAR SEQUENCE OF OPERATION, EACH AIR HANDLING UNIT AND FAN SHALL BE STOPPED WHENEVER ITS SMOKE DETECTOR OR ITS FIRE ALARM ZONE IS ACTIVATED.
- IN GENERAL, EACH MOTOR CONTROLLER SHALL BE PROVIDED WITH A 120V CONTROL POWER TRANSFORMER AND A "HAND-OFF-AUTO" SELECTOR SWITCH. WHEN THE SEQUENCE DESCRIPTION REQUIRES A MOTOR TO BE OPERATED BY AN AUTOMATIC DEVICE EXTERNAL TO THE MOTOR SUCH AS OUTSIDE TEMPERATURE, CENTRAL CONTROL CONSOLE, ETC., THIS SEQUENCE SHALL OCCUR ONLY WHEN THE SELECTOR SWITCH IS IN THE "AUTO" POSITION. THE "HAND" POSITION MAY BE USED TO OPERATE THE MOTOR AT ANY TIME, REGARDLESS OF THE FUNCTIONING OF THE AUTOMATIC DEVICE OR CIRCUIT. OPERATING IN THE "HAND" POSITION SHALL NOT DISABLE THE AUTOMATIC FUNCTIONS EXTERNAL TO THE MOTOR AS DESCRIBED HEREIN. SAFETY DEVICES AND CIRCUITS SHALL BE OPERATED AS DESCRIBED OR AS SHOWN ON THE POSITION OF THE H-O-A SWITCH. IN GENERAL, ALL CONTROL CIRCUITS SHALL ORIGINATE FROM RESPECTIVE MOTOR CONTROLLER CONTROL POWER TRANSFORMERS. CONFIRM THAT EACH CONTROL POWER TRANSFORMER AND CONTROL FUSE IS ADEQUATELY SIZED FOR ALL RELAYS, COILS, ETC., CONNECTED TO THE CIRCUIT. PROVIDE ALL NECESSARY INTERLOCK AND CIRCUIT ISOLATION RELAYS REQUIRED TO PERFORM THE SEQUENCE OF OPERATION SPECIFIED. COORDINATE ALL REQUIREMENTS WITH THE ELECTRICAL AND CONTROL CONTRACTORS.
- ALL CONTROL SETPOINTS SHALL BE FIELD ADJUSTABLE.
- TYPE A - FACTORY BUILT DIRECT EXPANSION SPLIT SYSTEM TYPE HEAT PUMP SYSTEMS:

A. THESE UNITS SHALL CONSIST OF AN EVAPORATOR UNIT WITH DIRECT EXPANSION COOLING COIL, A REMOTE AIR COOLED CONDENSING UNIT, ELECTRIC HEATING COIL, FACTORY INSTALLED CONTROL SYSTEM PROVIDED BY THE MANUFACTURER. ALL CONTROLS NECESSARY TO PROVIDE COMPLETE CONTROL OF ALL FUNCTIONS RELATED TO SPACE TEMPERATURE, OPERATION OF REVERSING VALVE, CYCLING OF COMPRESSORS, REFRIGERANT CIRCUITS, DIAGNOSTICS, INTERNAL ALARMS, ETC. SHALL BE PACKAGE FACTORY MOUNTED CONTROLS PROVIDED BY THE AIR CONDITIONING EQUIPMENT MANUFACTURER. ALL CONTROLS RELATED TO REMOTE MONITORING AND CONTROL, START-STOP CONTROL, AND ALL OTHER CONTROL SYSTEM FUNCTIONS SHALL BE PROVIDED BY THE CONTRACTOR UNLESS OTHERWISE INDICATED. THE UNITS SHALL HAVE A CONTROL SEQUENCE AS FOLLOWS:

- TEMPERATURE CONTROL: A ROOM THERMOSTAT SHALL CONTROL IN SEQUENCE THE REMOTE CONDENSING UNIT, ELECTRIC HEATING COIL AND THE REVERSING VALVE TO MAINTAIN THE DESIRED SPACE TEMPERATURE. THE REMOTE CONDENSING UNIT SHALL DE-ENERGIZE WHEN THE EVAPORATOR UNIT FAN IS OFF. THE REMOTE CONDENSING UNIT SHALL DE-ENERGIZE WHEN THE ELECTRIC HEATING COIL IS ENERGIZED.
- HEATING CONTROL: HEAT PUMP UNIT OPERATING IN HEATING MODE SHALL BE PRIMARY HEATING MODE. ELECTRIC HEATING COIL SHALL BE SECONDARY OR BACK-UP HEATING MODE. SECONDARY HEATING MODE SHALL BE ENERGIZED WHEN THE PRIMARY HEATING MODE CANNOT MAINTAIN THE DESIRED SPACE HEATING TEMPERATURE.
- HUMIDITY CONTROL: UNIT COMPRESSOR SHALL HAS CAPACITY TO MODULATE FROM 25%-100% IN 1% INCREMENTS. THE FAN AND COMPRESSOR SHALL MODULATE TO THE LOWEST SPEED/CAPACITY POSSIBLE TO MAINTAIN THE SET POINT. IF DEHUMIDIFICATION ONLY IS NEEDED THEN THE UNIT SHALL STAY ON. THE FAN SPEED SHALL MODULATE DOWN AND ALLOW FOR THE SPACE TEMPERATURE SETUP TO BE LOWER BY UP TO 3°F TO BRING THE SPACE HUMIDITY DOWN.
- CONTROL INTERLOCK: THE EVAPORATOR UNIT WILL BE AUTOMATICALLY STARTED AND STOPPED BY A SIGNAL FROM THE THERMOSTAT. THE EVAPORATOR AND CONDENSER UNITS SHALL BE INTERLOCKED WITH EACH OTHER TO ACHIEVE THE TEMPERATURE CONTROL INDICATED HEREIN.
- SMOKE DETECTOR CONTROL: SMOKE DETECTOR(S) LOCATED IN THE RETURN AIR STREAM TO THE UNIT SHALL STOP THE FAN WHEN THE PRESENCE OF SMOKE IS DETECTED. SMOKE DETECTORS WILL BE FURNISHED AND INSTALLED UNDER DIVISION 28.

5. AUTOMATIC DAMPERS AND MOTORIZED DAMPERS:

- GENERAL: PROVIDE AUTOMATIC DAMPERS AND OTHER MOTORIZED DAMPERS UNLESS NEVER SHOWN ON THE DRAWINGS. THESE DAMPERS SHALL BE INTERLOCKED WITH THEIR RESPECTIVE FAN, AIR HANDLING UNIT, OR EQUIPMENT TO OPEN WHEN THE FAN, AIR HANDLING UNIT, OR EQUIPMENT ENERGIZES AND TO CLOSE WHEN THE FAN, AIR HANDLING UNIT, OR EQUIPMENT DE-ENERGIZES. DAMPERS MAY BE REMOTELY LOCATED FROM THE FAN, AIR HANDLING UNIT, OR EQUIPMENT. WHEN A FAN, AIR HANDLING UNIT, OR EQUIPMENT IS INTERLOCKED WITH A DAMPER, THE DAMPER SHALL BE IN THE OPEN POSITION PRIOR TO THE FAN, AIR HANDLING UNIT, OR EQUIPMENT ENERGIZING. DAMPERS INTERLOCKED WITH THE OPERATION OF THE EMERGENCY GENERATOR SHALL BE ROTARY TYPE WITH SPRING RETURN SO THESE DAMPERS FULLY OPEN IMMEDIATELY UPON RECEIVING A SIGNAL THAT THE GENERATOR IS TO ENERGIZE. SLUICING ACTUATORS USED FOR DAMPERS INTERLOCKED WITH THE OPERATION OF THE EMERGENCY GENERATOR WILL NOT BE ACCEPTABLE.
- DAMPER ACTUATOR POSITION MONITORING: DAMPER ACTUATOR POSITION SHALL BE REMOTELY MONITORED FOR EACH AUTOMATIC DAMPER. SWITCH CONFIGURATION SHALL ALLOW THE BUILDING ENGINEER TO POSITIVELY VERIFY IF AN ACTUATOR IS IN THE OPEN OR IN THE CLOSED POSITION. CONTACTS FOR MONITORING SHALL BE PROVIDED FOR THE OPEN AND THE CLOSED POSITION.
- DAMPER BLADE POSITION MONITORING: IN ADDITION TO THE DAMPER ACTUATOR MONITORING, PROVIDE A DAMPER END SWITCH FOR EACH DAMPER ASSOCIATED WITH AN EXHAUST AND OUTSIDE FAN, ANY LIFE SAFETY SYSTEM, OR AT ANY OTHER DAMPER LOCATION AS REQUIRED IN THE SEQUENCE OF OPERATIONS SPECIFIED HEREIN. SWITCH CONFIGURATION SHALL ALLOW THE BUILDING ENGINEER TO POSITIVELY VERIFY IF A DAMPER IS IN THE OPEN OR IN THE CLOSED POSITION. CONTACTS FOR MONITORING SHALL BE PROVIDED FOR THE OPEN AND THE CLOSED POSITION. REMOTE MONITORING SHALL BE DIRECTLY VIA THE LOCAL ALARM AND NOT BY OTHER INDIRECT METHODS SUCH AS WIRING TO THE FAN MOTOR STARTER. LOCAL ALARM SHALL BE IN A LOCATION WITHIN THE BUILDING AS DIRECTED BY THE OWNER'S REPRESENTATIVE. COORDINATE THE EXACT LOCATION OF THIS LOCAL ALARM WITH THE OWNER'S REPRESENTATIVE.

6. FANS:

A. IN ALL AUTOMATIC MODES OF OPERATION, THE EXHAUST AND OUTSIDE AIR FANS SHALL RUN CONTINUOUSLY DURING OCCUPIED BUILDING HOURS AND PROVIDE CONSTANT AIRFLOW VOLUME AS INDICATED ON THE MECHANICAL DRAWINGS. THE FANS SHALL BE INTERLOCKED WITH THE AIR HANDLING UNITS SO THAT THE FANS ARE ONLY ENERGIZED WHEN THE AIR HANDLING UNITS ARE ENERGIZED. THESE FANS SHALL BE MANUALLY CONTROLLED ON/OFF VIA LOCAL MEANS OF DISCONNECT.

7. DUCT MOUNTED ELECTRIC HEATING COILS:

A. A ROOM THERMOSTAT PROVIDED BY THE CONTRACTOR SHALL CONTROL THE STEPS OR CONTINUOUS MODULATION OF THE ELECTRIC HEATING COIL AS SPECIFIED TO MAINTAIN THE ROOM TEMPERATURE SET POINT. DUCT MOUNTED AIR FLOW SWITCH SHALL BE PROVIDED TO LOCK OUT OPERATION OF ELECTRIC HEATING COIL UNLESS ADEQUATE AIR FLOW ACROSS HEATING COIL IS CONFIRMED.

8. ELECTRIC BASEBOARD HEATING CONVECTORS:


A. THE ELECTRIC BASEBOARD HEATING CONVECTOR HEATING SETPOINT SHALL BE 2°F LOWER THAN THE RESPECTIVE AIR CONDITIONING SET POINT IN THE HEATING MODE. BASEBOARD HEAT SHALL NOT ENERGIZE WHEN THE RESPECTIVE AIR CONDITIONING/HEATING ZONE IS IN THE COOLING MODE.

9. CONDENSATE DRAIN PAN HIGH WATER LEVEL ALARM CONTROL:

A. HIGH WATER LEVEL DETECTION SENSOR LOCATED WITHIN THE CONDENSATE DRAIN PAN FOR EACH AIR HANDLING UNIT, FAN COIL UNIT, AIR CONDITIONING UNIT, AND OTHER EQUIPMENT WITH CONDENSATE DRAIN PANS SHALL BE INTERLOCKED WITH THE RESPECTIVE UNIT. UPON SENSING WATER, THE RESPECTIVE UNIT SHALL BE DE-ENERGIZED AND AN LOCAL ALARM SHALL BE INITIATED SO AS TO NOTIFY THE OPERATIONS PERSONNEL OF THE WATER DETECTION.

10. ZONE SENSORS:

- LOCATION: ALL ZONE SENSORS LOCATED IN FINISHED AREAS SHALL BE MOUNTED 60" ABOVE THE FINISHED FLOOR, UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- ARCHITECTURAL REQUIREMENTS: SENSOR LOCATIONS SHOWN ON THE MECHANICAL DRAWINGS INDICATE A GENERAL LOCATION ONLY. THE EXACT LOCATION OF ALL SENSOR SHALL BE DETERMINED BY THE OWNER.
- TEMPORARY LOCATION OF SPACE THERMOSTATS: IN ALL AREAS WHERE THERMOSTAT LOCATIONS ARE NOT KNOWN AT THE TIME OF BUILDING STARTUP, SPACE THERMOSTATS FOR ELECTRIC HEATING COILS, AIR HANDLING UNITS, ETC. SHALL BE HUNG APPROXIMATELY 24" FROM THE CEILING IN THE AREA OF THE CONTROLLED ZONE AND CONNECTED. CONTROL WIRING SHALL BE NEATLY COILED AND ATTACHED TO CEILING GRID. ALL FINAL THERMOSTAT LOCATIONS SHALL BE AS INDICATED ON TENANT COMPLETION DRAWINGS.

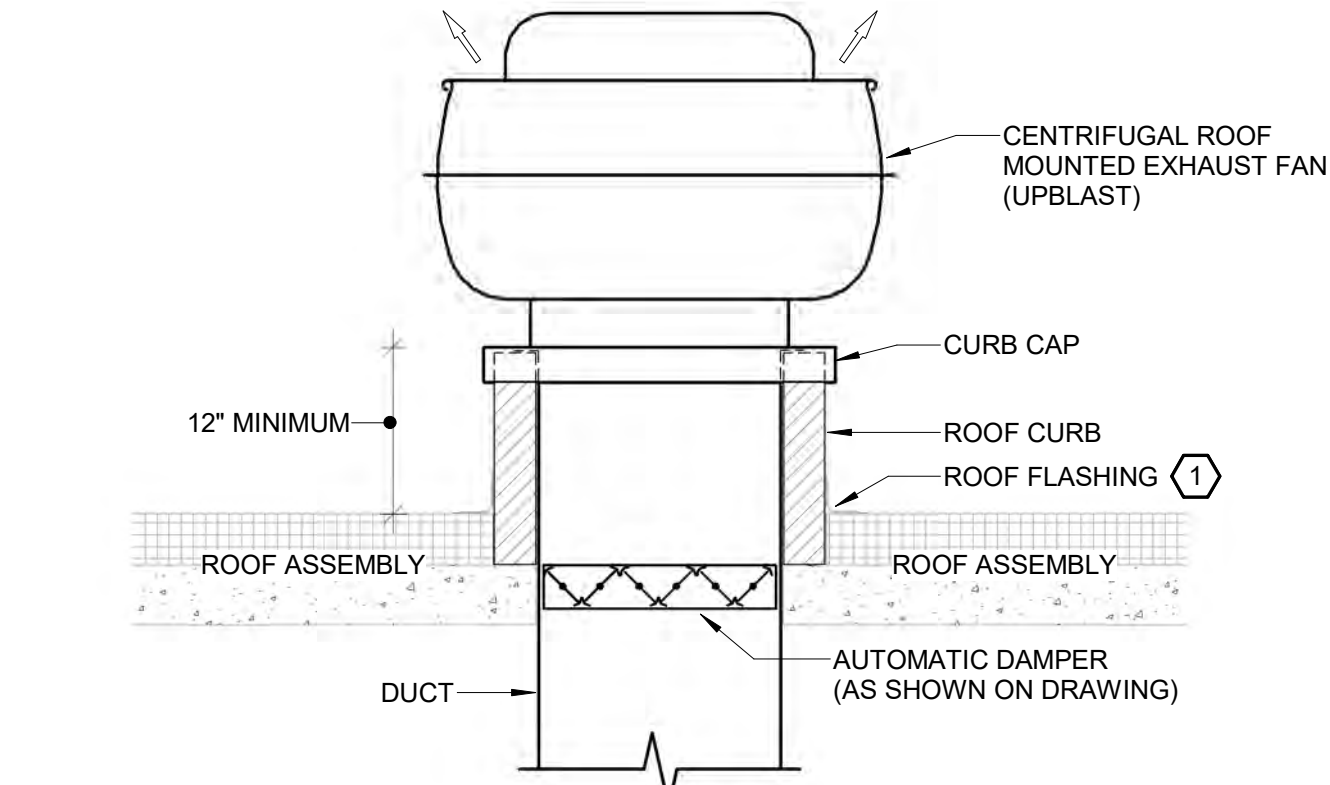

GENERAL NOTES:


- CURB AND ROOF OPENING DIMENSIONS SHALL BE DETERMINED BY FAN MANUFACTURER.

KEYNOTES:

- REFER TO ARCHITECTURAL DRAWINGS FOR ROOF WATERPROOFING AND FLASHING INFORMATION.

12 ROOF MOUNTED CENTRIFUGAL EXHAUST FAN DETAIL

Scale: N.T.S.

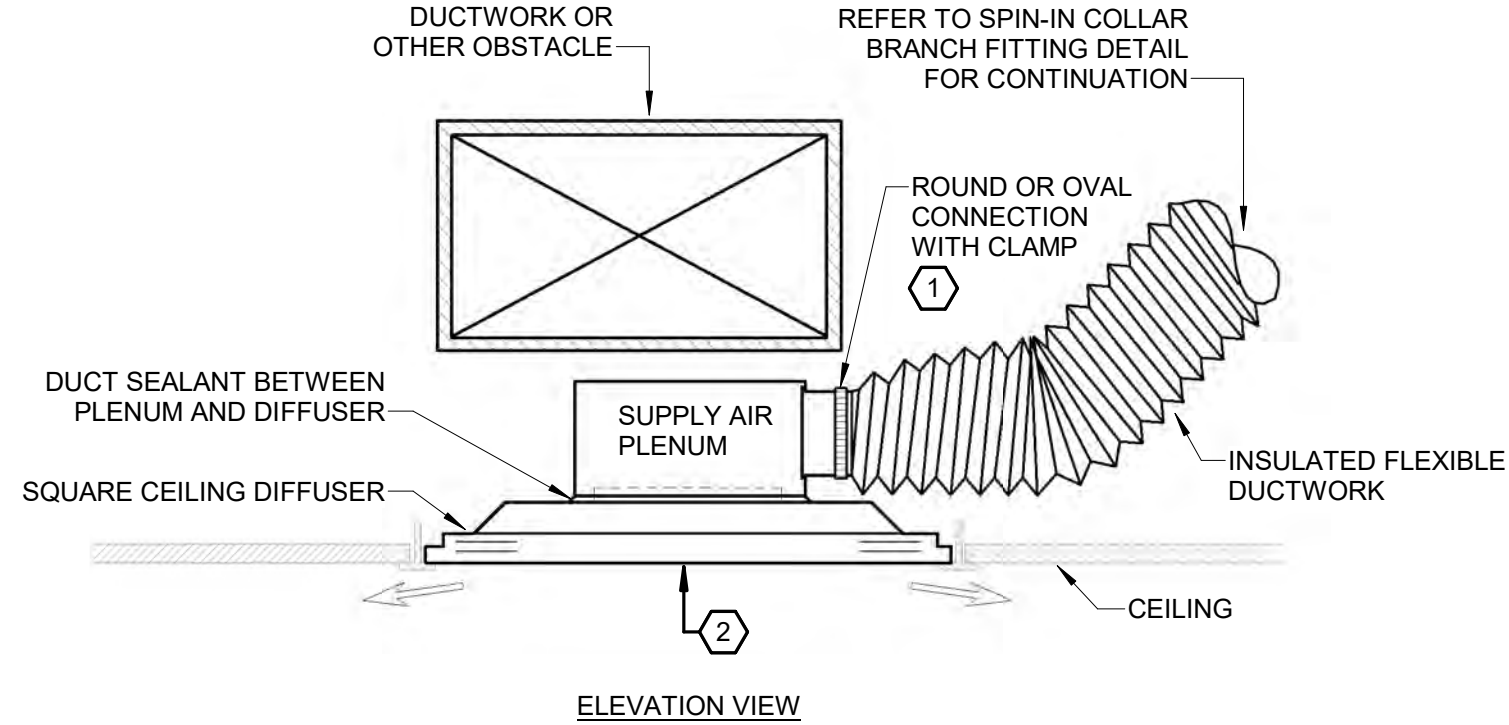

GENERAL NOTES:


- THIS DETAIL SHALL APPLY TO SQUARE CEILING OUTLETS THAT ARE LOCATED BELOW DUCTWORK OR OTHER OBSTACLES WHERE CLEARANCES ARE MINIMAL.
- THE SIZE OF THE SUPPLY AIR PLENUM SHALL BE A MINIMUM OF 1" LARGER IN HEIGHT AND WIDTH THAN THE FLAT OVAL DUCTWORK CONNECTION.
- THE SUPPLY AIR PLENUM IS NOT REQUIRED TO BE INSULATED. THE PLENUM AND DIFFUSER CONNECTION SHALL BE SEALED WITH AN APPROVED DUCTWORK SEALANT. REFER TO THE SPECIFICATIONS OR MECHANICAL NOTES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A ROUND TO FLAT OVAL TRANSITION SECTION OF DUCTWORK AS REQUIRED.

KEYNOTES:

- REFER TO SPECIFICATIONS FOR FLEXIBLE DUCT CLAMP TYPE.
- SEE SPECIFICATIONS FOR DIFFUSER FACE TYPE.

13 SQUARE CEILING DIFFUSER DETAIL

Scale: N.T.S.

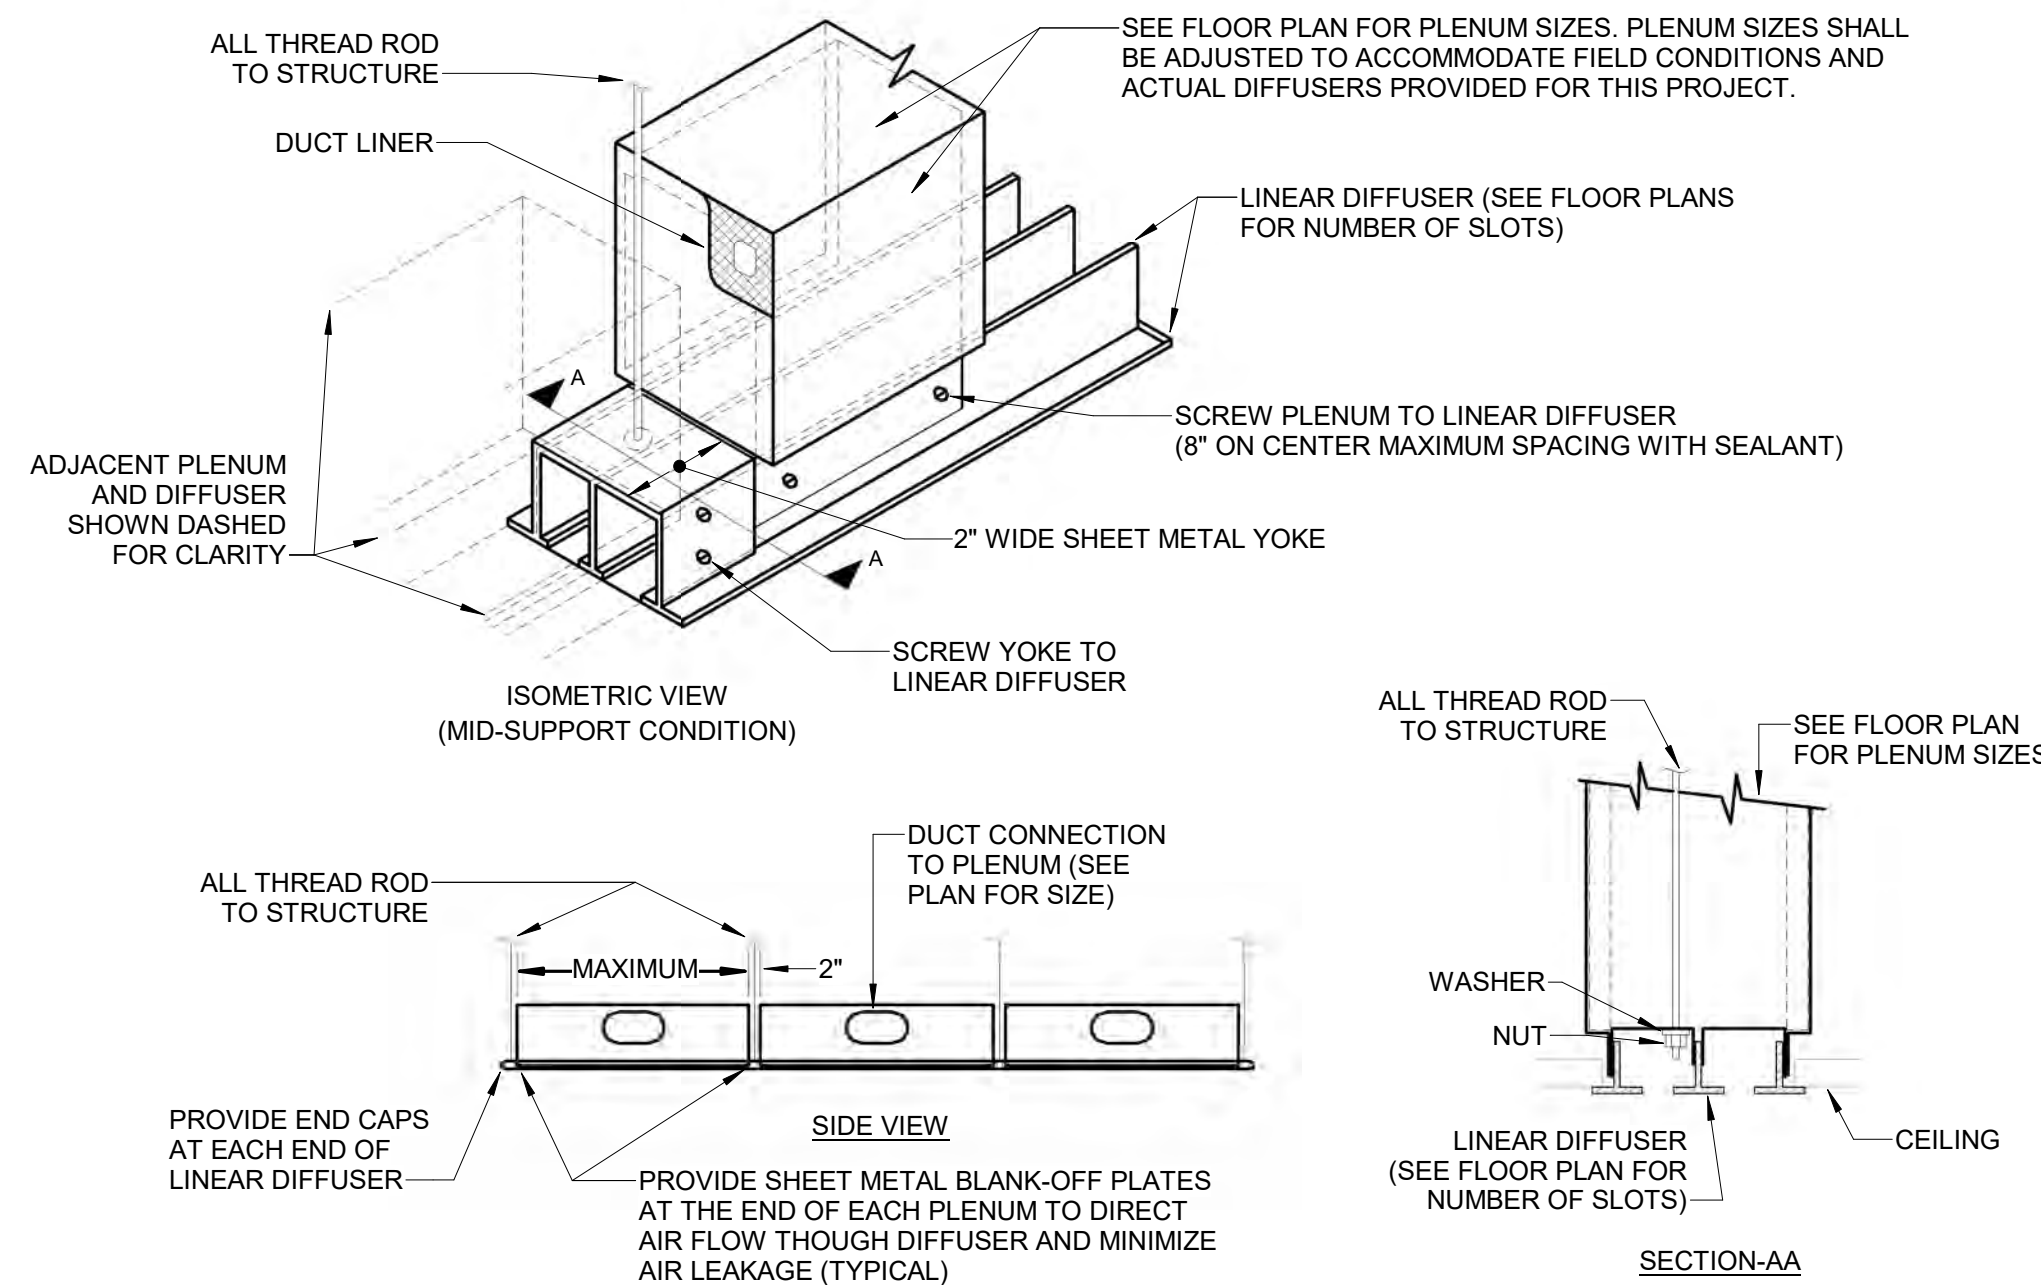

GENERAL NOTES:

- ALL JOINTS TO HAVE ALIGNMENT STRIPS.
- IF JOINT OCCURS AT SUPPORT YOKE, PROVIDE SCREWS ON BOTH SIDES OF JOINT.

14 LINEAR DIFFUSER DETAIL

Scale: N.T.S.



Dewberry Engineers Inc.

8401 Arlington Boulevard
Falls Church, VA 22041-4619
703.849.0100

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY	AC
APPROVED BY	SC
CHECKED BY	SC
DATE	08.26.2026
TITLE	

MECHANICAL DETAILS

PROJECT NO.

M-502

F

E

D

C

B

A

ELECTRIC BASEBOARD HEATER SCHEDULE									
TAG	SERVICE	HEATING CAPACITY		APPROX. LENGTH (F)	DEPTH (IN)	HEIGHT (IN)	MOUNTING TYPE	ELECTRICAL	
		(KW)	(W/FT)					VOLT	PH
EBH-1	VESTIBULE	2.25	250	9	3	5	PEDESTAL	208	1

- NOTES:
- REFER TO SPECIFICATION SECTION 23 82 33 FOR ADDITIONAL REQUIREMENTS.
 - COORDINATE EXACT LENGTH OF BASEBOARD HEATER WITH ARCHITECT. PROVIDE END CAPS AND JUNCTIONS AS REQUIRED TO MEET TOTAL CONTINUOUS LENGTH.
 - PROVIDE INTEGRATED RELAYS FOR LOW VOLTAGE CONTROL BY BUILDING ENERGY MANAGEMENT CONTROL SYSTEM.
 - BASEBOARD HEATER HEIGHT INDICATES TOTAL HEIGHT ABOVE FINISHED FLOOR INCLUDING HEATER SUPPORT AND/OR PEDESTAL HEIGHT.
 - UNITS SHALL BE PROVIDED WITH UNIT MOUNTED THERMOSTAT UNLESS OTHERWISE INDICATED ON THE DRAWINGS.

ELECTRIC CABINET UNIT HEATER SCHEDULE								
TAG	SERVICE	HEATING CAPACITY (KW)	AIR FLOW (CFM)	MOTOR (RPM)	MOTOR (HP)	ELECTRICAL		
						VOLT	PH	FLA
CUH-1-1	STAIR ST01	3	250	1,550	1/8	208	1	12

- NOTES:
- REFER TO SPECIFICATION SECTION 23 82 39 FOR ADDITIONAL REQUIREMENTS.
 - UNITS SHALL HAVE DIRECT DRIVE FANS UNLESS OTHERWISE NOTED.
 - PROVIDE INTEGRAL DISCONNECT PER NEC REQUIREMENTS. REFER TO ELECTRICAL PLANS FOR ELECTRICAL SERVICE REQUIREMENTS.
 - UNITS SHALL BE PROVIDED WITH UNIT MOUNTED THERMOSTAT UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
 - UNITS SHALL BE COMPLETE FROM THE MANUFACTURER WITH ALL NECESSARY SUPPORT DEVICES AND MOUNTING BRACKETS FOR INSTALLATION AND CONFIGURATION AS SHOWN ON THE DRAWINGS.

SCHEDULE OF FACTORY-BUILT DIRECT EXPANSION TYPE HEAT PUMP AIR CONDITIONING UNIT																																				
INDOOR AIR CONDITIONING UNIT																						AIR COOLED CONDENSING UNIT								UNIT EER	NOTES					
EQUIPMENT	SERVICE	UNIT TYPE	SUPPLY AIR (CFM)	OUTDOOR AIR (CFM)	ROOM DESIGN TEMP (°F)	FAN TYPE	FAN CTRL	ESP (IN WG)	FAN POWER TOTAL (BHP)	MOTOR HP TOTAL (HP)	ROOM SENSIBLE HEAT (BTU/HR)	ROOM LATENT HEAT (BTU/HR)	RETURN AIR SENSIBLE HEAT (BTU/HR)	OUTDOOR AIR SENSIBLE HEAT (BTU/HR)	OUTDOOR AIR LATENT HEAT (BTU/HR)	TOTAL SENSIBLE HEAT (BTU/HR)	GRAND TOTAL HEAT (BTU/HR)	COIL LAT (°F)	AIR FILTER TYPE	CASING TYPE	HEAT PUMP HEATING CAPACITY (BTU/HR)	ELECTRIC HEATER KW	ELECTRICAL				EQUIPMENT	AMBIENT TEMP (°F)	COMPRS QTY			COND FAN QTY	ELECTRICAL			
																							VOLT	PH	FLA	MOP							VOLT	PH	FLA	MOP
AHU-1	1ST FLOOR	VDT	650	140	73	FC	CAV	1.00	0.4	0.5	13,400	800	1,700	3,000	3,500	18,100	22,400	54	E	2	24,400	6.0	208	1	4.0	45	ACCU-1	95	1	1	208	1	0.7	25	10.5	1,2,4,5
AHU-2	1ST FLOOR	VDT	1,300	280	73	FC	CAV	1.05	0.8	1.0	26,700	400	500	5,600	6,400	32,800	39,600	54	E	2	48,500	11.3	208	3	5.7	25	ACCU-2	95	1	1	208	1	0.88	40	10.5	1,2,3,4,5
AHU-3	1ST FLOOR	VDT	1,300	200	73	FC	CAV	1.20	0.8	1.0	26,700	3,800	4,200	4,300	5,000	35,200	44,000	54	E	2	48,500	6.0	208	1	5.7	45	ACCU-3	95	1	1	208	1	0.88	40	10.5	1,2,4,5
AHU-4	1ST FLOOR	VDT	975	200	73	FC	CAV	1.00	0.6	0.75	20,100	1,000	1,200	4,300	5,000	25,600	31,600	54	E	2	36,380	6.0	208	1	5.7	45	ACCU-4	95	1	1	208	1	0.88	25	11.0	1,2,4,5
AHU-5	1ST FLOOR	VDT	1,300	260	73	FC	CAV	1.00	0.8	1.0	26,700	600	-1,700	5,600	6,400	30,600	37,600	54	E	2	48,500	11.3	208	3	5.7	25	ACCU-5	95	1	1	208	1	0.88	40	10.5	1,2,3,4,5
AHU-6	1ST FLOOR	VDT	1,625	300	73	FC	CAV	1.05	1.0	1.0	33,400	1,600	-2,400	6,500	7,400	37,500	46,500	54	E	2	60,900	11.3	208	3	5.7	25	ACCU-6	95	1	1	208	1	0.88	50	10	1,2,3,4,5
AHU-7	2ND FLOOR	VDT	650	140	73	FC	CAV	1.00	0.4	0.5	13,400	800	0	3,000	3,500	16,400	20,500	54	E	2	24,400	6.0	208	1	4	45	ACCU-7	95	1	1	208	1	0.7	25	10.5	1,2,4,5
AHU-8	2ND FLOOR	VDT	1,625	300	73	FC	CAV	1.00	1.0	1.0	33,400	1,600	0	6,500	7,400	39,900	48,900	54	E	2	59,900	11.3	208	3	5.7	25	ACCU-8	95	1	1	208	1	0.88	50	10.0	1,2,3,4,5
AHU-9	TELECOM	VDT	1,100	0	80	FC	CAV	1.00	0.7	0.75	30,900	0	0	0	0	30,900	30,900	54	B	2	34,800	-	208	1	5.7	45	ACCU-9	95	1	1	208	1	0.88	25	11.0	1,2,4,5

- GENERAL NOTES:
- REFER TO SPECIFICATION SECTION 23 81 26 FOR ADDITIONAL UNIT REQUIREMENTS.
 - EXTERNAL STATIC PRESSURE INCLUDES AIR FILTER PRESSURE LOSSES. REFER TO SPECIFICATION SECTION 23 40 00 FOR FILTER TYPES AND REQUIREMENTS.
 - UNIT TYPE (FAN POSITION WITH RESPECT TO COOLING COIL POSITION):
HDT-HORIZONTAL DRAW-THROUGH VDT-VERTICAL DRAW-THROUGH
HBT-HORIZONTAL BLOW-THROUGH VBT-VERTICAL BLOW-THROUGH
 - FAN TYPE: PLENUM (PL), FORWARD CURVED (FC), BACKWARD INCLINED (BI)
 - FAN SPEED CONTROL TYPE: VARIABLE AIR VOLUME (VAV), CONSTANT AIR VOLUME (CAV), TWO SPEED (TS)
 - COOLING COIL FACE VELOCITY SHALL NOT EXCEED 500 FPM.
 - CASING TYPE NUMBER REPRESENTS CASING THICKNESS (I.E. 2 = 2" THICK UNIT CONSTRUCTION)
 - CONDENSING UNIT SHALL BE PROVIDED BY THE SAME MANUFACTURER AS THAT OF THE INDOOR EVAPORATOR SECTION.
 - FOR DIRECT-DRIVE UNITS, PROVIDE FACTORY INSTALLED INTEGRAL VARIABLE SPEED CONTROLLER FOR BALANCING PURPOSES.
 - CONTRACTOR SHALL ENSURE INSTALLATION OF INDOOR AND OUTDOOR UNITS MAINTAIN MANUFACTURER'S RECOMMENDED ACCESS AND CLEARANCE.
 - FACTORY-BUILT DIRECT EXPANSION TYPE AC UNITS BASIS OF DESIGN: INDOOR MODEL: CARRIER 27VNA OUTDOOR MODEL: CARRIER FE58
- SPECIFIC NOTES:
- UNIT SHALL BE PROVIDED WITH WATER LEAK DETECTOR FOR FIELD INSTALLATION IN AUXILIARY DRAIN PAN.
 - UNIT SHALL BE PROVIDED WITH MANUFACTURER PROVIDED CONTROLLER.
 - THE ELECTRIC HEAT KW FOR AHU-(2,5,6,8) SHALL BE 208/3.
 - UNIT SHALL BE PROVIDED WITH MANUFACTURER FILTER RACK.
 - UNIT SHALL BE PROVIDED WITH MANUFACTURERE HUMINDY INFINITY SYSTEM CONTROL.

FAN SCHEDULE															
EQUIPMENT	SERVICE	FAN TYPE	DRIVE TYPE	AIRFLOW (CFM)	STATIC PRESSURE (IN WG)	FAN SPEED (RPM)	FAN POWER (BHP)	MOTOR		ELECTRICAL			ACCESSORIES		
								HP	RPM	VOLT	PH	FLA			
EF-1	EVIDENCE STORAGEES	CREF-U	DIRECT	1,050	0.75	1,424	0.26	1/2	1,725	115	1	6.4		AD,BS,CP,ECM,PRC,WH	
TEF-1	RESTROOMS	CREF-U	DIRECT	350	0.5	1,560	0.08	1/10	1,725	115	1	1.5		AD,BS,CP,ECM,PRC,WH	
OAF-1	MECHANICAL RM	SCF	DIRECT	1,800	0.75	1,826	0.47	1	2,250	208	3	6.5		AD,ECM	



- NOTES:
- REFER TO SPECIFICATION SECTION 23 34 00 FOR ADDITIONAL REQUIREMENTS.
 - REFER TO THE DRAWINGS AND THE SEQUENCES OF OPERATION FOR CONTROL REQUIREMENTS.
 - REFER TO THE FLOOR PLANS FOR ACTUAL SET CFM.
 - ALL FANS OUTSIDE SHALL BE PROVIDED WITH WEATHPRROF MOTOR HEAD.
 - OAF-1 TO BE PROVIDED WITH RIGHT-SIDE DISCHARGE AS SHOWN ON M-102.
- FAN TYPE:
- AXF AXIAL FAN
CBEF CEILING EXHAUST FAN
CREF-D CENTRIF. ROOF EXHAUST FAN DOWNBLAST
CREF-U CENTRIF. ROOF EXHAUST FAN UPBLAST
CRSF CENTRIFUGAL ROOF SUPPLY FAN
MFF MIXED FLOW FAN
PF PROPELLER FAN
PWF PROPELLER WALL FAN
SCF SQUARE CENTRIFUGAL FAN
TCF TUBULAR CENTRIFUGAL FAN
USF UTILITY SET FAN
- ACCESSORIES:
- AD AUTOMATIC DAMPER
BG BOTTOM INLET GRILLE
BS BIRDSCREEN
BD BACKDRAFT DAMPER
CP CURB CAP
DC DISCHARGE CONE
DS DISCHARGE SILENCER
ECM ELECTRONICALLY COMMUTATED MOTOR
FF FLAT FILTER FRAME WITH TYPE B MEDIA
IB INLET BELL
IC INLET CONE
IG INLET GUARD
IS INLET SILENCER
MS MOTOR STARTER
PRC PREFABRICATED ROOF CURB
SC SOUND ATTENUATING CURB
SSSC SOLID STATE SPEED CONTROLLER
VP VARIABLE PITCH FAN BLADES
WH WEATHERPROOF MOTOR HOUSING

LINEAR DIFFUSER SCHEDULE							
TAG	DIFFUSER TYPE	AIRFLOW SERVICE	SLOT		PLENUM LENGTH x HEIGHT (IN)	PLENUM INLET SIZE (IN)	NOTES
			QUANTITY	WIDTH (IN)			
LD-1	LD-A	SUPPLY	2	1	24 x 11	6	1, 2, 3, 4, 5, 6
LD-2	LD-B	EXHAUST	2	1	48 x 11	8	1, 2, 3, 4, 5, 6, 7
LD-3	LD-B	EXHAUST	2	1	48 x 11	8	1, 2, 3, 4, 5, 6, 7
LD-4	LD-B	EXHAUST	2	1	48 x 11	8	1, 2, 3, 4, 5, 6, 7
LD-5	LD-B	EXHAUST	2	1	24 x 11	8	1, 2, 3, 4, 5, 6, 7
LD-6	LD-A	SUPPLY	1	1	24 x 11	6	1, 2, 3, 4, 5, 6
LD-7	LD-B	EXHAUST	1	1	24 x 11	6	1, 2, 3, 4, 5, 6, 7
LD-8	LD-B	EXHAUST	1	1	24 x 11	6	1, 2, 3, 4, 5, 6, 7
LD-9	LD-A	SUPPLY	1	1	24 x 11	6	1, 2, 3, 4, 5, 6

- NOTES:
- REFER TO ARCHITECTURAL DRAWINGS FOR EXACT DIFFUSER LENGTH, LOCATION, QUANTITY AND DIFFUSER/CEILING INTERFACE DETAILS. DIFFUSER BORDER SHALL BE COMPATIBLE WITH CEILING CONSTRUCTION.
 - REFER TO FLOOR PLANS FOR PLENUM QUANTITY.
 - LINEAR DIFFUSER ACTIVE SECTION SHALL BE EQUAL TO SUPPLY PLENUM LENGTH. DISCHARGE AIR PATTERN CONTROLLER SHALL BE PROVIDED FOR ACTIVE SECTIONS ONLY.
 - ALL INACTIVE SECTIONS OF LINEAR DIFFUSER SHALL REMAIN OPEN WITH LIGHT SHIELD FOR RETURN AIR UNLESS NOTED OTHERWISE.
 - COORDINATE CONNECTION BETWEEN PLENUM AND LINEAR DIFFUSER TO MINIMIZE AIR LEAKAGE. PLENUM SHALL BE INSTALLED IN ACCORDANCE WITH THE DIFFUSER MANUFACTURER'S REQUIREMENTS INCLUDING END CAPS.
 - PROVIDE TITUS DIFFUSER BORDER TYPE 22 OR APPROVED EQUIVALENT FOR FRAMELESS APPEARANCE.
 - DIFFUSERS SHALL BE CONNECTED WITH RIGID BRANCH DUCTWORK. FLEXIBLE DUCTWORK SHALL NOT BE PROVIDED.

ELECTRIC HEATING COIL SCHEDULE										
EQUIPMENT	SERVICE	HEATING CAPACITY (KW)	AIR FLOW (CFM)	DIMENSIONS W X H (IN)	CONTROL STEPS / SCR	PRESSURE DROP (IN WG)	VELOCITY MIN (FPM)	VELOCITY MAX (FPM)	ELECTRICAL	
									VOLT	PH
EHC-1	1ST & 2ND FLOOR	35	1800	18x14	SCR	0.1	600	1,500	208	3

- NOTES:
- REFER TO SPECIFICATION SECTION 23 82 01 FOR ADDITIONAL REQUIREMENTS.
 - PROVIDE INTEGRAL DISCONNECT PER NEC REQUIREMENTS. REFER TO ELECTRICAL PLANS FOR ELECTRICAL SERVICE REQUIREMENTS.
 - REFER TO DRAWINGS FOR EXACT DUCT SIZES. UNLESS INDICATED OTHERSIZE, THE SIZE OF HEATER SHALL BE ADJUSTED TO MATCH THE INSIDE CLEAR DUCT DIMENSIONS.

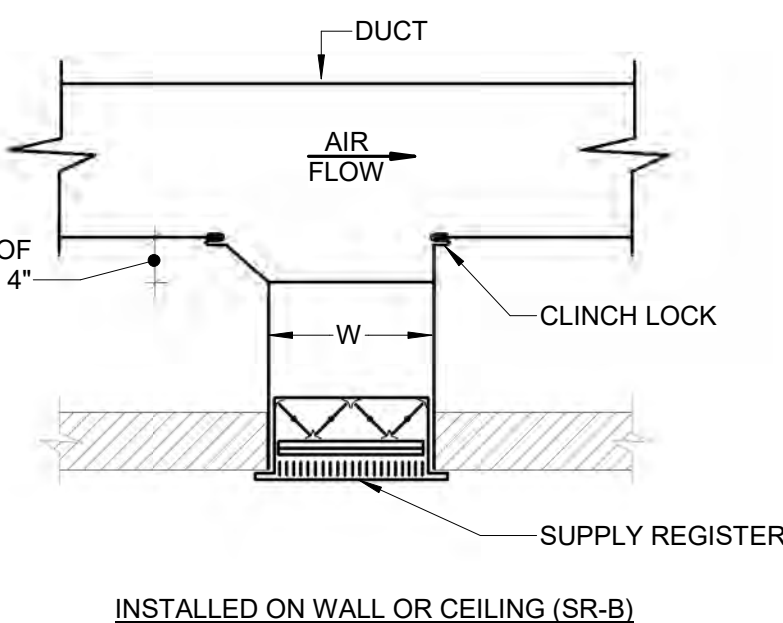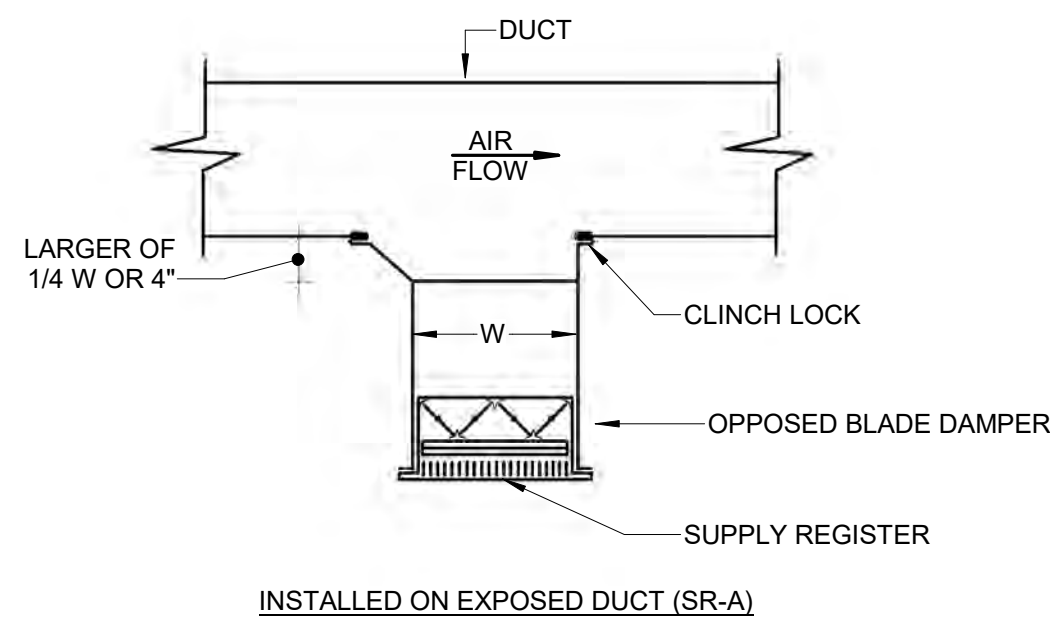

16 SUPPLY REGISTER DETAIL
Scale: N.T.S.

15 PERIMETER SLOT DIFFUSER DETAIL
Scale: N.T.S.



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ AC
APPROVED BY _____ SC
CHECKED BY _____ SC
DATE _____ 08.26.2026

TITLE

MECHANICAL
SCHEDULES

PROJECT NO.

M-601

F
E
D
C
B
A

1

2

3

4

5

6

GENERAL NOTES:



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

KEYNOTES:

- REFER TO THE TY SERIES OF DRAWINGS FOR ADDITIONAL CONDUIT INFRASTRUCTURE RELATED TO THE ENTRY/EXIT GATE.
- PROVIDE (2) - 2" CONDUITS CONNECTING EACH END OF THE GATES. PROVIDE (2) - 2" CONDUITS FROM THE CONTROLLER TO ONE OF THE GATE ENDS. COORDINATE WITH FIELD CONDITIONS.

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ PH
APPROVED BY _____ SC
CHECKED BY _____ WR
DATE _____ 08.26.2026

TITLE


ELECTRICAL
EXTERIOR PLANS

PROJECT NO.

ES-101

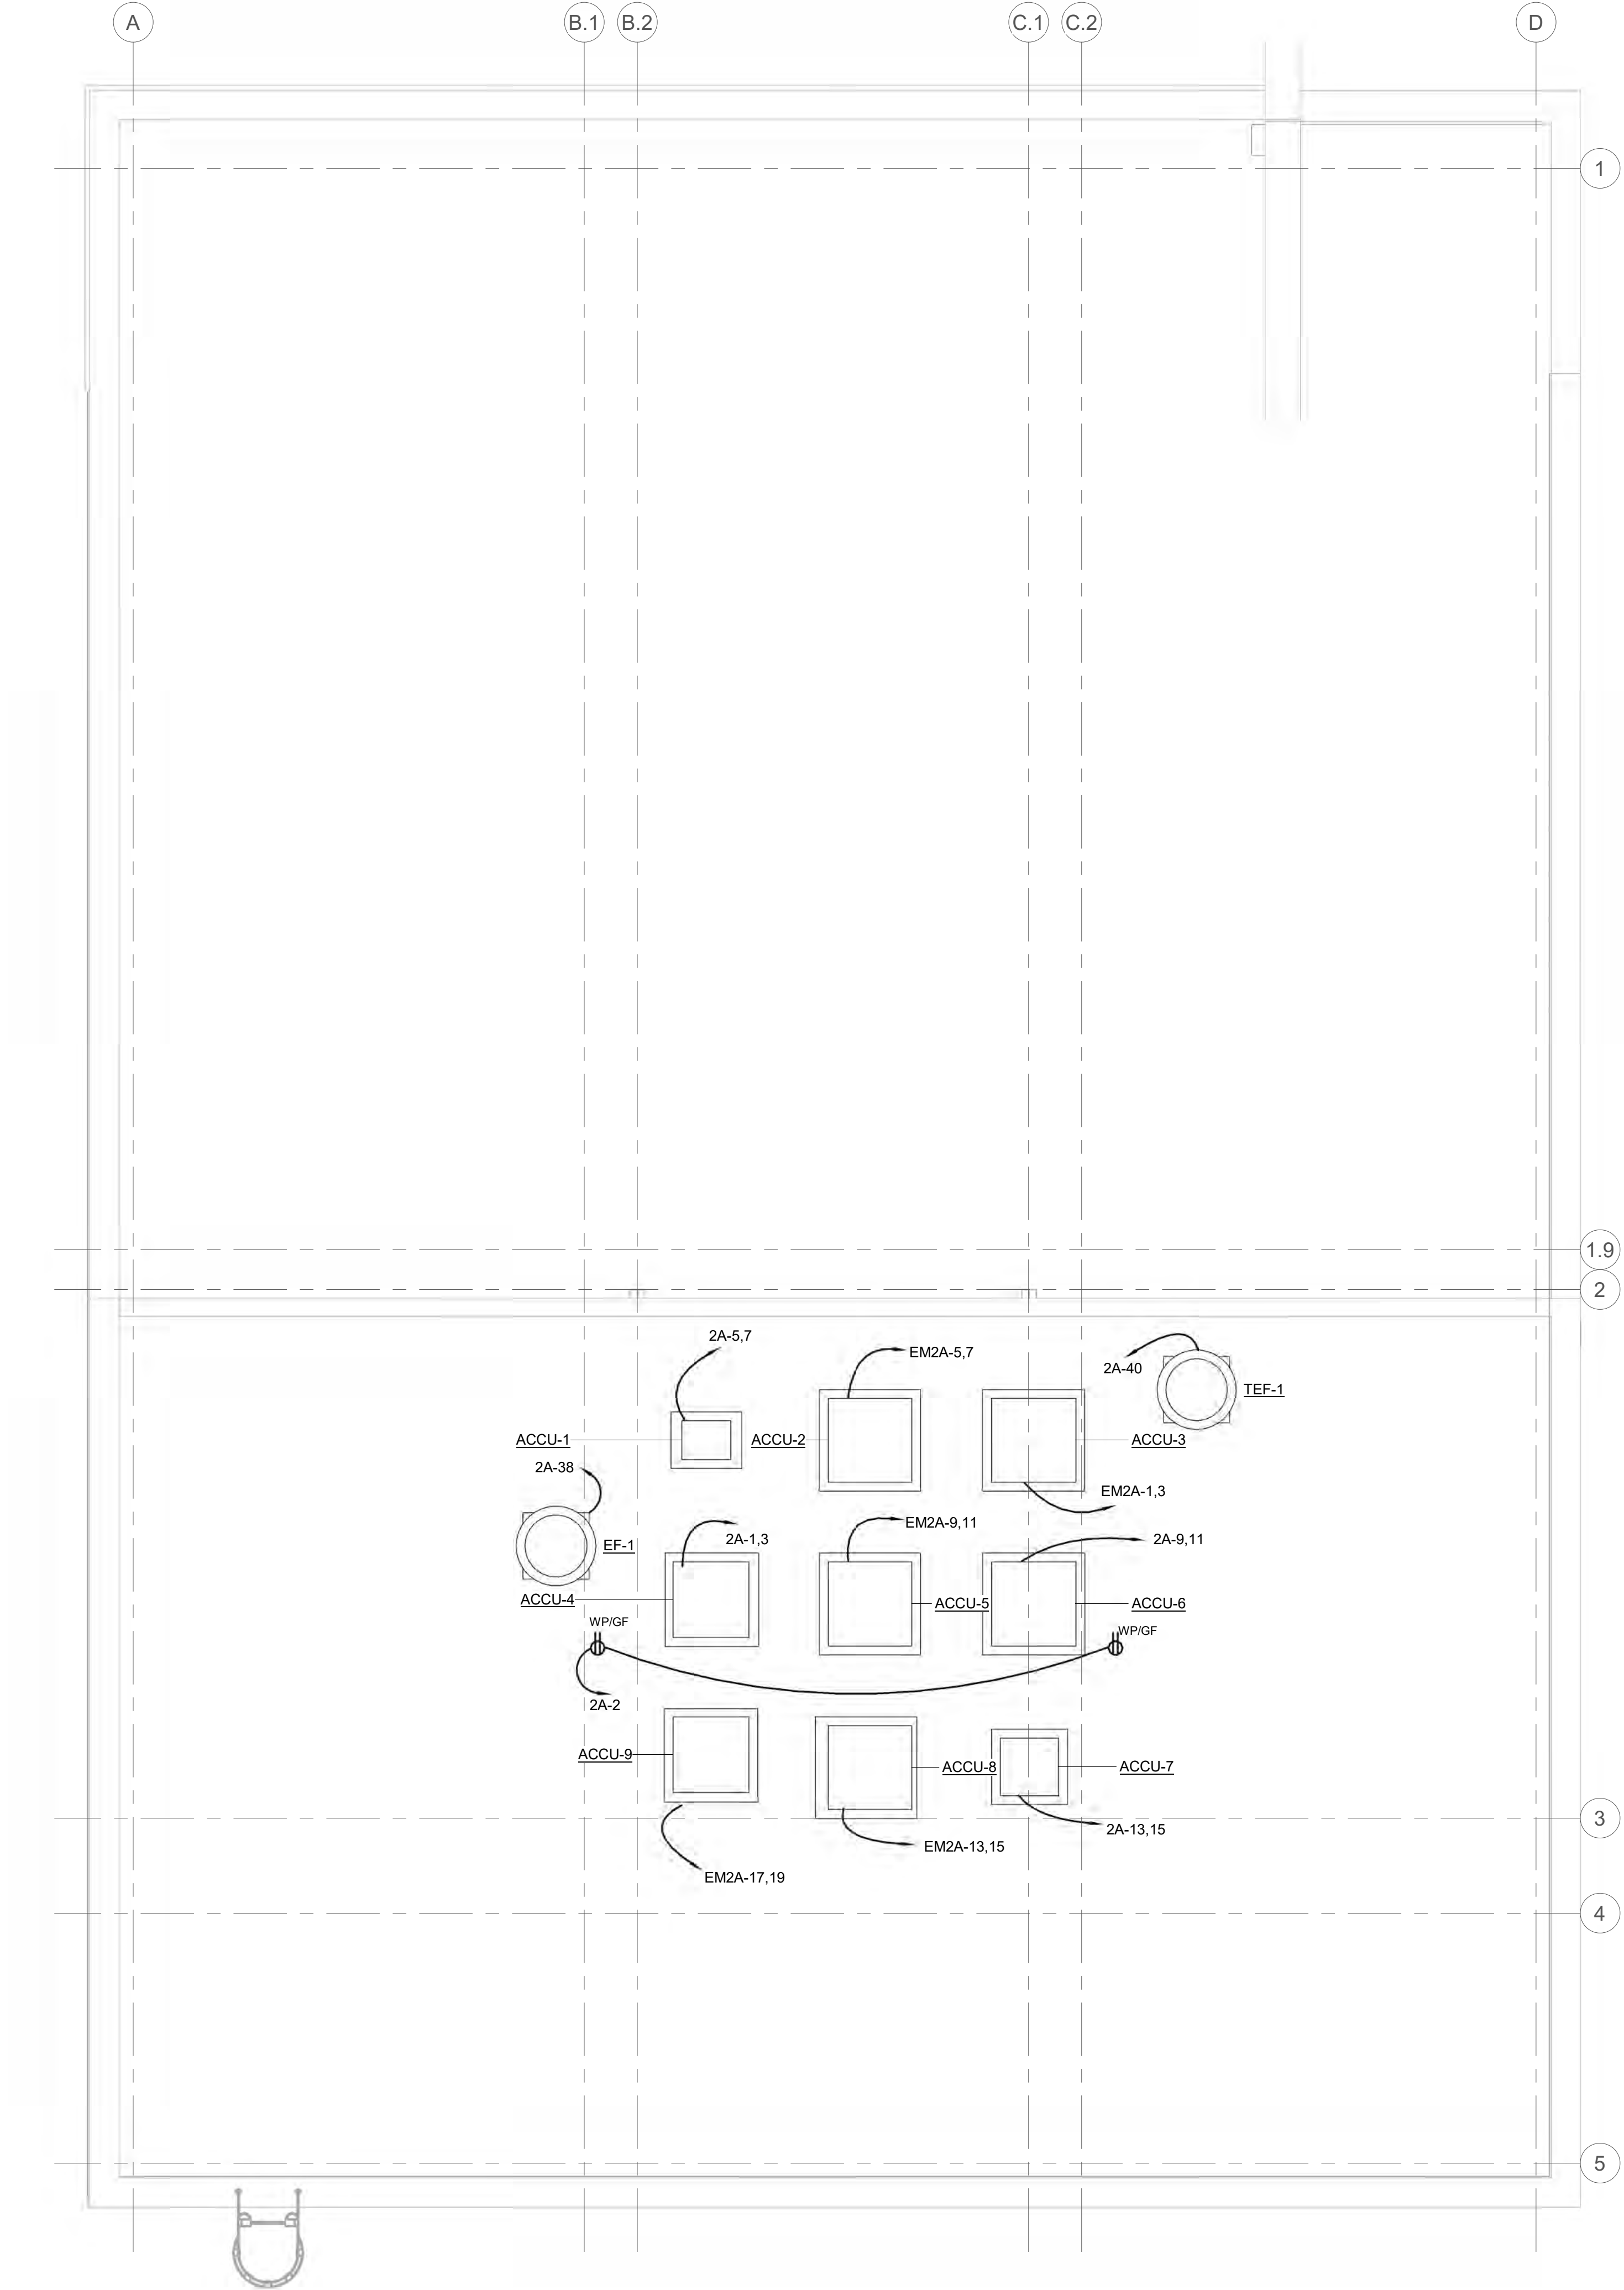

1 ROOF ELECTRICAL EQUIPMENT PLAN
Scale: 1/4" = 1'-0"

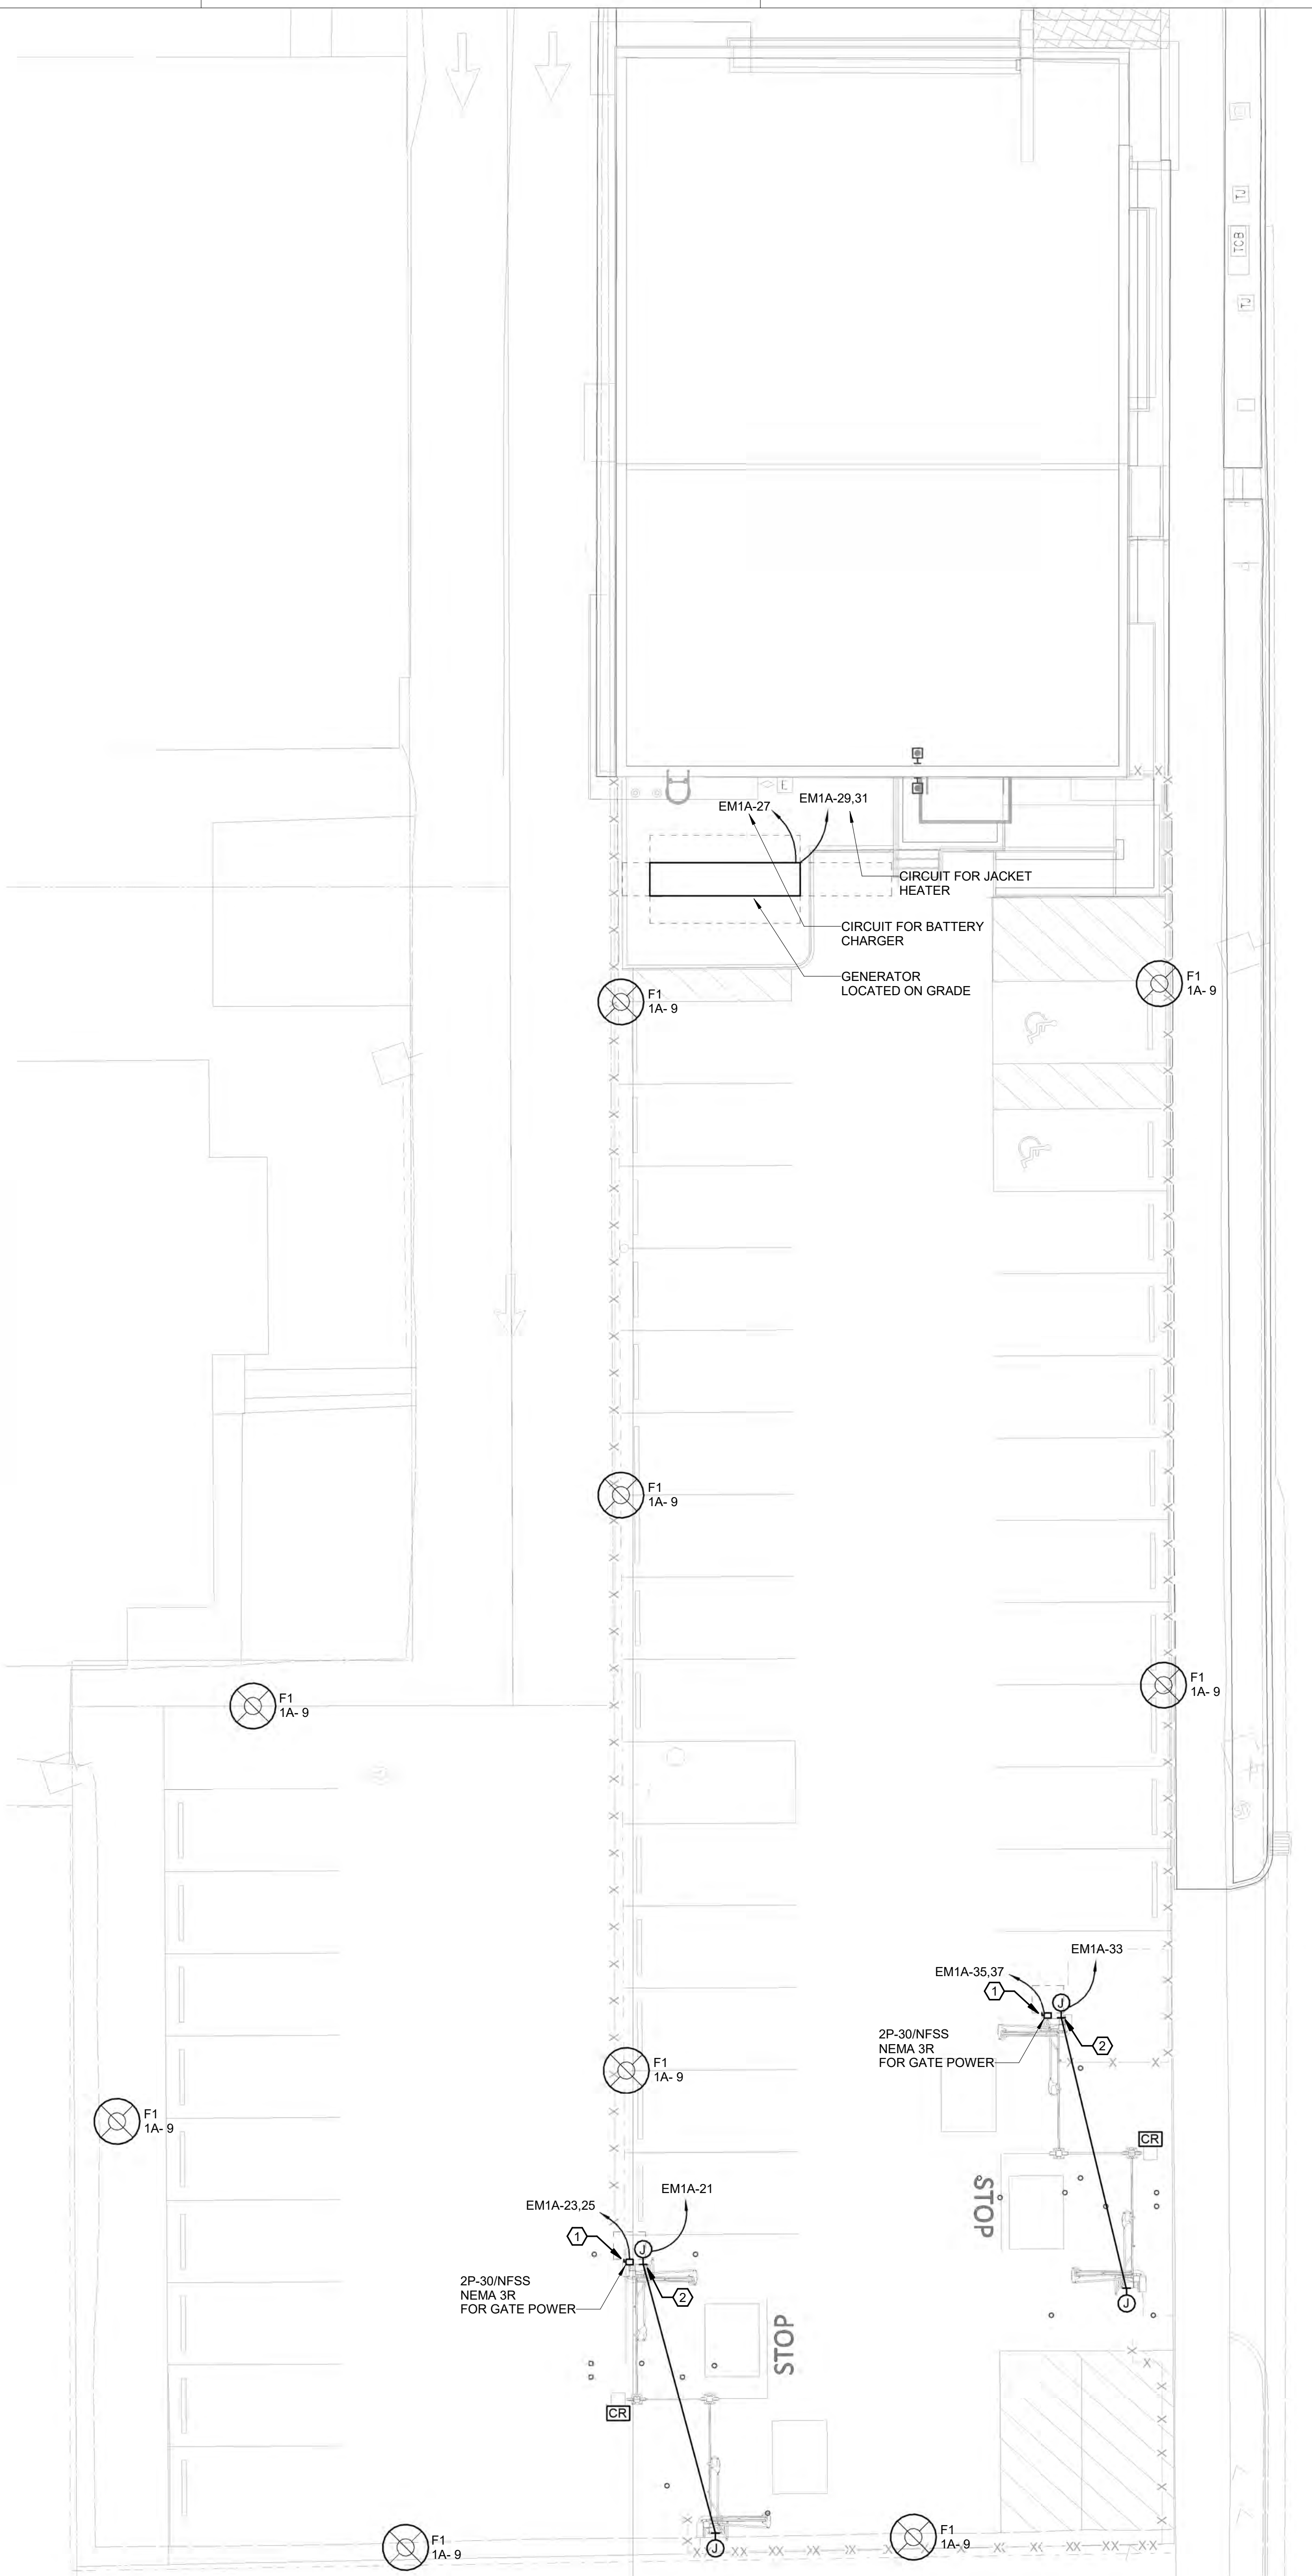

2 ELECTRICAL SITE PLAN
Scale: 1" = 10'-0"

8/24/2026 12:39:47 PM

A

B

C

D


E

F

1

ELECTRICAL SITE PHOTOMETRICS PLAN

Scale: 1" = 10'-0"

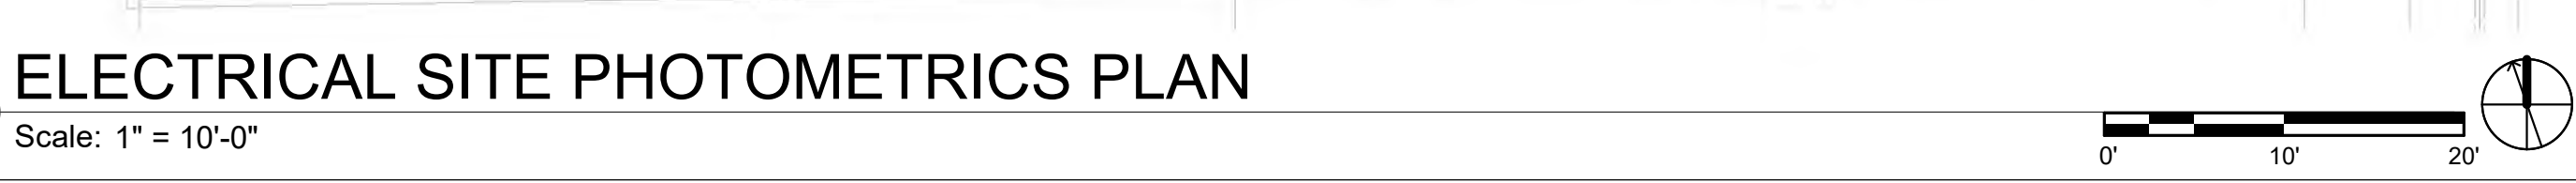

GENERAL NOTES:

KEYNOTES:



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ PH
APPROVED BY _____ SC
CHECKED BY _____ WR
DATE _____ 08.26.2026

TITLE

ELECTRICAL
EXTERIOR
PHOTOMETRICS
PLAN

PROJECT NO.

ES-102

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY _____ PH
APPROVED BY _____ SC
CHECKED BY _____ WR
DATE _____ 08.26.2026

TITLE


ELECTRICAL
DEMOLITION
PLANS

PROJECT NO.

ED-101

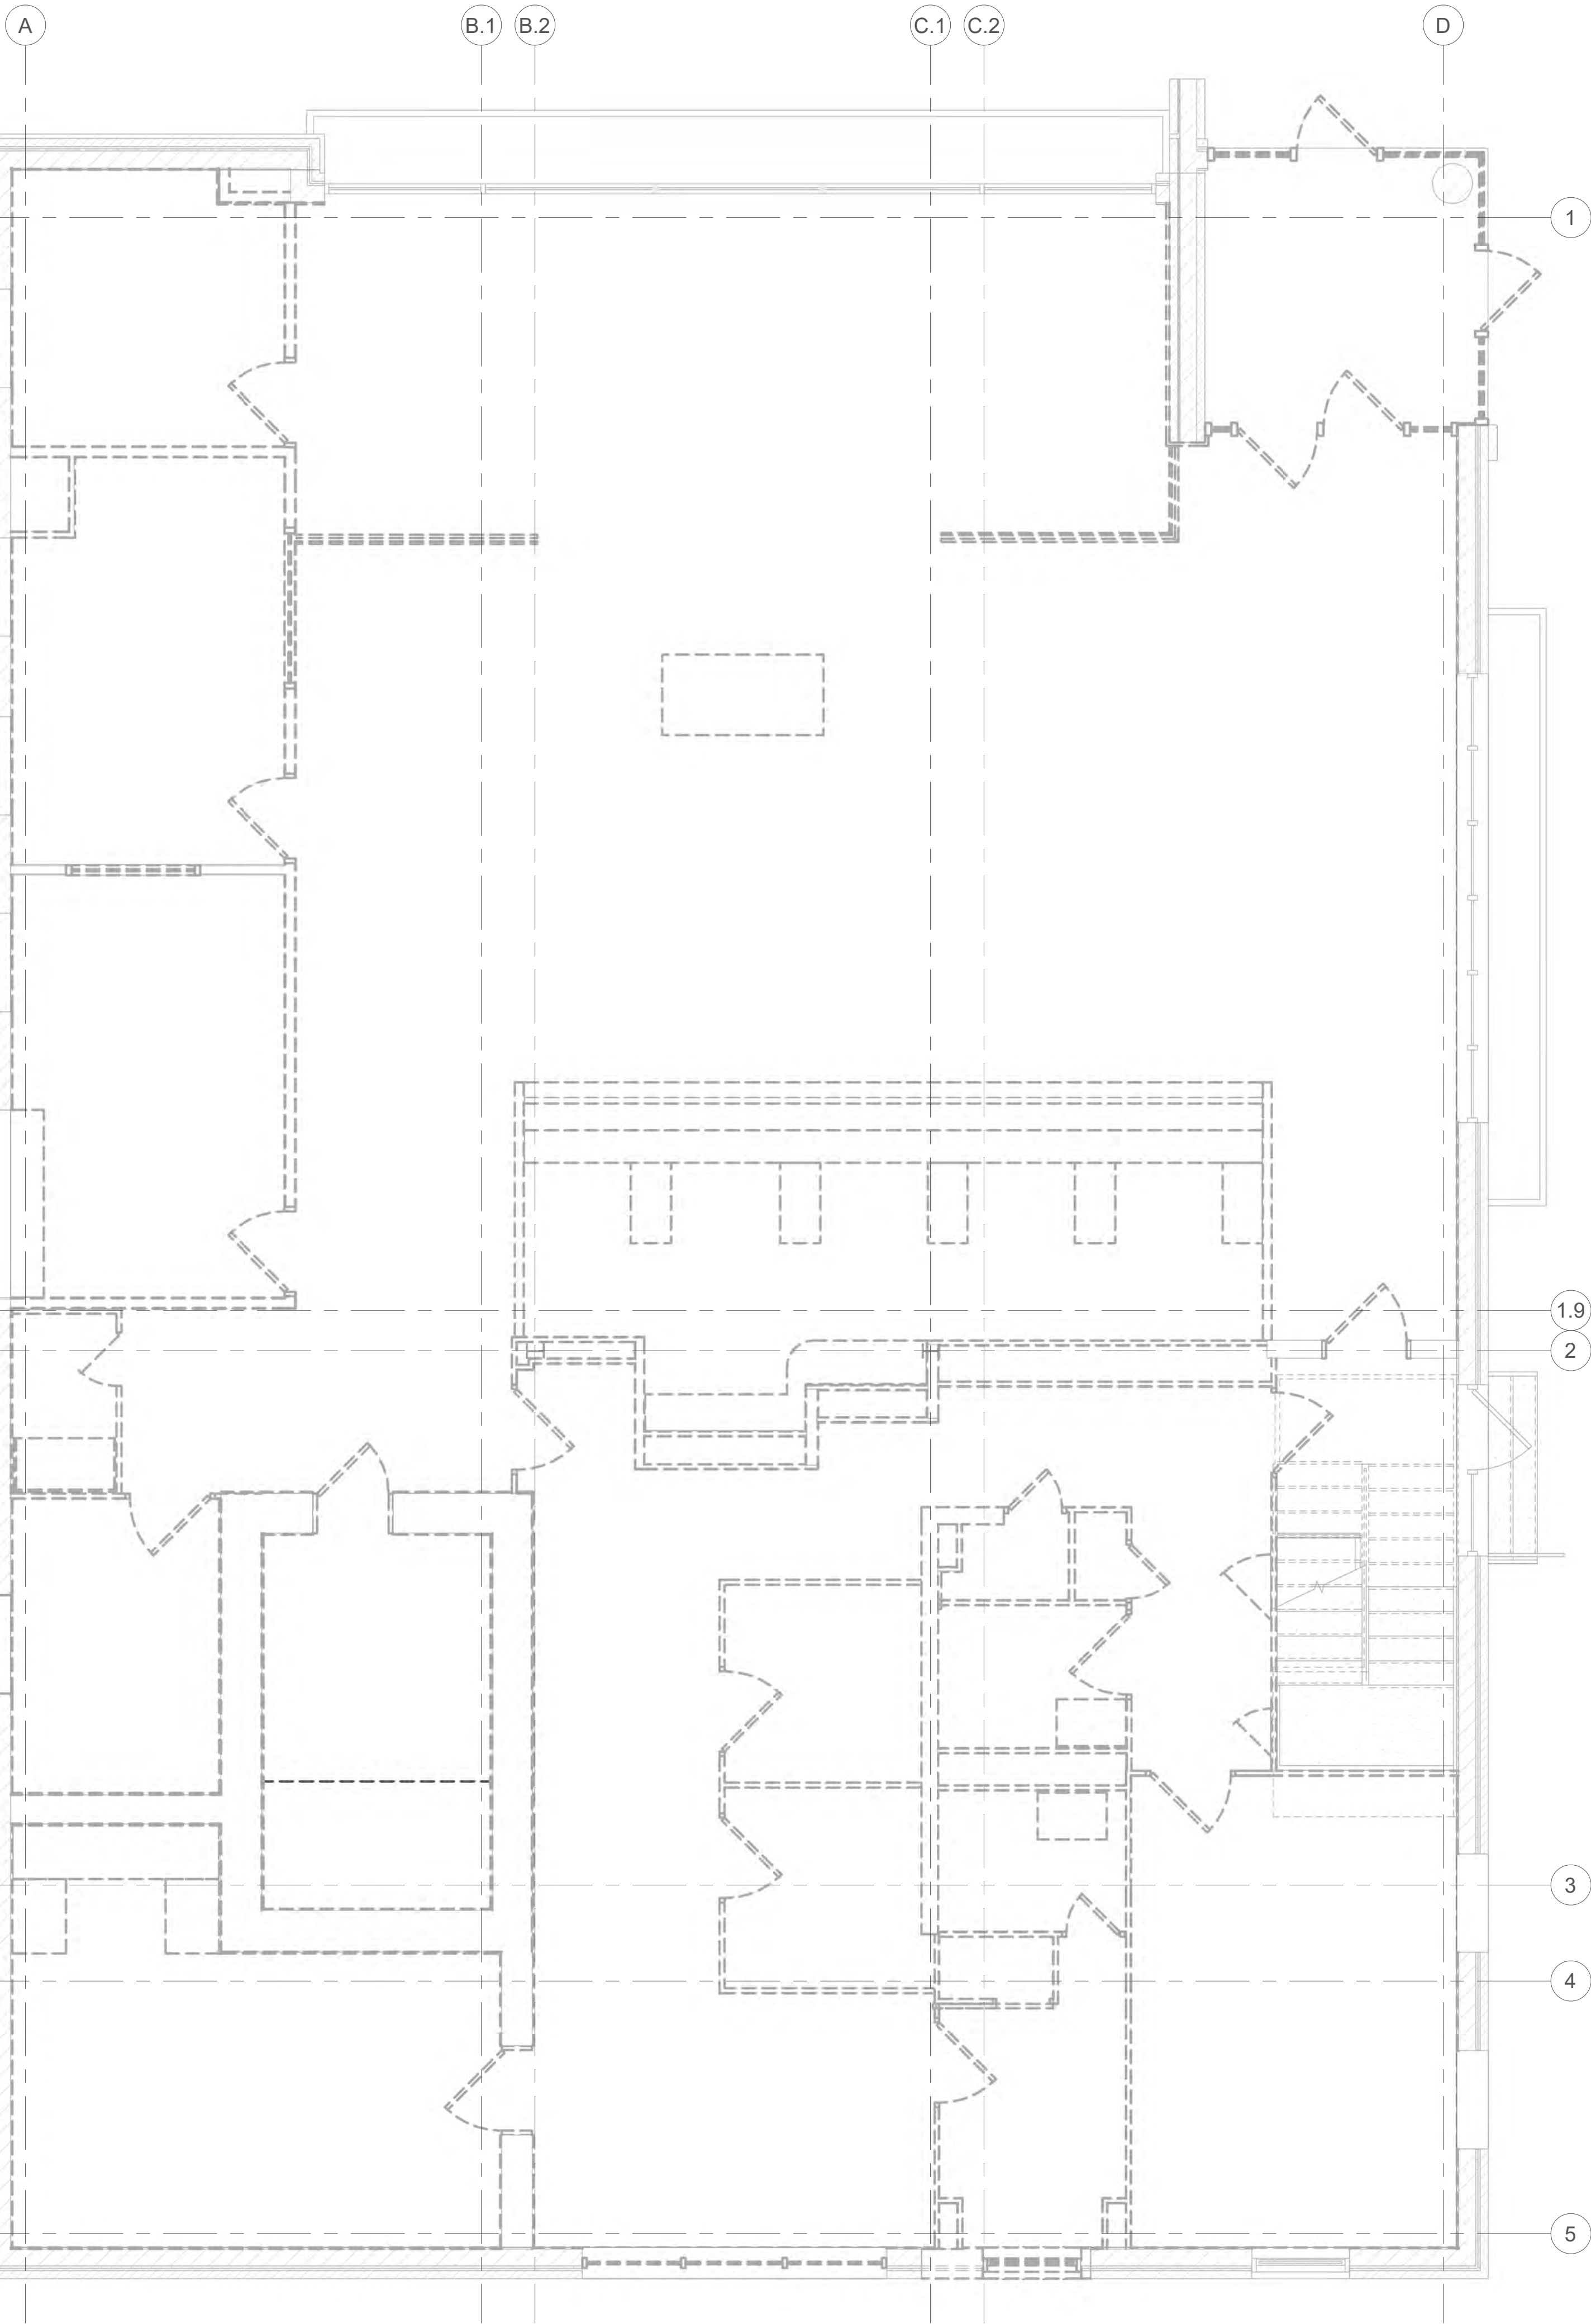

1 FIRST FLOOR ELECTRICAL DEMOLITION PLAN
Scale: 1/4" = 1'-0"

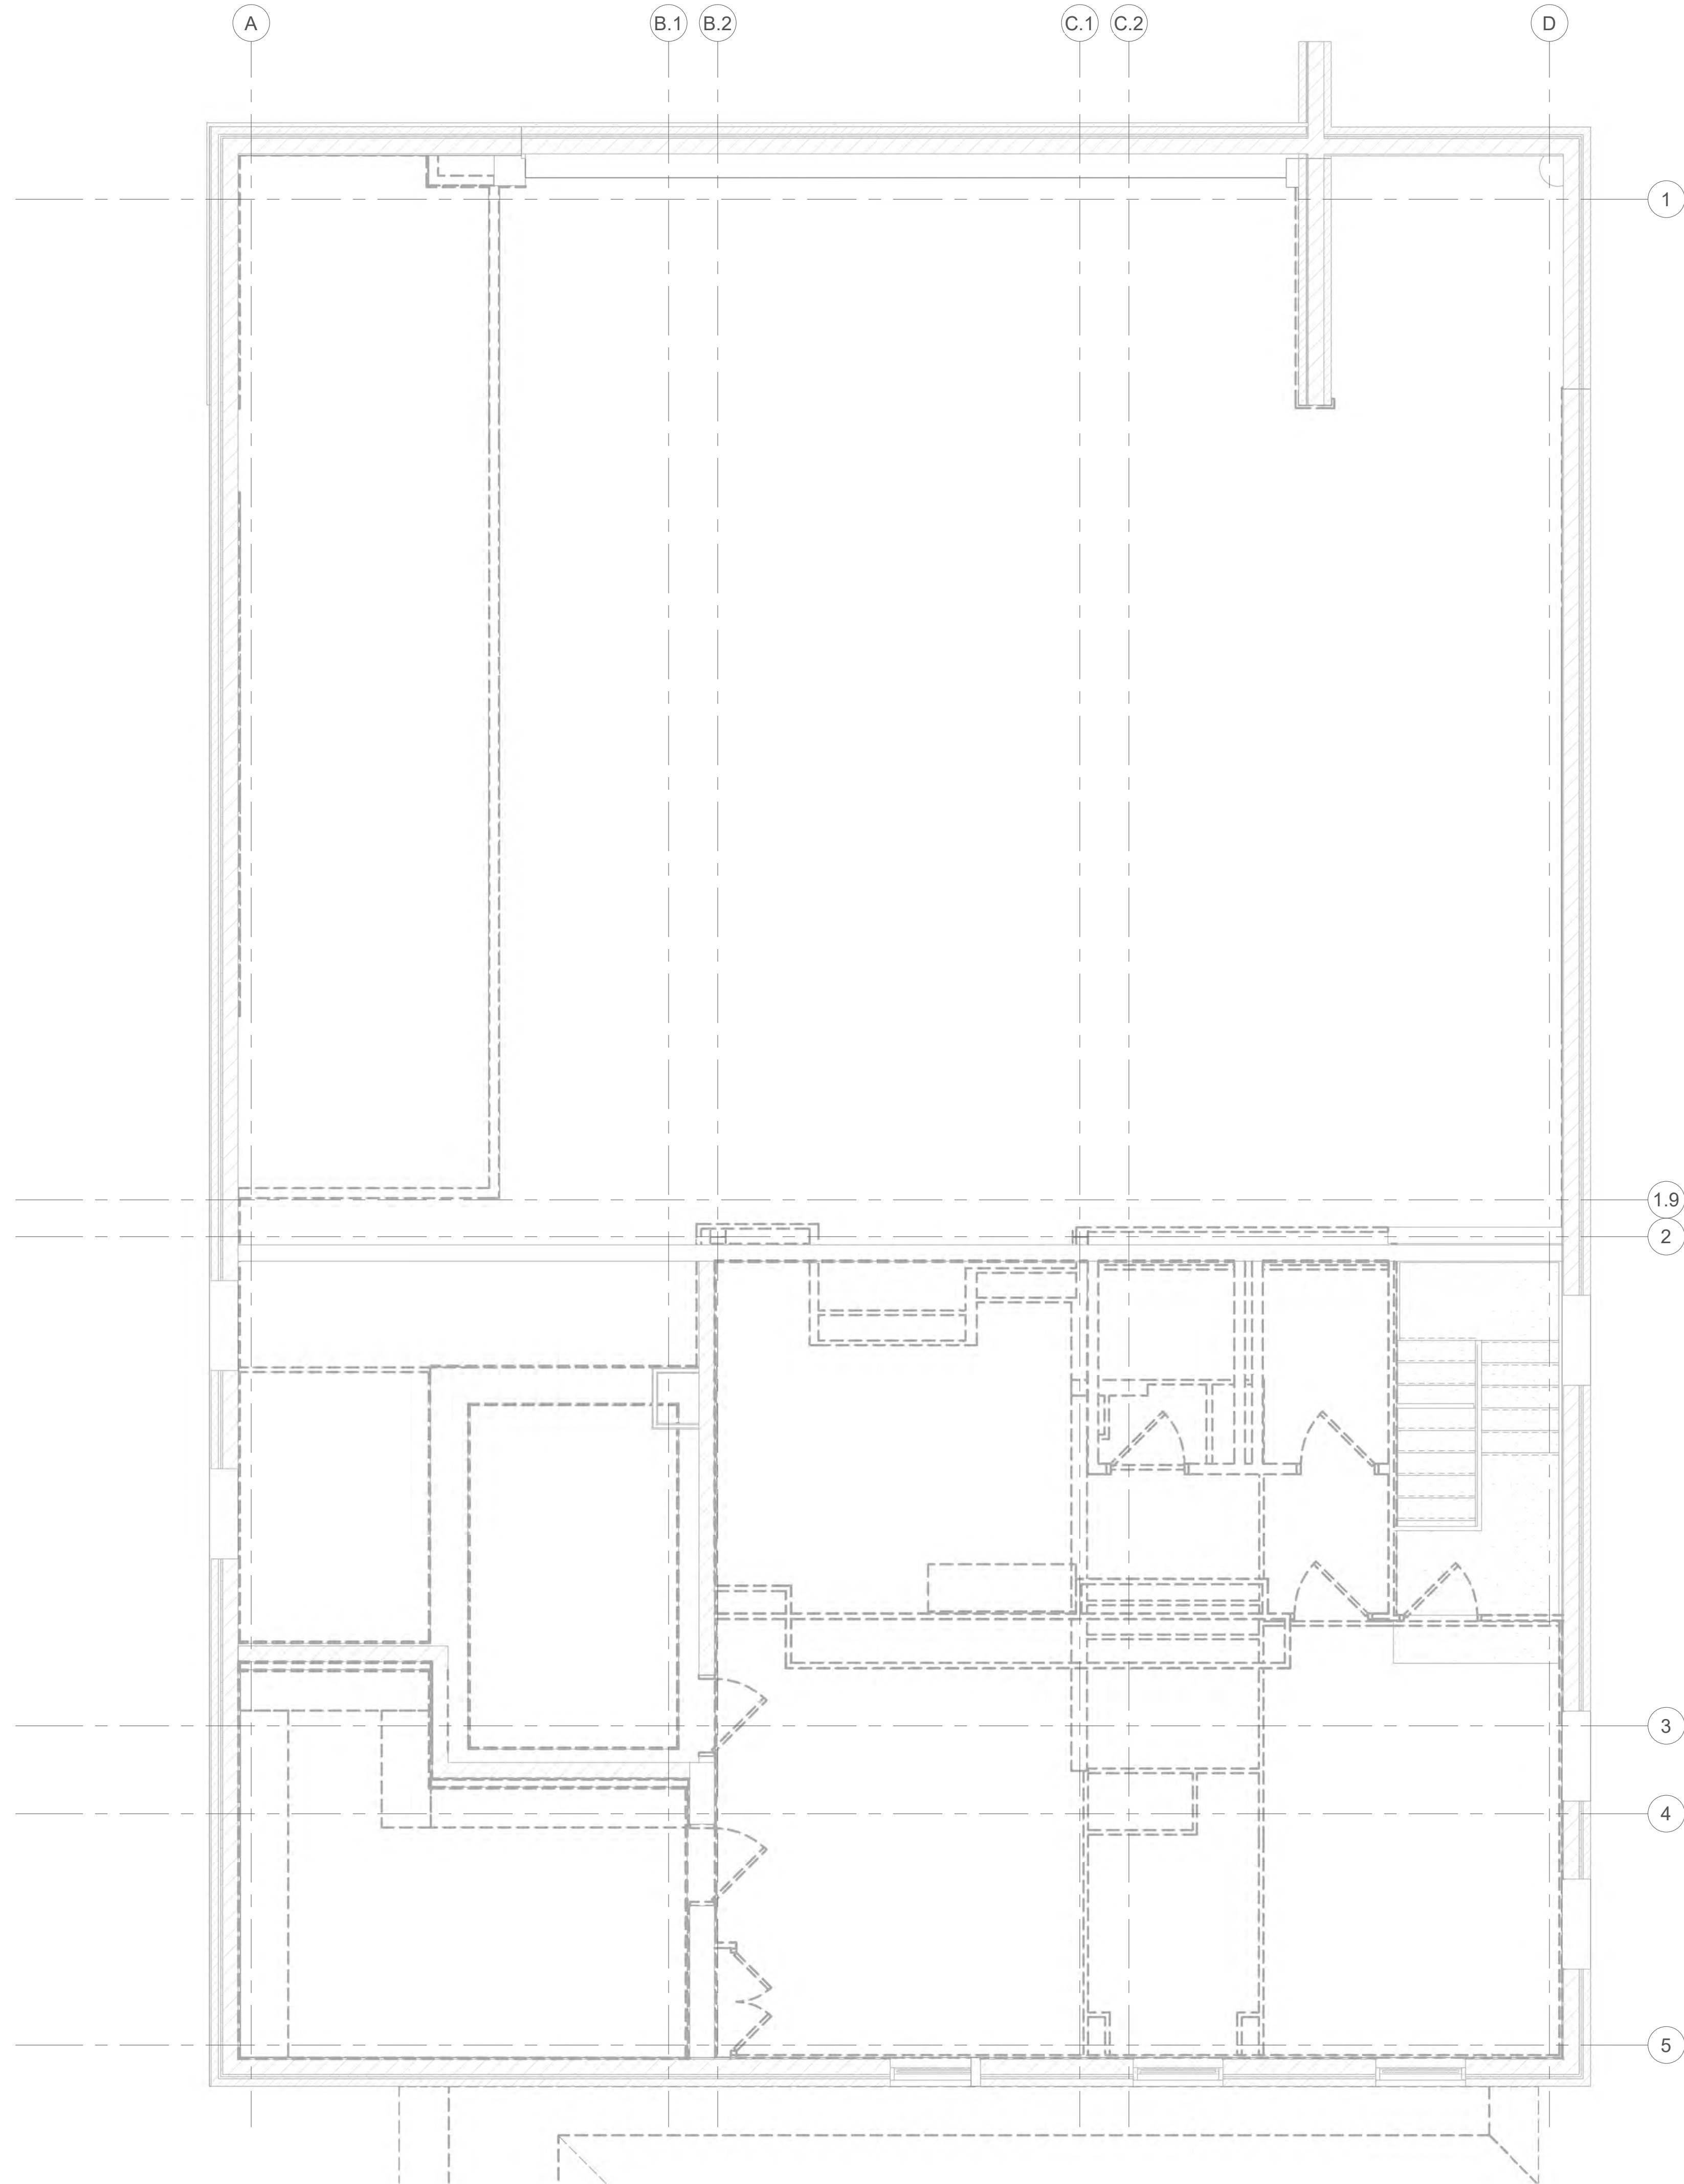

2 SECOND FLOOR ELECTRICAL DEMOLITION PLAN
Scale: 1/4" = 1'-0"



GENERAL NOTES:

GENERAL NOTES:

- ALL EXISTING ELECTRICAL WORK IN THE AREAS OF WORK INCLUDING BUT NOT LIMITED TO RECEPTACLES, LIGHTING, LIGHTING CONTROLS, CIRCUITING, CONDUIT, FIRE ALARM DEVICES/WIRING, ELECTRICAL CONNECTIONS TO OWNER'S EQUIPMENT, AND ELECTRICAL CONNECTIONS TO MECHANICAL/PLUMBING EQUIPMENT BEING DEMOLISHED, SHALL BE DEMOLISHED. REFER TO ELECTRICAL SPECIFICATION SECTION 26 05 30, AS WELL AS THE MECHANICAL, PLUMBING, AND ARCHITECTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
- THE DEMOLITION SCOPE SHALL EXTEND TO THE ROOFTOP. THE REQUIREMENTS IN THE GENERAL NOTE ABOVE SHALL APPLY TO THE ENTIRE ROOFTOP.

KEYNOTES:



Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ PH
APPROVED BY _____ SC
CHECKED BY _____ WR
DATE _____ 08.26.2026


TITLE
ELECTRICAL
LIGHTING PLANS

PROJECT NO.

EL-101


1 FIRST FLOOR LIGHTING PLAN

Scale: 1/4" = 1'-0"

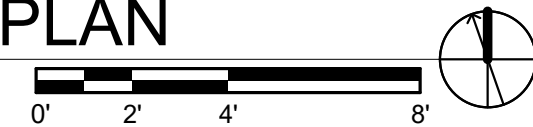

2 SECOND FLOOR LIGHTING PLAN

Scale: 1/4" = 1'-0"

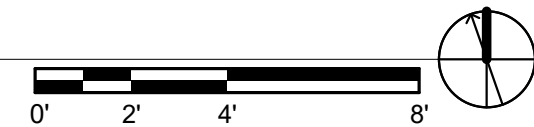

GENERAL NOTES:

- ALL EXIT SIGNS SHALL BE UNSWITCHED.
- ALL LIGHTS WITH AN 'EM' DESIGNATOR AT THE END SHALL HAVE AN ADDITIONAL UNSWITCHED HOT FOR BATTERY PACK OPERATION DURING LOSS OF POWER. UNLESS NOTED OTHERWISE, THEY SHALL BE CONTROLLED WITH NON-EM LIGHTS DURING NORMAL OPERATION BUT TURN TO 100% ON WHEN POWER IS LOST.

KEYNOTES:

- LIGHTING IN THIS SPACE SHALL BE MANUAL ON/MANUAL OFF ONLY DUE TO SAFETY AND SECURITY REASONS.
- THIS IS A 24 HOUR OPERATIONAL BUILDING. THE STAIRWELL LIGHTS SHALL REMAIN ON 24/7.
- UNSWITCHED NIGHT LIGHT.

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEA



KEY PLAN

SCALE

REVISIONS


NO DESCRIPTION DATE

DRAWN BY	PI
APPROVED BY	SA
CHECKED BY	WI
DATE	08.26.202
TITLE	

ELECTRICAL POWER PLANS

PROJECT NO. _____

EP-101

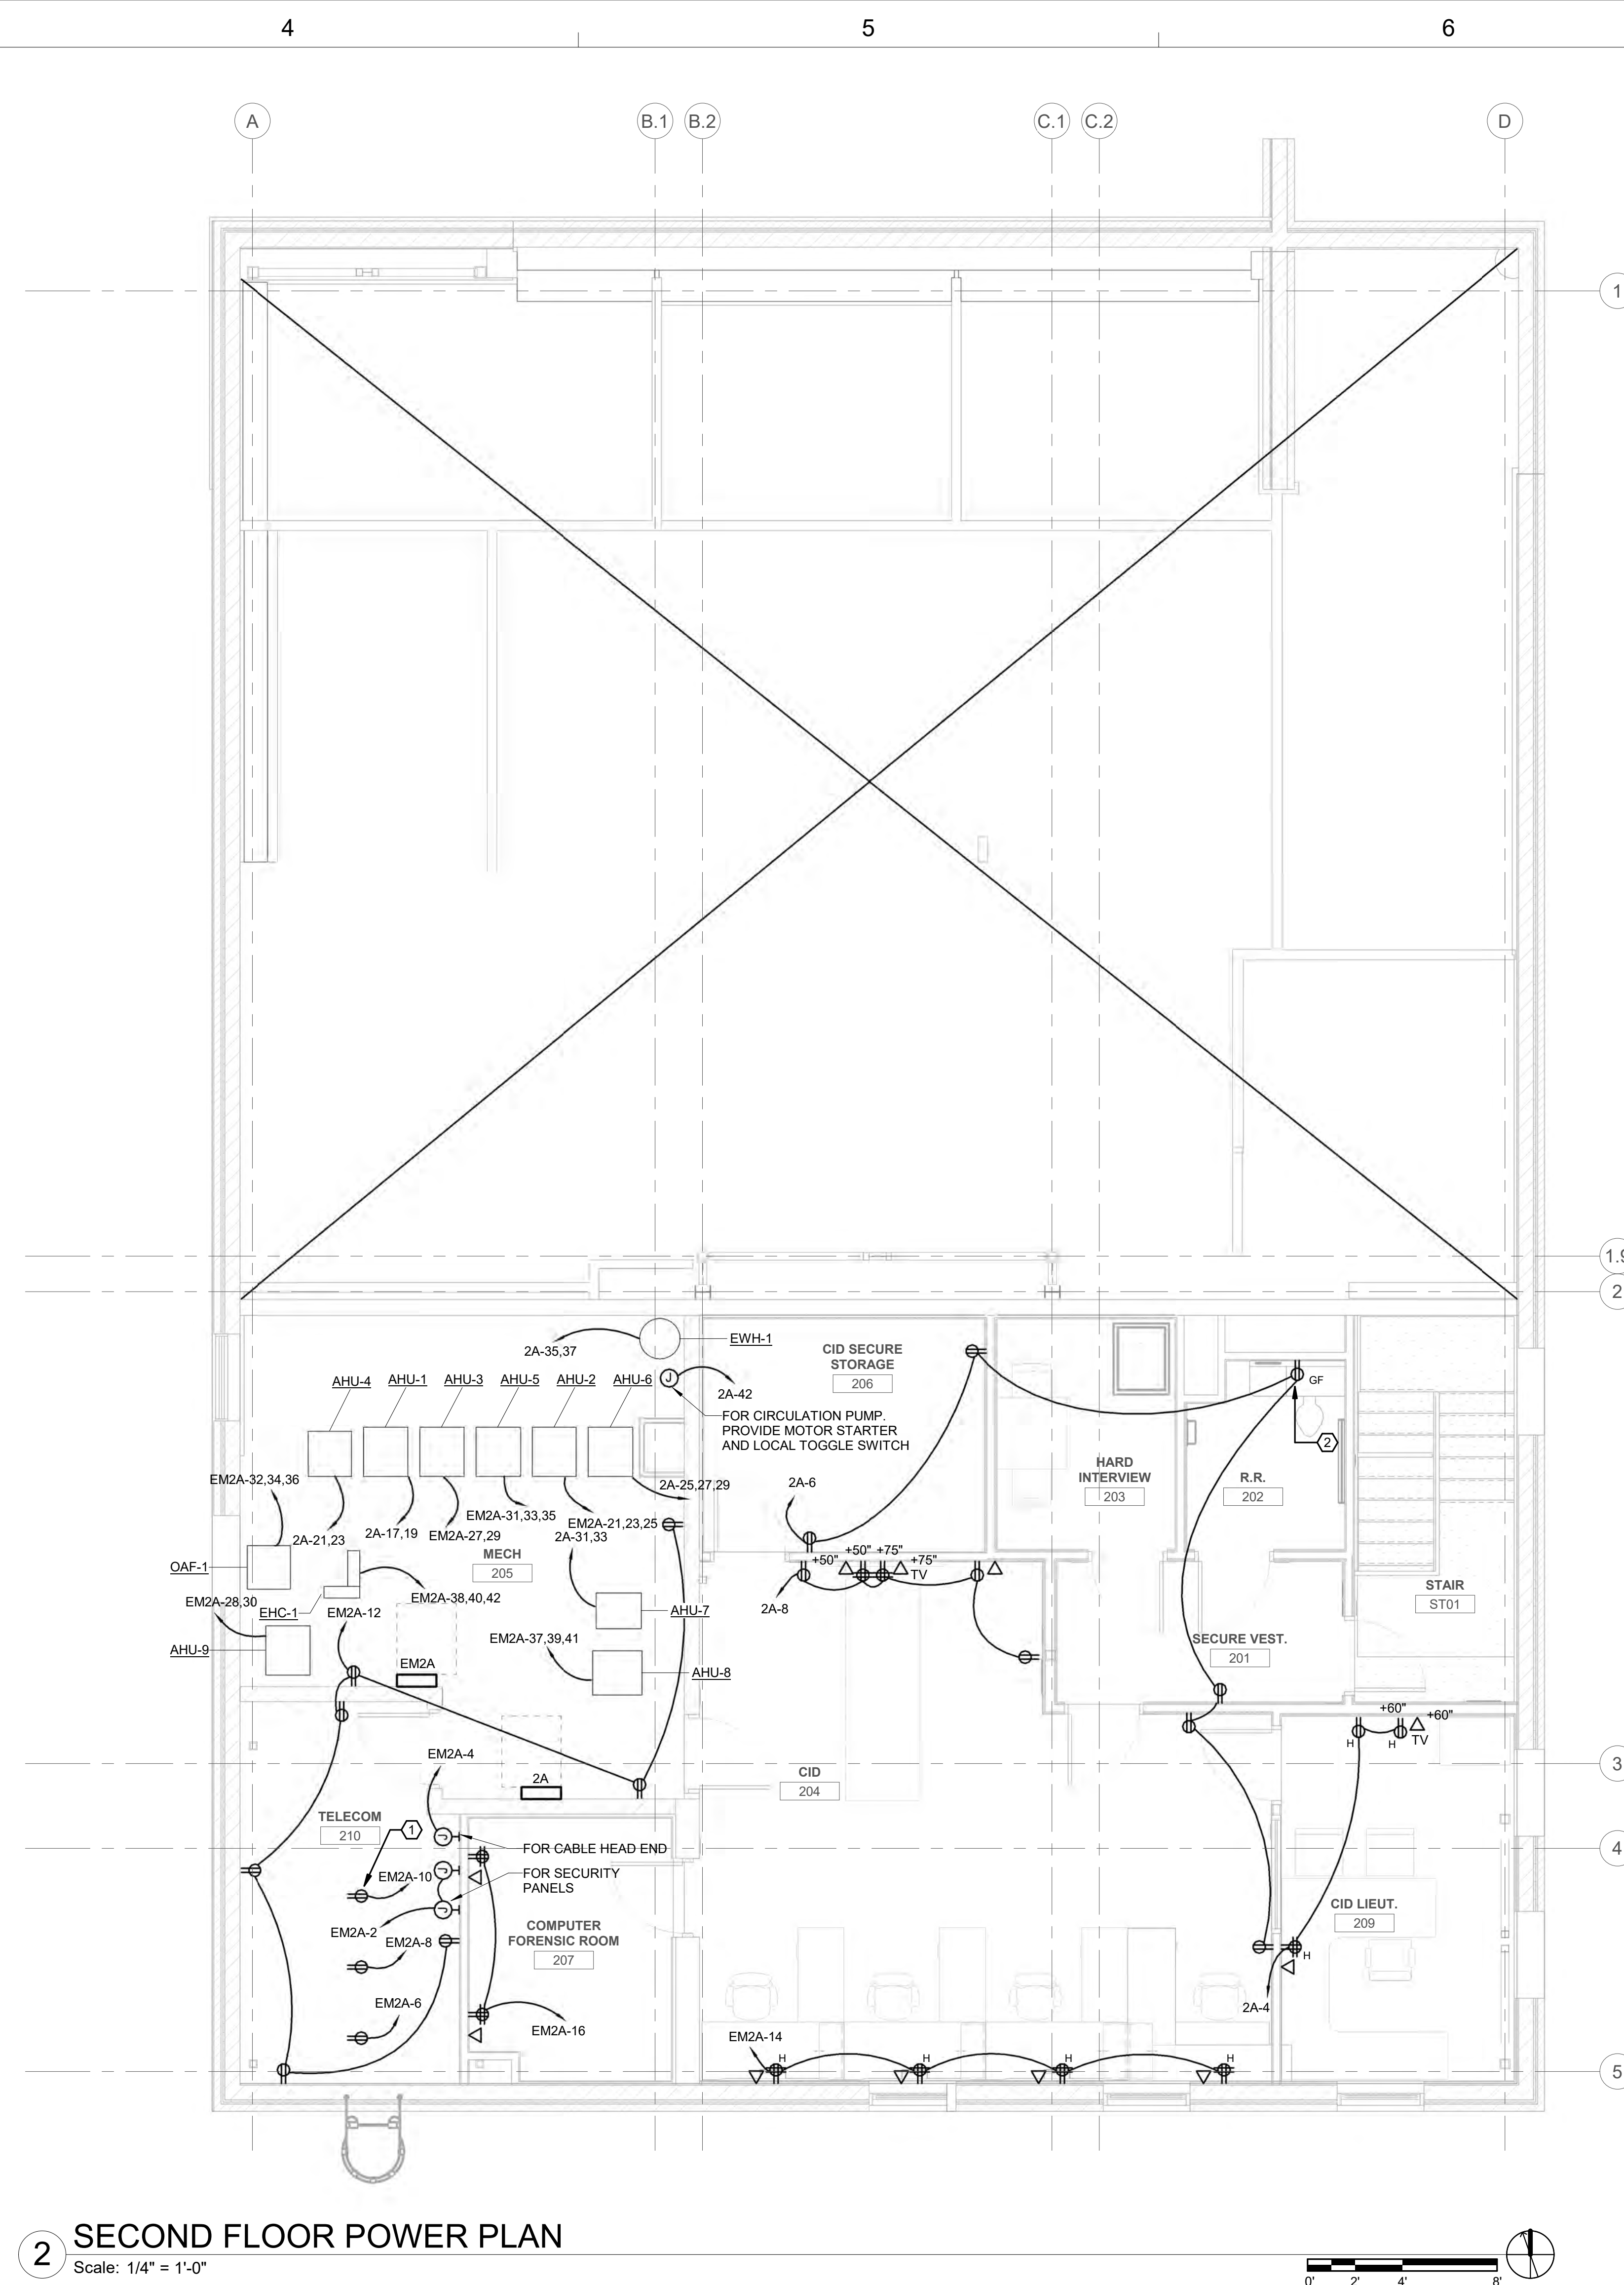

GENERAL NOTES:

1. THE ELECTRICAL CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR PROVIDING THE EMPTY CONDUIT INFRASTRUCTURE, SLEEVES, AND GROUND WIRES REQUIRED BY THE TECHNOLOGY DRAWINGS (TT AND TY DRAWINGS). THE ELECTRICAL DRAWINGS DO NOT DOCUMENT THE SCOPE.
2. REFER TO TECHNOLOGY DRAWINGS TT-001 AND TY-001 FOR LOW-VOLTAGE CONDUIT SIZES, DETAILS, AND OTHER INFORMATION.
3. REFER TO DRAWING TY-501 FOR DOOR SECURITY REQUIREMENTS, INCLUSIVE OF CONDUIT INFRASTRUCTURE.
4. GFI RECEPTACLES SHALL PROVIDE GFI PROTECTION ONLY FOR THE INDICATED RECEPTACLE. THEY SHALL NOT BE WIRED IN SERIES FOR GFI PROTECTION FOR OTHER RECEPTACLES ON A COMMON CIRCUIT.

KEYNOTES:

- 1 DUPLIX RECEPTACLES MOUNTED ABOVE RACKS, TYPICAL OF 3. COORDINATE INSTALLATION WITH TECHNOLOGY VENDOR REQUIREMENTS AND FIELD CONDITIONS.
- 2 COORDINATE RECEPTACLE WITH TOILET ENCLOSURE. RECEPTACLE SHALL BE FULLY CONCEALED WITHIN.
- 3 PROVIDE LOW-VOLTAGE WIRING, TRANSFORMER, AND ALL OTHER NECESSARY COMPONENTS FOR A FULLY FUNCTIONAL AUTOMATIC SINK VALVE.
- 4 PROVIDE THREE (3) USB-A COMBINATION QUADRIPLUX RECEPTACLES AND TWO (2) USB-C COMBINATION QUADRIPLUX RECEPTACLES AT THIS DOCKING AREA.
- 5 REMOTE GENERATOR PANEL. CONFIRM PREFERRED LOCATION WITH CLIENT.
- 6 PROVIDE (1) - 1-1/2" CONDUIT FROM THE PUSH BUTTON TO THE AUTOMATIC DOOR HARDWARE CONTROLS. COORDINATE WITH THE MANUFACTURER FOR EXACT CONDUIT SIZE AND ANY ADDITIONAL CONDUIT PATHWAYS.

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS


NO.	DESCRIPTION	DATE

DRAWN BY _____ PH
APPROVED BY _____ SC
CHECKED BY _____ WR
DATE _____ 08.26.2026
TITLE


ELECTRICAL FIRE
ALARM PLANS

PROJECT NO.

EF-101

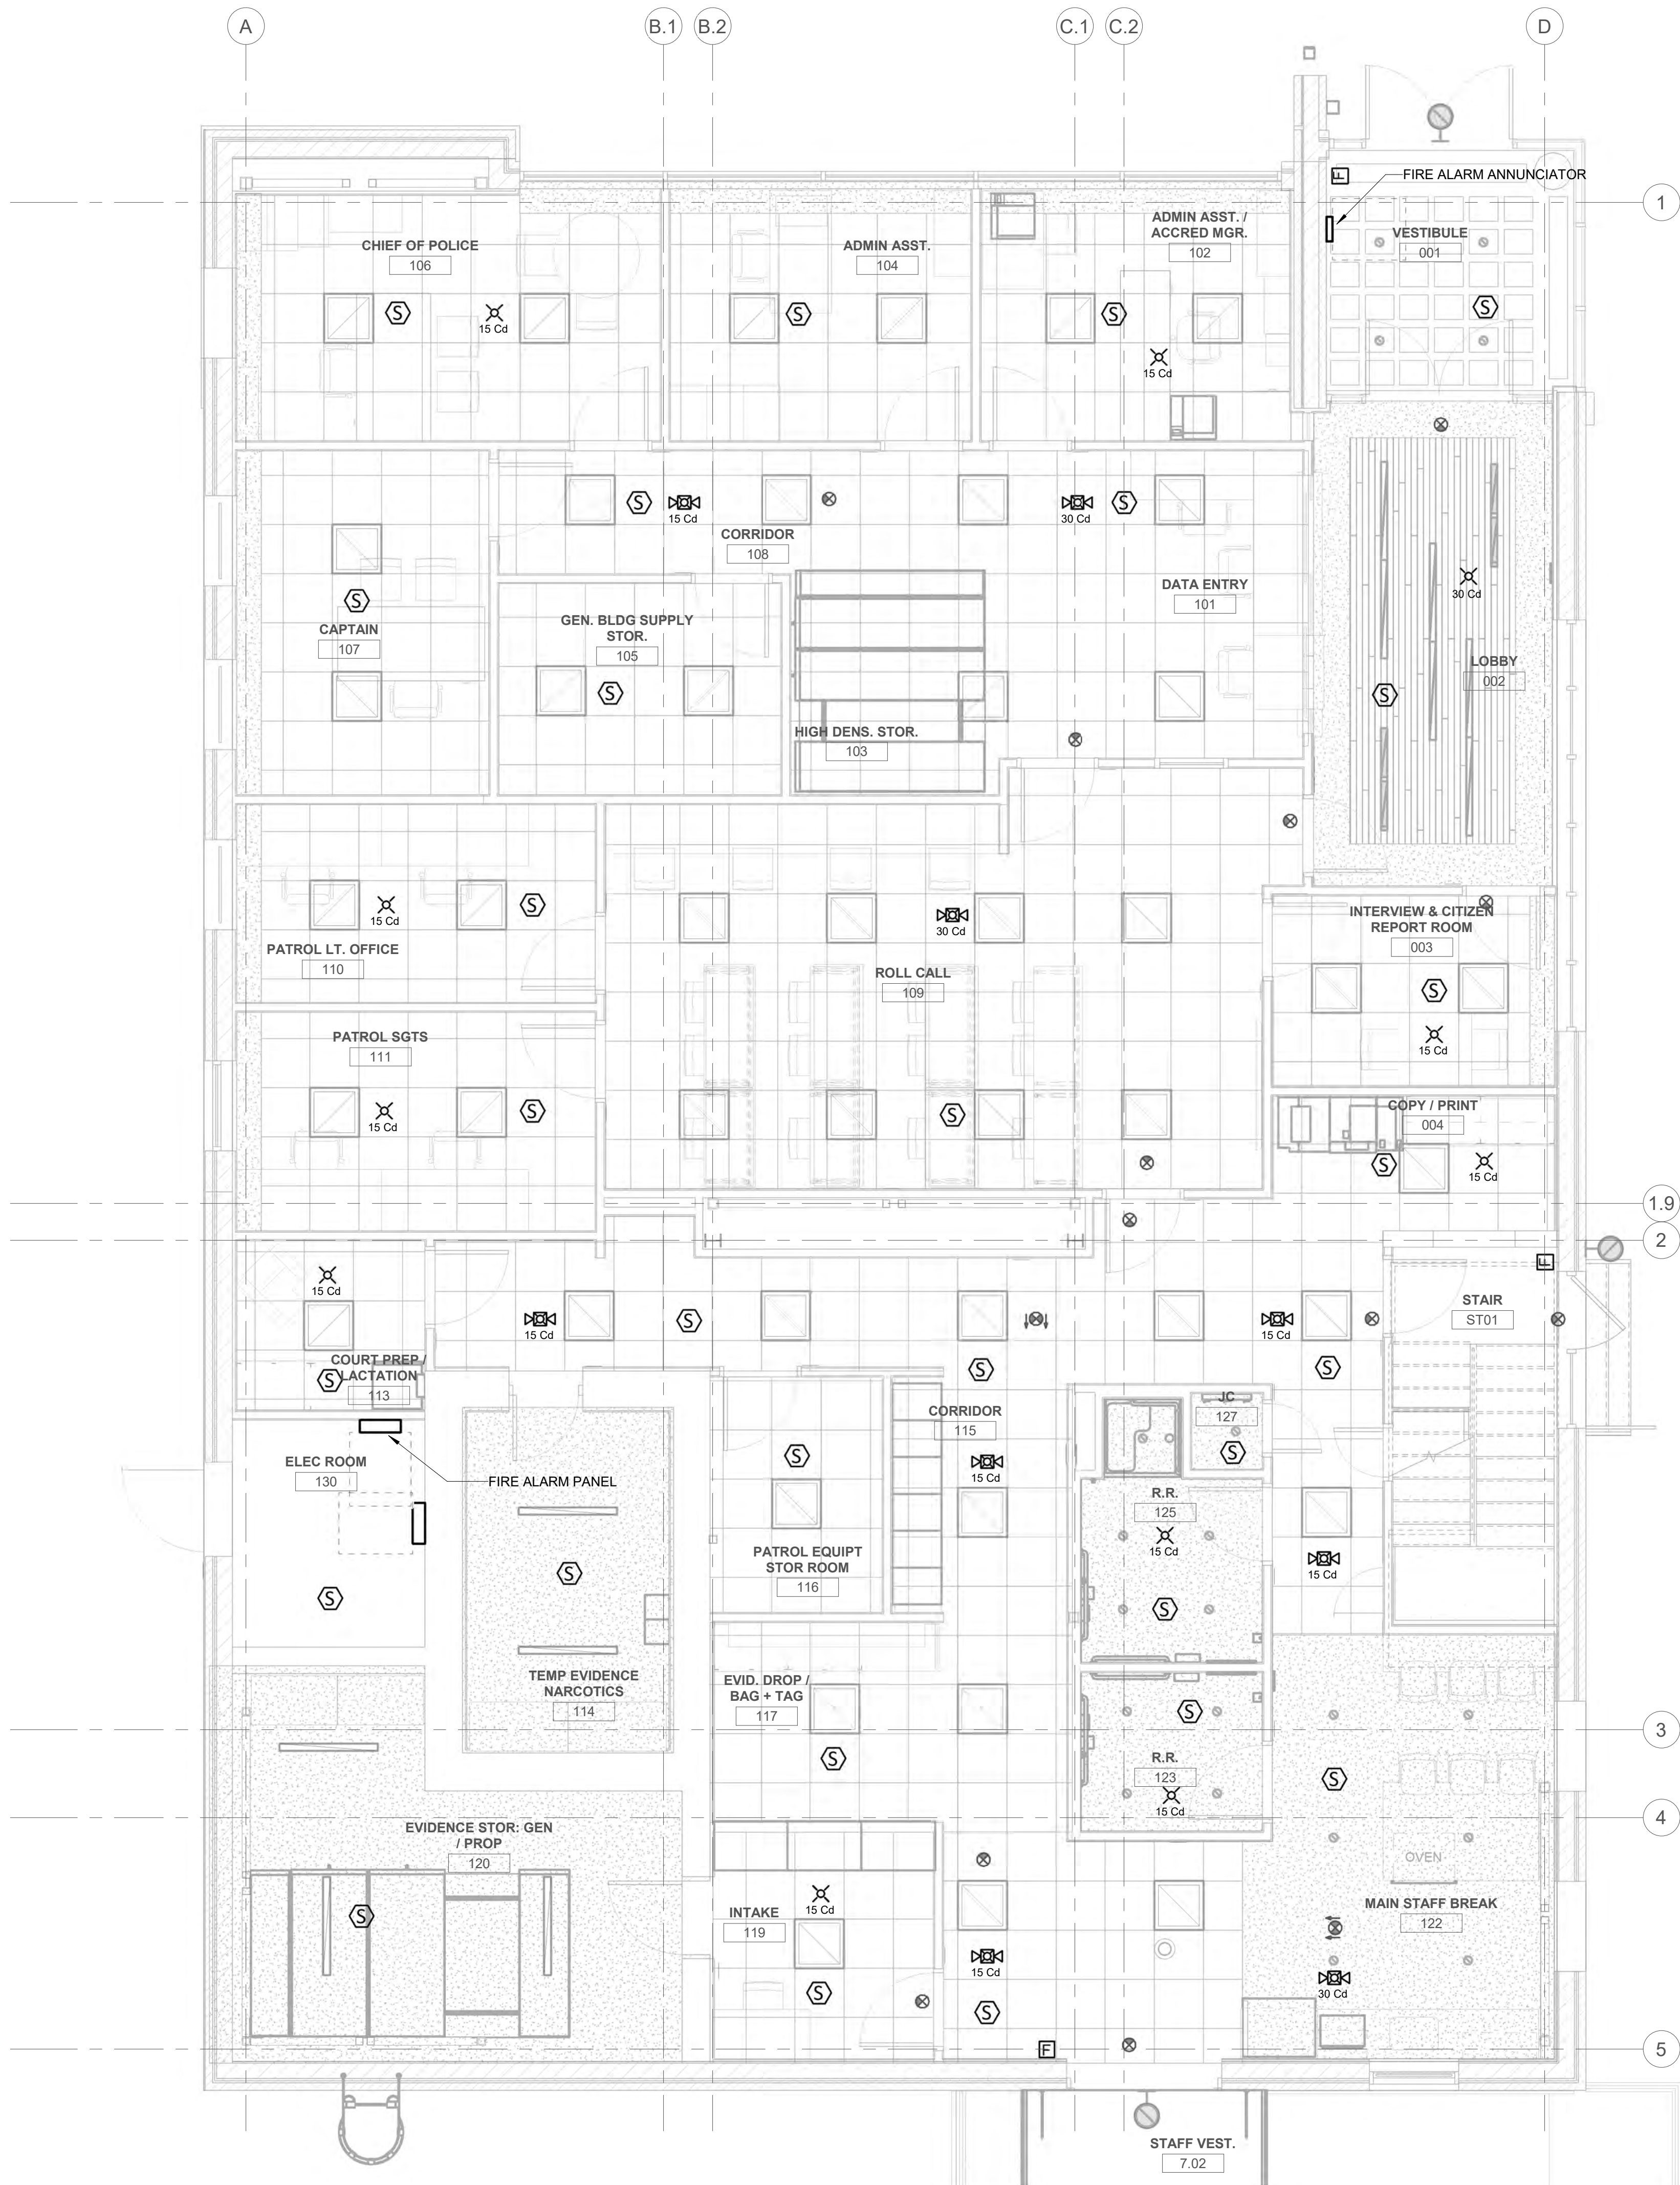

1 FIRST FLOOR FIRE ALARM PLAN
Scale: 1/4" = 1'-0"

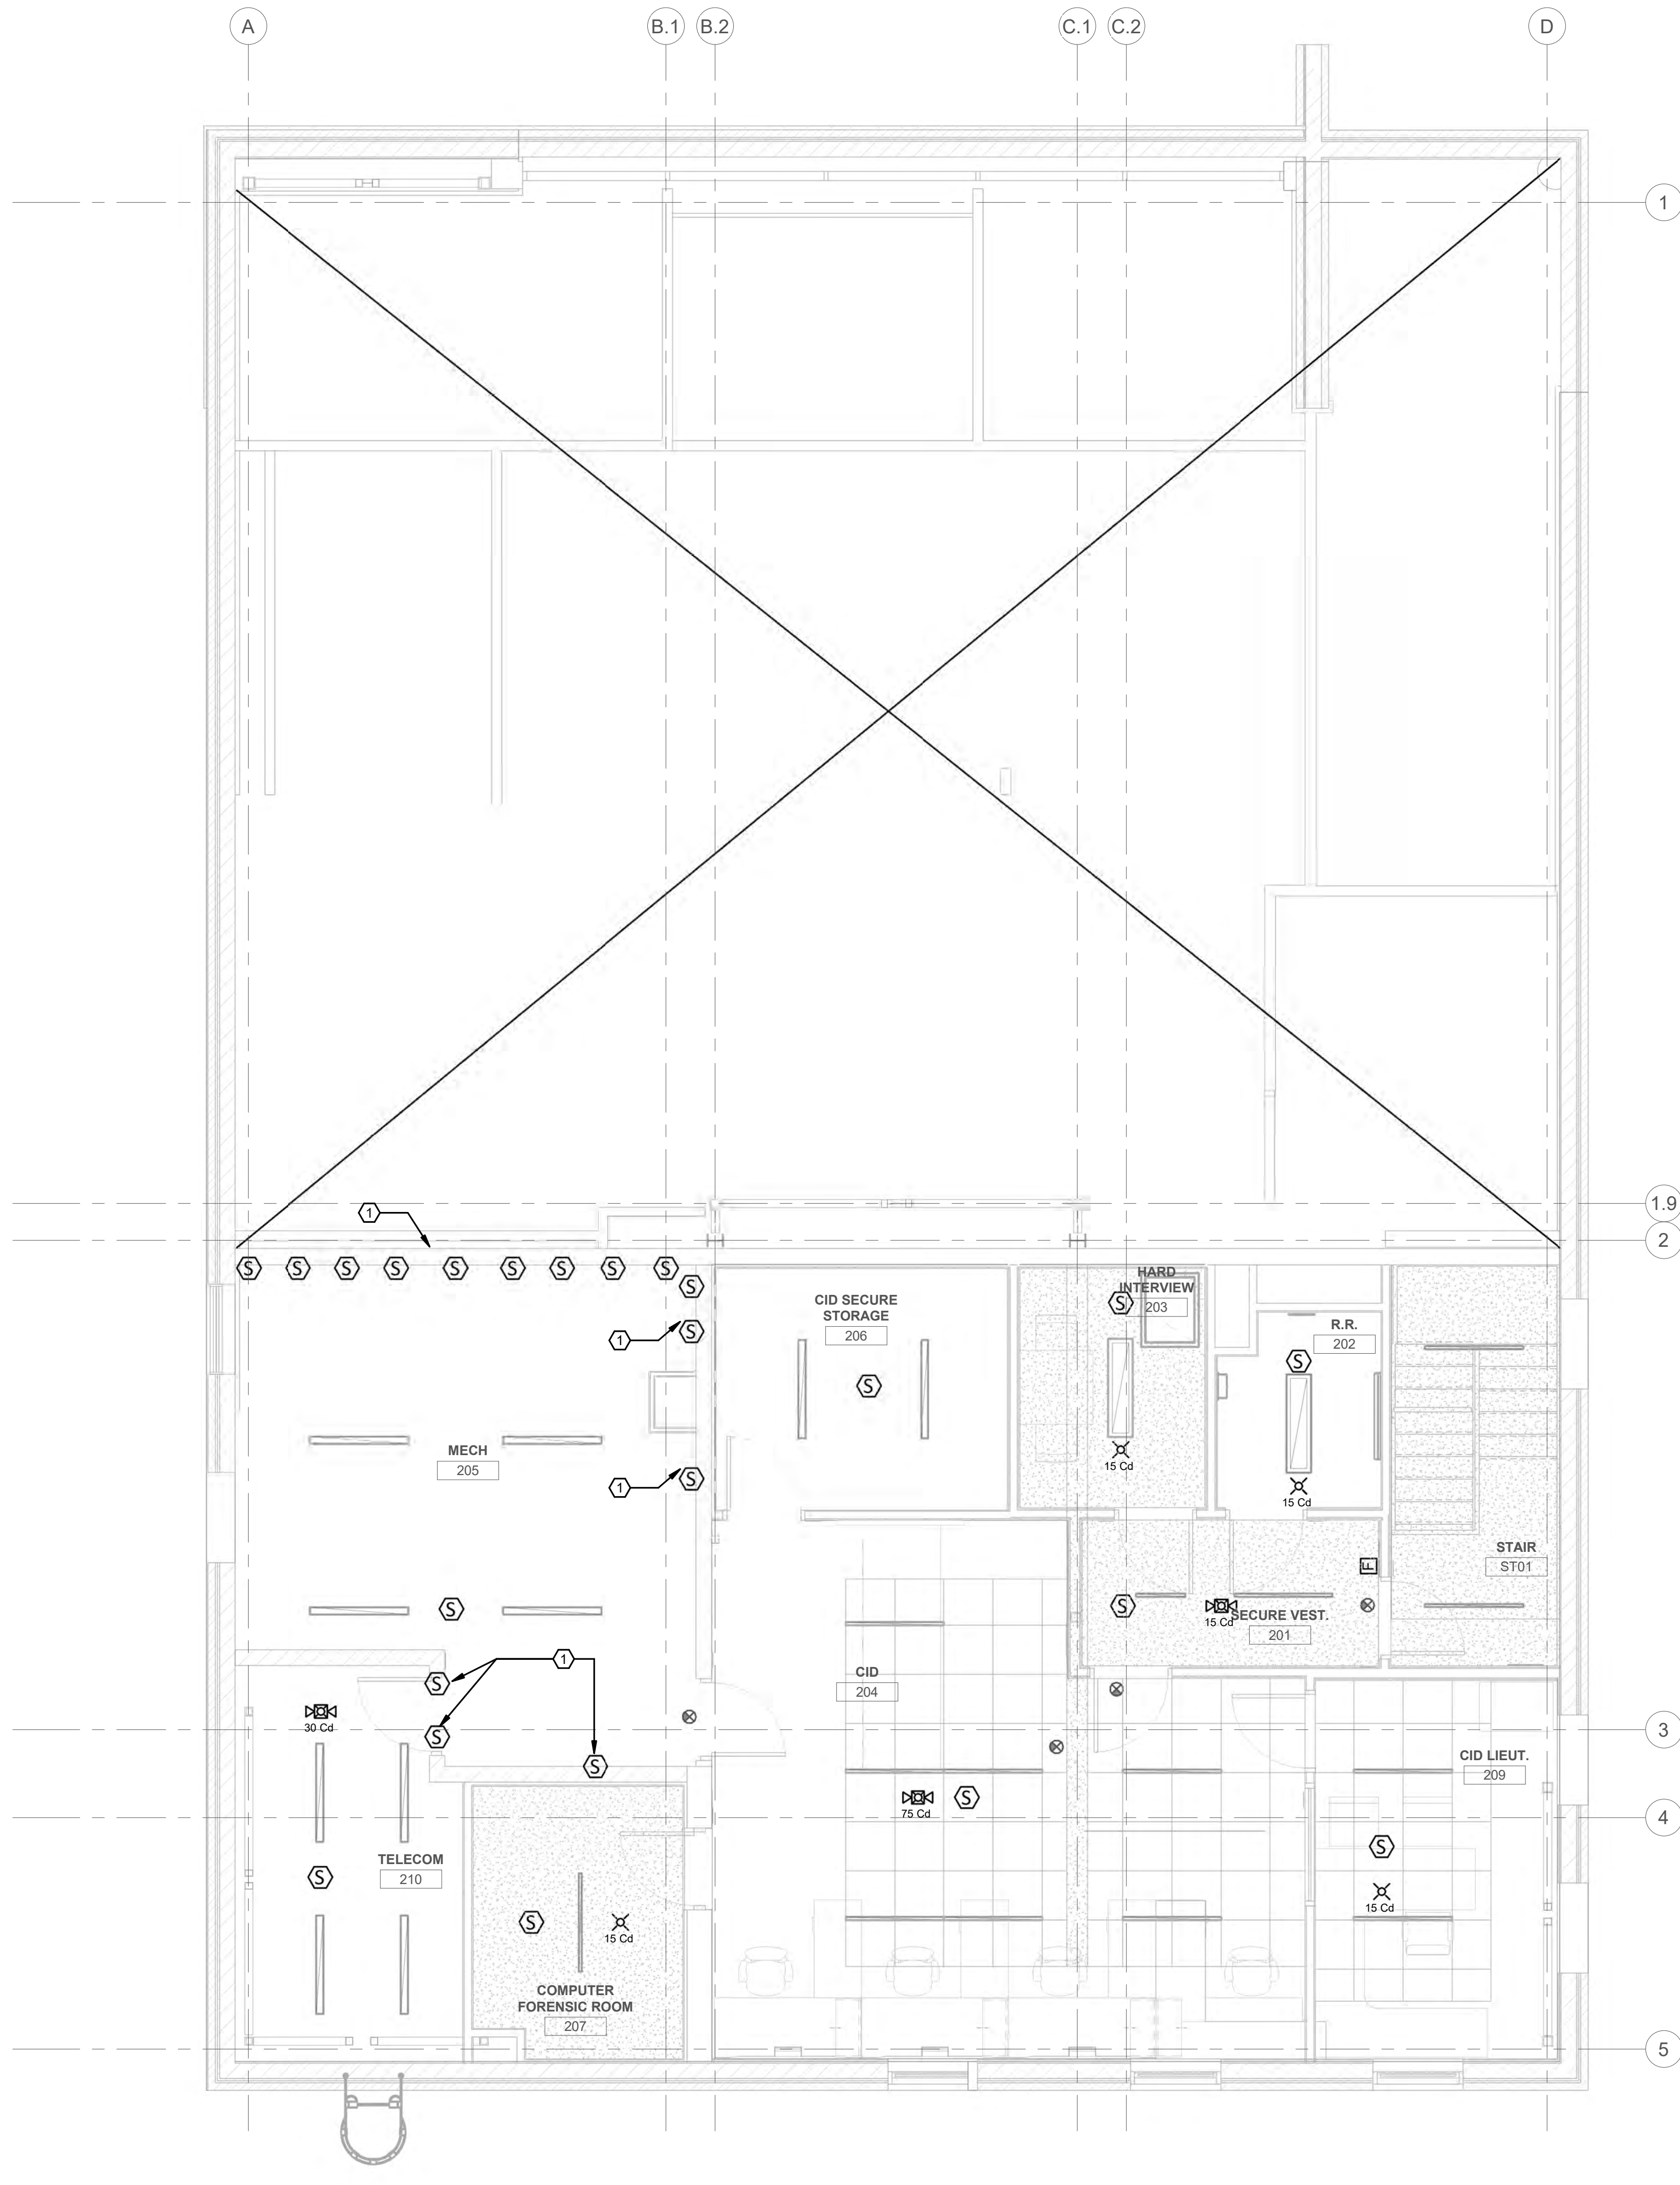

3 SECOND FLOOR FIRE ALARM PLAN
Scale: 1/4" = 1'-0"

GENERAL NOTES:

1. CEILING MOUNTED FIRE ALARM DEVICES SHALL BE CENTERED ON ACOUSTIC CEILING TILES WHERE APPLICABLE.

KEYNOTES:

- 1 PROVIDE RETURN AIR CUTOUT SMOKE DETECTOR. REFER TO DETAIL 2 ON DRAWING E-501.

COMcheck Software Version COMcheckWeb
Interior Lighting Compliance Certificate

Project Information

Energy Code: 2021 IECC
Project Title: Strasburg
Project Type: New Construction

Construction Site: 115 W King St
Strasburg, Virginia 22657
Owner/Agent: Designer/Contractor:

Additional Efficiency Package(s)

Credits: 10.0 Required 0.0 Proposed

Allowed Interior Lighting Power

Area Category	B Floor Area (ft ²)	C Allowed Watts / ft ²	D Allowed Watts
1-1st Floor Entry Lobby (Common Space Types:Lobby - General)	329	0.84	276
2-1st Floor Corridors (Common Space Types:Corridor/Transition <8 ft wide)	581	0.41	238
3-1st Floor Offices (Common Space Types:Office - Enclosed)	644	0.14	477
4-1st Floor Copy Room (Common Space Types:Copy/Print Room)	88	0.31	27
5-1st Floor Open Offices (Common Space Types:Office - Open Plan)	1025	0.61	625
6-2nd Floor Computer Forensics (Common Space Types:Computer Room)	115	0.94	108
7-2nd Floor Stair (Common Space Types:Stairwell)	123	0.49	60
8-2nd Floor Interview (Common Space Types:Conference/Meeting/Multipurpose)	81	0.38	31
9-2nd Floor Restroom (Common Space Types:Storage <50 sq.ft.)	171	0.74	127
10-2nd Floor Office (Common Space Types:Office - Enclosed)	85	0.41	35
11-2nd Floor Corridors (Common Space Types:Corridor/Transition <8 ft wide)	498	0.61	304
12-2nd Floor Open Offices (Common Space Types:Office - Open Plan)	530	0.43	228
13-2nd Floor Elec/IT (Common Space Types:Electrical/Mechanical)	133	0.38	51
14-2nd Floor Storage (Common Space Types:Storage >=50 - <=1000 sq.ft.)	190	0.52	99
15-1st Floor Evidence & Intake (Common Space Types:Locker Room)	103	0.97	100
16-1st Floor Interview (Common Space Types:Conference/Meeting/Multipurpose)	61	0.59	36
17-1st Floor Lactation (Common Space Types:Lounge/Breakroom)	232	0.59	137
18-1st Floor Break Room (Common Space Types:Lounge/Breakroom)	111	0.49	54
19-1st Floor Stair (Common Space Types:Stairwell)	131	0.63	83
20-1st Floor Restrooms (Common Space Types:Restrooms)	101	0.43	43
21-1st Floor Elec/Jan (Common Space Types:Electrical/Mechanical)	614	0.38	233
22-1st Floor Storage (Common Space Types:Storage >=50 - <=1000 sq.ft.)			
Total Allowed Watts =			3450

Proposed Interior Lighting Power

Project Title: Strasburg
Data filename: Report date: 06/24/25
Page 1 of 7

Fixture ID : Description / Lamp / Wattage Per Lamp / Ballast	B Lamps/ Fixture	C # of Fixture	D Fixture Watt.	E (C X D)
1-1st Floor Entry Lobby (Common Space Types:Lobby - General)				
C: Other:	1	4	7	29
D: Other:	1	8	13	106
2-1st Floor Corridors (Common Space Types:Corridor/Transition <8 ft wide)				
A2: Other:	1	12	24	289
3-1st Floor Offices (Common Space Types:Office - Enclosed)				
A1: Other:	1	8	33	266
4-1st Floor Copy Room (Common Space Types:Copy/Print Room)				
A2: Other:	1	1	24	24
5-1st Floor Open Offices (Common Space Types:Office - Open Plan)				
A1: Other:	1	4	33	133
A2: Other:	1	12	24	289
6-2nd Floor Computer Forensics (Common Space Types:Computer Room)				
F: Other:	1	1	40	40
7-2nd Floor Stair (Common Space Types:Stairwell)				
F: Other:	1	1	40	40
8-2nd Floor Interview (Common Space Types:Conference/Meeting/Multipurpose)				
H: Other:	1	1	47	47
9-2nd Floor Restroom (Common Space Types:Storage <50 sq.ft.)				
H: Other:	1	1	47	47
10-2nd Floor Office (Common Space Types:Office - Enclosed)				
F: Other:	1	2	40	79
11-2nd Floor Corridors (Common Space Types:Corridor/Transition <8 ft wide)				
F: Other:	1	2	40	79
12-2nd Floor Open Offices (Common Space Types:Office - Open Plan)				
F: Other:	1	7	40	277
13-2nd Floor Elec/IT (Common Space Types:Electrical/Mechanical)				
B: Other:	1	7	18	130
14-2nd Floor Storage (Common Space Types:Storage >=50 - <=1000 sq.ft.)				
B: Other:	1	2	18	37
15-1st Floor Evidence & Intake (Common Space Types:Locker Room)				
A1: Other:	1	1	33	33
A2: Other:	1	1	24	24
16-1st Floor Interview (Common Space Types:Conference/Meeting/Multipurpose)				
A1: Other:	1	2	33	67
17-1st Floor Lactation (Common Space Types:Lounge/Breakroom)				
A2: Other:	1	1	24	24
18-1st Floor Break Room (Common Space Types:Lounge/Breakroom)				
C: Other:	1	6	7	44
19-1st Floor Stair (Common Space Types:Stairwell)				
F: Other:	1	1	40	40
20-1st Floor Restrooms (Common Space Types:Restrooms)				
C: Other:	1	9	7	66
21-1st Floor Elec/Jan (Common Space Types:Electrical/Mechanical)				
B: Other:	1	1	18	18
C: Other:	1	1	7	7
22-1st Floor Storage (Common Space Types:Storage >=50 - <=1000 sq.ft.)				
A2: Other:	1	2	24	48
A1: Other:	1	1	33	33
B: Other:	1	5	18	92
Total Proposed Watts =				2410

Project Title: Strasburg
Data filename: Report date: 06/24/25
Page 2 of 7


Interior Lighting PASSES: Design 30% better than code

Interior Lighting Compliance Statement


Compliance Statement: The proposed interior lighting design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed interior lighting systems have been designed to meet the 2021 IECC requirements in COMcheck Version COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Name - Title Signature Date


Project Title: Strasburg
Data filename: Report date: 06/24/25
Page 3 of 7

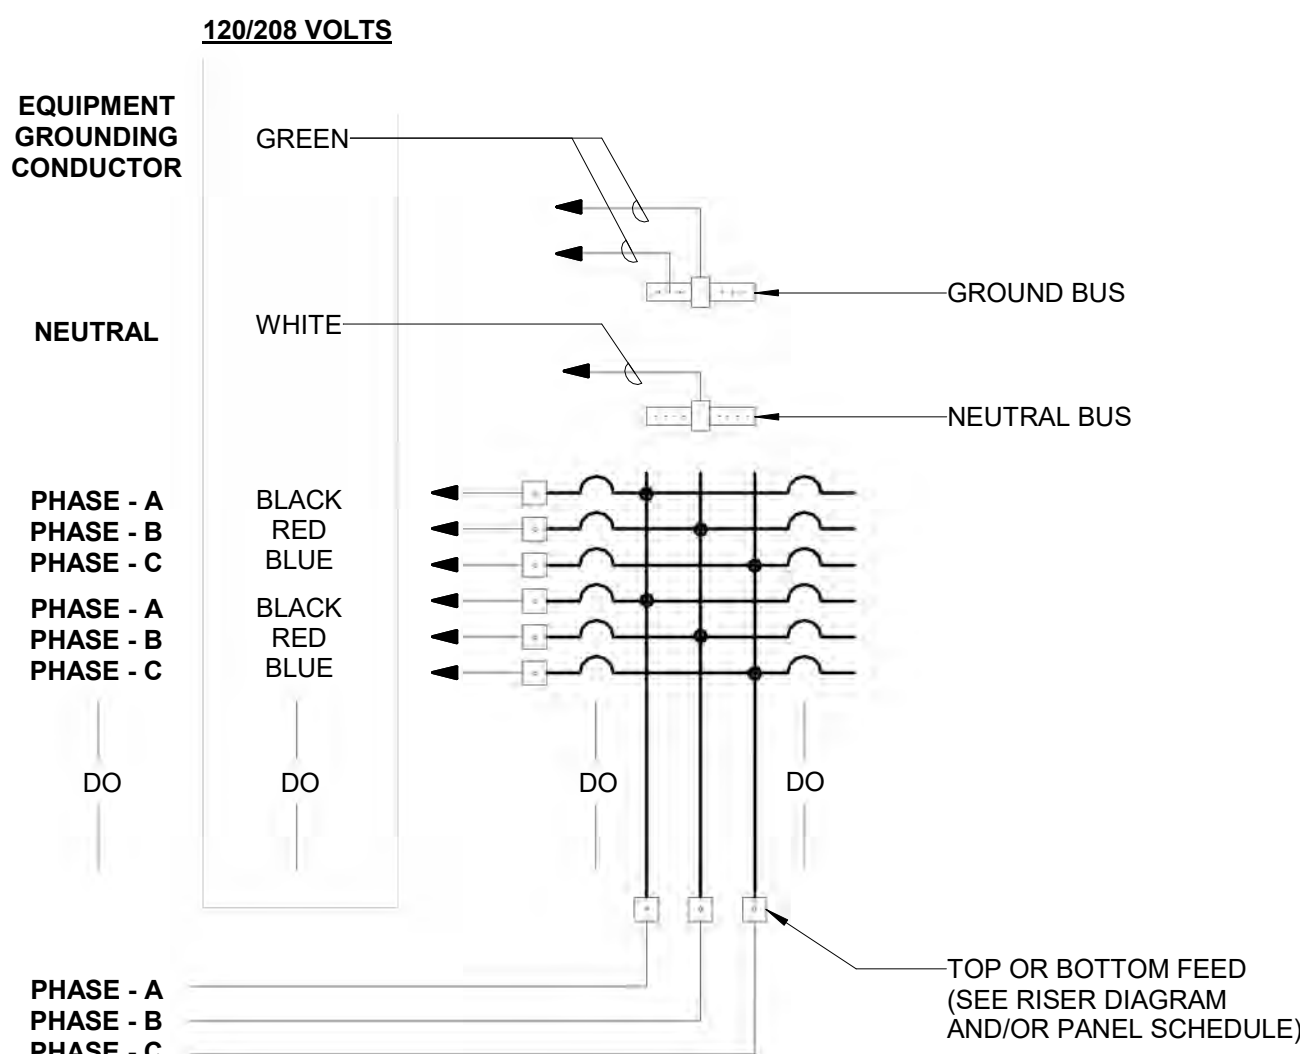

1 ELECTRICAL CONDUCTOR COLOR CODE DETAIL
Scale: N.T.S.

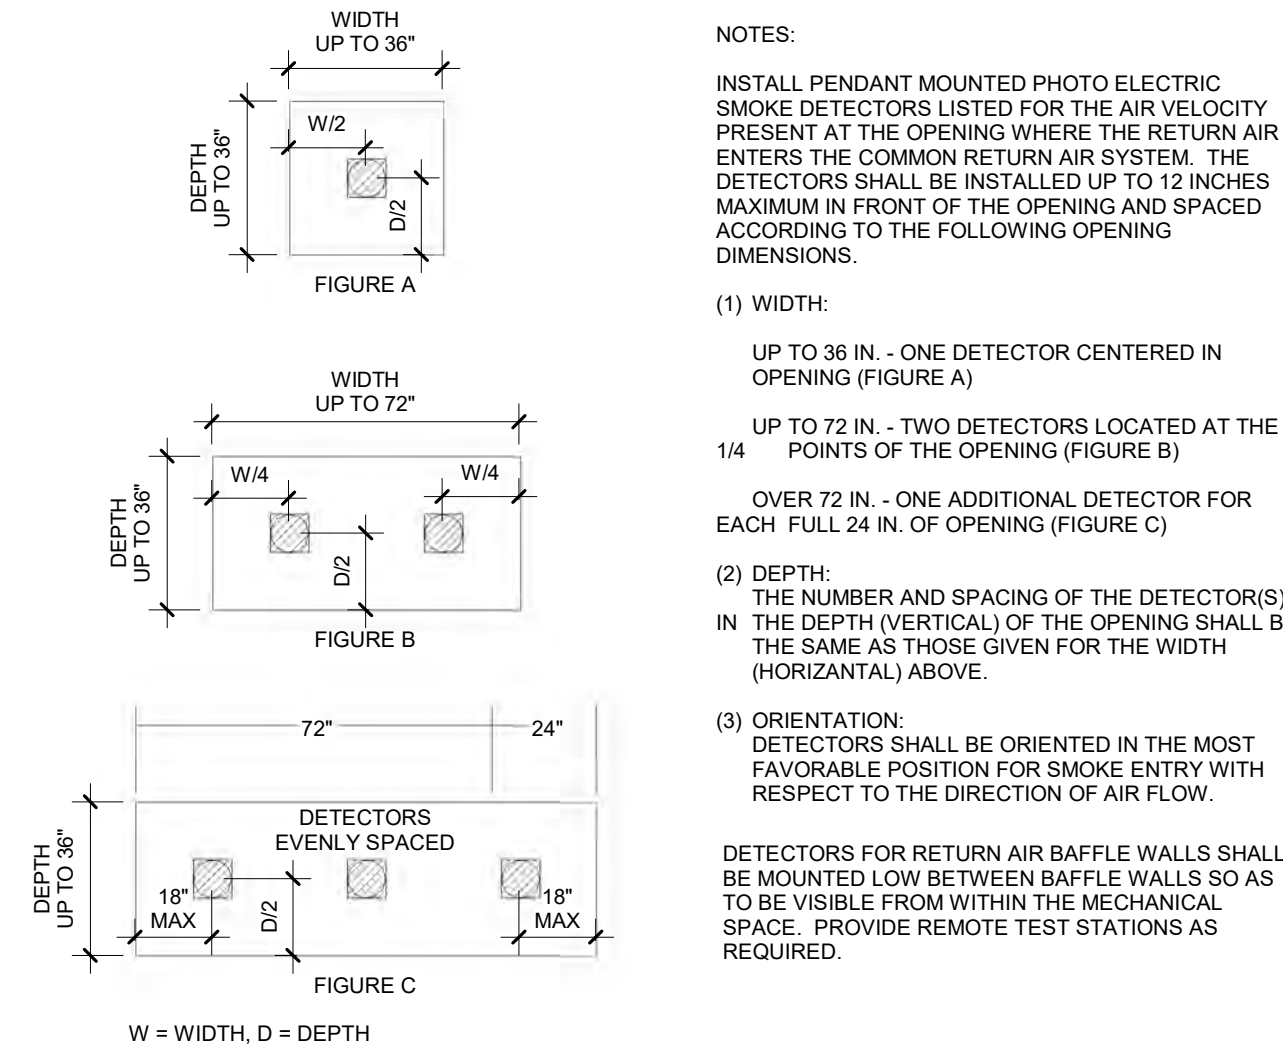

2 LOCATION OF SMOKE DETECTOR(S) IN RETURN AIR SYSTEM
Scale: N.T.S.

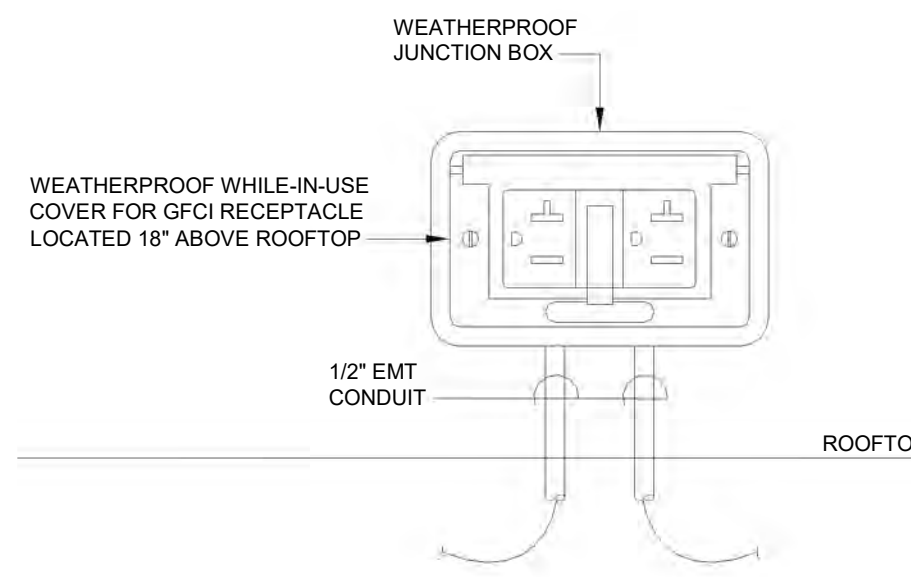

3 ROOFTOP RECEPTACLE MOUNTING DETAIL
Scale: N.T.S.

NOTE:

- THIS FIGURE ILLUSTRATES THE WORKING SPACE IN FRONT OF THE ELECTRICAL EQUIPMENT REQUIRED BY SECTION 110.26(A) AND 110.26(F) OF THE NATIONAL ELECTRICAL CODE.


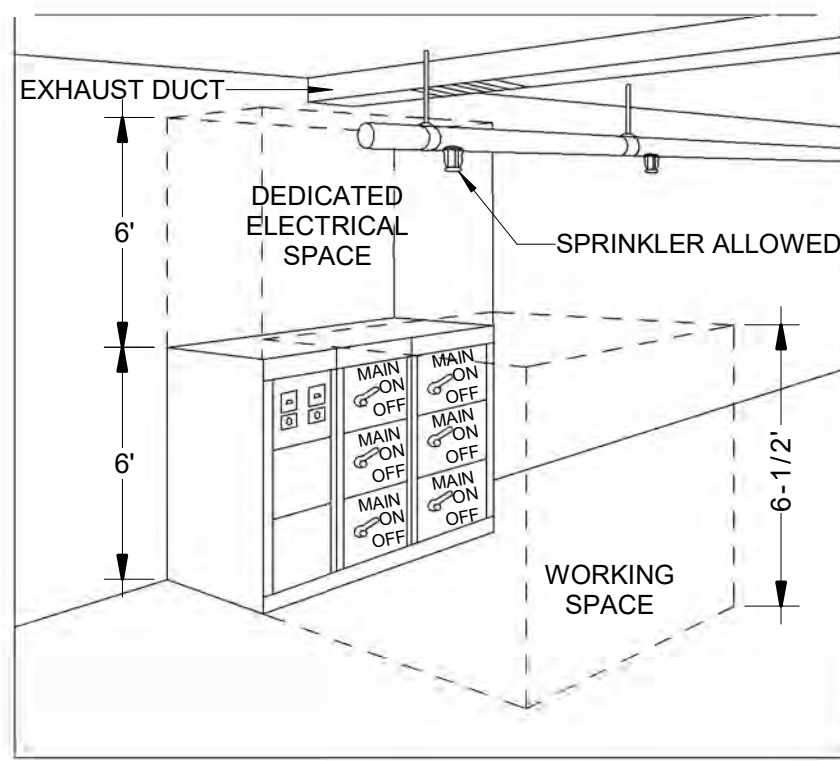


TABLE A - WORKING SPACES		MINIMUM CLEAR DISTANCE FEET		
VOLTAGE TO GROUND NOMINAL	CONDITION:	1	2	3
0-150		3	3	3
151-600		3	3-1/2	4

WHERE THE "CONDITIONS" ARE AS FOLLOWS


- EXPOSED LIVE PARTS ON ONE SIDE AND NO LIVE OR GROUNDING PARTS ON THE OTHER SIDE OF THE WORKING SPACE, OR EXPOSED LIVE PARTS ON BOTH SIDES EFFECTIVELY GUARDED BY SUITABLE WOOD OR OTHER INSULATING MATERIALS. INSULATED WIRE OR INSULATED BUSBARS OPERATING AT NOT OVER 300V TO GROUND SHALL NOT BE CONSIDERED LIVE PARTS.
- EXPOSED LIVE PARTS ON ONE SIDE AND GROUNDING PARTS ON THE OTHER SIDE (CONCRETE BRICK OR TILE WALLS SHALL BE CONSIDERED AS GROUNDING.)
- EXPOSED LIVE PARTS ON BOTH SIDES OF THE WORK SPACE (NOT GUARDED AS PROVIDED IN CONDITION 1) WITH THE OPERATOR BETWEEN.

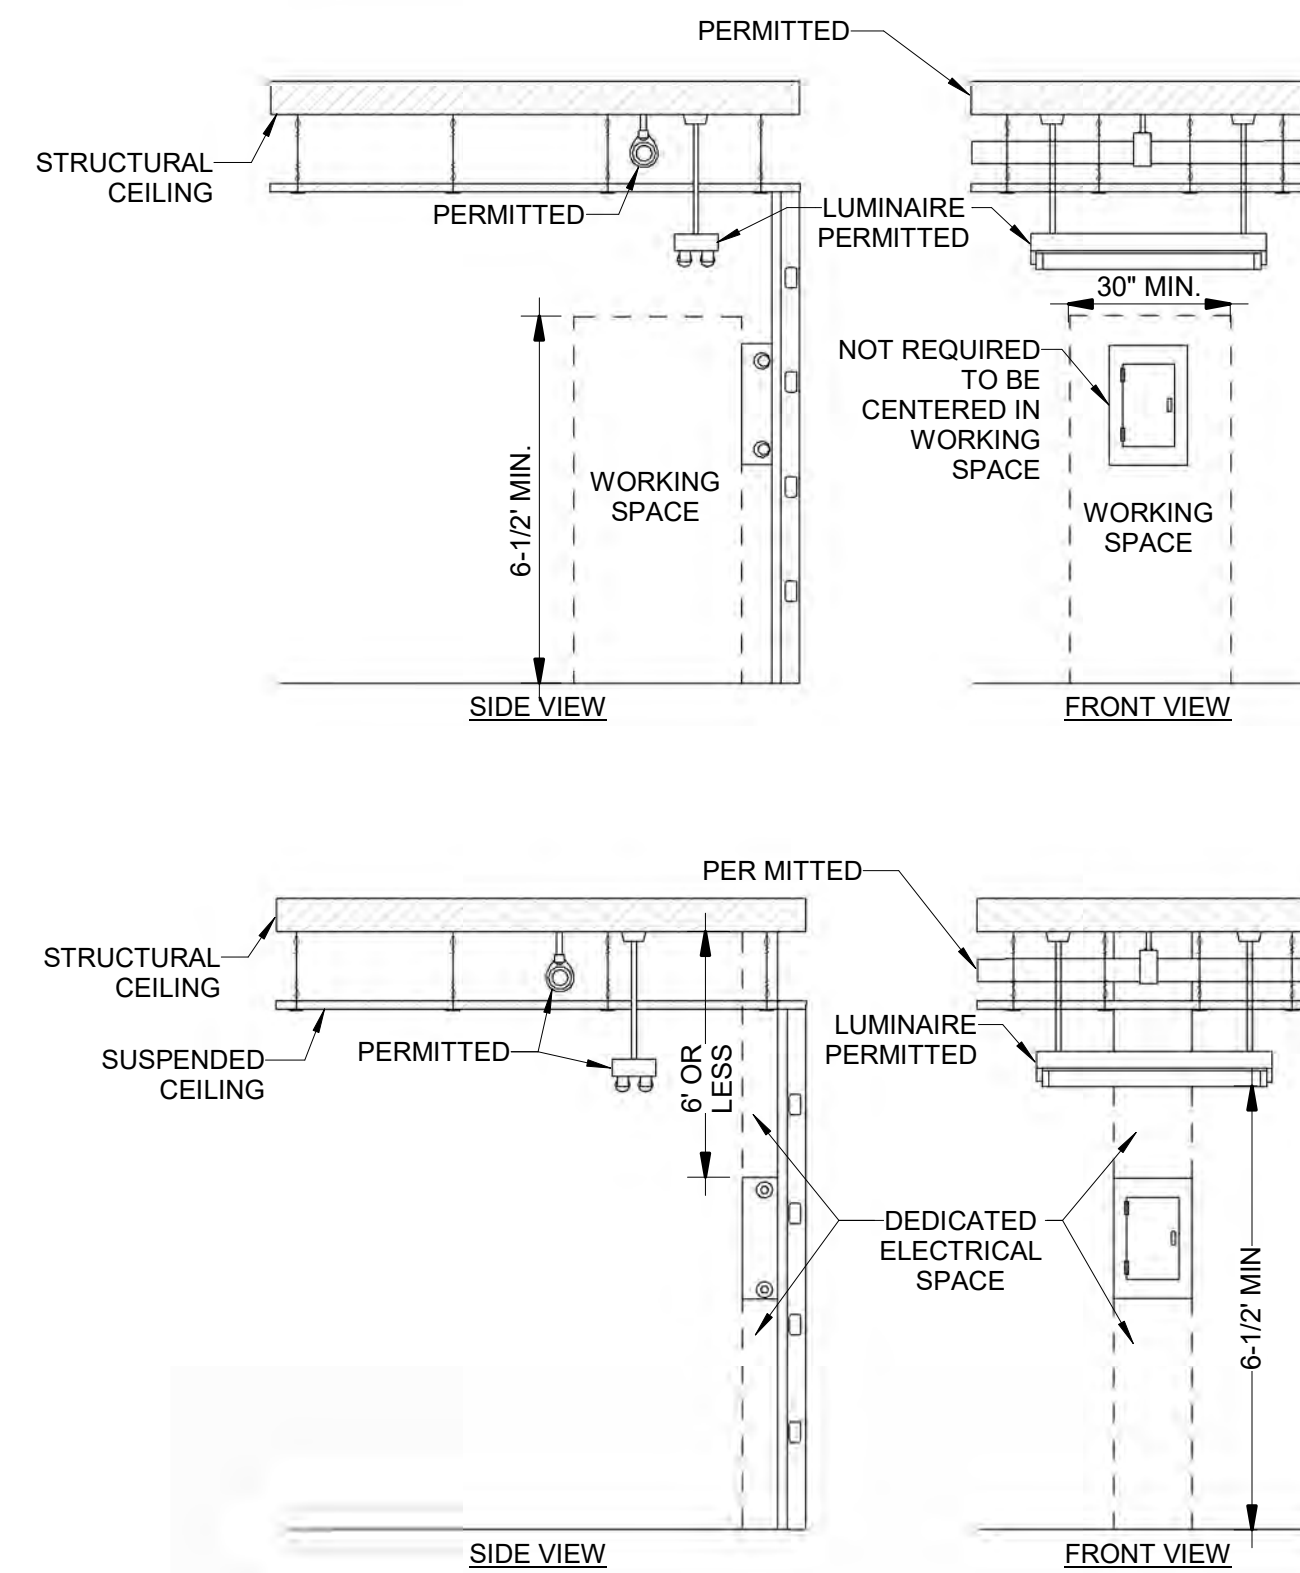

4 WORKING CLEARANCE FOR ELECTRICAL EQUIPMENT
Scale: N.T.S.

5 Fire Alarm Matrix

Scale: N.T.S.

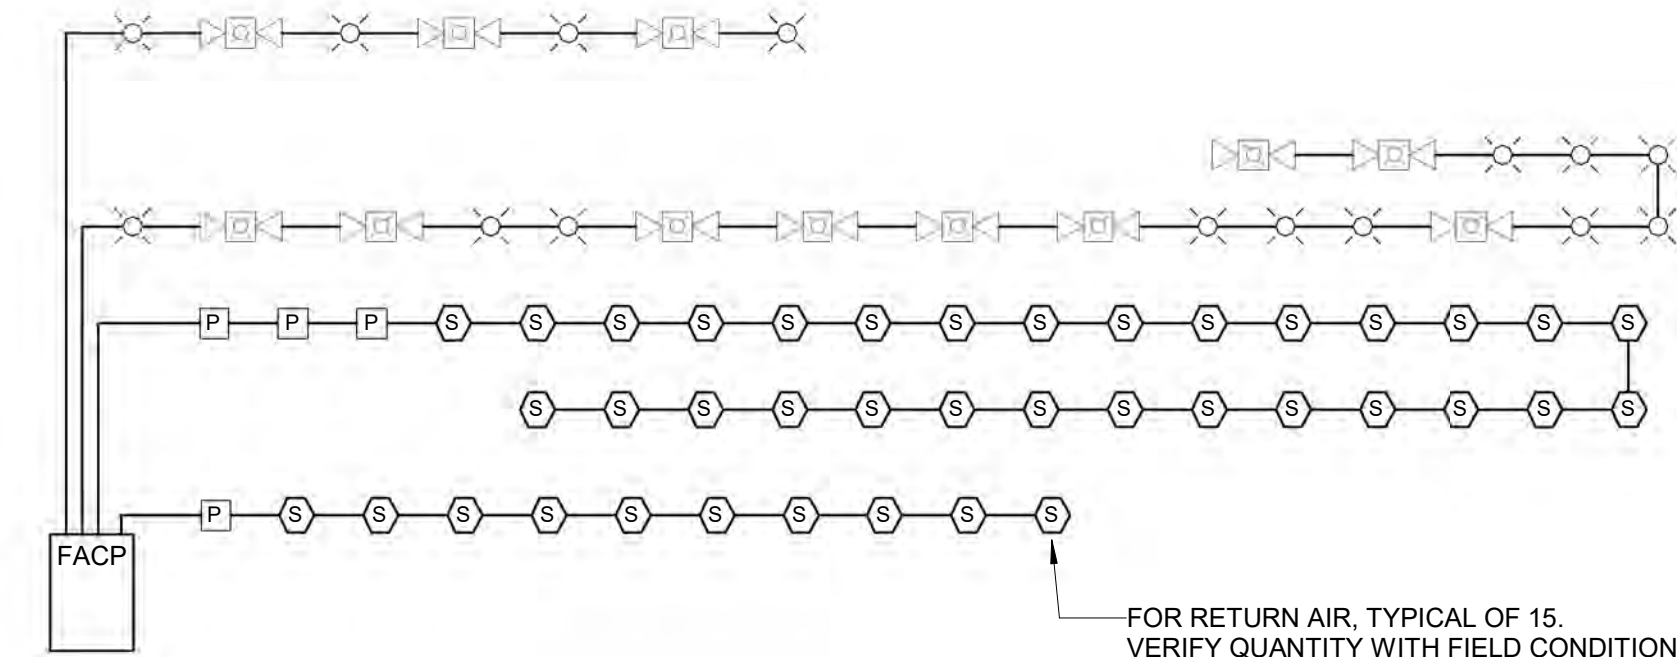

FIRE ALARM RISER NOTES:


- REGARDLESS OF THE RISER, QUANTITIES SHALL BE PROVIDED PER THE FLOORPLANS.
- COORDINATE EXACT REQUIREMENTS AND CIRCUITS WITH SELECTED DEVICES, AVAILABLE CIRCUIT CAPACITIES, AND ROUTING OF INSTALLED CONDUCTORS.

6 FIRE ALARM RISER

Scale: N.T.S.

7 SITE LIGHTING POLE BASE DETAIL
Scale: N.T.S.

Scale: N.T.S.

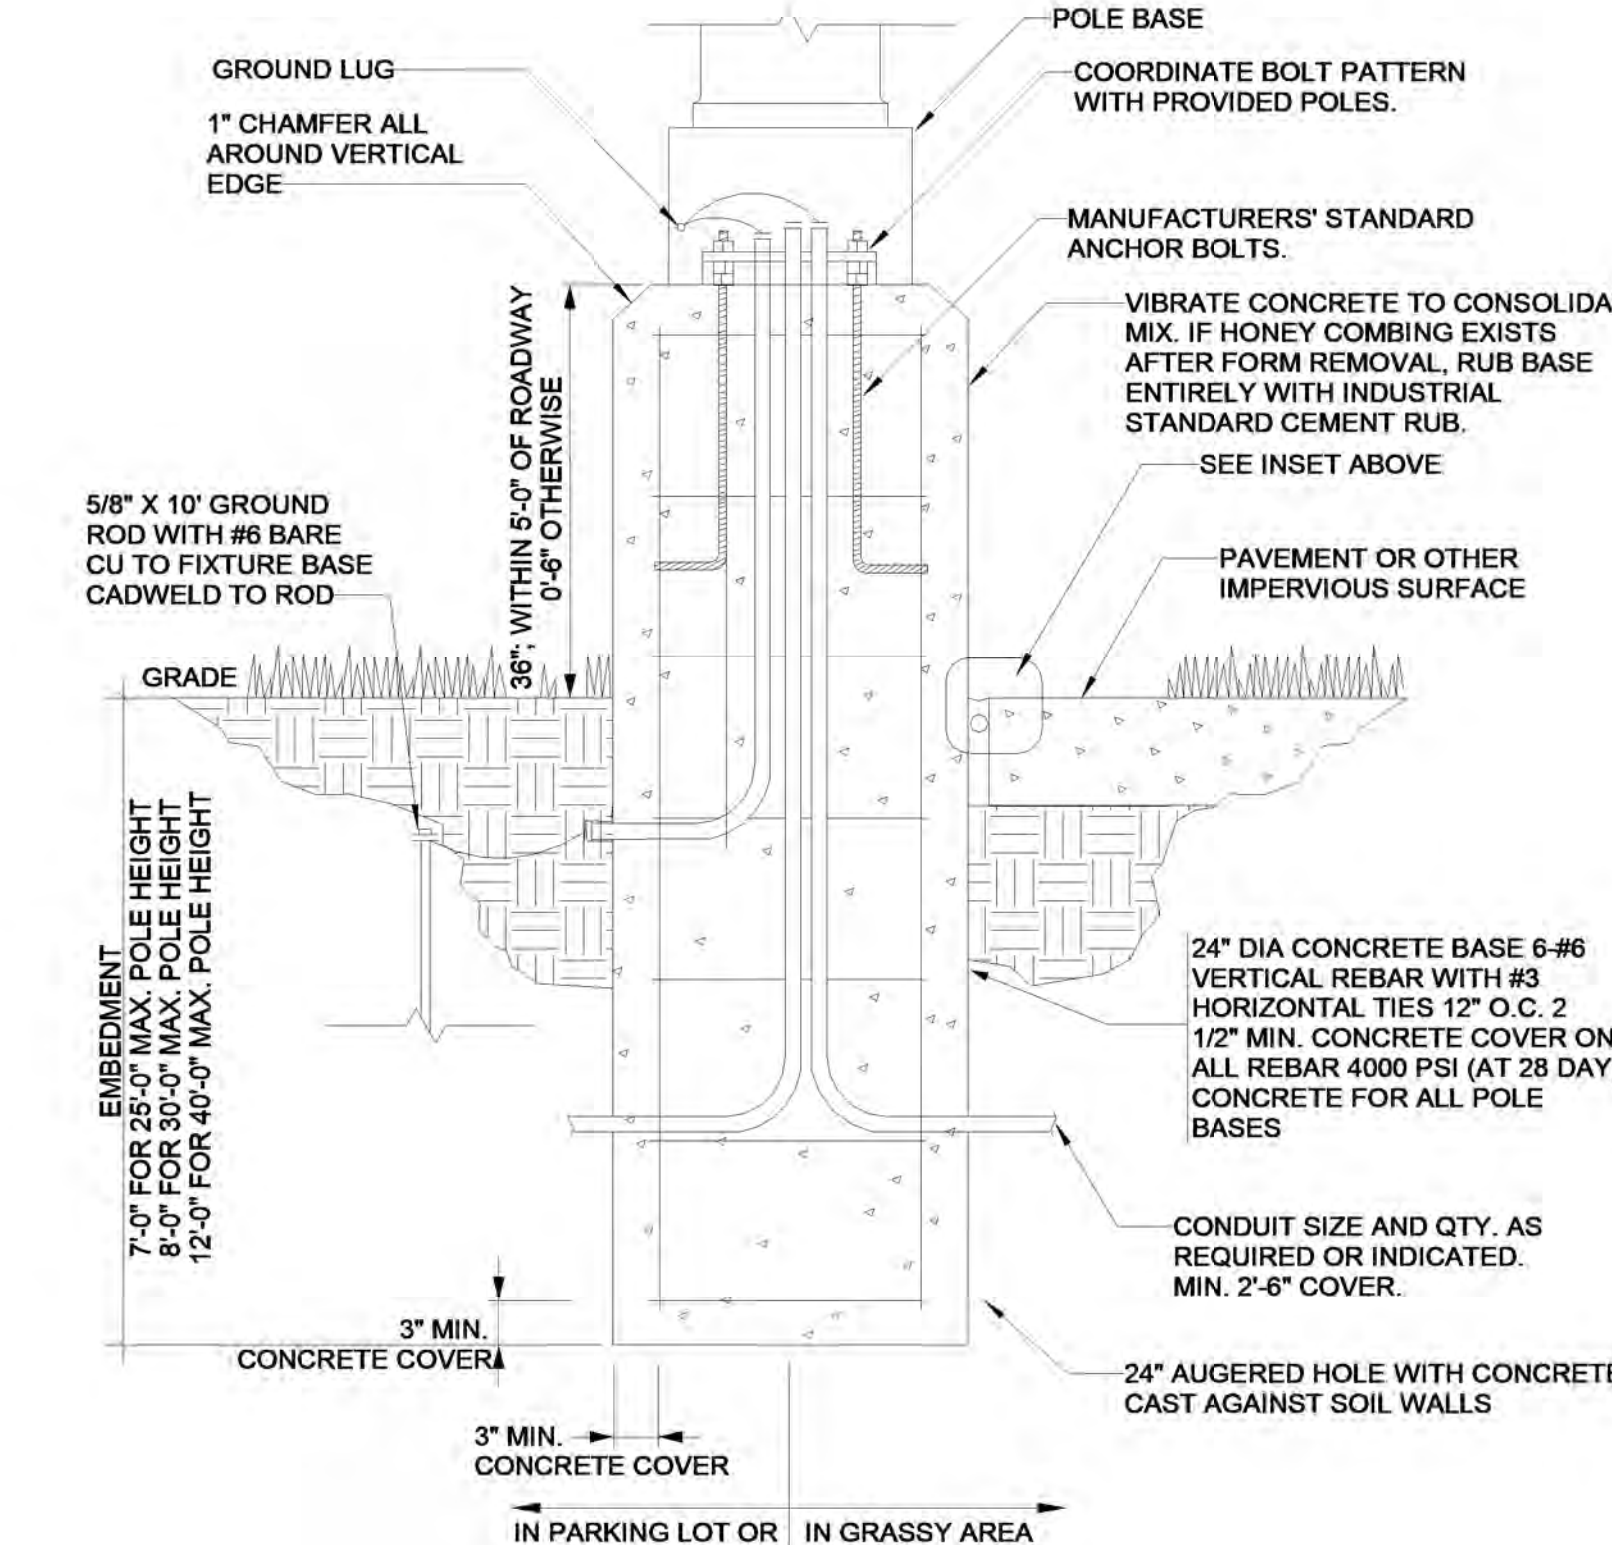

4 WORKING CLEARANCE FOR ELECTRICAL EQUIPMENT
Scale: N.T.S.

Dewberry
Dewberry Engineers Inc.
8401 Arlington Boulevard
Fairfax, VA 22031-4619
703.849.0100

TOWN OF STRASBURG
STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN

SCALE

REVISIONS

NO.	DESCRIPTION	DATE


DRAWN BY PH
APPROVED BY SC
CHECKED BY WR
DATE 08.26.2026

TITLE

ELECTRICAL
DETAILS

PROJECT NO.

E-501

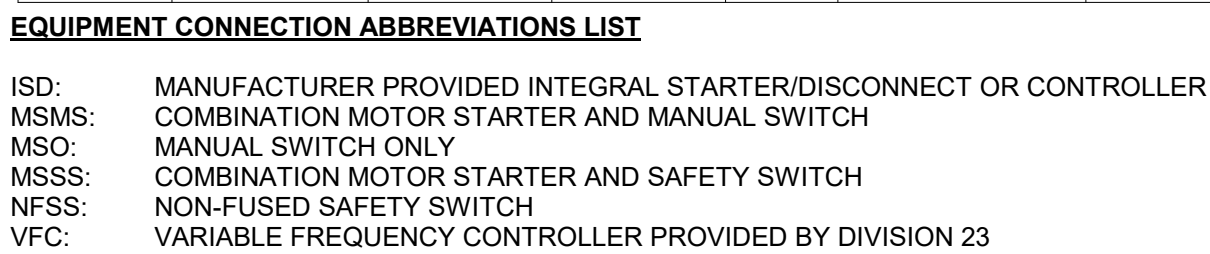

RISER DIAGRAM KEYED NOTES:

1 PROVIDE #2/0 MAIN BONDING JUMPER

1. ALL GROUND WIRES SHALL BE COPPER, REGARDLESS OF PHASE CONDUCTOR TYPE.
2. ATS #1 SERVES OPTIONAL STANDBY (NEC 702) LOADS ONLY. BUILDING EMERGENCY (NEC 700) LOADS INCLUDING EGRESS LIGHTING AND FIRE ALARM SYSTEMS ARE PROVIDED WITH ALTERNATE BATTERY SOURCES TO MEET THEIR DURATION, SURVIVABILITY, AND SEPARATION REQUIREMENTS.

SCALE

TITLE

& SCHEDULES

PROJECT NO.

F

E

D

C

B

A

TELECOMMUNICATIONS SYSTEMS SYMBOL LEGEND							
SYMBOL	DESCRIPTION	SPECIFICATION SECTION	WIRING REQUIREMENTS	MINIMUM CONDUIT SIZE	BACK BOX	MOUNTING HEIGHT	NOTES
	WALL MOUNTED TELECOMMUNICATIONS OUTLET, TELEPHONE PLATE	27 15 00	(1) CATEGORY 6 UTP, UON	1" CONDUIT	TWO GANG 3 1/2" DEEP BOX WITH ONE GANG TRIM RING	46" AFF TO CENTER OF BOX WALL MOUNTED, UON	①
	WALL MOUNTED TELECOMMUNICATIONS OUTLET	27 15 00	(2) CATEGORY 6 UTP, UON	1" CONDUIT	TWO GANG 3 1/2" DEEP BOX WITH ONE GANG TRIM RING	18" AFF, UON	②
	CATV OUTLET	27 11 20	(1) RG-6U, UON	3/4" CONDUIT	TWO GANG 3 1/2" DEEP BOX WITH ONE GANG TRIM RING	REFER TO PLANS FOR ELEVATION	③
	WIRELESS ACCESS POINT TELECOMMUNICATIONS OUTLET	27 15 00	(1) CATEGORY 6 UTP, UON	1" CONDUIT	TWO GANG 3 1/2" DEEP BOX	CEILING MOUNTED, REFER TO DETAIL	④
	FOUR POST 19" EIA, 7" TALL 45 RU FLOOR MOUNTED RACK	27 11 16	REFER TO BLOCK DIAGRAMS	REFER TO PLANS	N/A	SECURED TO FLOOR	⑤
	TWO POST 19" EIA, 7" TALL, 45 RU FLOOR MOUNTED RACK	27 11 16	REFER TO BLOCK DIAGRAMS	REFER TO PLANS	N/A	SECURED TO FLOOR	⑥
	TELECOMMUNICATIONS GROUNDING BUSBAR	27 05 26	REFER TO GROUNDING BLOCK DIAGRAM	REFER TO BACKBONE CONDUIT BLOCK DIAGRAM	N/A	MIN. 24" AFF	⑦
	AUDIO VISUAL INTERFACE, TYPE 1 SUBSCRIPT ADJACENT TO SYMBOL DENOTES SYSTEM INTERFACE COMPONENT IDENTIFIER	27 41 30	REFER TO SYSTEM BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	⑧
	AUDIO VISUAL INTERFACE, TYPE 2	27 41 30	REFER TO SYSTEM BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	⑨
	AUDIO VISUAL INTERFACE , TYPE 3	27 41 30	REFER TO SYSTEM BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	⑩
	AUDIO VISUAL INTERFACE , TYPE 4	27 41 30	REFER TO SYSTEM BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	⑪
	WALL MOUNT DISPLAY	N/A	REFER TO SYSTEM BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	REFER TO SYSTEM CONDUIT BLOCK DIAGRAM	60", UON	⑫

TELECOMMUNICATIONS LEGEND KEYED NOTES:

- ① WALL MOUNTED TELECOMMUNICATIONS OUTLET, TELEPHONE PLATE. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL ALL CABLING, TERMINATIONS, OUTLETS, STUDDED FACE PLATE, RACK TERMINATION HARDWARE, AND RELATED INFRASTRUCTURE AS CALLED FOR IN THE CONTRACT DOCUMENTS.
- ② WALL MOUNTED TELECOMMUNICATIONS OUTLET. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL ALL CABLING, TERMINATIONS, OUTLETS, STANDARD FACE PLATE, RACK TERMINATION HARDWARE, AND RELATED INFRASTRUCTURE AS CALLED FOR IN THE CONTRACT DOCUMENTS. SUBSCRIPT ADJACENT SYMBOL INDICATES QUANTITY OF CATEGORY 6 DROPS IF DIFFERENT FROM THAT SHOWN IN LEGEND. SUBSCRIPT 'AC' DENOTES ABOVE COUNTER MOUNTING HEIGHT. WHERE SHOWN ADJACENT TO CATV OUTLET, TERMINATE ON SAME FACEPLATE AS CATV.
- ③ CATV OUTLET. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL ALL CABLING, AND CATV OUTLET AS CALLED FOR IN CONTRACT DOCUMENTS. WHEN SHOWN ADJACENT TO TELECOMMUNICATIONS OUTLET, CATV AND CATEGORY 6 TERMINATIONS MADE ON SHARED FACE PLATE.
- ④ WIRELESS ACCESS POINT DATA TELECOMMUNICATIONS OUTLET. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL ALL CABLING, TERMINATIONS, OUTLETS, FURNITURE FACE PLATE, RACK TERMINATION HARDWARE, AND RELATED INFRASTRUCTURE AS CALLED FOR IN THE CONTRACT DOCUMENTS.
- ⑤ FOUR POST FLOOR MOUNTED TECHNOLOGY RACK. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL RACK AND APPURTENANCES CALLED FOR IN CONTRACT DOCUMENTS. MAINTAIN MIN. 3' OPEN AND CLEAR WORKING SPACE IN THE FRONT AND REAR OF THE RACK. COORDINATE MOUNTING OF POWER OUTLETS SERVING THE RACK WITH DIVISION 26.
- ⑥ TWO POST FLOOR MOUNTED TECHNOLOGY RACK. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL RACK AND APPURTENANCES CALLED FOR IN CONTRACT DOCUMENTS. MAINTAIN MIN. 3' OPEN AND CLEAR WORKING SPACE IN THE FRONT AND REAR OF THE RACK. WITH 32" DEEP EQUIPMENT INSTALLED. COORDINATE MOUNTING OF POWER OUTLETS SERVING THE RACK WITH DIVISION 26.
- ⑦ TELECOM GROUNDING BUSBAR. UNDER DIVISION 26 SCOPE OF WORK, FURNISH AND INSTALL THE COMPLETE TELECOMMUNICATIONS GROUNDING SYSTEM AS CALLED FOR IN THE CONTRACT DOCUMENTS. SUBSCRIPT 'P' ADJACENT TO SYMBOL DENOTES PRIMARY BONDING BUSBAR. SUBSCRIPT 'S' ADJACENT TO SYMBOL DENOTES SECONDARY BONDING BUSBAR. DIVISION 26 TO PROVIDE TELECOM BONDING BACKBONE CONNECTING TELECOM MAIN GROUNDING BUSBAR TO MAIN BUILDING GROUND, AND SHALL BE SIZED IN ACCORDANCE WITH TIA 607-B STANDARD.
- ⑧ WALL MOUNTED AUDIO VISUAL INTERFACE PANEL, TYPE 1. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL ACTIVE DEVICES, CABLING, TERMINATIONS, AND PROGRAMMING AS CALLED FOR IN THE CONTRACT DOCUMENTS. SUBSCRIPT 'A' DENOTES HDMI & USB TRANSMIT DEVICE, SUBSCRIPT 'R' DENOTES COMPATIBLE RECEIVER DEVICE.
- ⑨ WALL MOUNTED AUDIO VISUAL INTERFACE PANEL, TYPE 2. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL HDMI PASS THROUGH PLATE AND CABLING AS CALLED FOR IN THE CONTRACT DOCUMENTS.
- ⑩ WALL MOUNTED AUDIO VISUAL INTERFACE PANEL, TYPE 3. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL DEVICE, CABLING, TERMINATIONS, AND PROGRAMMING AS CALLED FOR IN THE CONTRACT DOCUMENTS. SUBSCRIPT 'A' DENOTES HDMI TRANSMIT DEVICE, SUBSCRIPT 'R' DENOTES COMPATIBLE RECEIVER DEVICE.
- ⑪ WALL MOUNTED AUDIO VISUAL INTERFACE PANEL, TYPE 4. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 27 SCOPE OF WORK FURNISH AND INSTALL DEVICE, CABLING, TERMINATIONS, AND PROGRAMMING AS CALLED FOR IN THE CONTRACT DOCUMENTS. SUBSCRIPT 'A' DENOTES HDMI TRANSMITTER, SUBSCRIPT 'R' DENOTES RECEIVER.
- ⑫ WALL MOUNT DISPLAY. FURNISH AND INSTALL RACEWAY SYSTEM, SPECIALTY BACK BOX, DISPLAY BACKING, CABLING AND CONNECTIVITY. COORDINATE AUDIO/VISUAL SYSTEMS, TELECOMMUNICATIONS, CATV AND 120VAC POWER. DISPLAY AND DISPLAY MOUNT IS OWNER FURNISHED AND INSTALLED.

TELECOMMUNICATIONS SYSTEMS GENERAL NOTES:

1. INDICATED MOUNTING HEIGHTS ARE FOR DESIGN PURPOSES ONLY. COORDINATE FINAL MOUNTING HEIGHT OF ALL EQUIPMENT WITH SURROUNDING EQUIPMENT AND SURROUNDING CONDITIONS. MOUNTING HEIGHTS INDICATED ARE TO CENTER OF BOX.
2. CABLE WILL BE CMP.
3. CABLING USED FOR IN-SLAB FLOOR BOXES SHALL BE INDOOR/OUTDOOR RATED CABLING.
4. PROTECT FROM WEATHER, THEFT, DIRT, FUMES, WATER, CONSTRUCTION DEBRIS, ETC., AT ALL TIMES. DAMAGED EQUIPMENT WILL BE RESTORED TO LIKE NEW CONDITION OR REPLACED BY THE CONTRACTOR.
5. CLEAN ALL EQUIPMENT TO PRESENT A "NEW" CONDITION AT PROJECT COMPLETION. VACUUM CLEAN INTERNAL AREAS OF EQUIPMENT RACKS AND ENCLOSURES.
6. CONTRACTOR IS REQUIRED TO ACCOMMODATE INCIDENTAL MOVEMENT OF THE FIELD DEVICES AS DIRECTED BY THE ARCHITECT FROM THE LOCATION INDICATED UP TO 10 FEET PROVIDED THE DEVICE ROUGH IN HAS NOT COMMENCED.
7. NO CONDUIT LARGER THAN 2" SHALL BE USED FOR THE HORIZONTAL STRUCTURED CABLE.
8. ALL ASPECTS OF THE STRUCTURED CABLE SYSTEM ARE TO BE INCLUDED IN THE CONTRACT.
9. CONDUIT ENDS SHALL BE FITTED WITH PLASTIC BUSHINGS.
10. ALL COMMUNICATIONS CABLE SHALL BE A CONTINUOUS RUN FROM THE COMMUNICATIONS WIRING CLOSET TO THE OUTLET FREE OF ANY SPLICES OR TAPS.
11. APPROVED METHODS SHALL BE USED TO SUPPORT TELECOMMUNICATIONS WIRE.
12. ALL WIRE RUNS SHOULD FOLLOW THE SHORTEST PATH POSSIBLE. IF ANY RUNS EXCEED 90 METERS, OR LENGTHS SPECIFIED IN THE REFERENCE AND REGULATIONS, OR THE CONTRACTOR SHOULD NOTIFY THE ARCHITECT IMMEDIATELY.
13. PATCH PANELS SHALL BE MOUNTED ON 19-INCH RELAY RACKS. PROPER WIRE MANAGEMENT AND SUPPORTS ARE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE PROVIDED.
14. THE PATCH PANELS SHALL LABELED AS PER THE OWNER'S IT WIRE NUMBERING SCHEME. IF THE OWNER DOES NOT HAVE ONE, THE INDUSTRY STANDARD SHALL BE USED.
15. CABLE TRAYS ARE TO BE MOUNTED TO SUPPORT WIRING ABOVE AND BETWEEN THE RACKS AND WALL FIELD. ALL WIRING SHOULD BE RUN THROUGH THE CABLE TRAY AND DROP DOWN AT THE POINT OF TERMINATION.
16. CATEGORY 6 CABLE LENGTHS SHALL NOT EXCEED 295' IN LENGTH.
17. COORDINATE THE WORK OF DIVISION 27 WITH OTHER TRADES TO AVOID CONFLICTS.
18. STORE EQUIPMENT IN A CLEAN, DRY PLACE UNTIL READY FOR INSTALLATION. PROTECT FROM WEATHER, THEFT, DIRT, FUMES, WATER, CONSTRUCTION DEBRIS, ETC., AT ALL TIMES.
19. DATA/CATV OUTLETS SHALL MATCH ELEVATION AND ORIENTATION OF ADJACENT POWER OUTLET.
20. REFER TO ALL RISER DIAGRAMS FOR ADDITIONAL CABLE REQUIREMENTS. FURNISH AND INSTALL ALL CABLE AS REQUIRED FOR A COMPLETE AND FUNCTIONING SYSTEM.
21. REFER TO ALL RISER DIAGRAMS FOR ADDITIONAL CONDUIT REQUIREMENTS. FURNISH AND INSTALL ALL CONDUITS AS REQUIRED FOR A COMPLETE AND FUNCTIONING SYSTEM.
22. ALL CABLE KNOCKOUTS AND CABLE PASS THROUGHS ARE TO BE EQUIPPED WITH GROMMETS FOR THE PROTECTION OF CABLE. TYPICAL OF ALL BOXES, CONDUIT TERMINATIONS, METAL CABINETS, EQUIPMENT RACKS, PRESENTATION CONSOLES, AND COUNTER TOPS.
23. ALL CABLE SHALL BE CONTINUOUS FROM PATCH PANEL TO TELECOMMUNICATIONS OUTLET.
24. CONDUITS FOR TELECOMMUNICATIONS OUTLETS SHALL BE SIZED AS FOLLOWS:

MAXIMUM NUMBER OF CABLES PER TRADE SIZE

1"	4
1-1/4"	7
1-1/2"	9
2"	16

MAXIMUM FILL RATE PER CONDUIT SHALL NOT EXCEED 40%. ADJUSTMENT SHALL BE MADE TO MAXIMUM NUMBER OF CABLES AS NEEDED BASED ON DIAMETER OF CABLE USED.

25. 'RACEWAY SYSTEM' INCLUDES ALL CONDUITS, BACK BOXES, FITTINGS, PLASTIC BUSHINGS OR GROMMETS, STRUCTURAL SUPPORTS, CABLE TRAYS, GROUNDING BUSHINGS, AND PULL STRINGS/PULL ROPES. THE DIVISION 27 CONTRACTOR SHALL PROVIDE J-HOOKS.
26. REFER TO DIVISION 26 DRAWINGS AND SPECIFICATIONS FOR FIRE STOPPING SYSTEM REQUIREMENTS.

ABBREVIATIONS:

AC - ABOVE COUNTER
ACT - ACOUSTIC TILE CEILING
ADA - AMERICANS WITH DISABILITIES ACT
AFF - ABOVE FINISH FLOOR
AFG - ABOVE FINISH GRADE
ANSI - AMERICAN NATIONAL STANDARDS INSTITUTE
ATS - AUTOMATIC TRANSFER SWITCH
AWG - AMERICAN WIRE GAUGE
BAS - BUILDING AUTOMATION SYSTEM
BLDG - BUILDING
BMS - BUILDING MANAGEMENT SYSTEM
CATV - COMMUNITY ANTENNA TELEVISION
CCTV - CLOSED CIRCUIT TELEVISION
CLG - CEILING
CMP - COMMUNICATIONS MULTIPURPOSE CABLE
PLENUM
CMR - COMMUNICATIONS MULTIPURPOSE CABLE RISER
COMM - COMMUNICATION
CU - COPPER
DB - DUCTBANK
DC - DIRECT CURRENT
DWG - DRAWING
EF - ENTRANCE FACILITY
EIA - ELECTRONIC INDUSTRIES ALLIANCE
ELEC - ELECTRIC, ELECTRICAL
ELEV - ELEVATOR
EMT - ELECTRICAL METALLIC TUBING
F/UTP - OVERALL FOIL SHIELD TWISTED PAIR
FLR - FLOOR
FO - FIBER OPTIC
FURN - FURNITURE
GRD - GROUND
GRC - GALVANIZED RIGID METALLIC CONDUIT
HH - HAND HOLE
IBT - INTERSYSTEM BONDING TERMINATION
ICT - INFORMATION COMMUNICATIONS TECHNOLOGIES
IDF - INTERMEDIATE DISTRIBUTION FRAME
LV - LOW VOLTAGE
MDF - MAIN DISTRIBUTION FRAME
MFR - MANUFACTURER
MM - MULTI MODE
N.C. - NORMALLY CLOSED
N.O. - NORMALLY OPEN
NA - NOT APPLICABLE
NEC - NATIONAL ELECTRIC CODE
NEMA - NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NFPA - NATIONAL FIRE PROTECTION ASSOCIATION
NIC - NOT IN CONTRACT
NTS - NOT TO SCALE
OSP - OUTSIDE PLANT
PBB - PRIMARY BONDING BUSBAR
PLC - PROGRAMMABLE LOGIC CONTROLLER
POE - POWER OVER ETHERNET
PVC - POLYVINYL CHLORIDE
QTY - QUANTITY
RBB - RACK BONDING BUSBAR
RCP - REFLECTED CEILING PLAN
REQ, REQ'D - REQUIRED
RMC - RIGID METALLIC CONDUIT
RNC - RIGID NON-METALLIC CONDUIT
SBB - SECONDARY BONDING BUSBAR
SPOT - SINGLE POLE DOUBLE THROW
SPST - SINGLE POLE SINGE THROW
SM - SINGLE MODE
TBB - TELECOMMUNICATIONS BONDING BACKBONE
TBC - TELECOMMUNICATIONS BONDING CONDUCTOR
TEBC - TELECOMMUNICATIONS EQUIPMENT BONDING CONDUCTOR
TEL, TELECOM - TELECOMMUNICATIONS
TGB - TELECOMMUNICATIONS GROUNDING BUSBAR
TIA - TELECOMMUNICATIONS INDUSTRIES ASSOCIATION
UG - UNDERGROUND
UON - UNLESS OTHERWISE NOTED
UPS - UNINTERRUPTIBLE POWER SUPPLY
UTP - UNSHIELDED TWISTED PAIR
V - VOLTS
VA - VOLT AMPERES
VIP - VOICE OVER INTERNET PROTOCOL

ICT DEMO SHEET INDEX	
SHEET NO.	SHEET NAME
TECHNOLOGY	
TD-111	FIRST FLOOR PLAN DEMOLITION - TECHNOLOGY
TD-121	SECOND FLOOR PLAN DEMOLITION - TECHNOLOGY

ICT SHEET INDEX	
SHEET NO.	SHEET NAME
TECHNOLOGY	
TT-001	LEGEND SHEET - TELECOM
TT-111	FIRST FLOOR PLAN - TELECOM
TT-112	FIRST FLOOR RCP - TELECOM
TT-121	SECOND FLOOR PLAN - TELECOM
TT-122	SECOND FLOOR RCP - TELECOM
TT-401	LARGE SCALE PLANS - TELECOM
TT-501	DETAILS - TELECOM
TT-502	DETAILS - TELECOM
TT-503	DETAILS - TELECOM
TT-601	BLOCK DIAGRAMS - TELECOM
TT-602	BLOCK DIAGRAMS - AV
TT-603	BLOCK DIAGRAMS - AV



Dewberry Architects Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.846.0100

Dewberry Engineers Inc.
401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID



KEY PLAN 08/24/2026

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC

APPROVED BY MJM

CHECKED BY GTR

DATE 08.26.2026

TITLE

LEGEND SHEET - TELECOM

PROJECT NO. 50165756

TT-001

SHEET NO.

TOWN OF STRASBURG

STRASBURG POLICE STATION

1115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID



SCALE

0' 2' 4' 8'

SCALE: 1/4" = 1' - 0"

[illegible]


FIRST FLOOR
PLAN
DEMOLITION -
TECHNOLOGY

PROJECT NO.	50165756
-------------	----------

TD-111

SHEET NO.

1. THE DRAWINGS IDENTIFY THE EXTENTS OF THE DEMOLITION AREA WITHIN THE SCOPE OF WORK, AND DO NOT INDICATE EVERY OUTLET, BOX, CONDUIT, OR CABLE THAT MUST BE REMOVED. THE CONTRACTOR SHALL VISIT THE SITE PRIOR TO SUBMITTING A BID TO VERIFY THE EXISTING CONDITIONS AND SCOPE OF WORK.
2. THE CONTRACTOR IS RESPONSIBLE FOR REMOVAL OF TECHNOLOGY EQUIPMENT INCLUDING BUT NOT LIMITED TO: COPPER, FIBER, AND COAX CABLEING AND THEIR ASSOCIATED FACEPLATES, JACKS, BACK BOXES, AND RAYS. SECURITY DEVICES SHALL BE REMOVED.
3. ALL EXISTING OUTLET/DEVICE CABLEING SHALL BE TRACED BACK TO THE SOURCE AND REMOVED PRIOR TO REMOVING CABLEING.

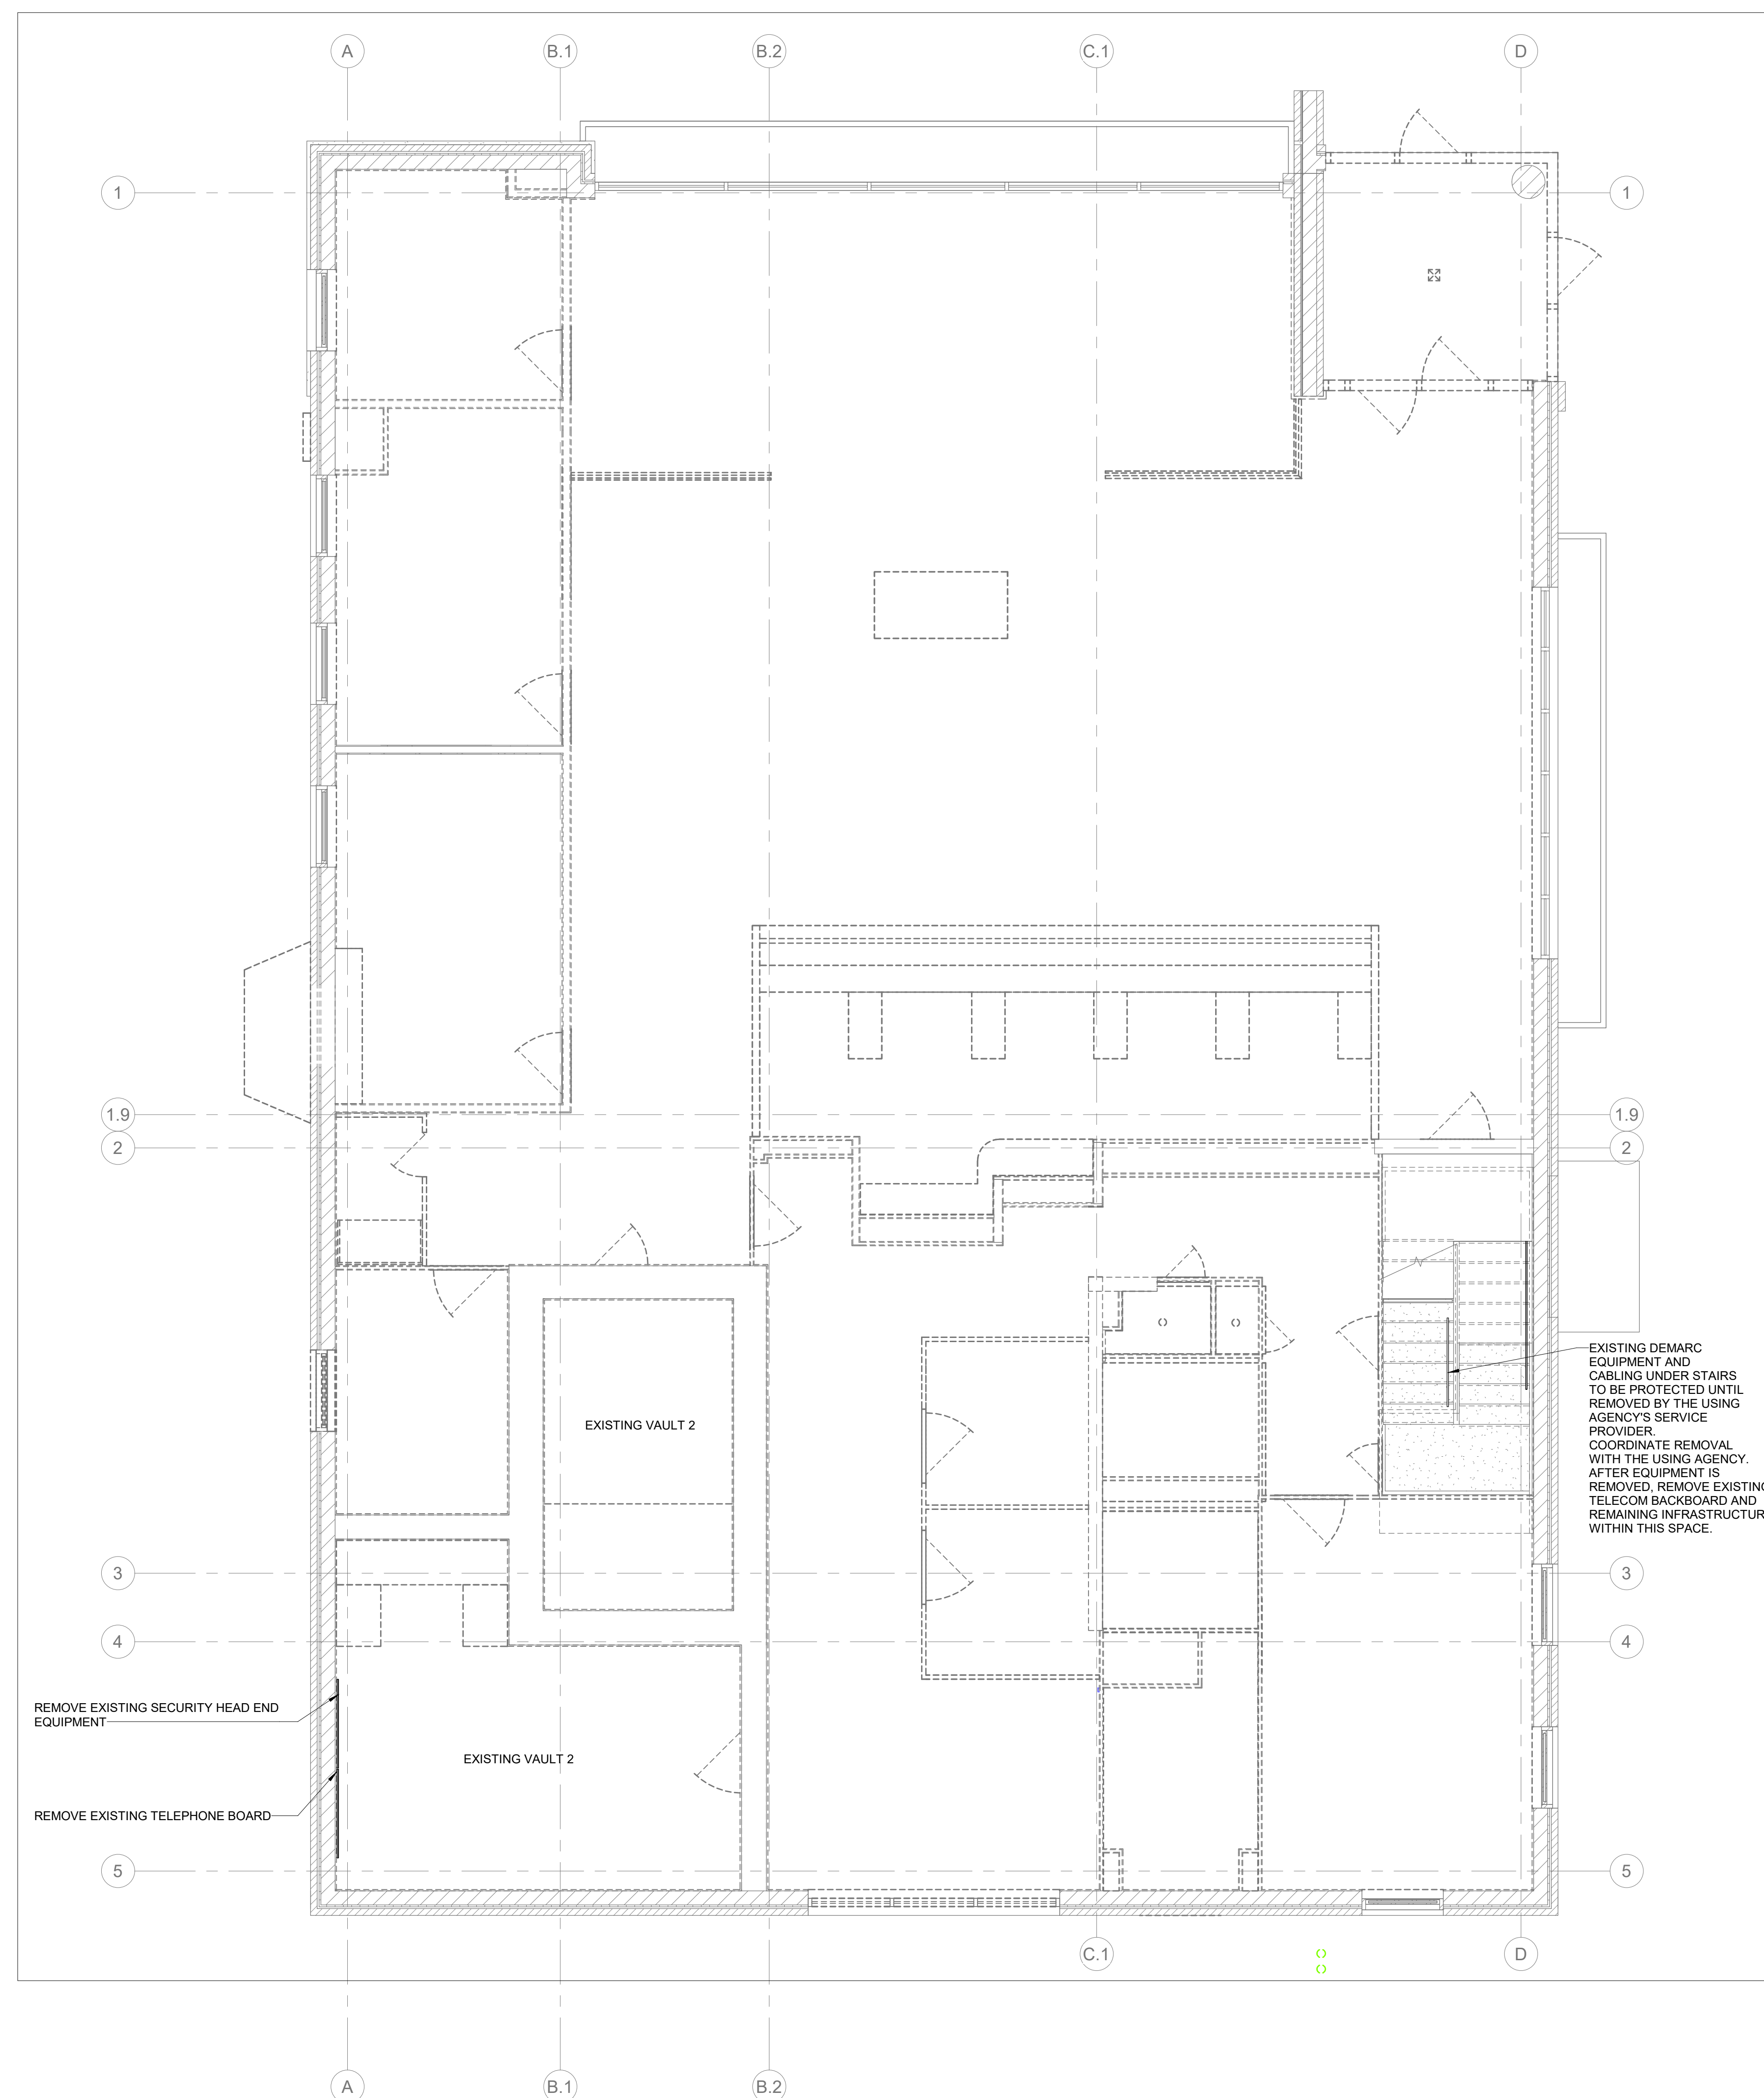

1 FIRST FLOOR PLAN DEMOLITION - TECHNOLOGY


TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID



SCALE



0' 2' 4' 8'

SCALE: $\frac{1}{4}" = 1' - 0"$

REVISIONS		
NO.	DESCRIPTION	DATE

DRAWN BY _____	JAC
APPROVED BY _____	MJM
CHECKED BY _____	GTR
DATE _____	08.26.2026

TITLE _____

SECOND FLOOR
PLAN
DEMOLITION -
TECHNOLOGY

PROJECT NO.	50165756
-------------	----------

TD-121

SHEET NO. _____



F


E

D

C

B

A

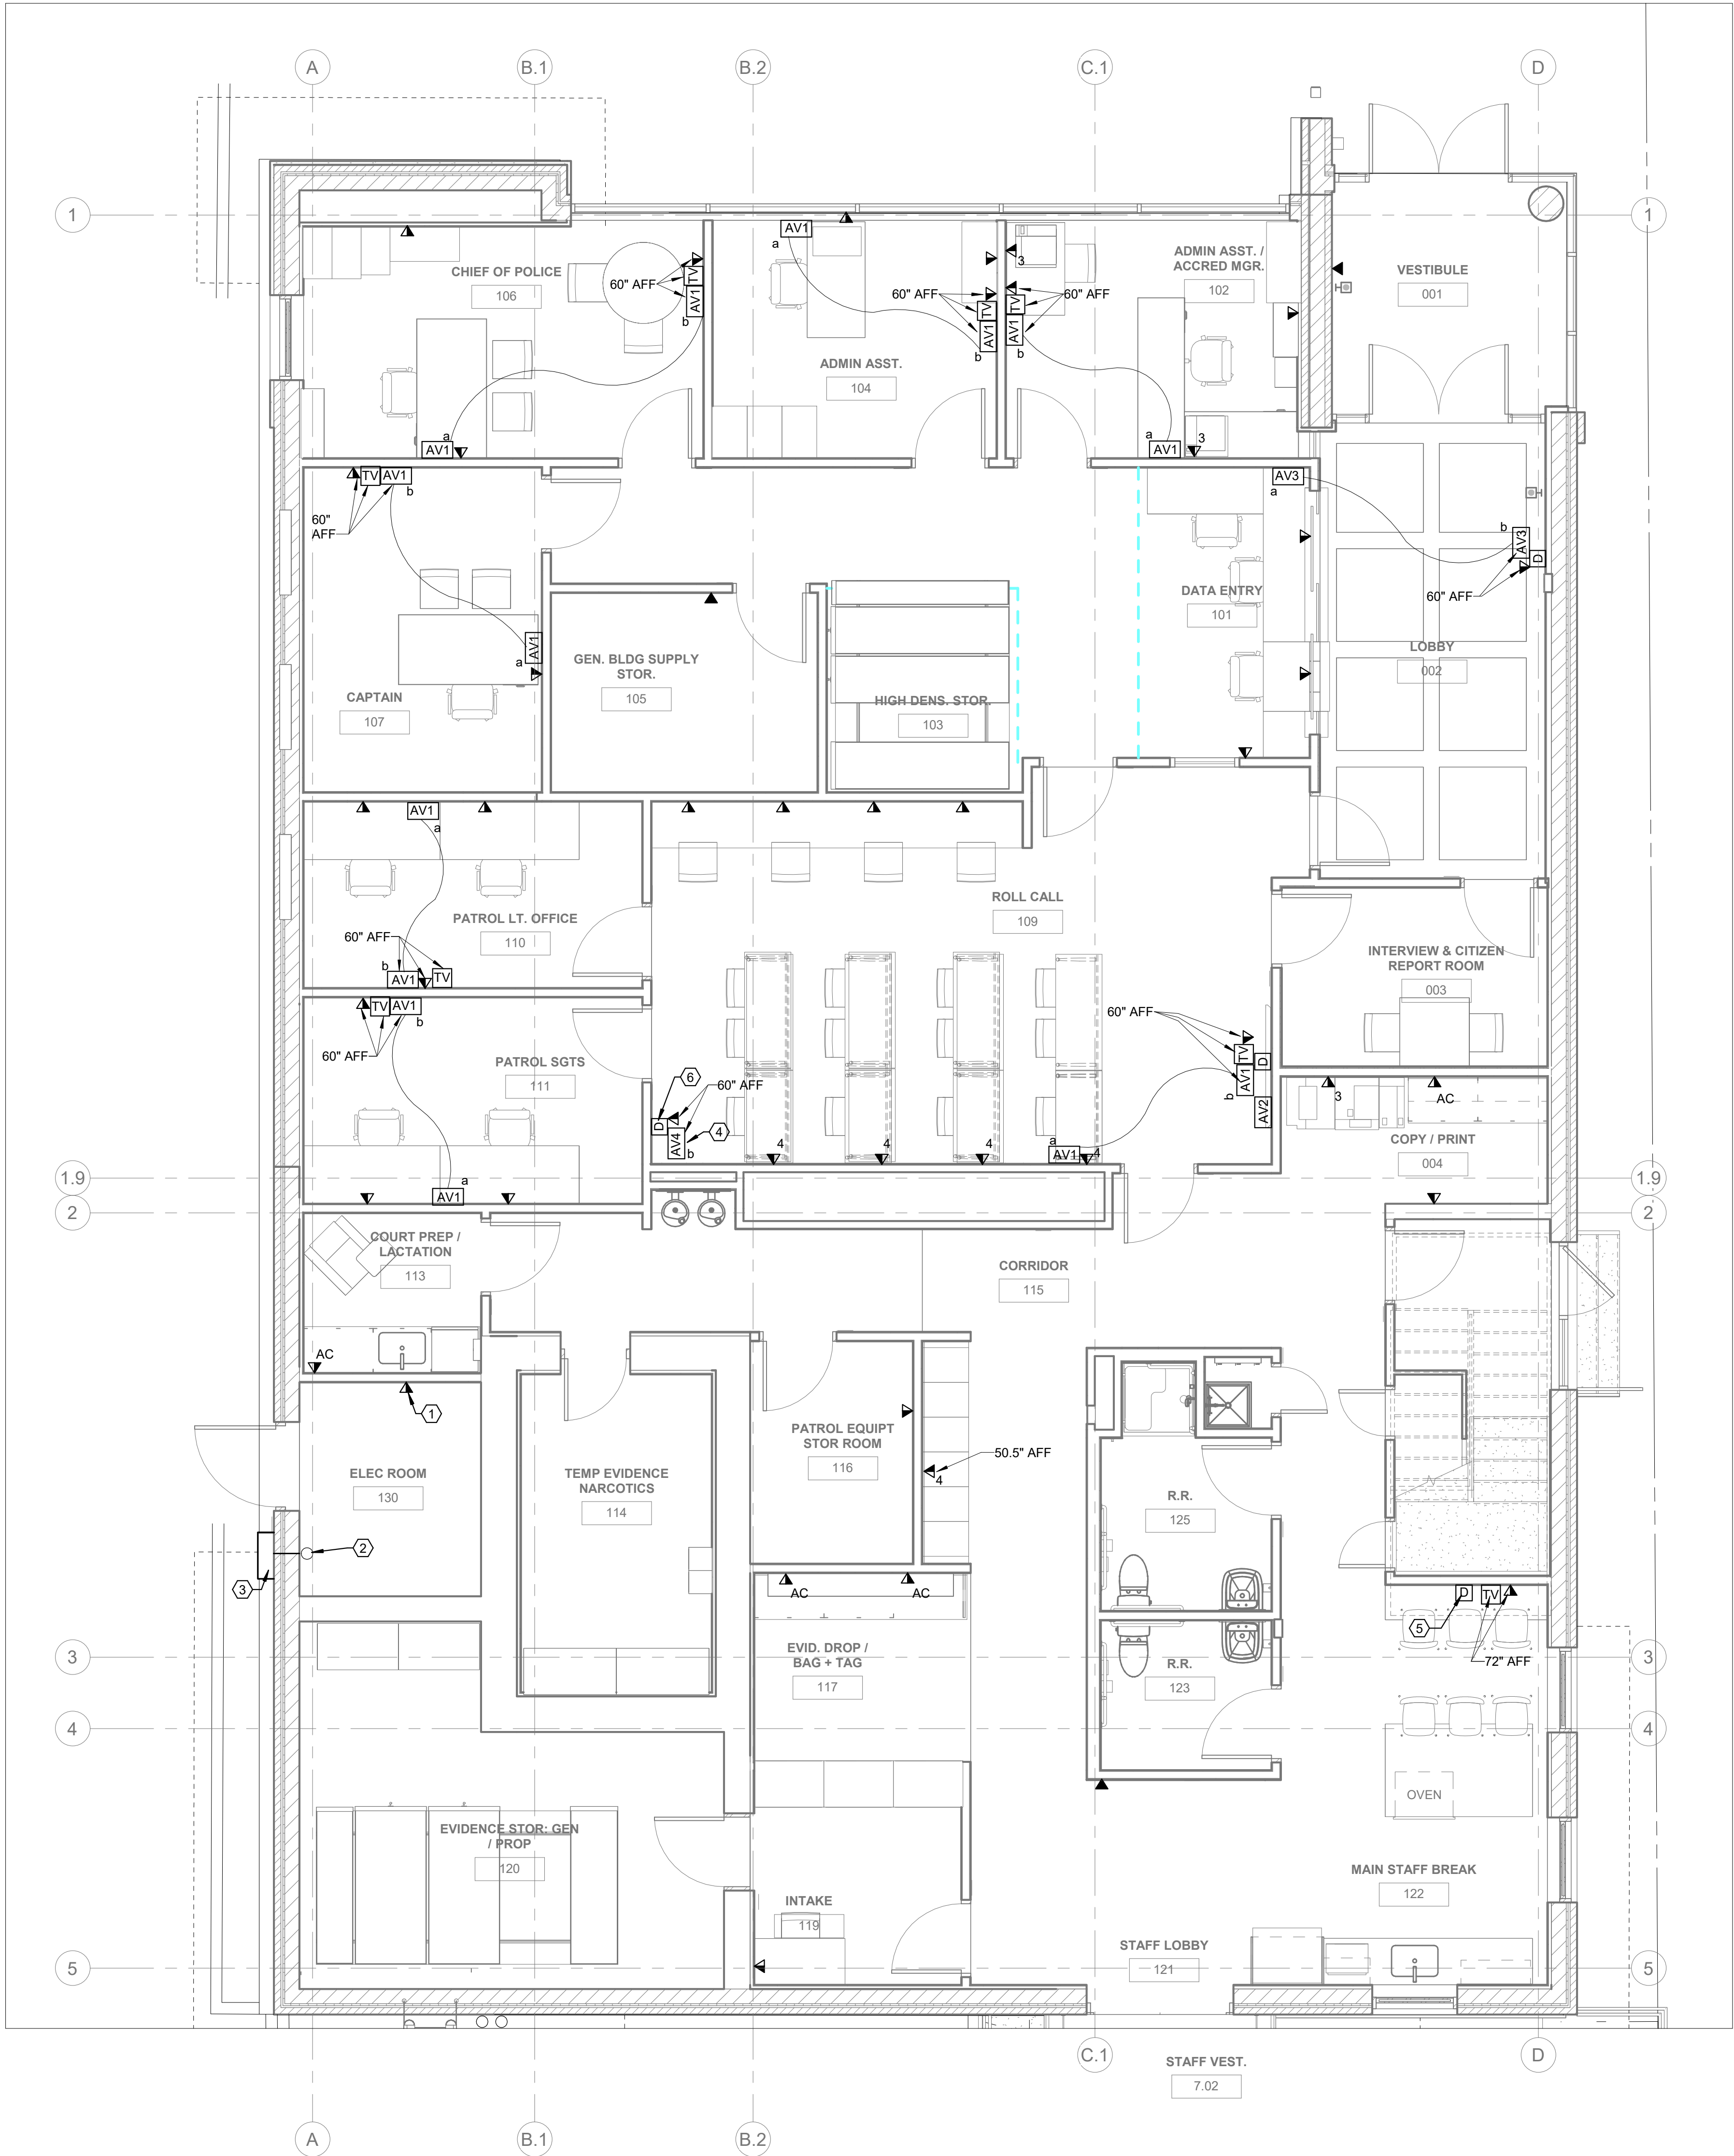

1 FIRST FLOOR PLAN - TELECOM
Scale: 1/4" = 1'-0"

GENERAL NOTES:

1. ALL CABLING THIS PLAN IS TO ROUTE TO AND TERMINATE IN SECOND FLOOR TELECOM ROOM 210.
2. ALL CABLING IN FINISHED PUBLIC AND OCCUPIED SPACES SHALL NOT BE VISIBLE, CABLING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.
3. REFER TO AV CONDUIT BLOCK DIAGRAMS ON DRAWING TT-603 FOR MOUNTING ELEVATION OF BACK BOXES AND CONDUIT SIZES THAT ASSOCIATE WITH THE DISPLAY AND AV HARDWARE LOCATIONS.

KEYED NOTES:

1. COORDINATE FINAL PLACEMENT AND LOCATION OF TELECOMMUNICATIONS OUTLET WITH ELECTRICAL EQUIPMENT.
2. 2" SMART LB TO SUPPORT PROVIDER F.O. CABLE ENTRY. REFER TO "PROVIDER CABLE ENTRY PATHWAY DETAIL" AND TELECOM CONDUIT BLOCK DIAGRAM.
3. 16"WX16"LX8"D NEMA 4 ENCLOSURE TO SUPPORT PROVIDER CABLE ENTRY.
4. THE CORRELATING TRANSMIT DEVICE SHALL BE LOCATED IN RACK "MTR1" LOCATED IN THE SECOND FLOOR TELECOM ROOM 210.
5. TELEVISION IS OWNER FURNISHED AND INSTALLED. PROVIDE WALL BACKING AND TELECOM/ATV OUTLETS ON SHARED FACE PLATE AT THE SAME ELEVATION AS POWER.
6. SECURITY MONITOR FURNISHED AND INSTALLED BY DIV. 28 SECURITY VENDOR. FURNISH AV EXTENDER AS INDICATED IN THE BLOCK DIAGRAMS TO SUPPORT ROUTING OF VIDEO TO THE SECURITY MONITOR.



Dewberry Architects Inc.

8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100

Dewberry Engineers Inc.

401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN 08/24/2026

SCALE



REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE

FIRST FLOOR
PLAN - TELECOM


PROJECT NO. 50165756

TT-111

SHEET NO.

1. ALL CABLING THIS PLAN IS TO ROUTE TO AND TERMINATE IN SECOND FLOOR TELECOM ROOM 210.
2. NEW BASKET TRAY IS TO RUN IN PLENUM ABOVE FINISHED CEILING. COORDINATE ROUTING WITH OTHER TRADES AND SURROUNDING CONDITIONS.
3. ALL CABLING IN FINISHED PUBLIC/OCCUPIABLE SPACES SHALL NOT BE VISIBLE. CABLING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.

1. 2" TELECOM GROUNDING CONDUIT PASS THROUGH FROM FLOOR ABOVE ROUTED FROM IBT IN ELECTRICAL ROOM THROUGH FLOOR ABOVE TO TELECOM ROOM
2. 2" CONDUIT TO SUPPORT PROVIDER CABLING PASS THROUGH FROM FLOOR ABOVE ROUTED FROM TELECOM ROOM TO EXTERNAL 16"x16" ENCLOSURE.
3. (3/4" SLEEVES THROUGH FLOOR ABOVE INTO ROOM 206 TO SUPPORT LOW VOLTAGE CABLING ROUTED TO TELECOM ROOM.

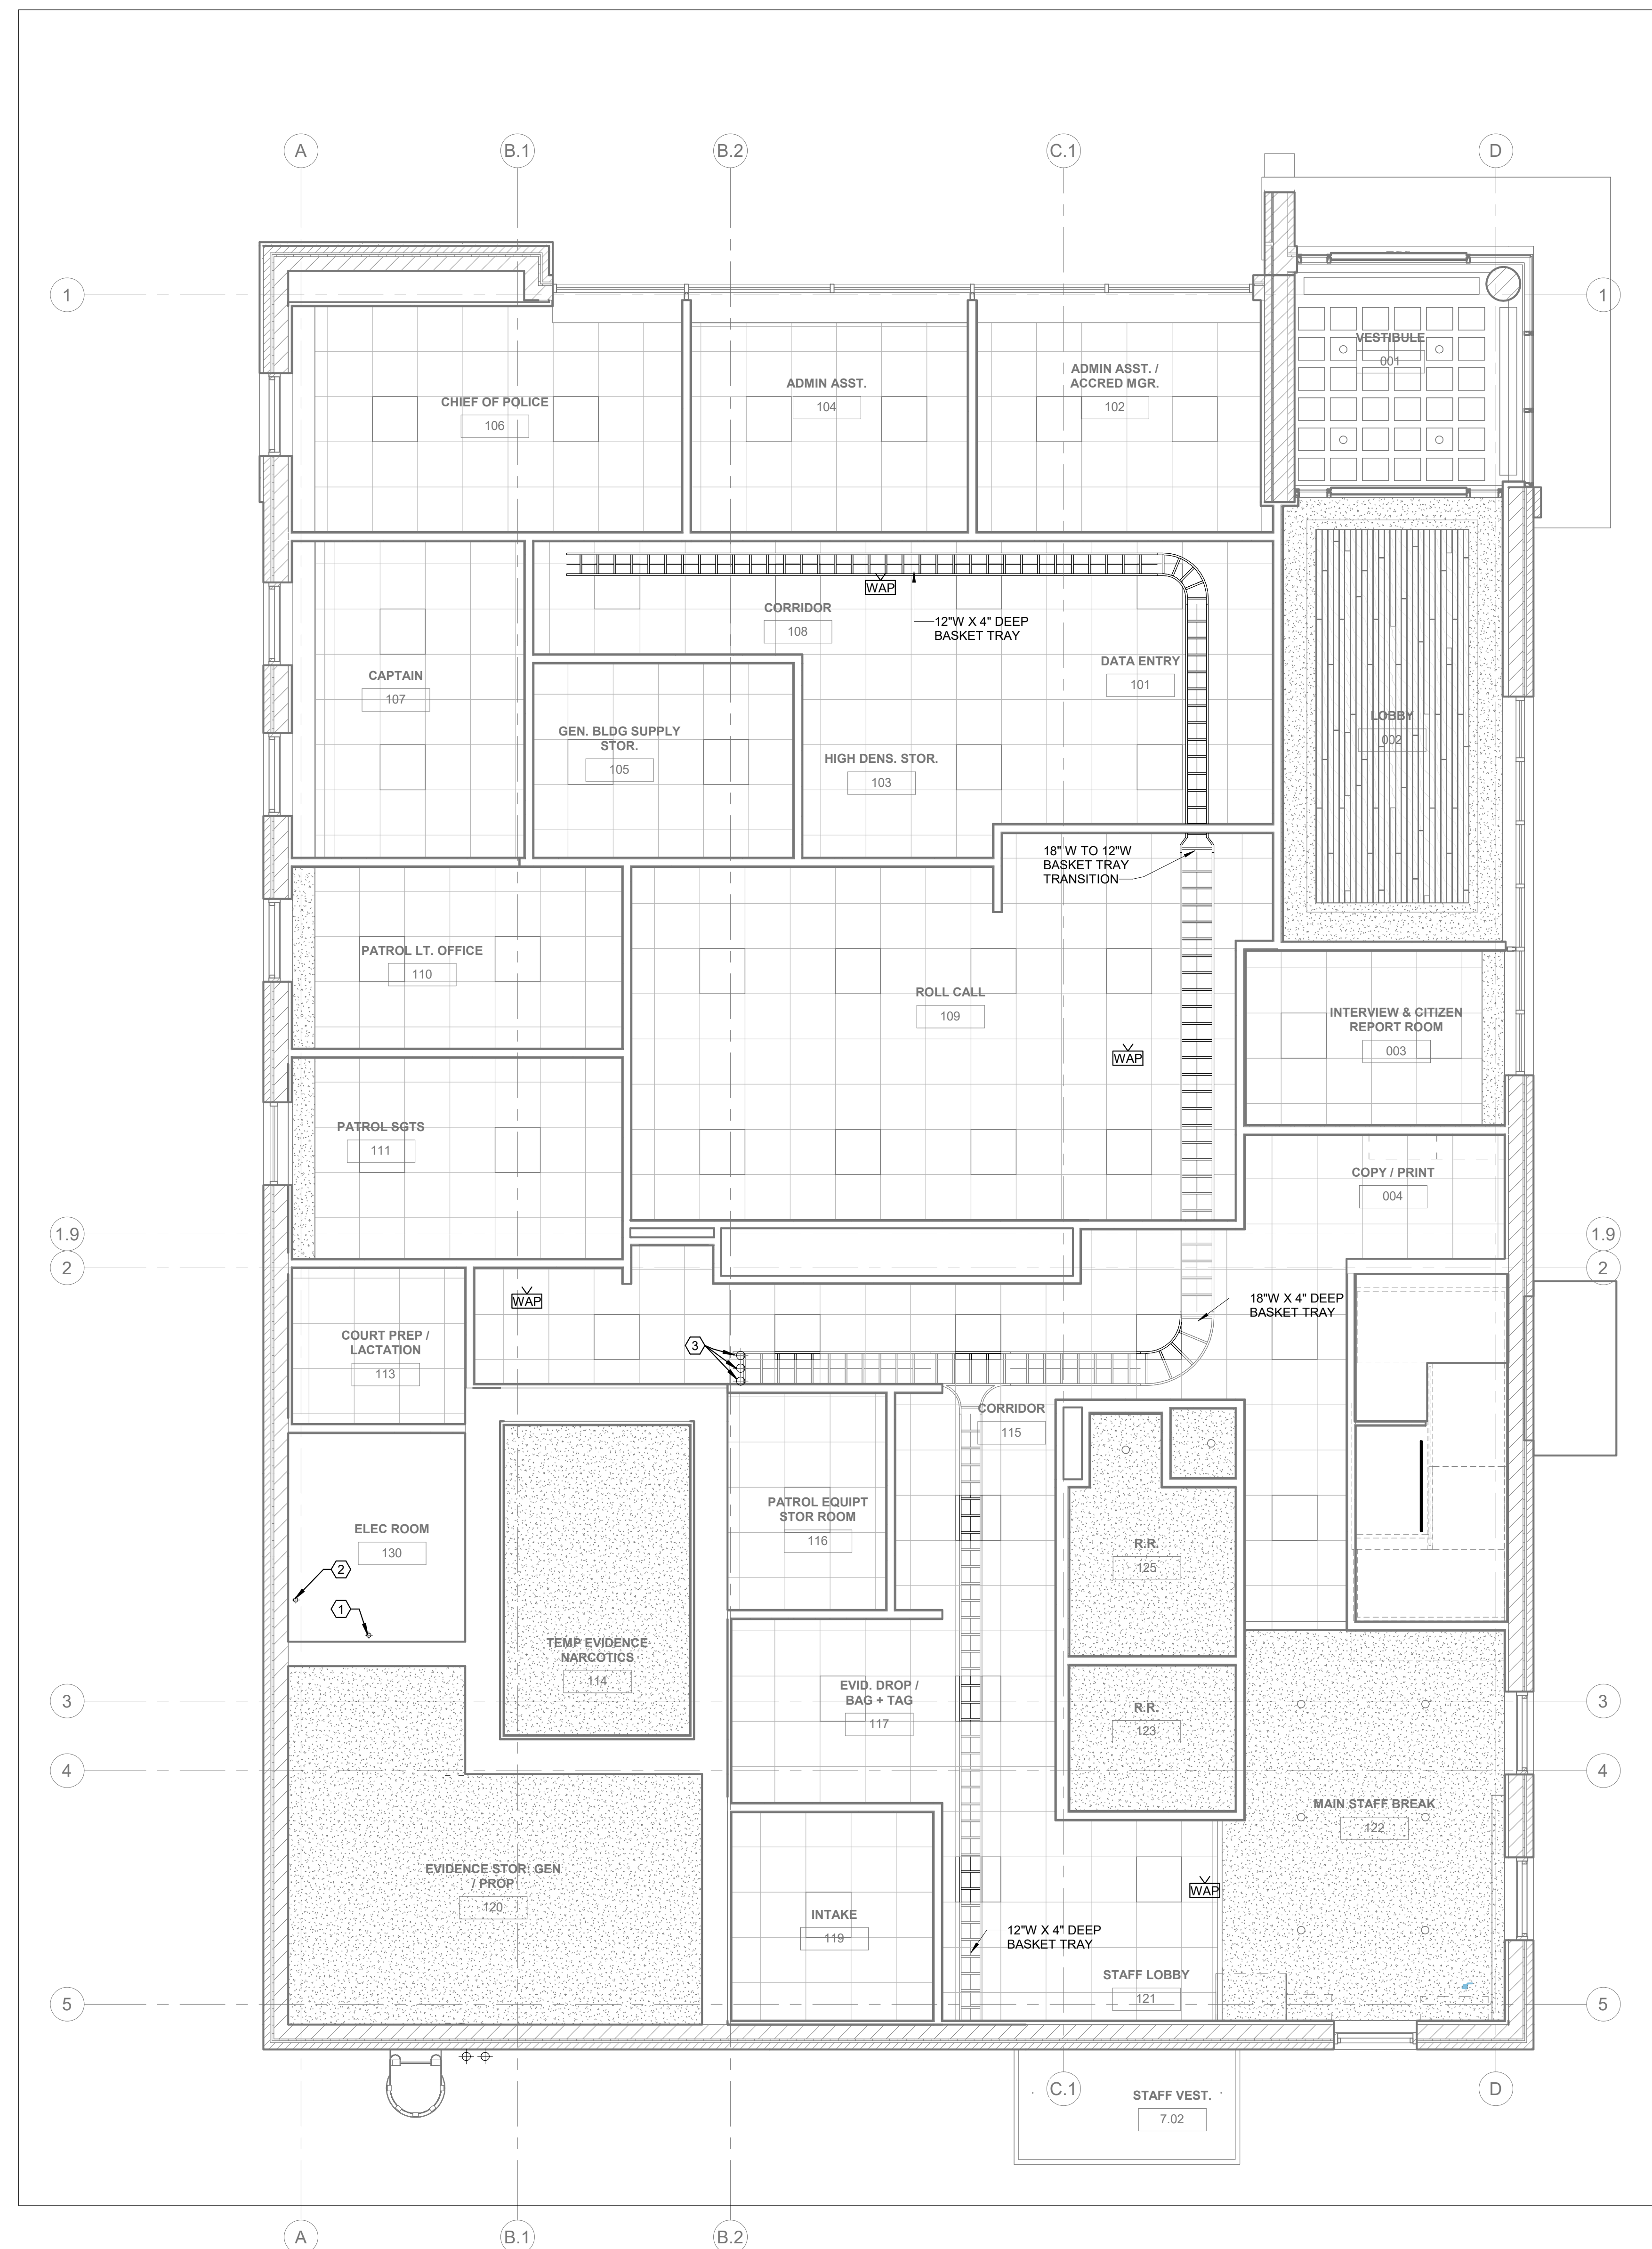

1 FIRST FLOOR RCP - TELECOM
Scale: 1/4" = 1'-0"

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID



SCALE



0' 2' 4' 8'

SCALE: $\frac{1}{4}" = 1' - 0"$

[illegible]

FIRST FLOOR
RCP - TELECOM

PROJECT NO.	50165756
-------------	----------

TT-112

SHEET NO.

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

COMMONWEALTH OF VIRGINIA
MICHAEL JASON
McTAVISH
Lic. No. 0402050286
PROFESSIONAL ENGINEER

08/24/2026

SCALE



0' 2' 4' 8'

SCALE: $\frac{1}{4}" = 1' - 0"$

REVISIONS		
NO.	DESCRIPTION	DATE
DRAWN BY _____	JAC	
APPROVED BY _____	MJM	
CHECKED BY _____	GTR	
DATE _____		08.26.2026
TITLE _____		

SECOND FLOOR
PLAN - TELECOM

PROJECT NO.	50165756
-------------	----------

TT-121


SHEET NO. _____

GENERAL NOTES:

1. ALL CABLING THIS PLAN IS TO ROUTE TO AND TERMINATE IN SECOND FLOOR TELECOM ROOM 210.
2. ALL CABLING IN FINISHED PUBLIC/OCCUPIABLE SPACES SHALL NOT BE VISIBLE, CABLING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.

KEYED NOTES:

1. COORDINATE FINAL PLACEMENT AND LOCATION OF TELECOMMUNICATIONS OUTLET WITH MECHANICAL SYSTEMS FOR SUPPORT OF BUILDING MANAGEMENT AND CONTROL SYSTEMS.
2. 18"W X 2"D BASKET TYPE CABLE TRAY VERTICALLY AND SECURELY MOUNTED TO WALL FROM 12" AFF TO TRAY ABOVE. PROVIDE CABLE TRAY WATERFALL DROP OUTS AT THE HORIZONTAL TRANSITION ABOVE.
3. 2" TELECOM GROUPING CONDUIT ROUTED TO MAIN ELECTRICAL ROOM BELOW. COORDINATE FINAL LOCATION WITH MECHANICAL EQUIPMENT IN SPACE.
4. 2" CONDUIT PROVIDER CONDUIT ROUTED THROUGH FLOOR TO MAIN ELECTRICAL ROOM BELOW FROM TELECOM ROOM.
5. DATA OUTLET SHALL SUPPORT THE INTERVIEW RECORD SYSTEM TOUCH PANEL.

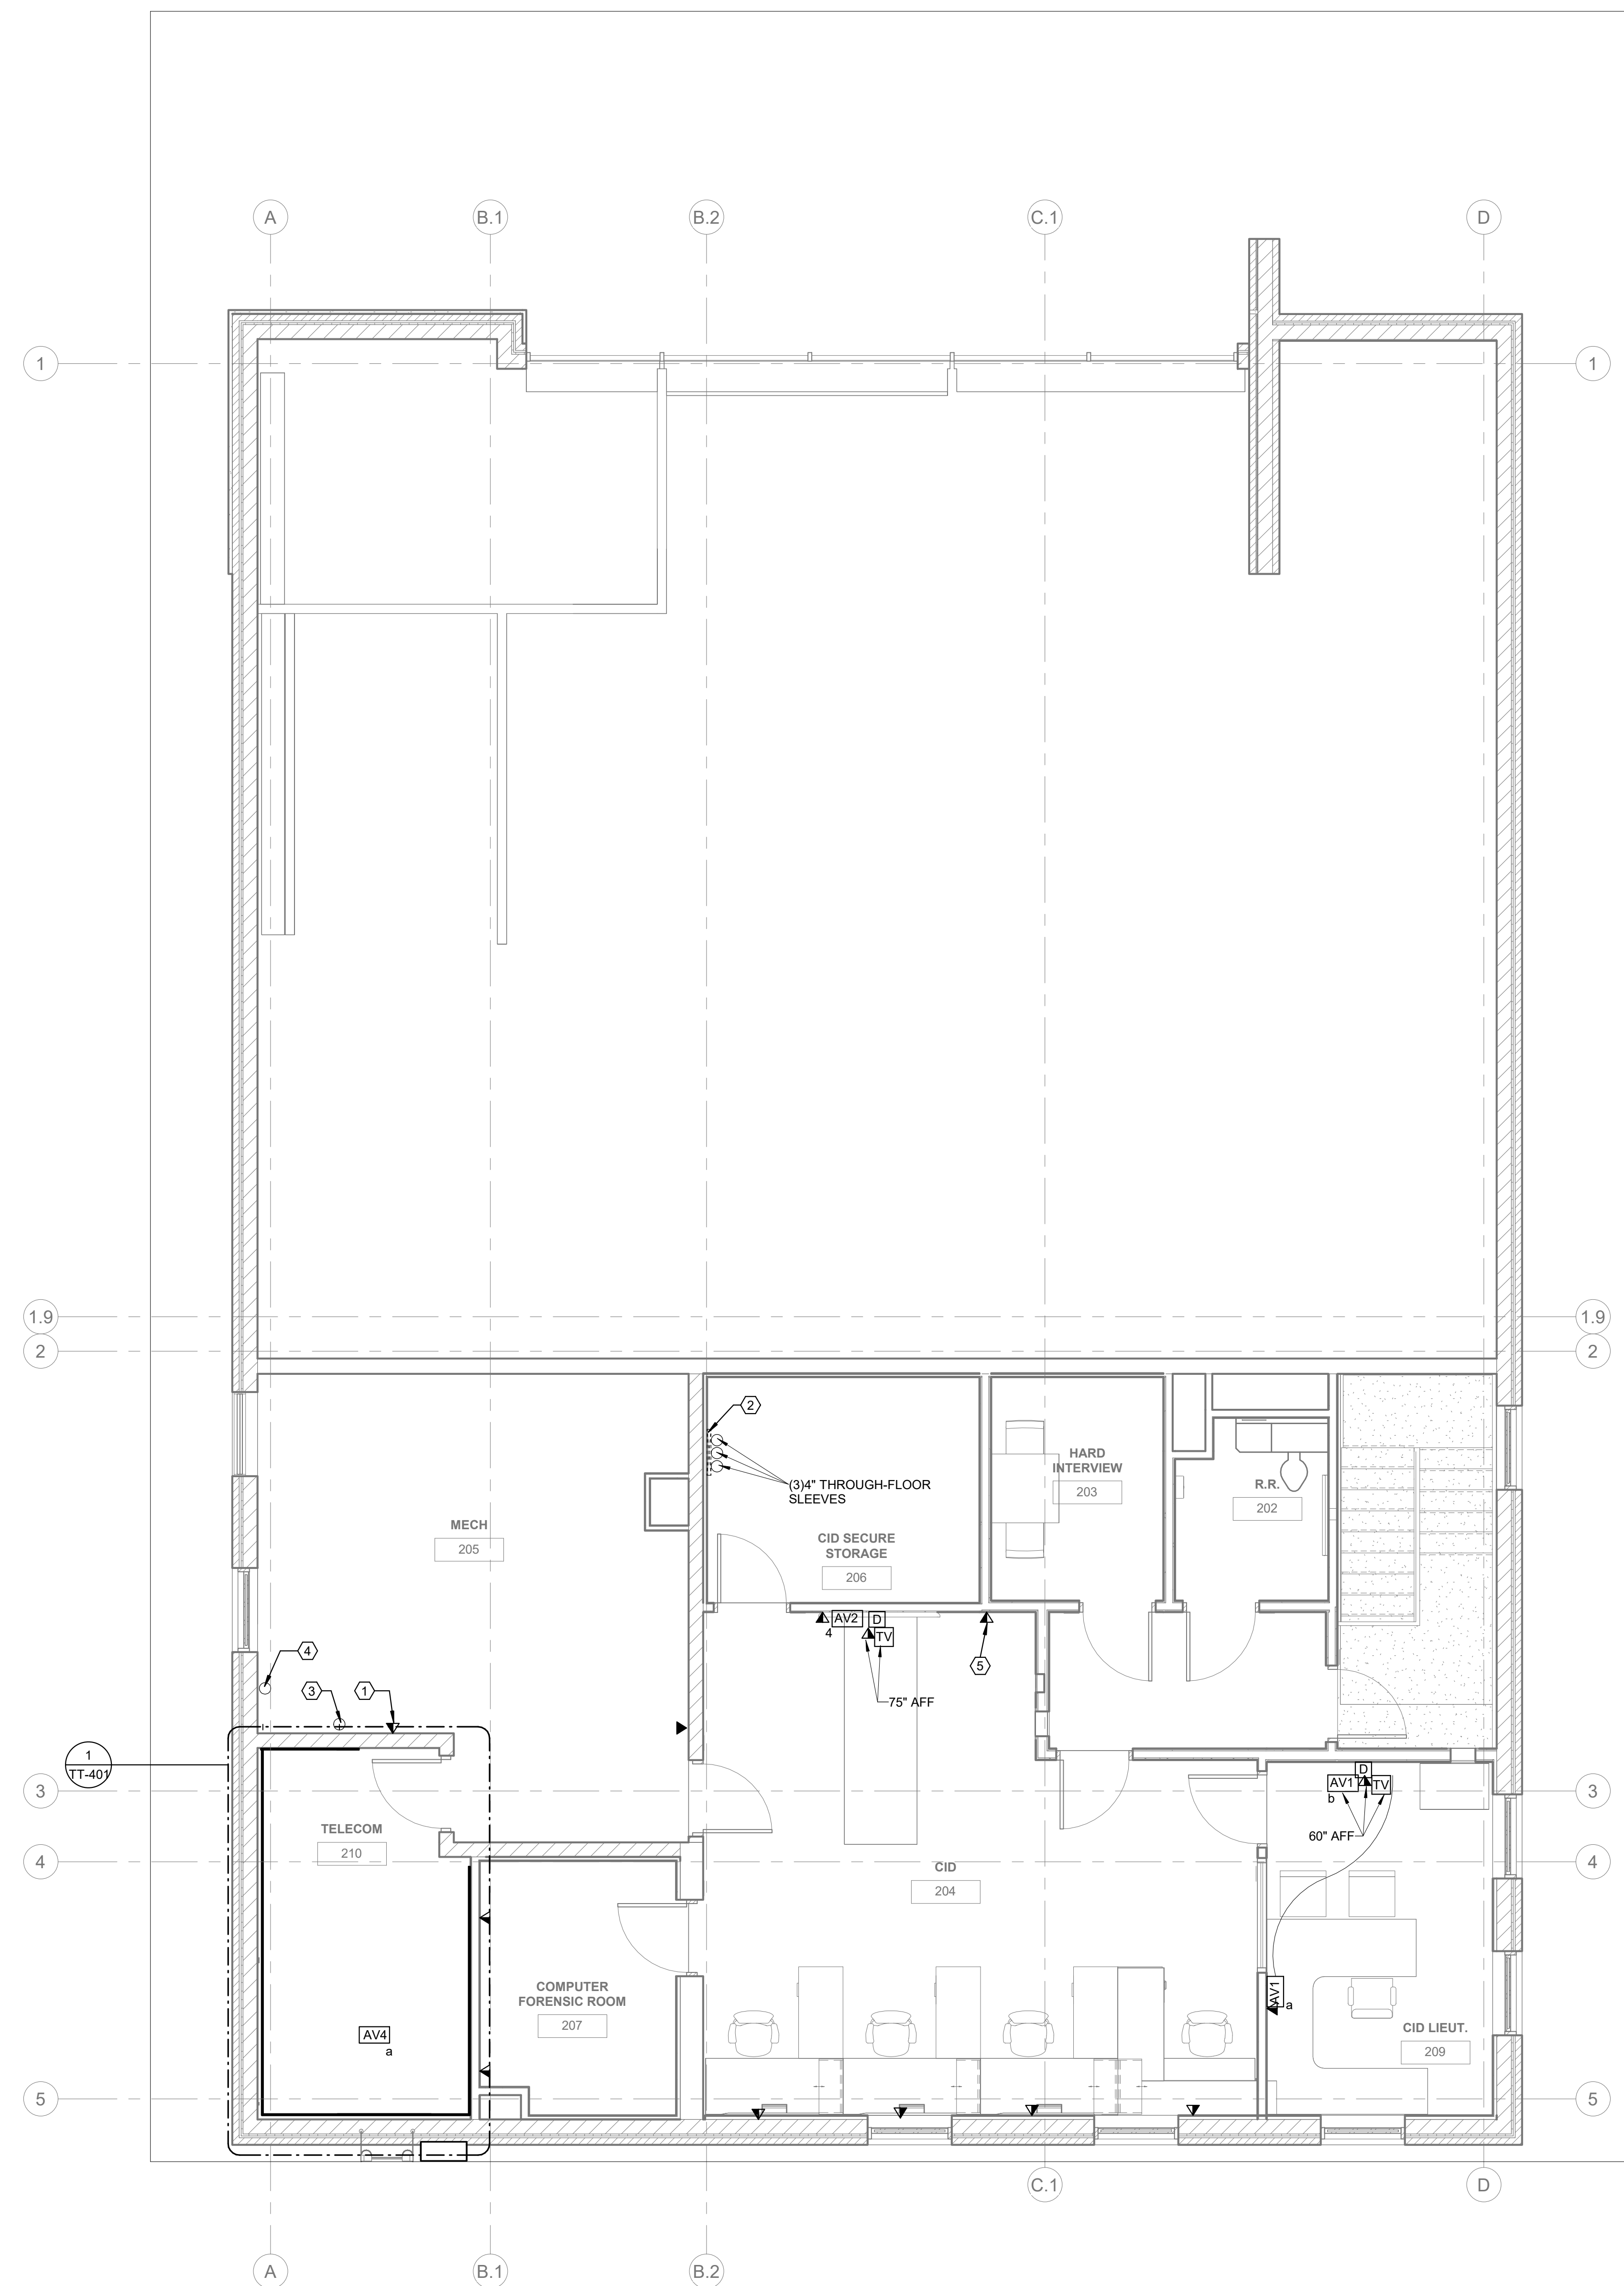

1 SECOND FLOOR PLAN - TELECOM
Scale: 1/4" = 1'-0"

F
E
D
C
B
A


1 2 3 4 5 6

GENERAL NOTES:

1. ALL CABLING THIS PLAN IS TO ROUTE TO AND TERMINATE IN SECOND FLOOR TELECOM ROOM 210.
2. ALL CABLING IN FINISHED PUBLIC/OCCUPIABLE SPACES SHALL NOT BE VISIBLE AND BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY.

KEYED NOTES:

1. COORDINATE ROUTING OF 4" CONDUITS WITH MECHANICAL DUCTWORK IN THIS SPACE.
2. CONDUITS ARE TO PASS THROUGH THE WALL ABOVE THE CABLE TRAY.
3. CONDUITS ARE TO TERMINATE ABOVE THE CABLE TRAY.
4. MOUNT 18"W X 4" D BASKET TYPE CABLE TRAY ABOVE THE DOOR FRAMES. COORDINATE WITH MECHANICAL EQUIPMENT IN THIS SPACE.
5. 18"W LADDER TYPE CABLE TRAY IN THIS ROOM. CENTER ABOVE RACKS.
6. 2" TELECOM GROUNDING CONDUIT SUPPORTING TBC STUBBED THROUGH WALL AND ROUTED FROM TELECOM ROOM TO MAIN ELECTRICAL SERVICE ROOM BELOW. COORDINATE THE FINAL ROUTING WITH THE MECHANICAL AND ELECTRICAL EQUIPMENT.
7. 2" CONDUIT TO SUPPORT PROVIDER CABLING STUBBED THROUGH WALL AND ROUTED FROM TELECOM ROOM TO 16"X16"X6" DEEP EXTERNAL NEMA 4 ENCLOSURE BELOW. COORDINATE FINAL ROUTING WITH THE MECHANICAL AND ELECTRICAL EQUIPMENT. CONDUIT MUST NOT HAVE MORE THAN 180° OF BEND TOTAL BETWEEN PULLING/ACCESS POINTS. PROVIDE PULL BOXES IN LINE WITH CONDUIT IF WARRANTED BASED ON COORDINATION WITH ADJACENT EQUIPMENT.
8. COORDINATE WORK WITH SITE SECURITY PATHWAYS - REFER TO 'TY' SERIES DRAWINGS.

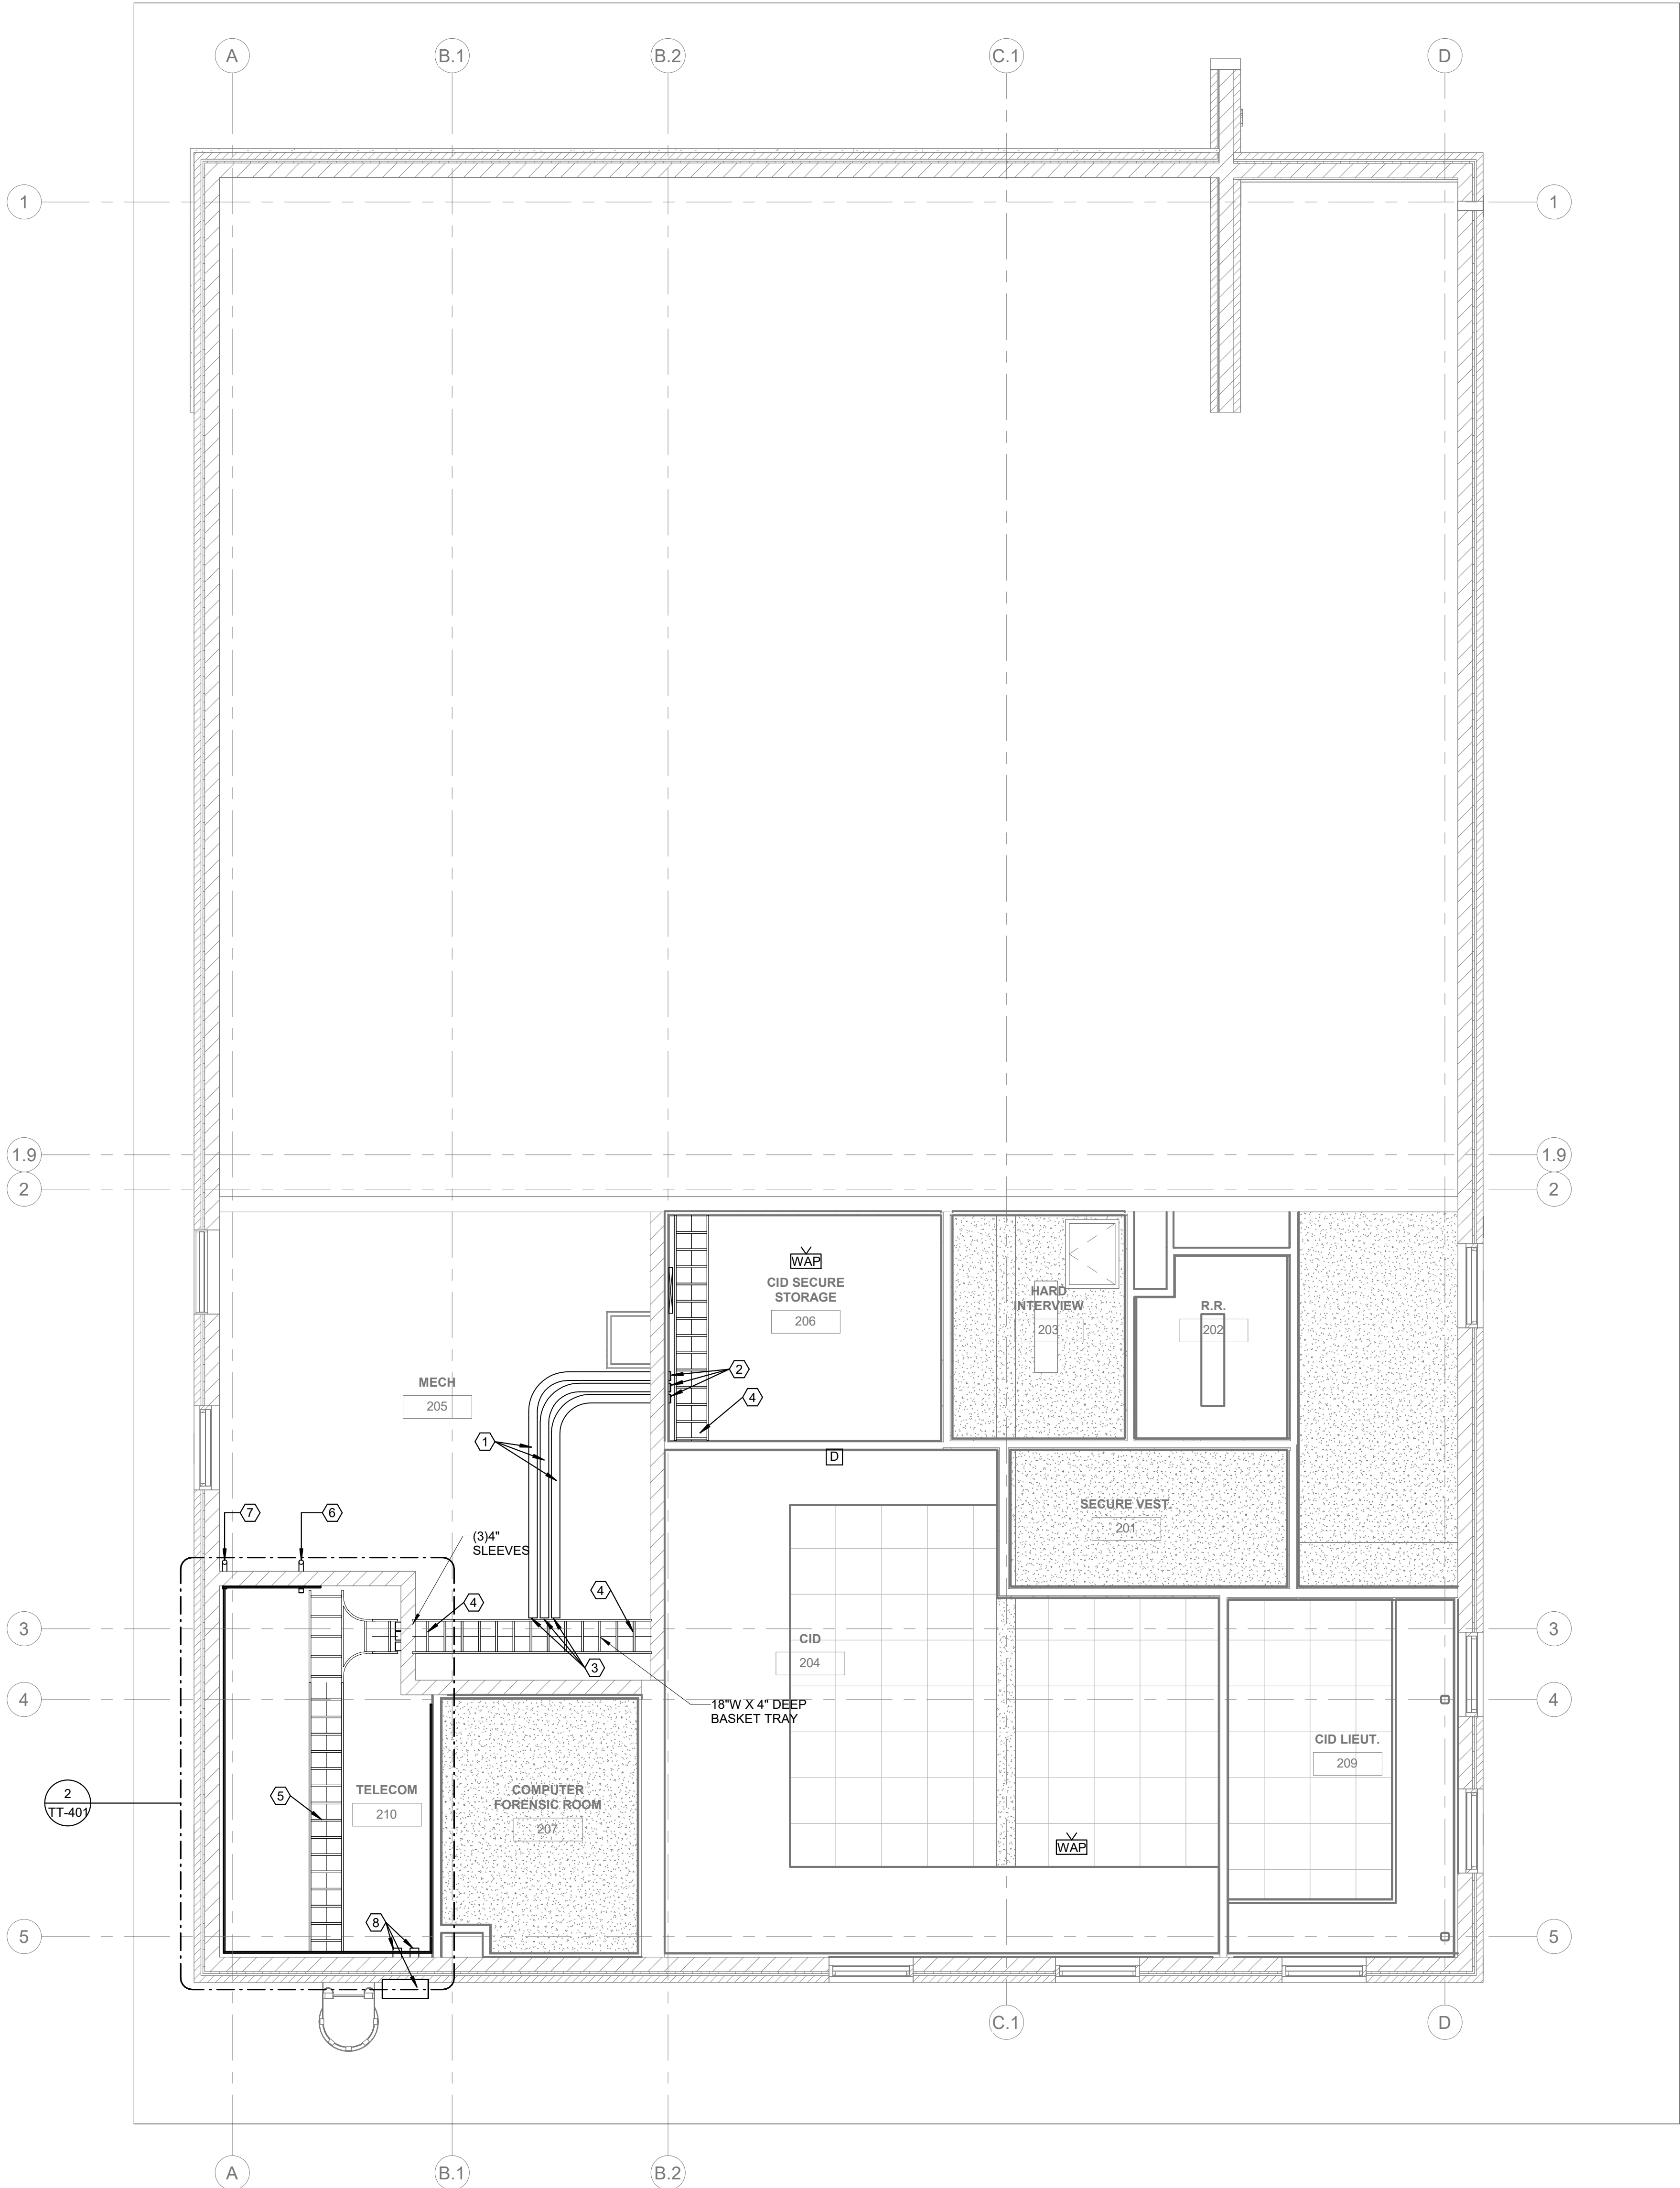

1 SECOND FLOOR RCP - TELECOM
Scale: 1/4" = 1'-0"



Dewberry Architects Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.946.0100

Dewberry Engineers Inc.
401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN 08/24/2026

SCALE

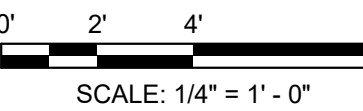

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE

SECOND FLOOR
RCP - TELECOM

PROJECT NO. 50165756

TT-122

SHEET NO.

1

2

3

4

5

6

F


E

D


C

B


A

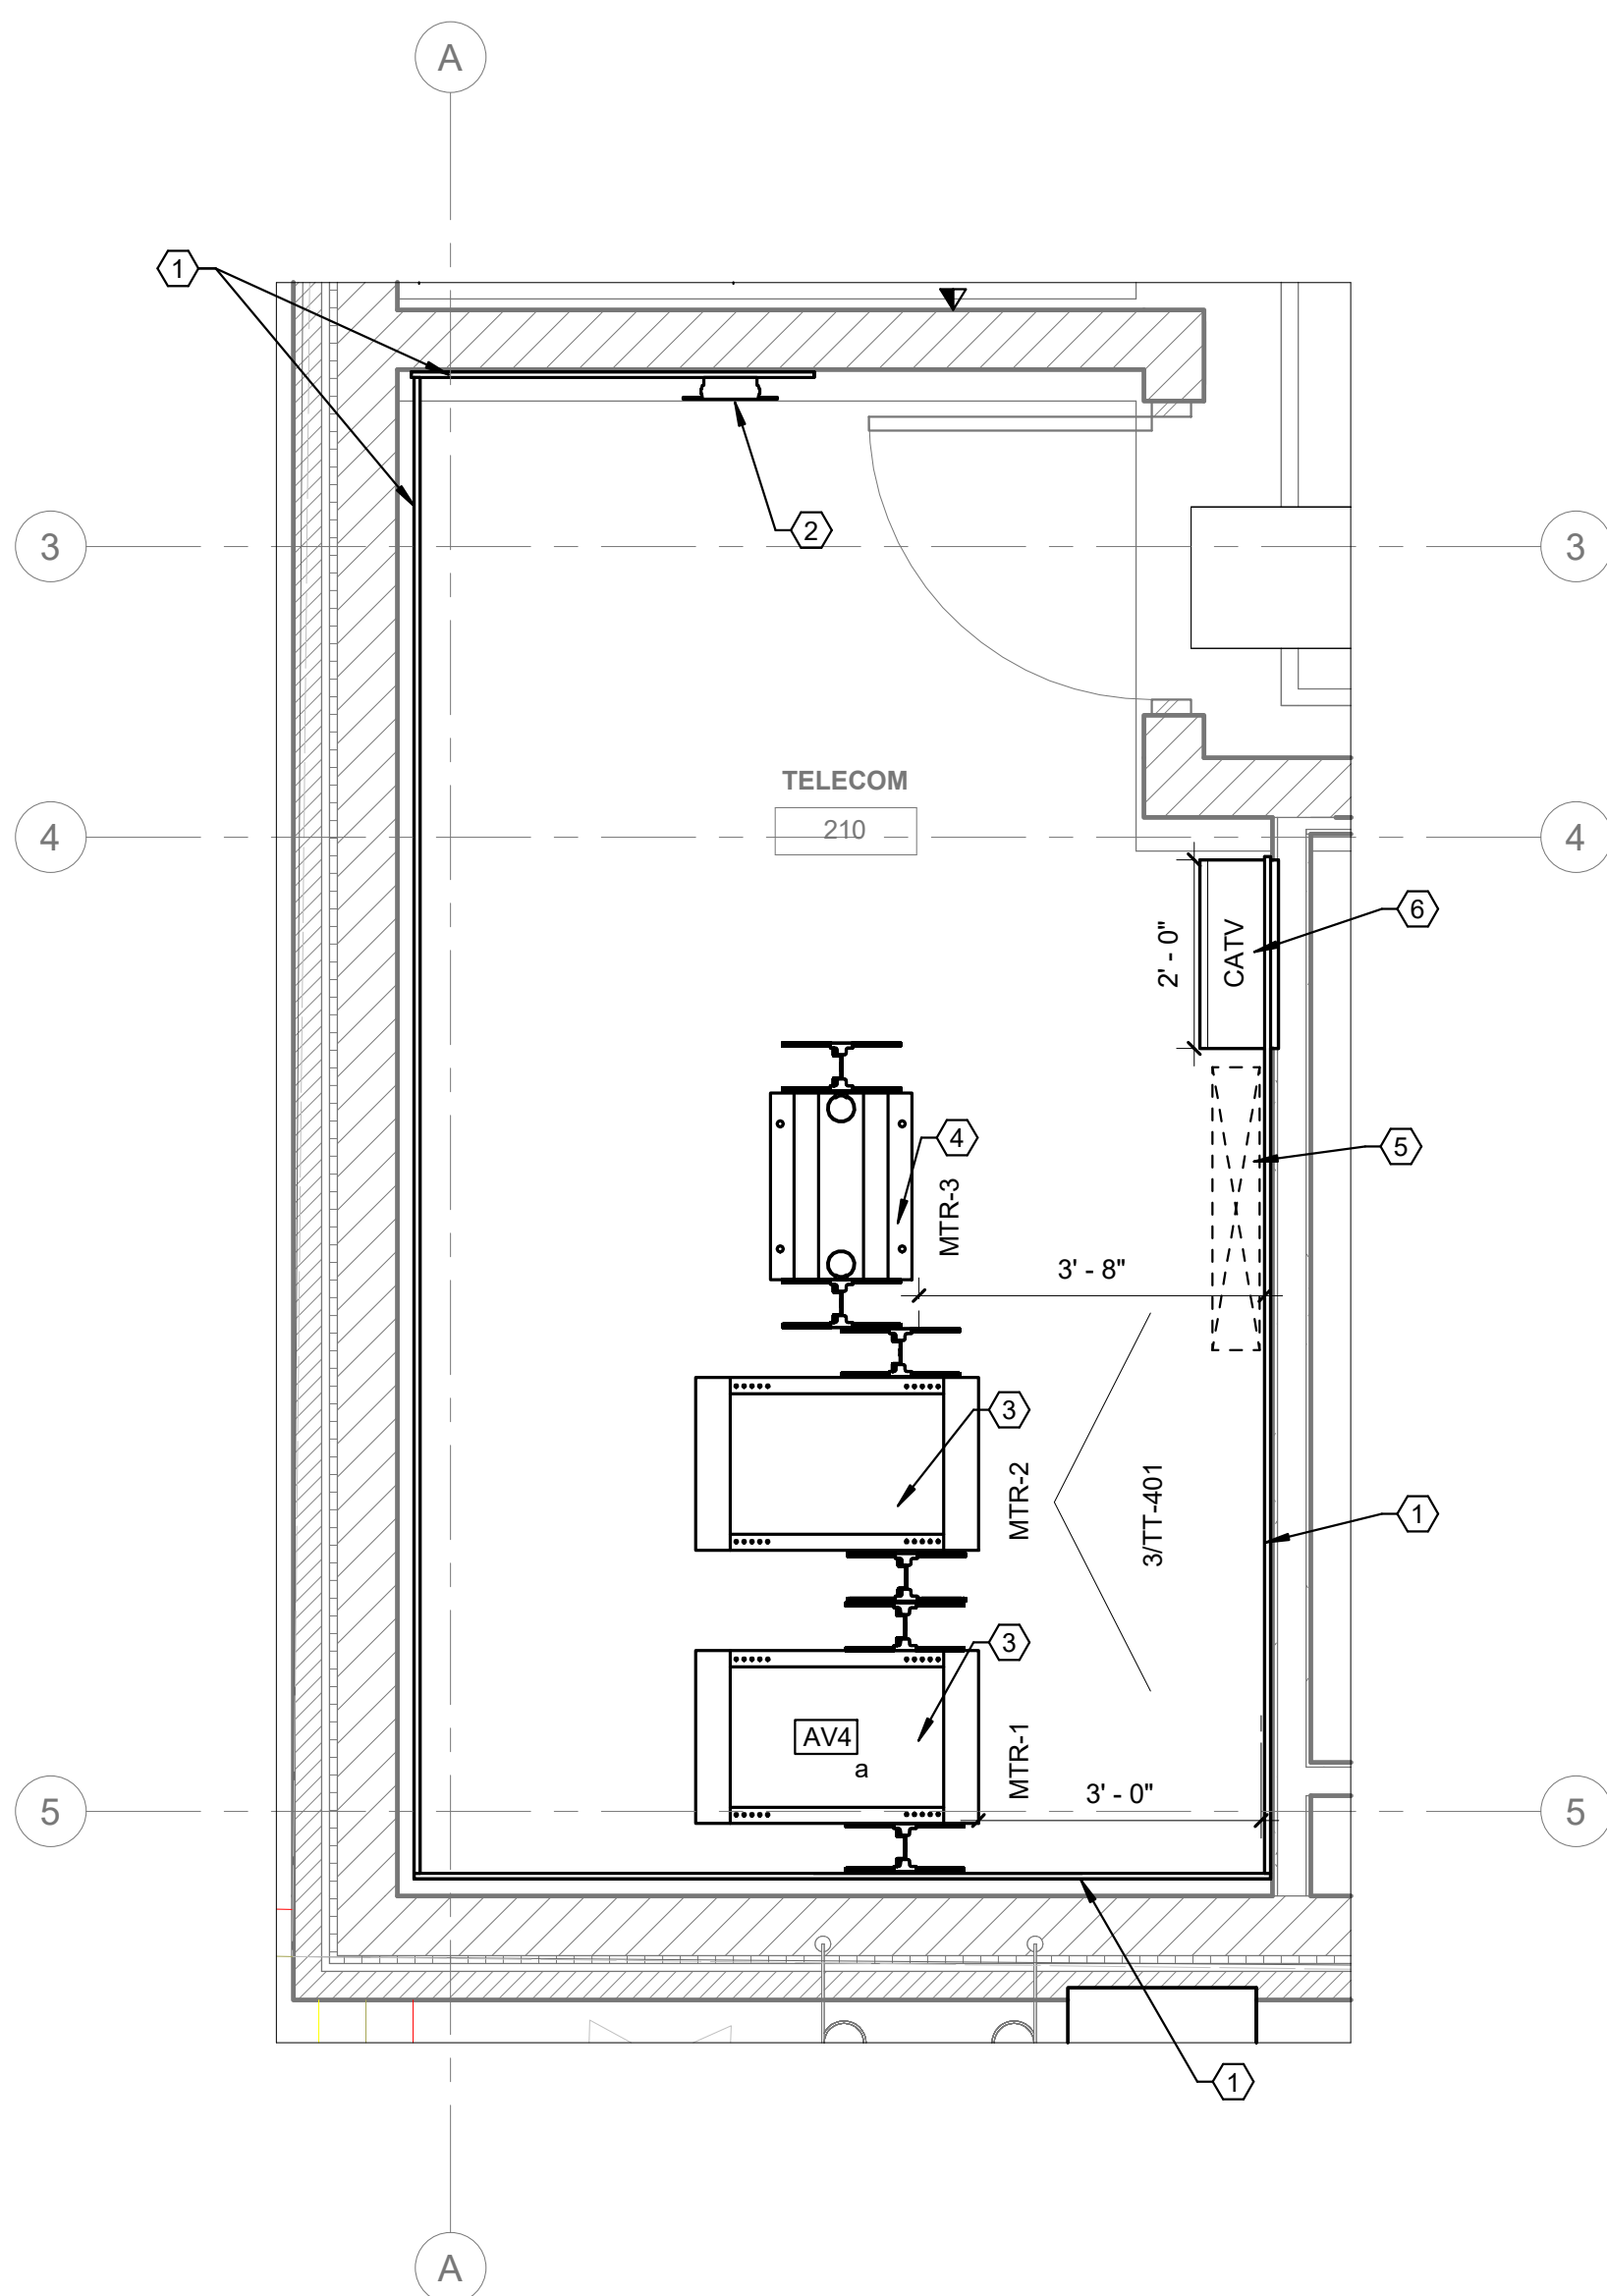

1 TELECOM ROOM ENLARGED PLAN - TELECOM
Scale: 1/2" = 1'-0"

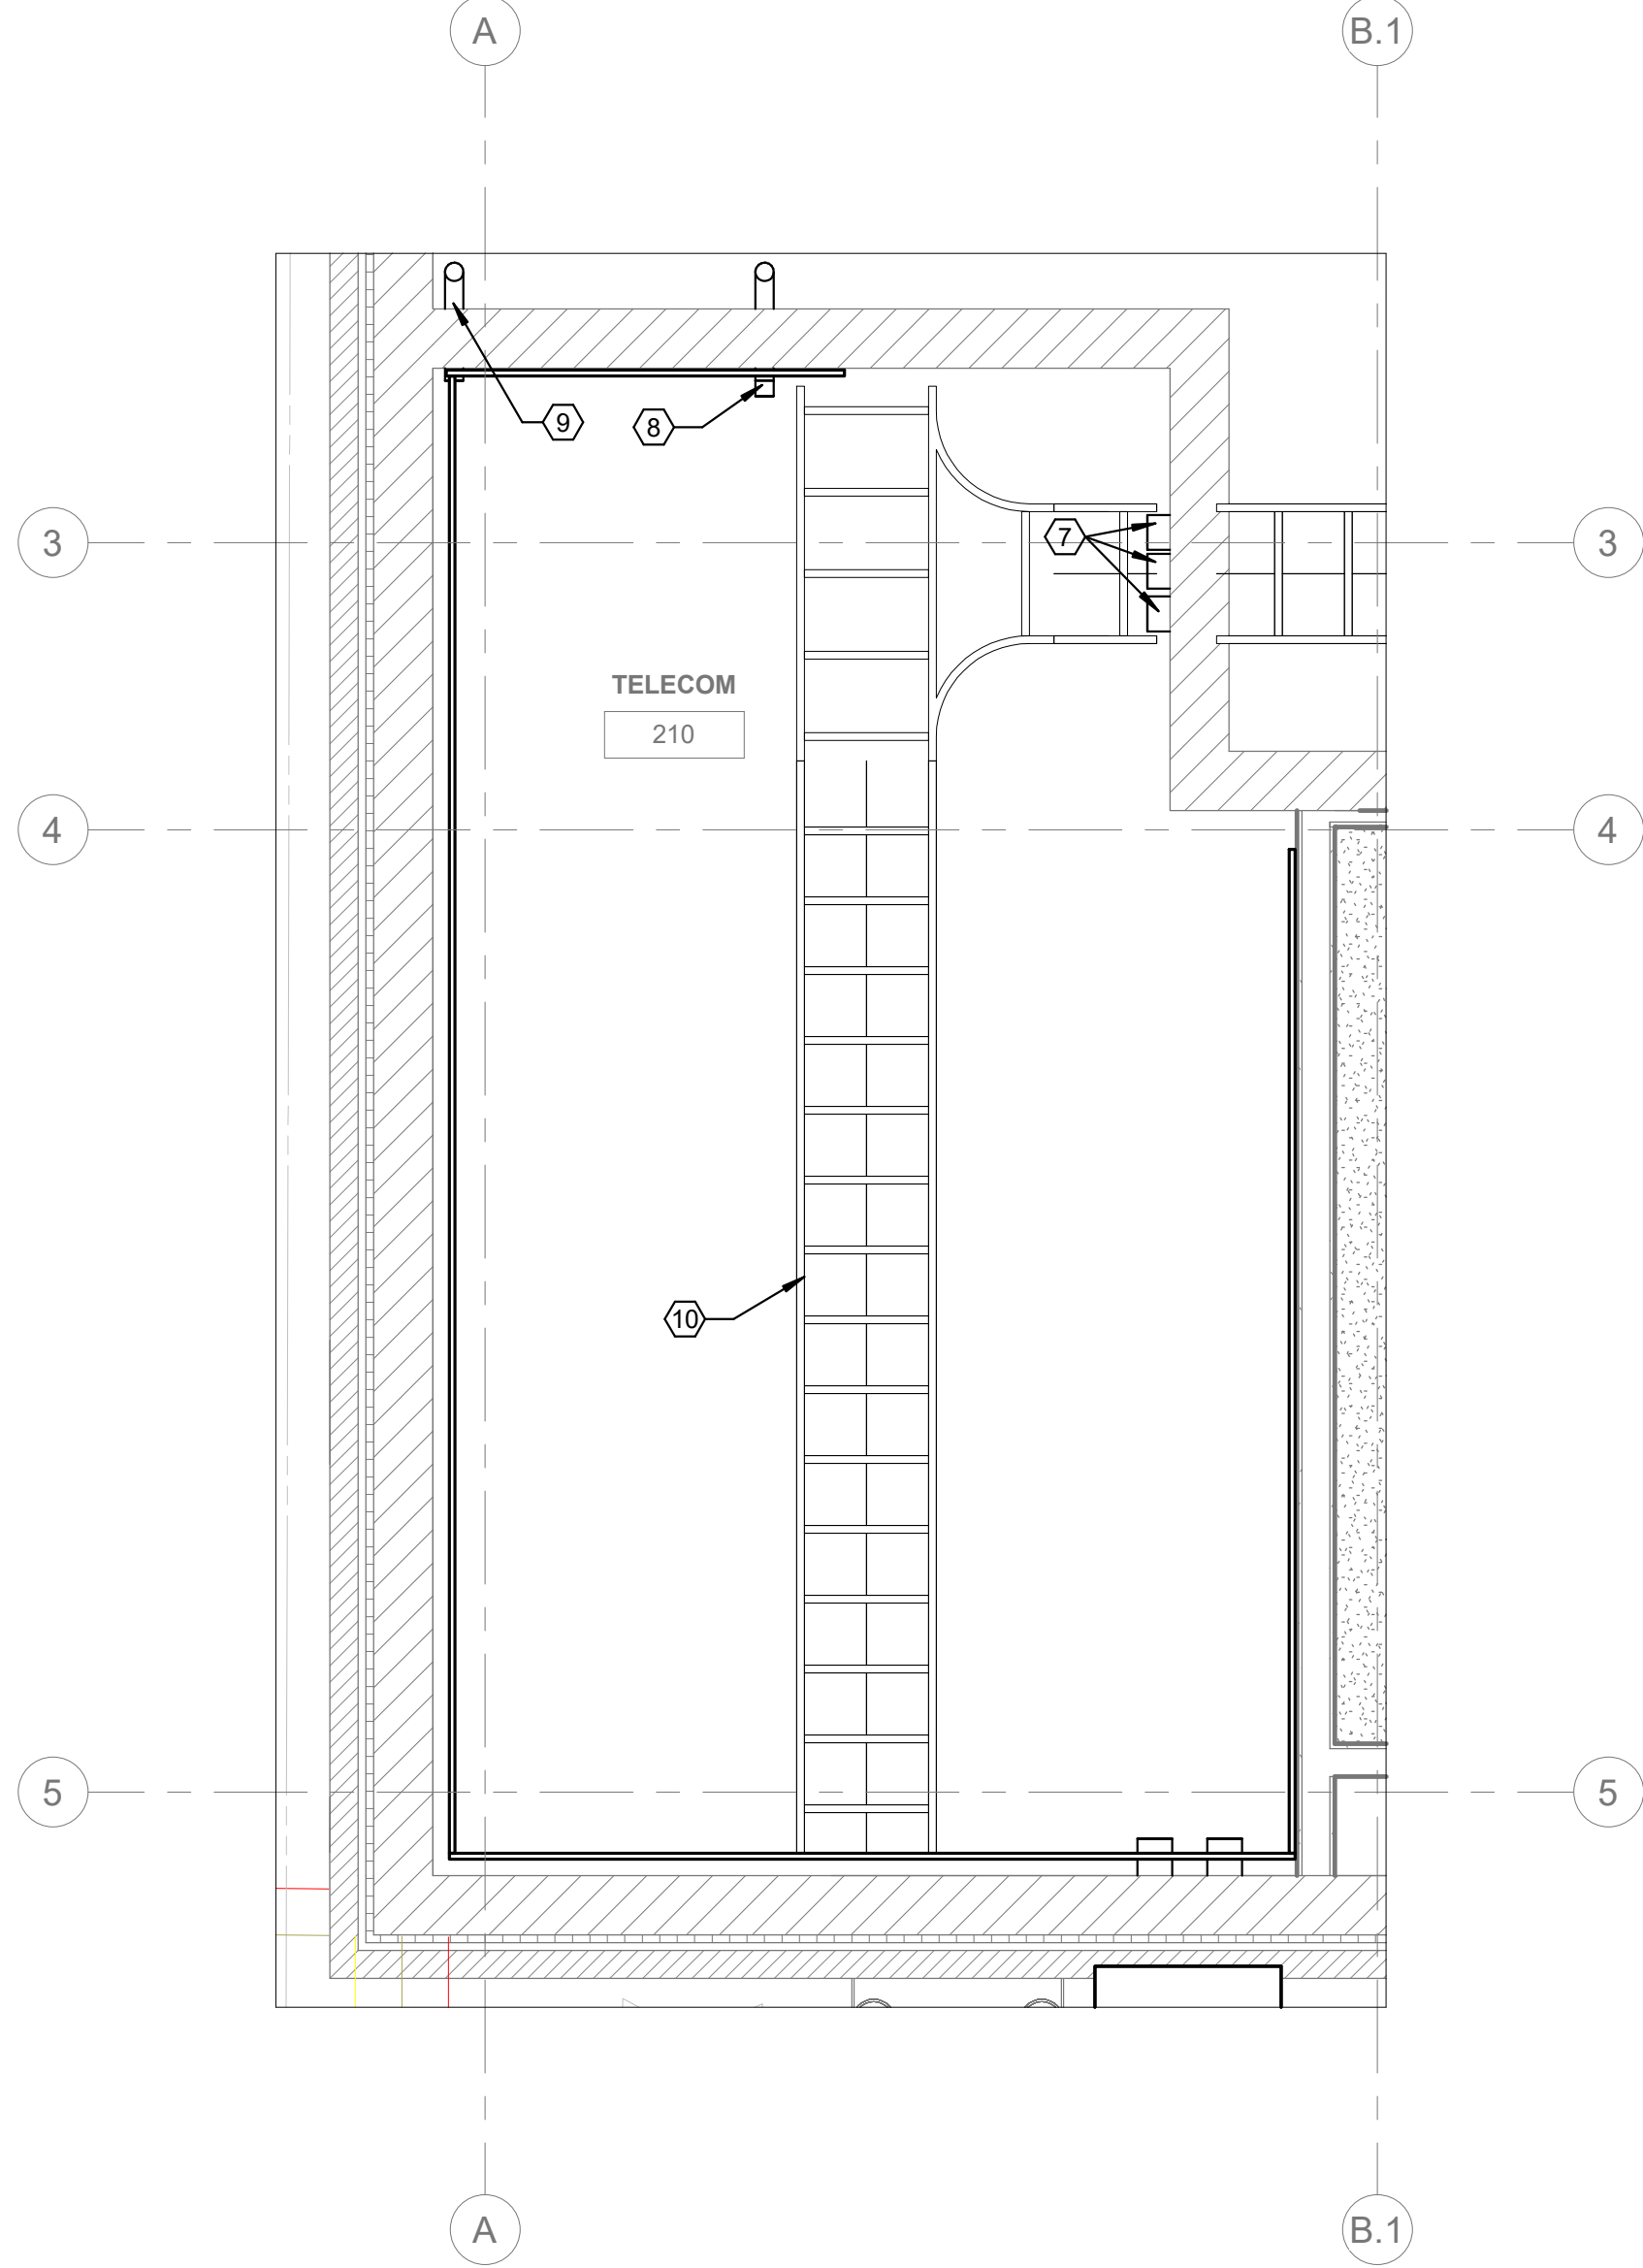

2 TELECOM ROOM ENLARGED RCP - TELECOM
Scale: 1/2" = 1'-0"

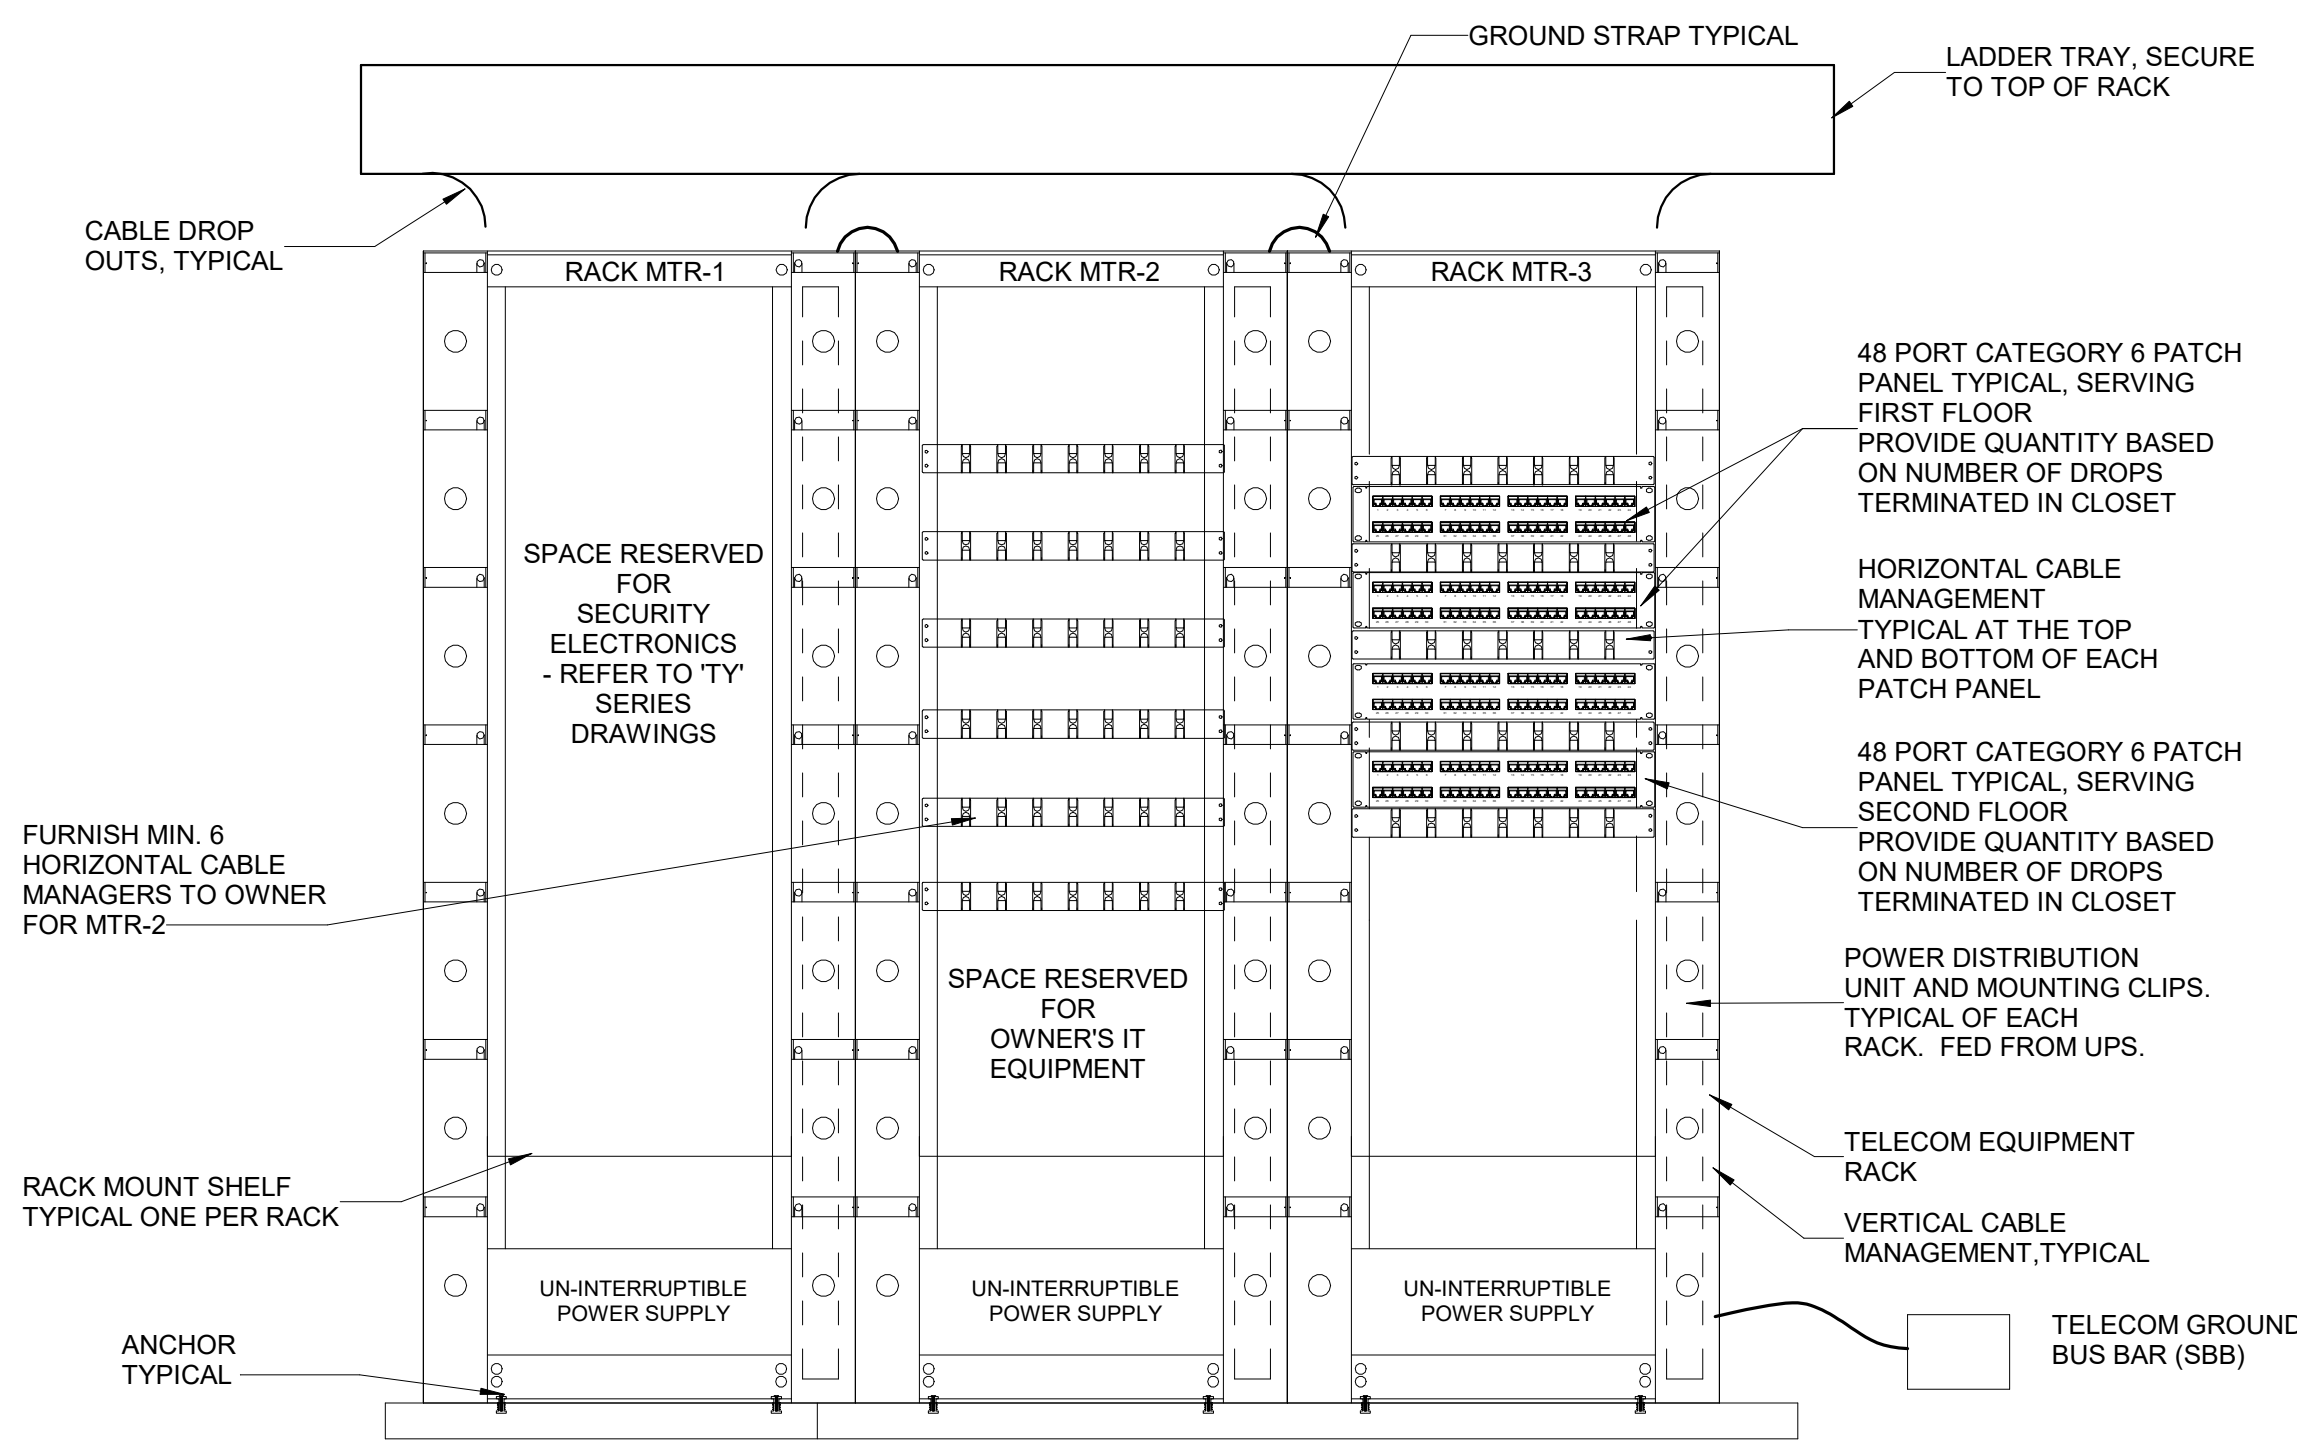

3 TELECOM RACK ELEVATION- TELECOM ROOM 210
Scale: NTS

GENERAL NOTES:

1. REFER TO SHEET TT-001 FOR GENERAL NOTES, SYMBOLS, & ABBREVIATIONS PERTAINABLE TO THIS DRAWING.

KEYED NOTES:

1. 3/4" AC GRADE PLYWOOD, 4'WX8' SHEETS MOUNTED VERTICALLY, BOTTOM MOUNTED 9" AFF. CONTINUOUS ENTIRE LENGTH OF WALL. THE GRADE 'A' SURFACE IS TO BE THE EXPOSED SIDE, PAINTED WITH WHITE FIRE RETARDANT PAINT, FIRE RATED SEAL LEFT EXPOSED FOR INSPECTION.
2. PRIMARY BONDING BUSBAR (PBB) WALL MOUNTED BELOW CABLE TRAY.
3. 4-POST RACK WITH VERTICAL CABLE MANAGERS, TYP. REFER TO RACK ELEVATION VIEW FOR ADDITIONAL DETAILS. THE RACK IS TO BE SECURELY ATTACHED TO THE FLOOR IN ALL FOUR CORNERS AS WELL AS TO THE CABLE TRAY CENTERED ABOVE THE RACK.
4. 2-POST RACK WITH VERTICAL CABLE MANAGERS, TYP. REFER TO RACK ELEVATION VIEW FOR ADDITIONAL DETAILS. THE RACK IS TO BE SECURELY ATTACHED TO THE FLOOR IN ALL FOUR CORNERS AS WELL AS TO THE CABLE TRAY CENTERED ABOVE THE RACK.
5. SPACE RESERVED FOR ACCESS CONTROL/ALARM SECURITY PANELS AND DOOR HARDWARE POWER SUPPLIES. REFER TO TY DRAWINGS.
6. CATV DISTRIBUTION HEAD END. ALL HORIZONTAL CABLES ARE TO BE LABELED WITH ROOM WHICH THEY SERVE.
7. (3) 4" SLEEVES ABOVE CABLE TRAY.
8. 2" TELECOMMUNICATIONS BONDING BACKBONE CONDUIT.
9. 2" TELECOMMUNICATIONS PROVIDER CABLING CONDUIT.
10. 18"W LADDER TYPE CABLE TRAY CENTERED ABOVE RACKS.



Dewberry Architects Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.948.0100

Dewberry Engineers Inc.
401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN 08/24/2026

SCALE



REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE

LARGE SCALE
PLANS -
TELECOM

PROJECT NO. 50165756

TT-401

SHEET NO.

8/24/2026 11:39:08 AM

A

B

C


D

E

F


1 TELECOMMUNICATIONS ROUGH-IN DETAIL - J HOOK

Scale: N.T.S.

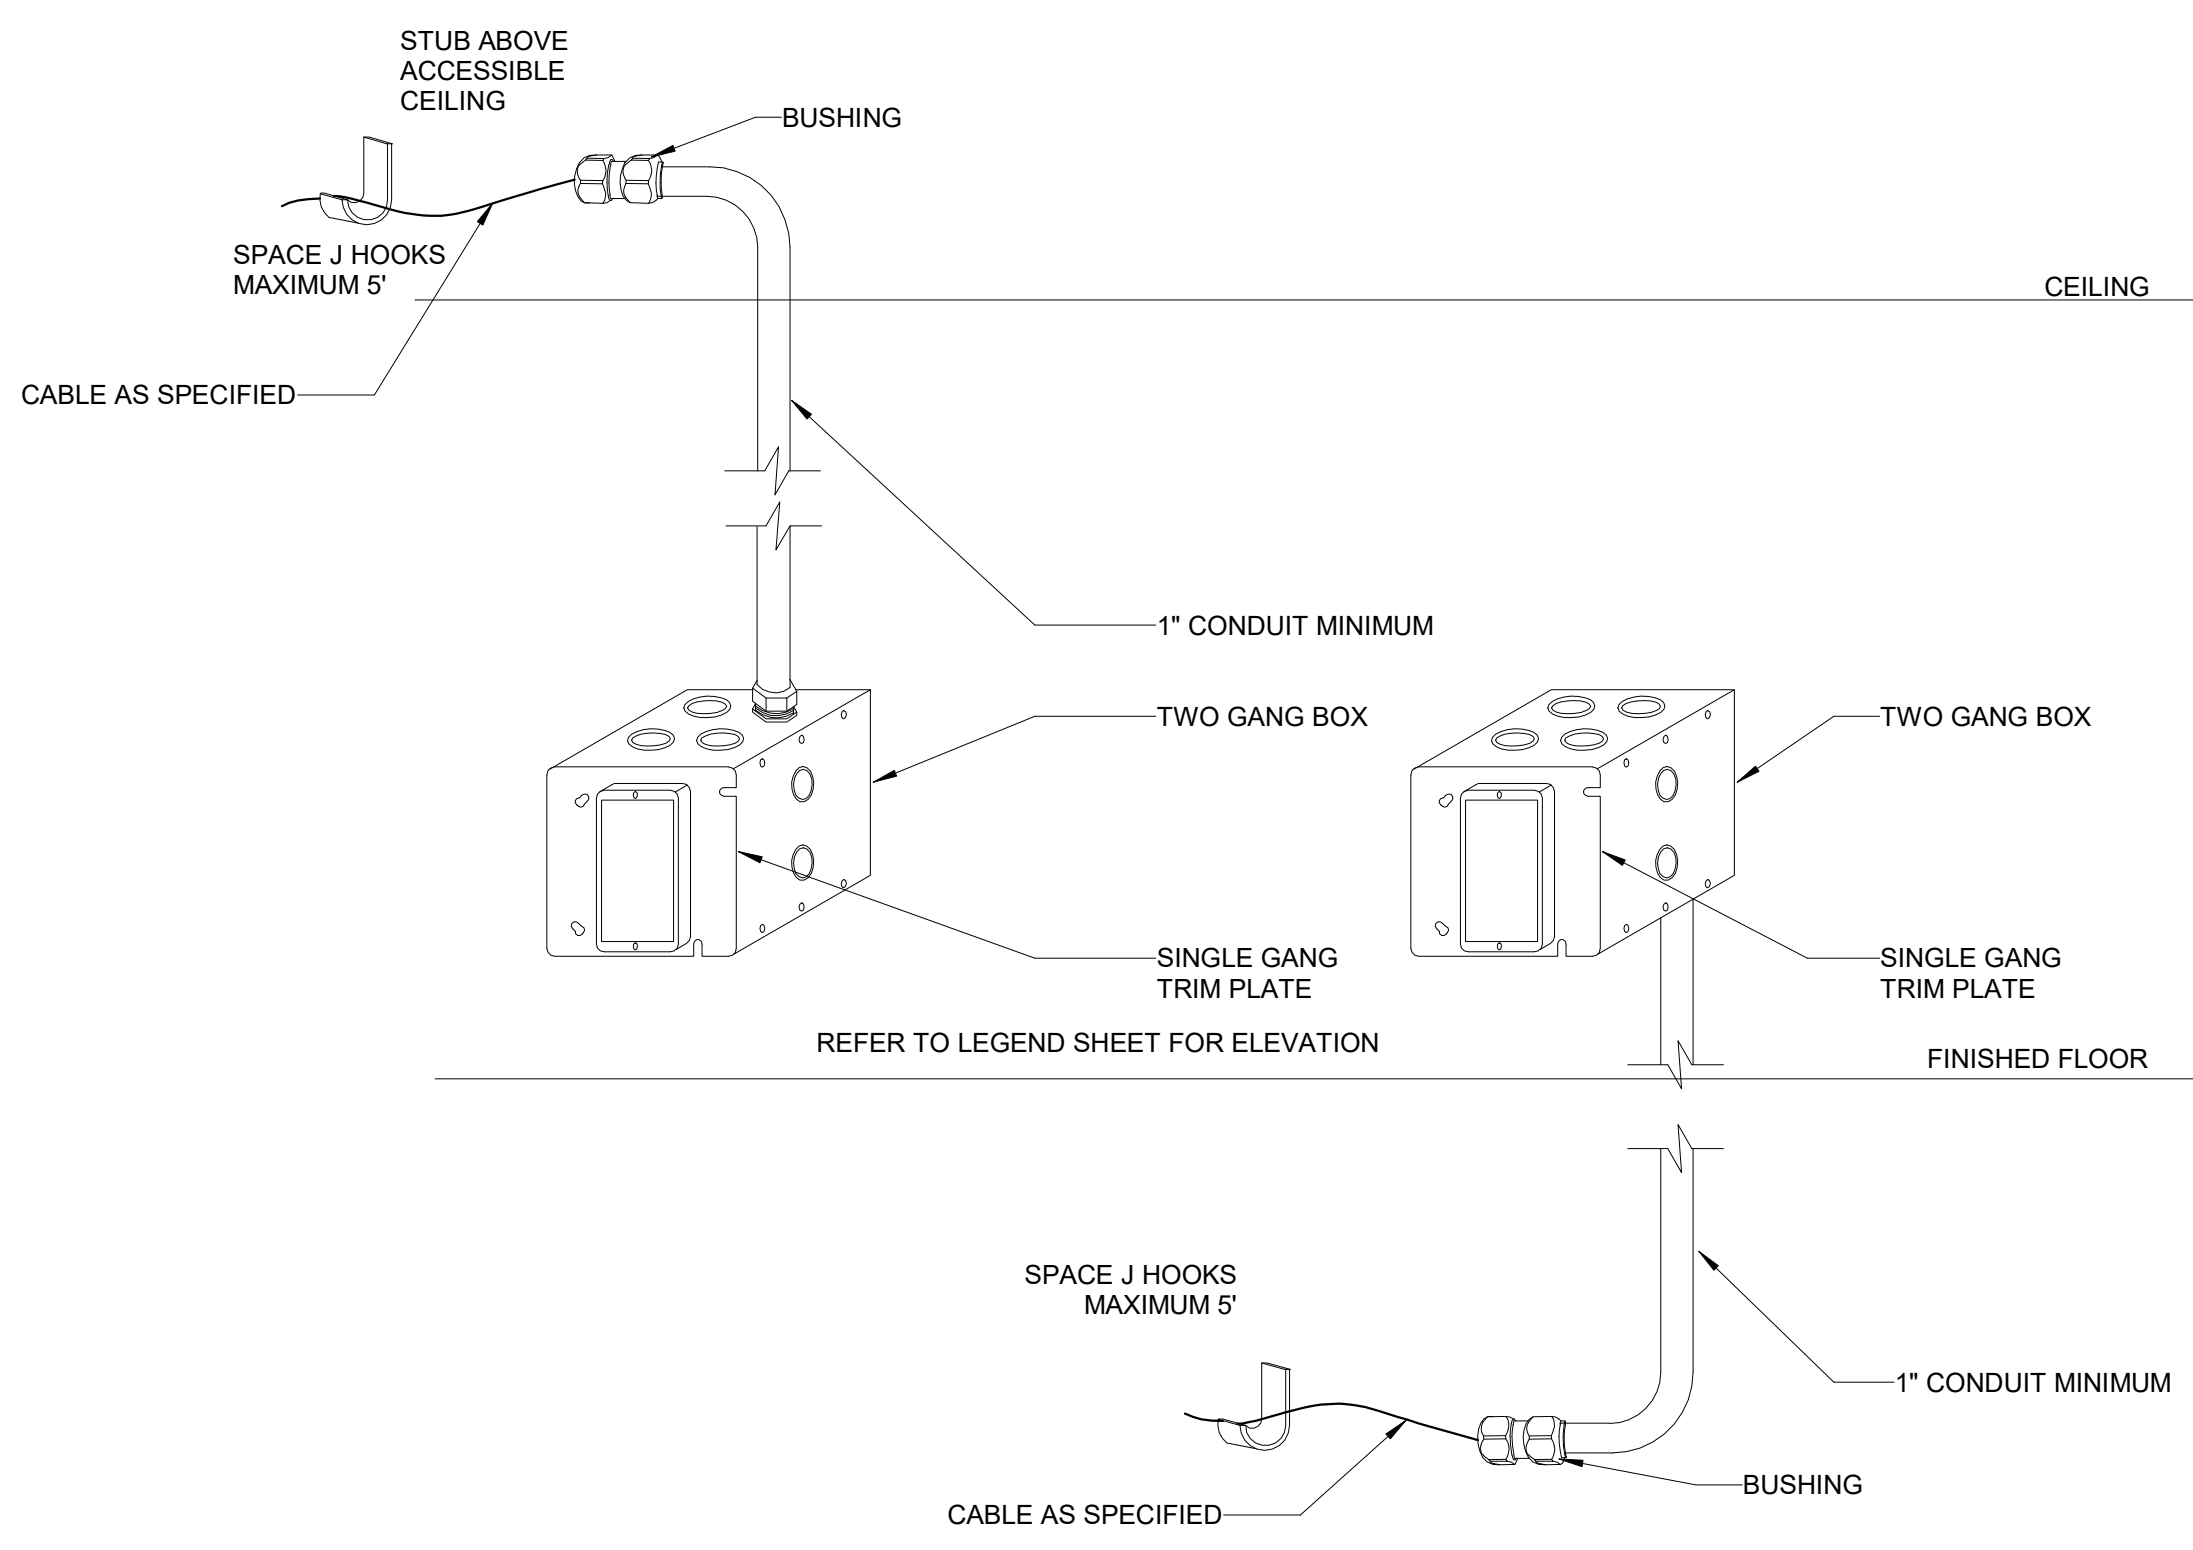


4 TELECOM FACE PLATE DETAIL

Scale: NTS

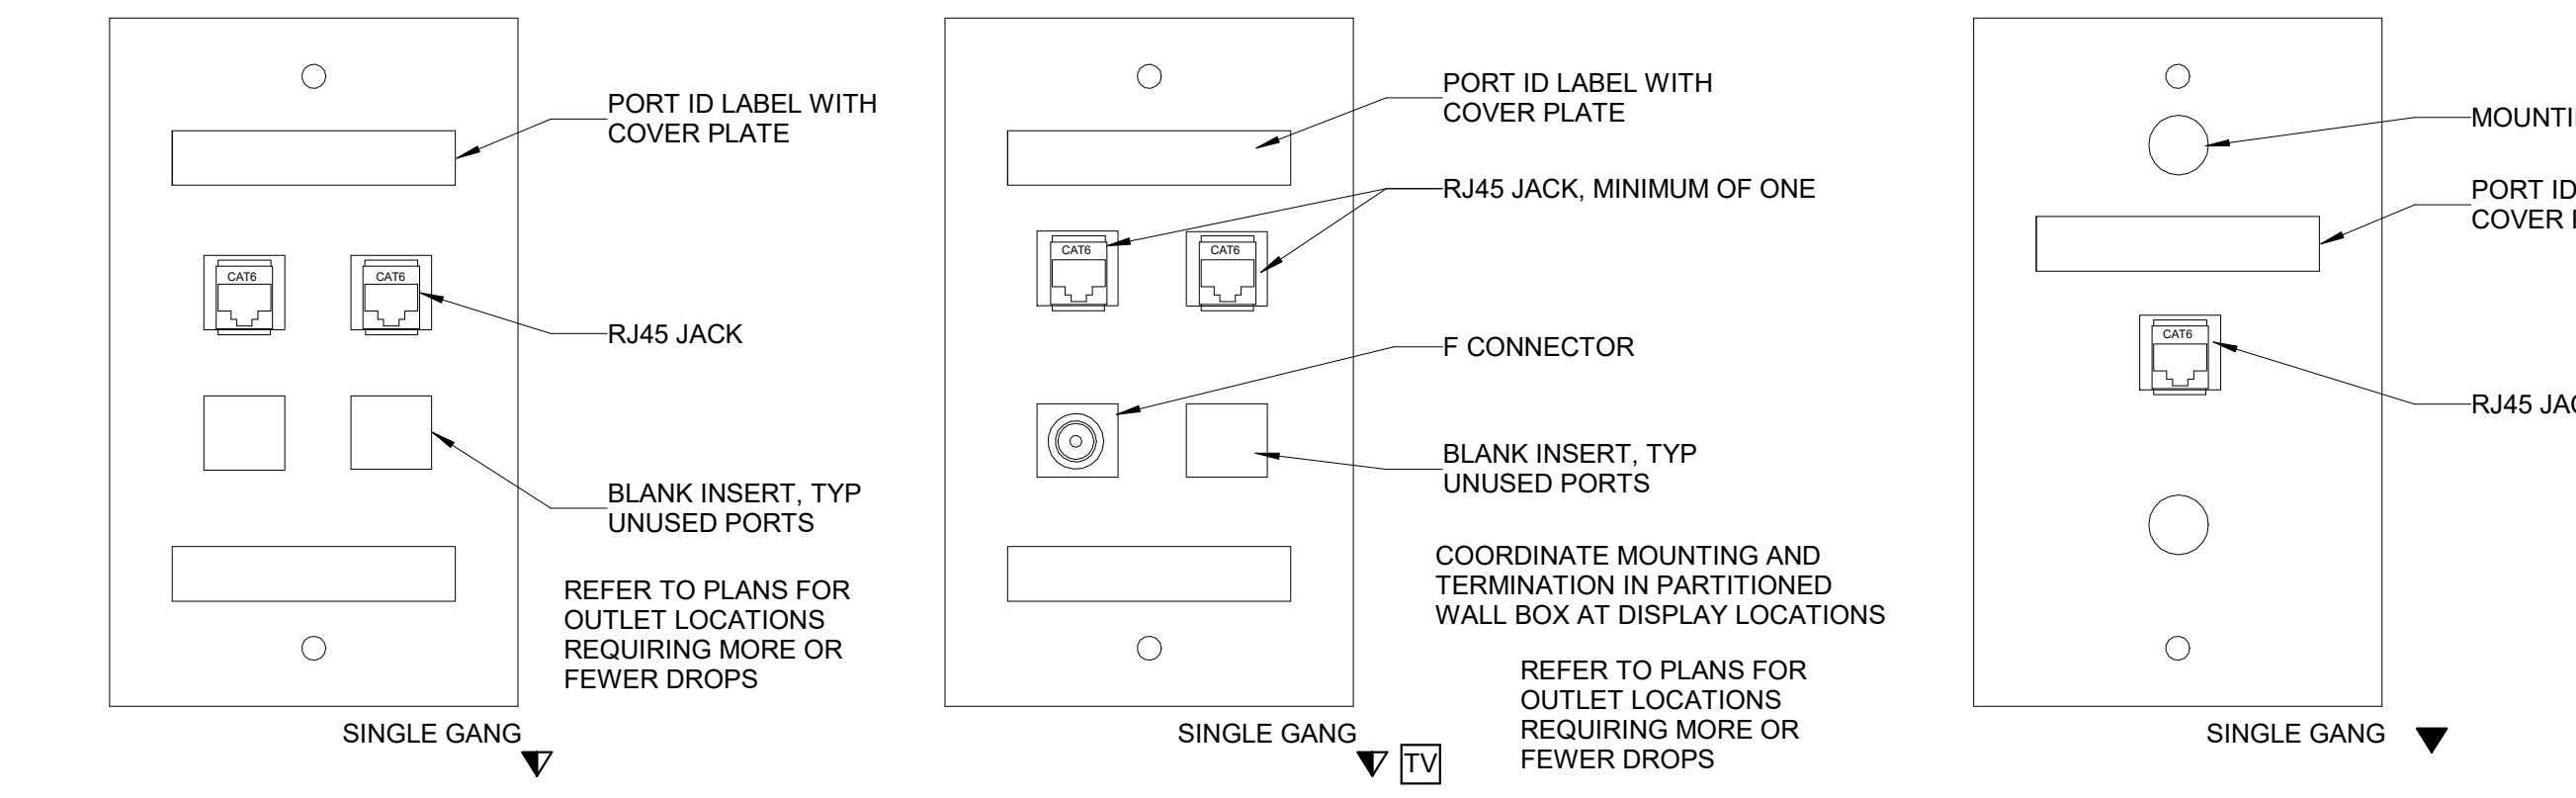


2 WAP DATA OUTLET DETAIL - ACOUSTIC TILE CEILING

Scale: N.T.S.

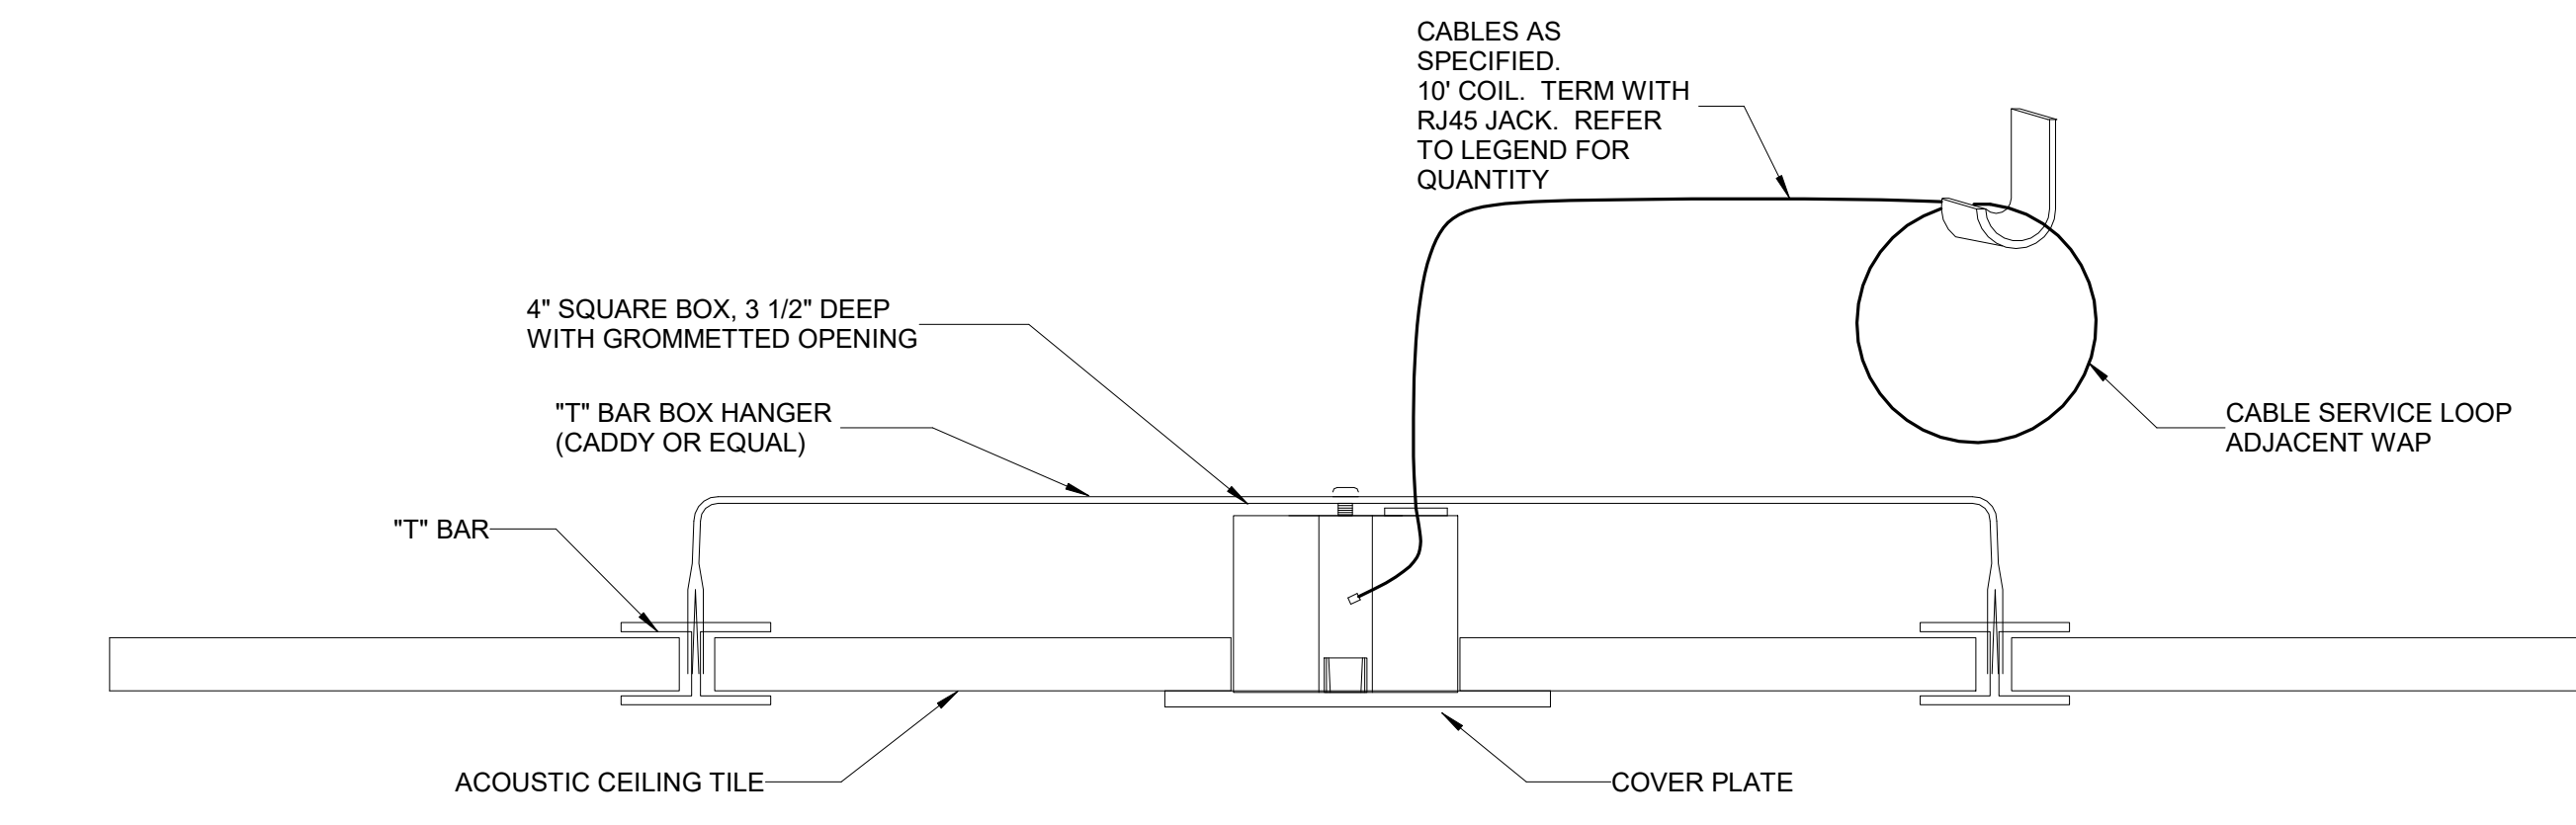


5 TELECOM WALL BOX FIRE PROOFING DETAIL

Scale: NTS

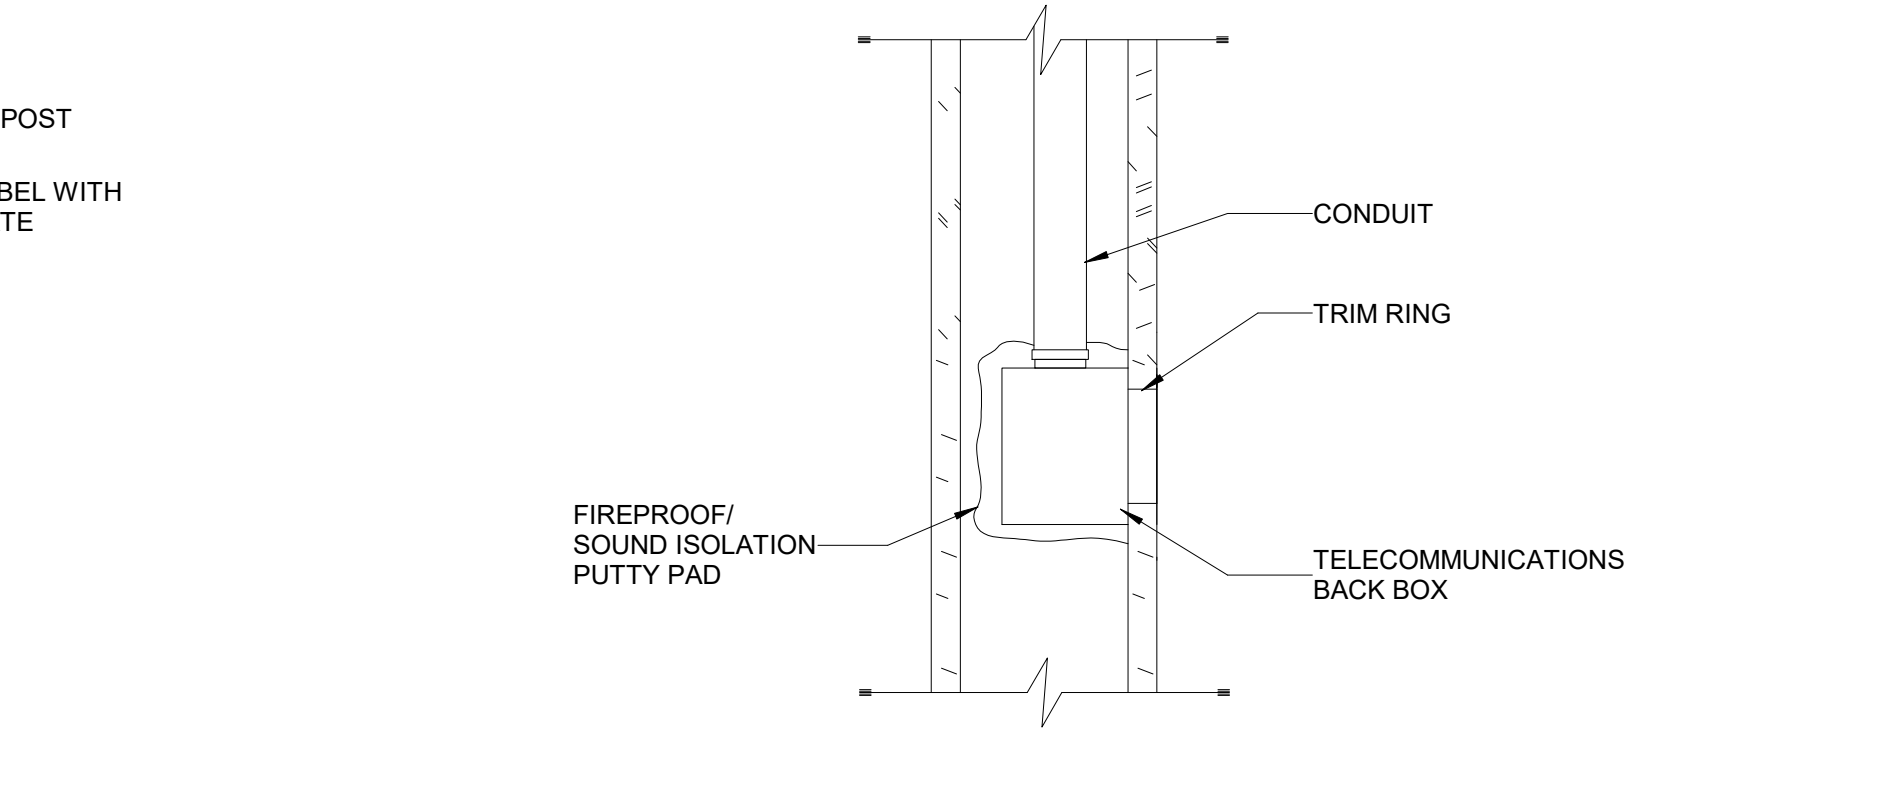


3 WAP DATA OUTLET DETAIL - FIXED CEILING

Scale: N.T.S.

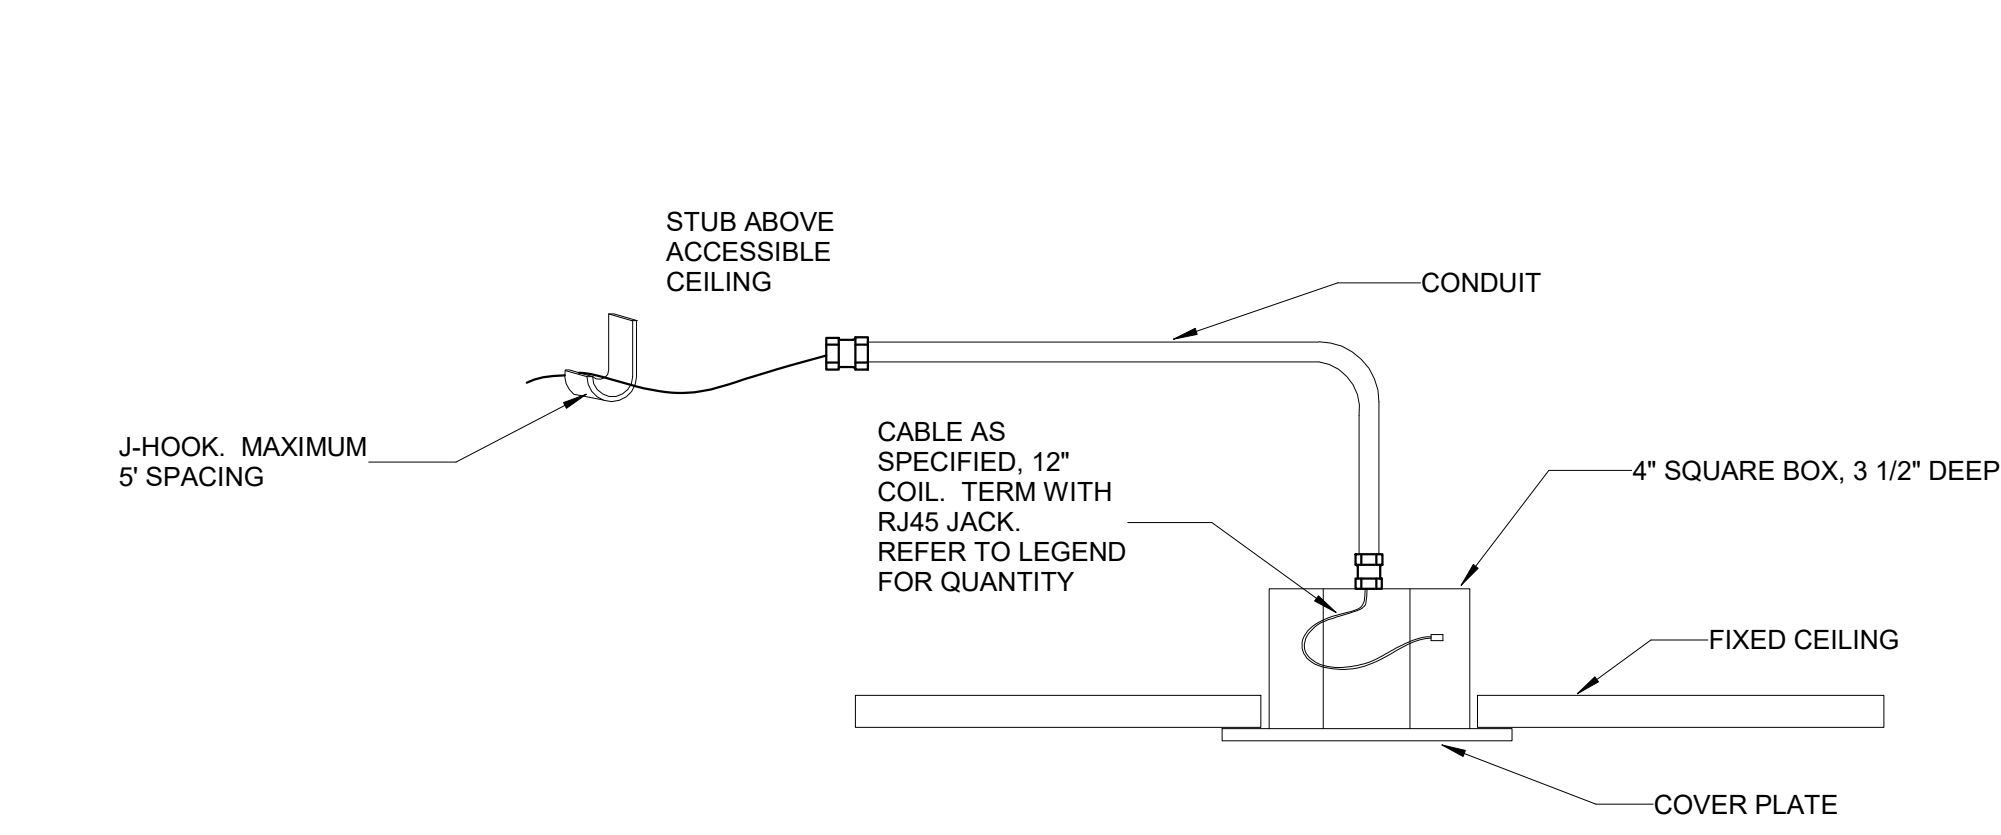


6 FIRE RATED WALL PENETRATION

Scale: NTS

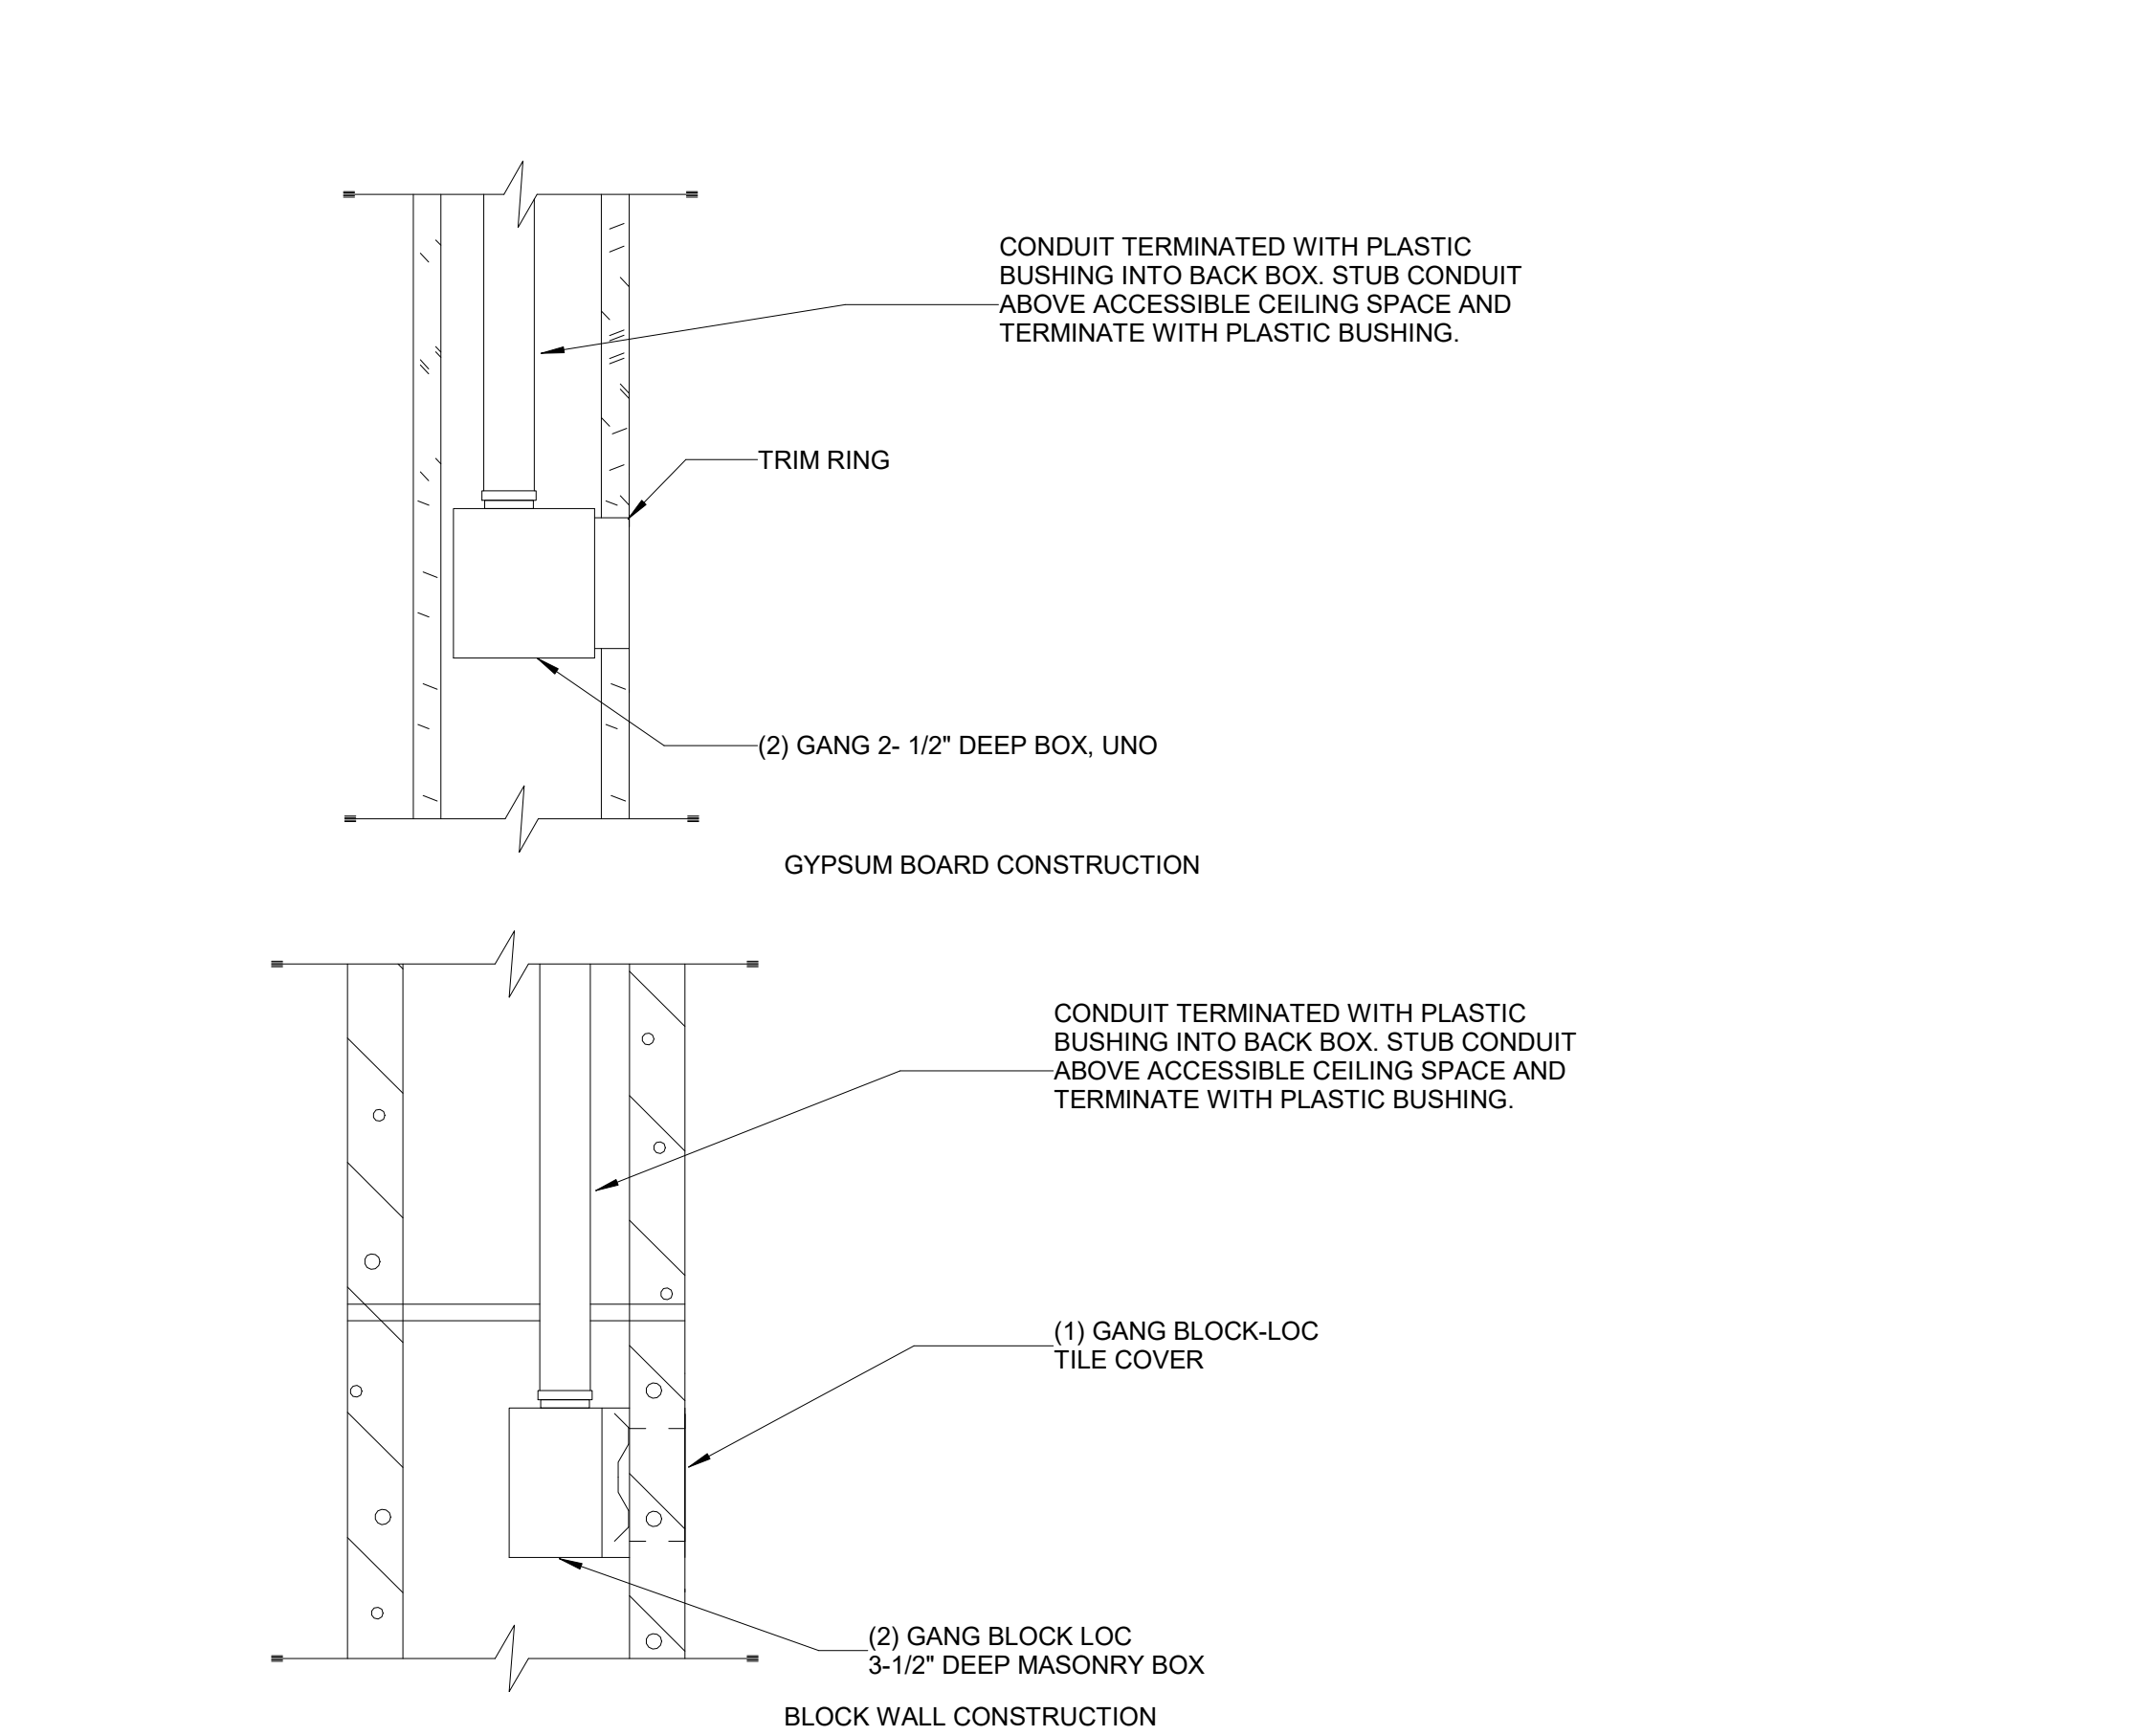

7 RATED WALL CONDUIT PENETRATION DETAIL

Scale: NTS

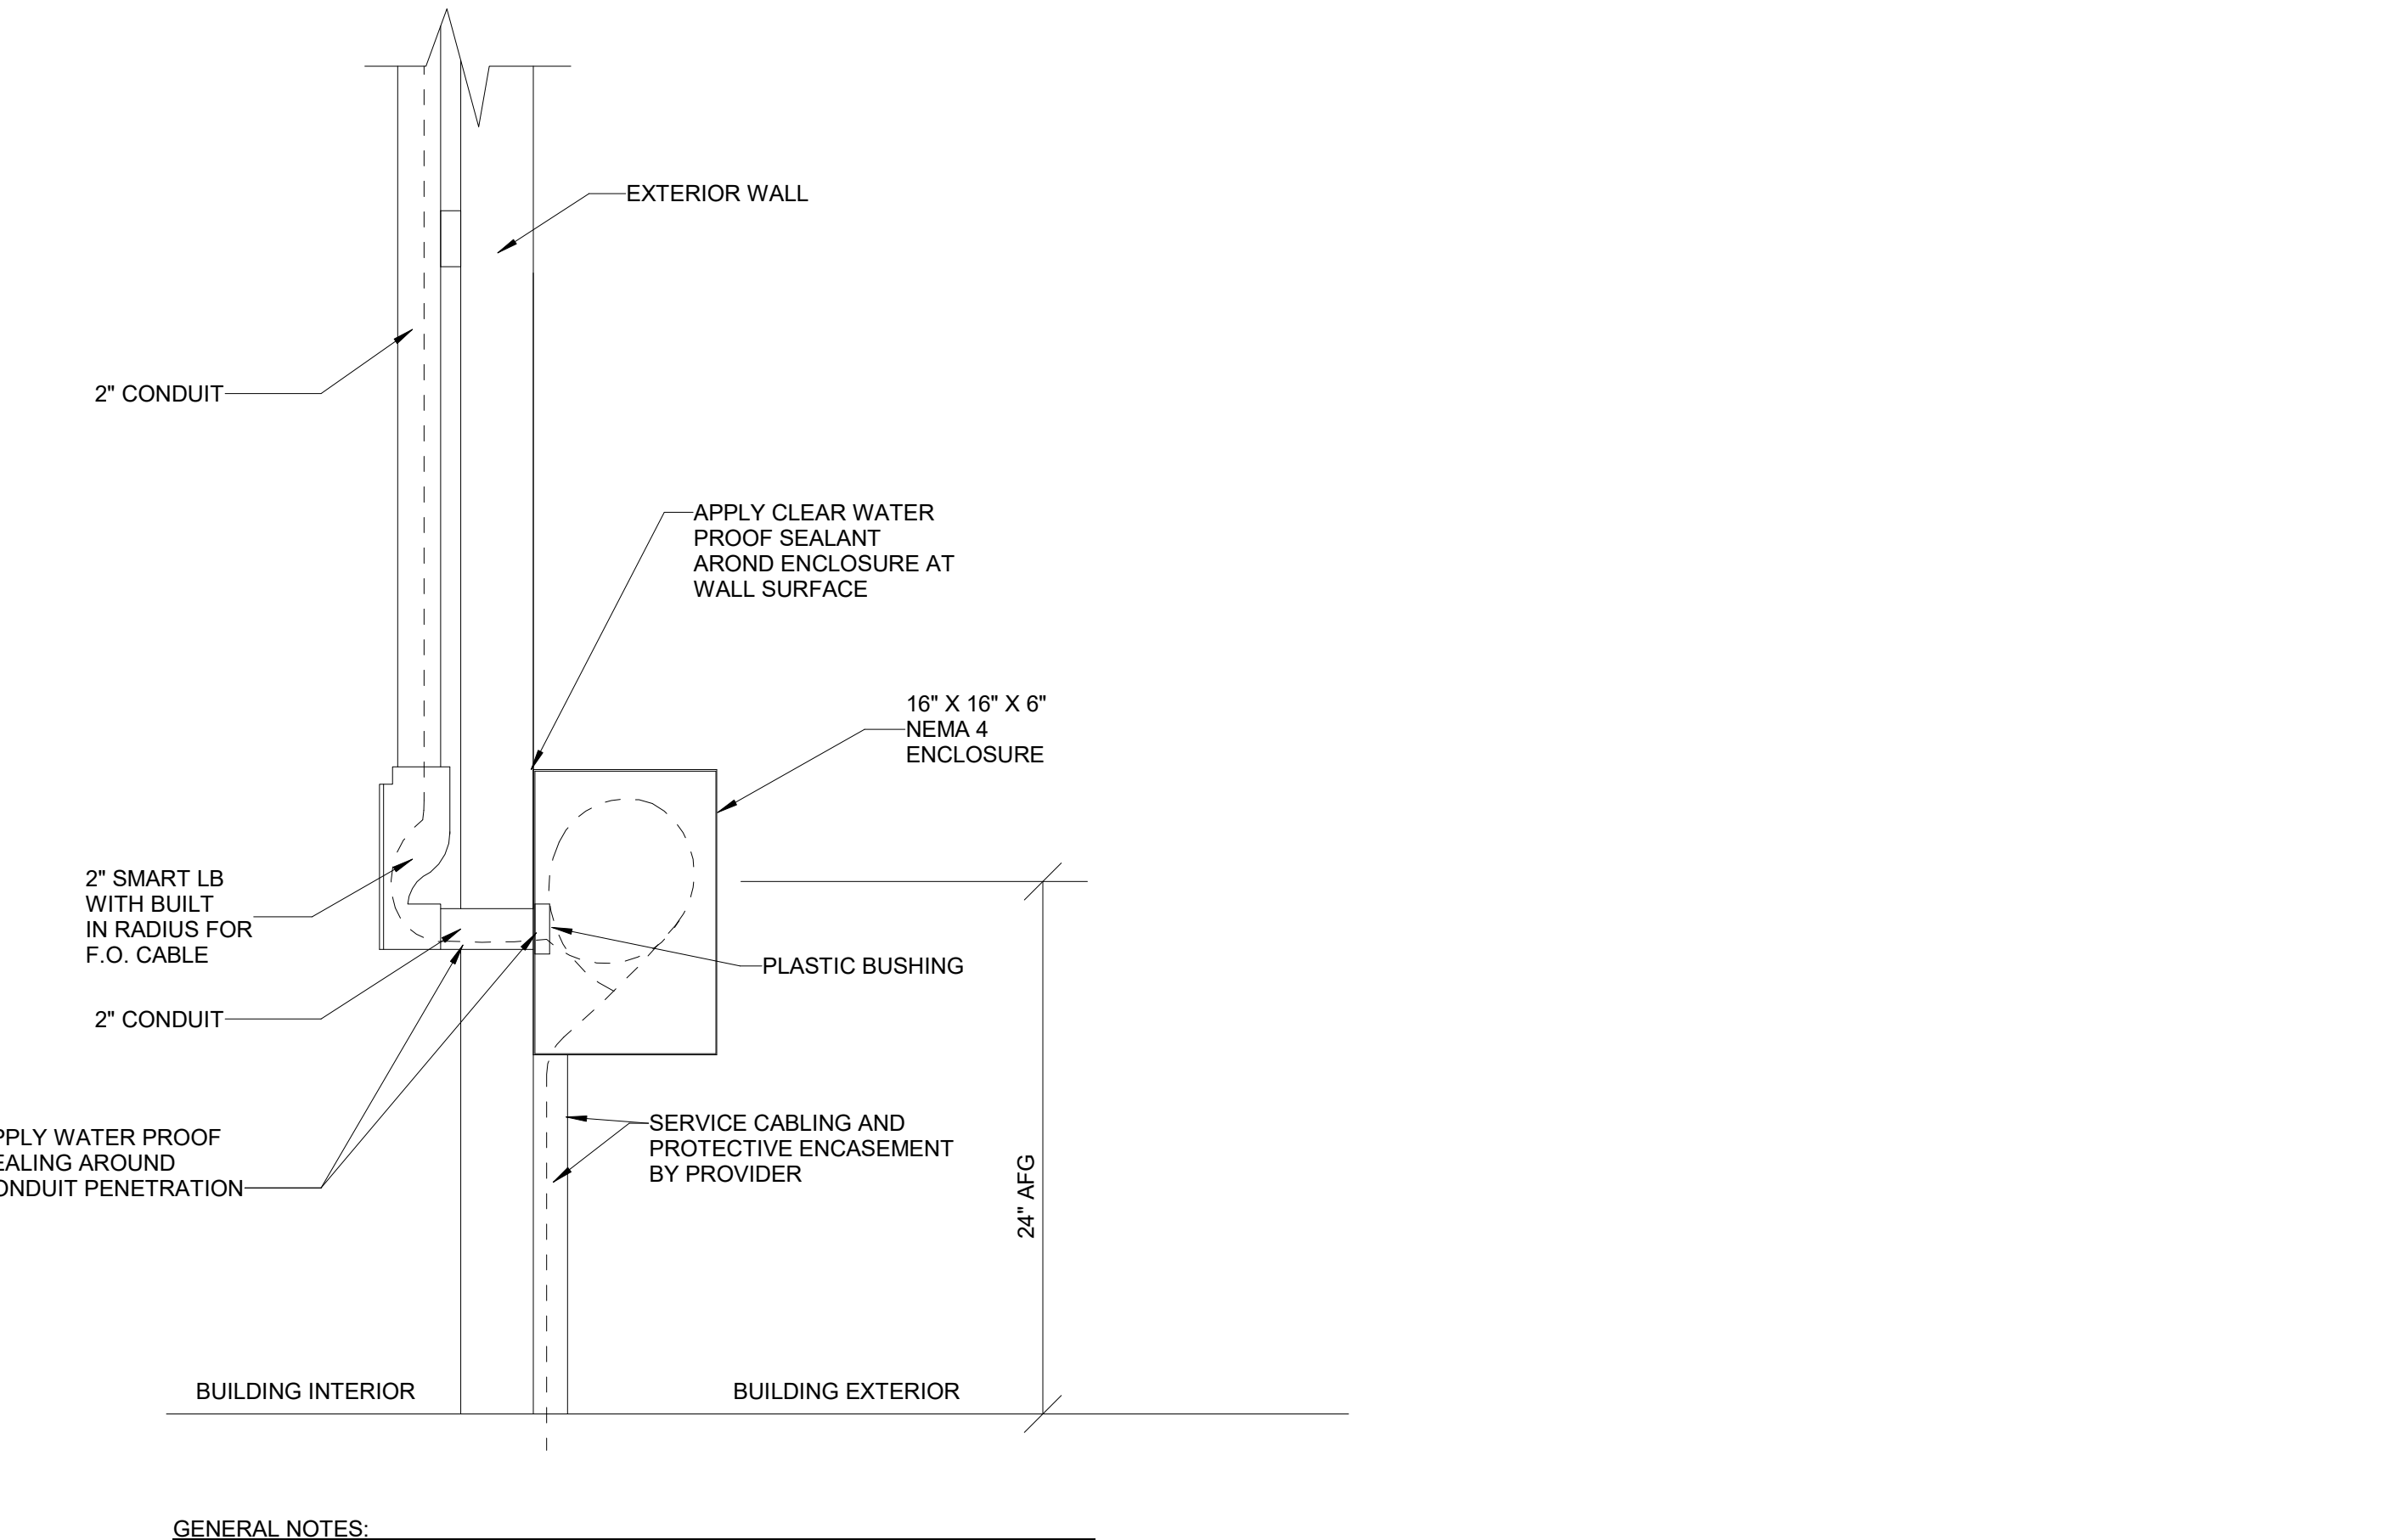

GENERAL NOTES:
1. FURNISH PULL TAPE IN CONDUIT AND SECURE AT EACH CONDUIT END.
2. PATHWAY SUPPORTS PROVIDER BELOW GRADE CABLE ENTRY.

9 TELECOM OUTLET BACK BOX INSTALLATION DETAILS

Scale: NTS




10 PROVIDER CABLE ENTRY PATHWAY DETAIL

Scale: NTS



8 NON-RATED WALL PENETRATION DETAIL

Scale: NTS

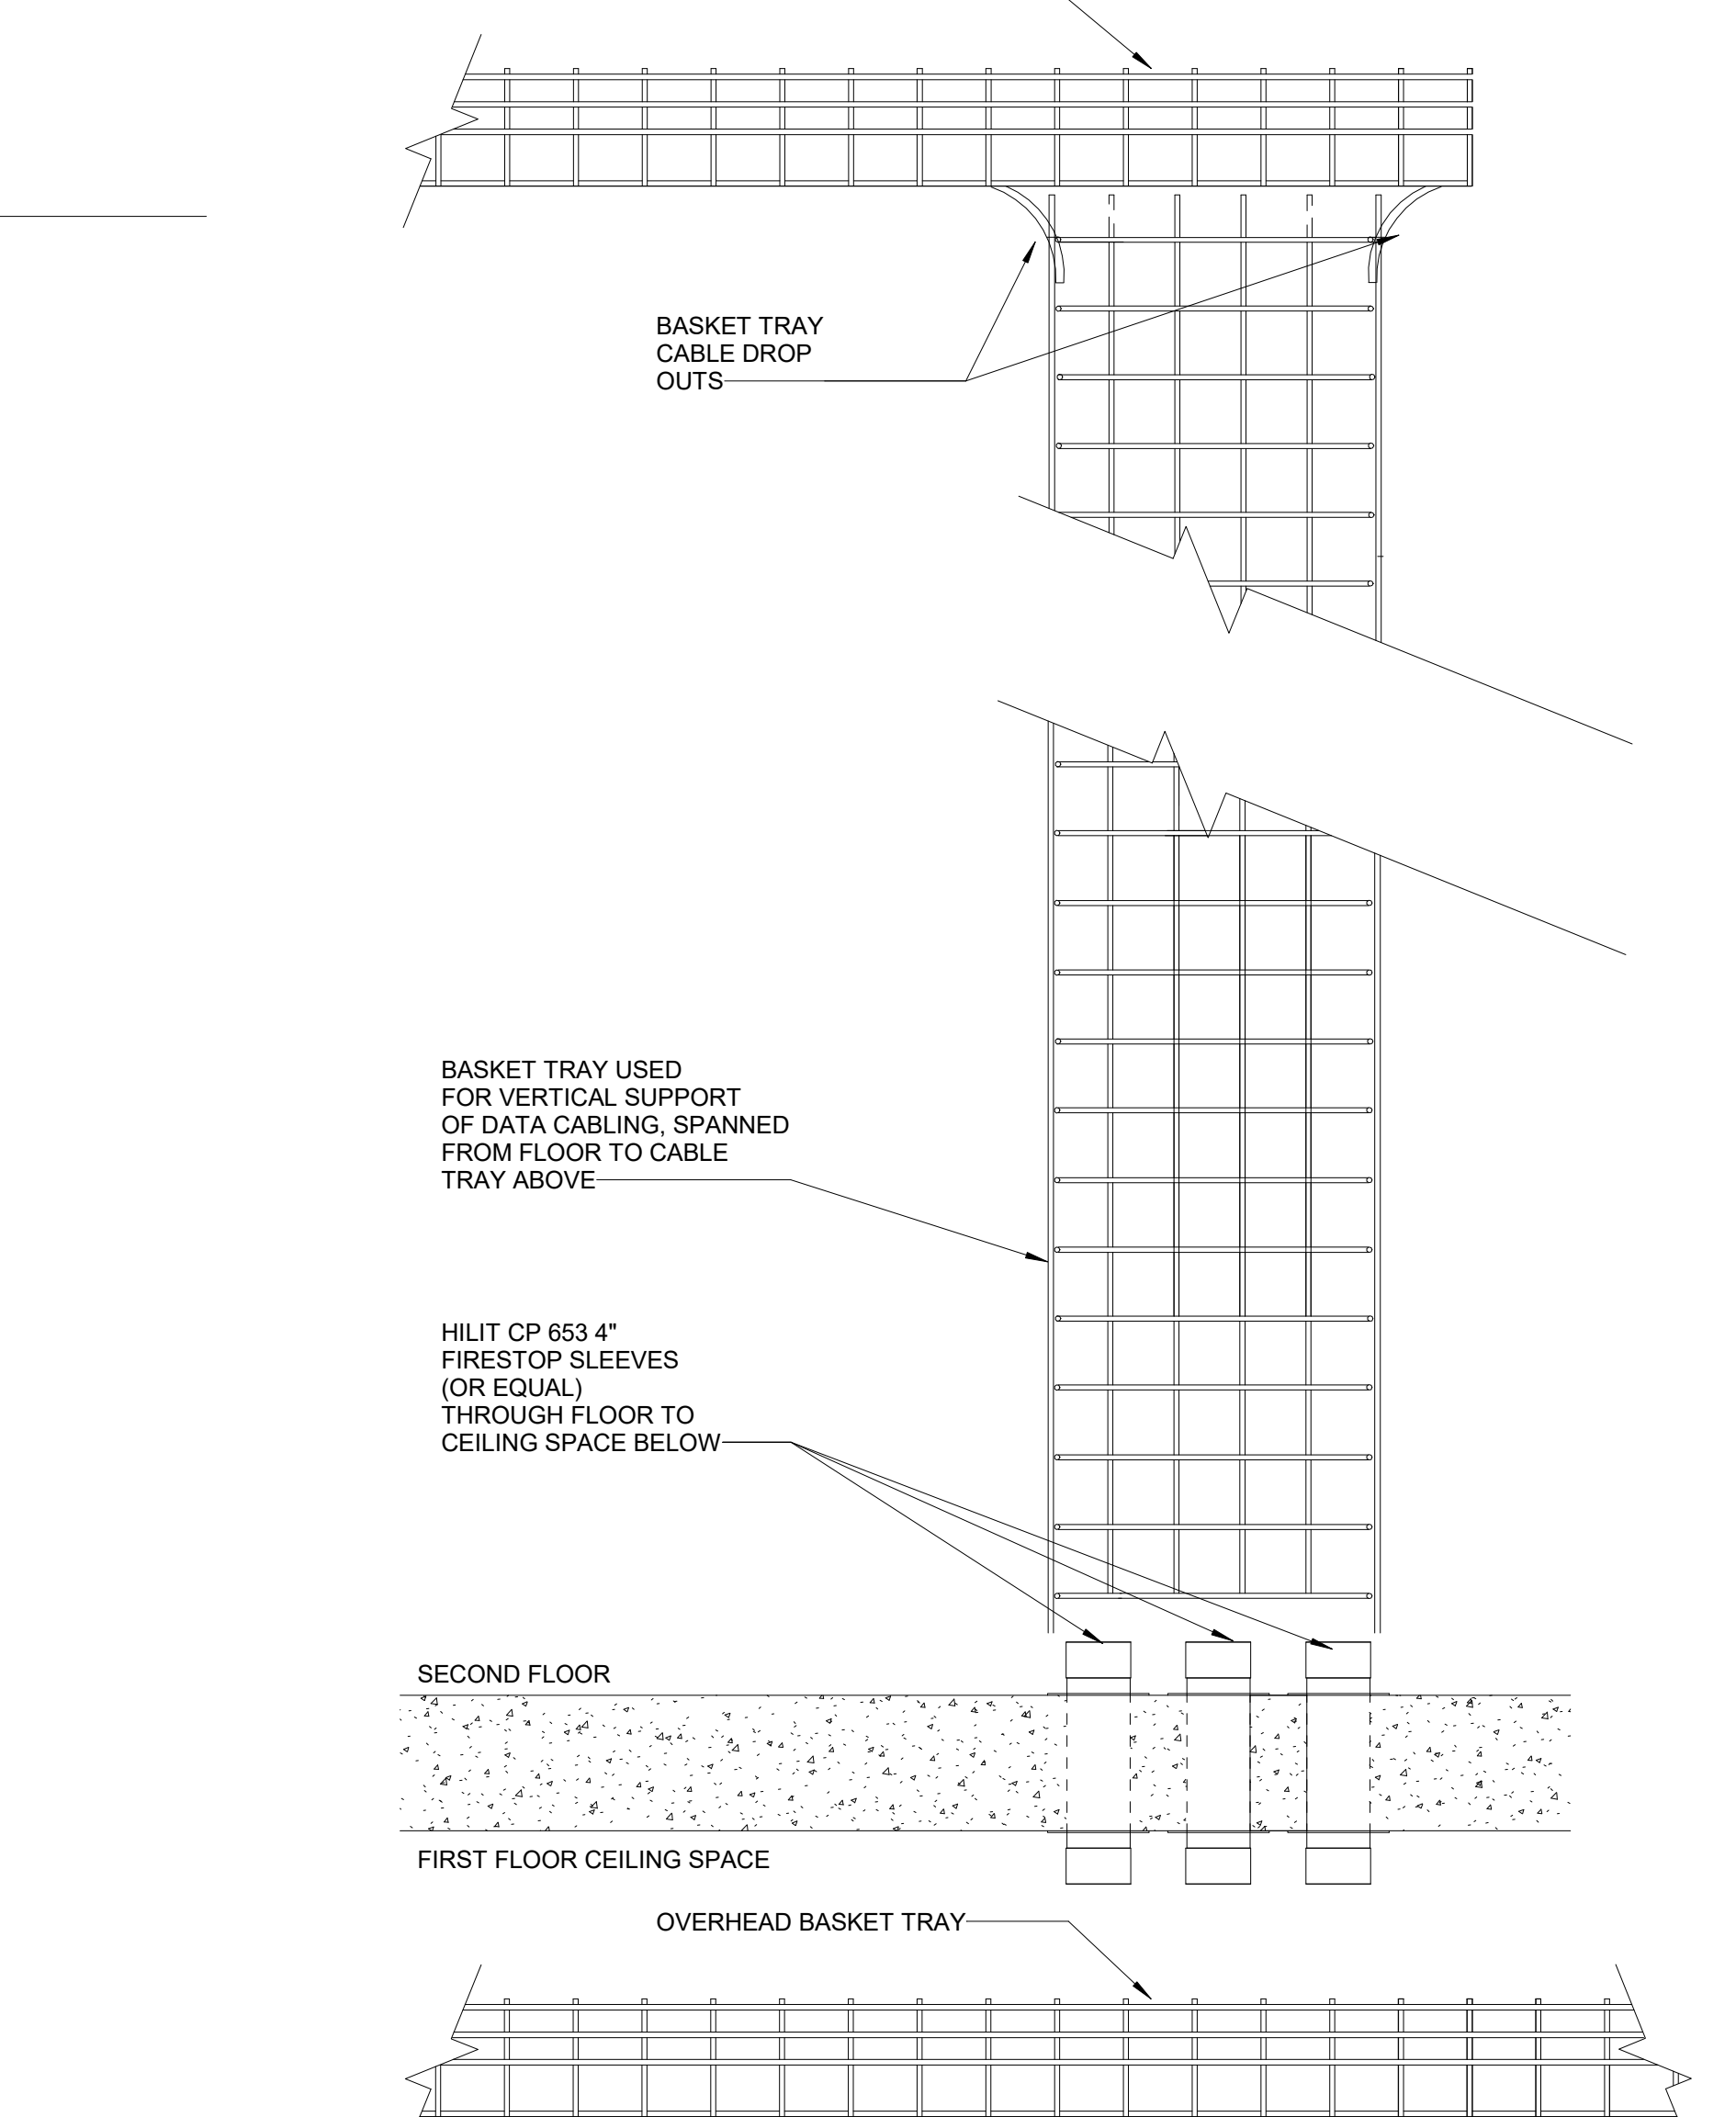

11 BASKET TRAY TRANSITION - SECURE STORAGE 206

Scale: NTS



Dewberry Architects Inc.

8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100

Dewberry Engineers Inc.

401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL



KEY PLAN 08/24/2026

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC

APPROVED BY MJM

CHECKED BY GTR

DATE 08.26.2026

TITLE

DETAILS -
TELECOM

PROJECT NO. 50165756

TT-501

SHEET NO.

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE

DETAILS -
TELECOM

PROJECT NO. 50165756

TT-502

SHEET NO.

8/24/2026 11:39:09 AM

A


B

C


D

E

F

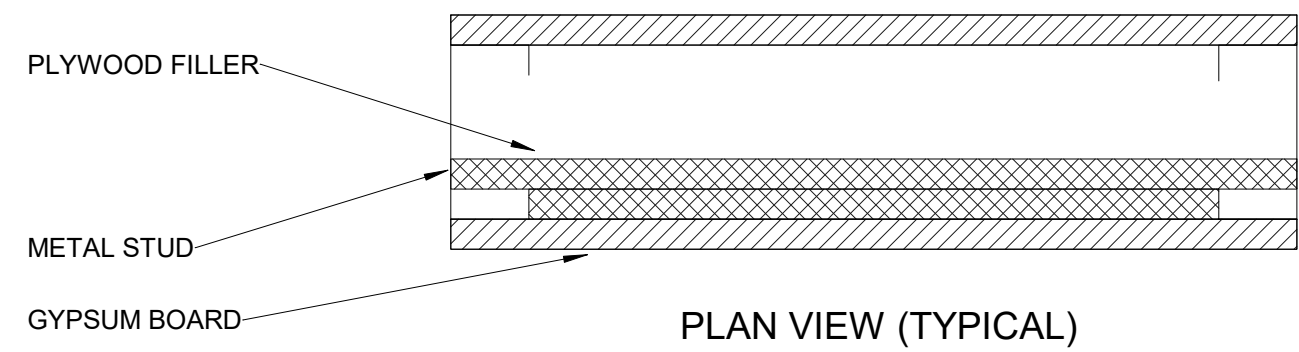

PLAN VIEW (TYPICAL)

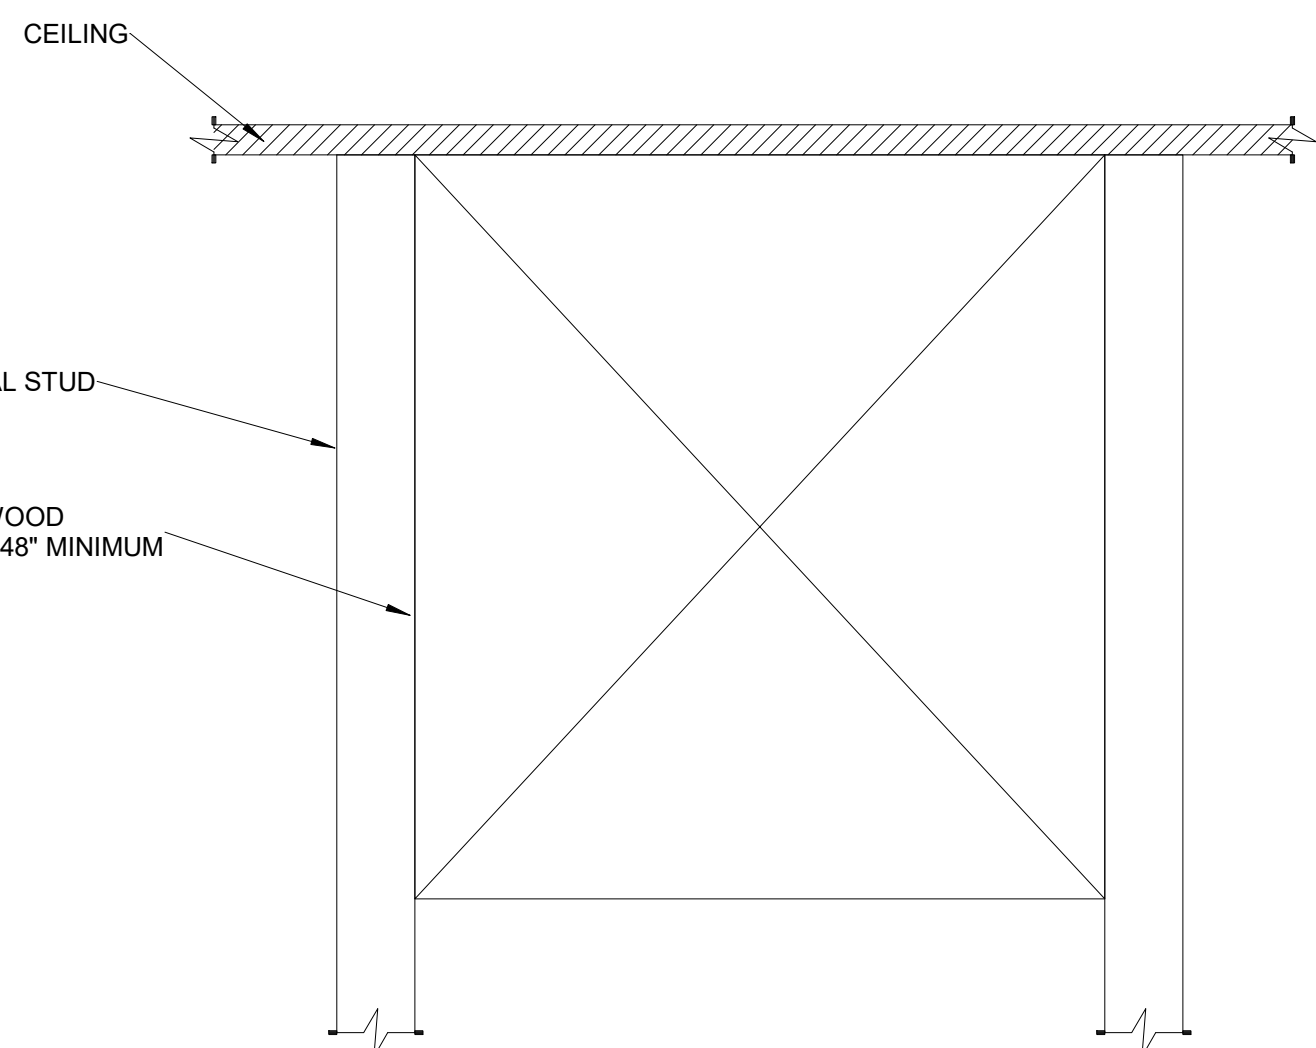

ELEVATION (TYPICAL)



TYPICAL OF ALL WALL MOUNT DISPLAY LOCATIONS IN STUD WALLS.

1 DISPLAY BLOCKING DETAIL

Scale: N.T.S.

2 BASKET RADIUS SHIELD DETAIL


Scale: NTS

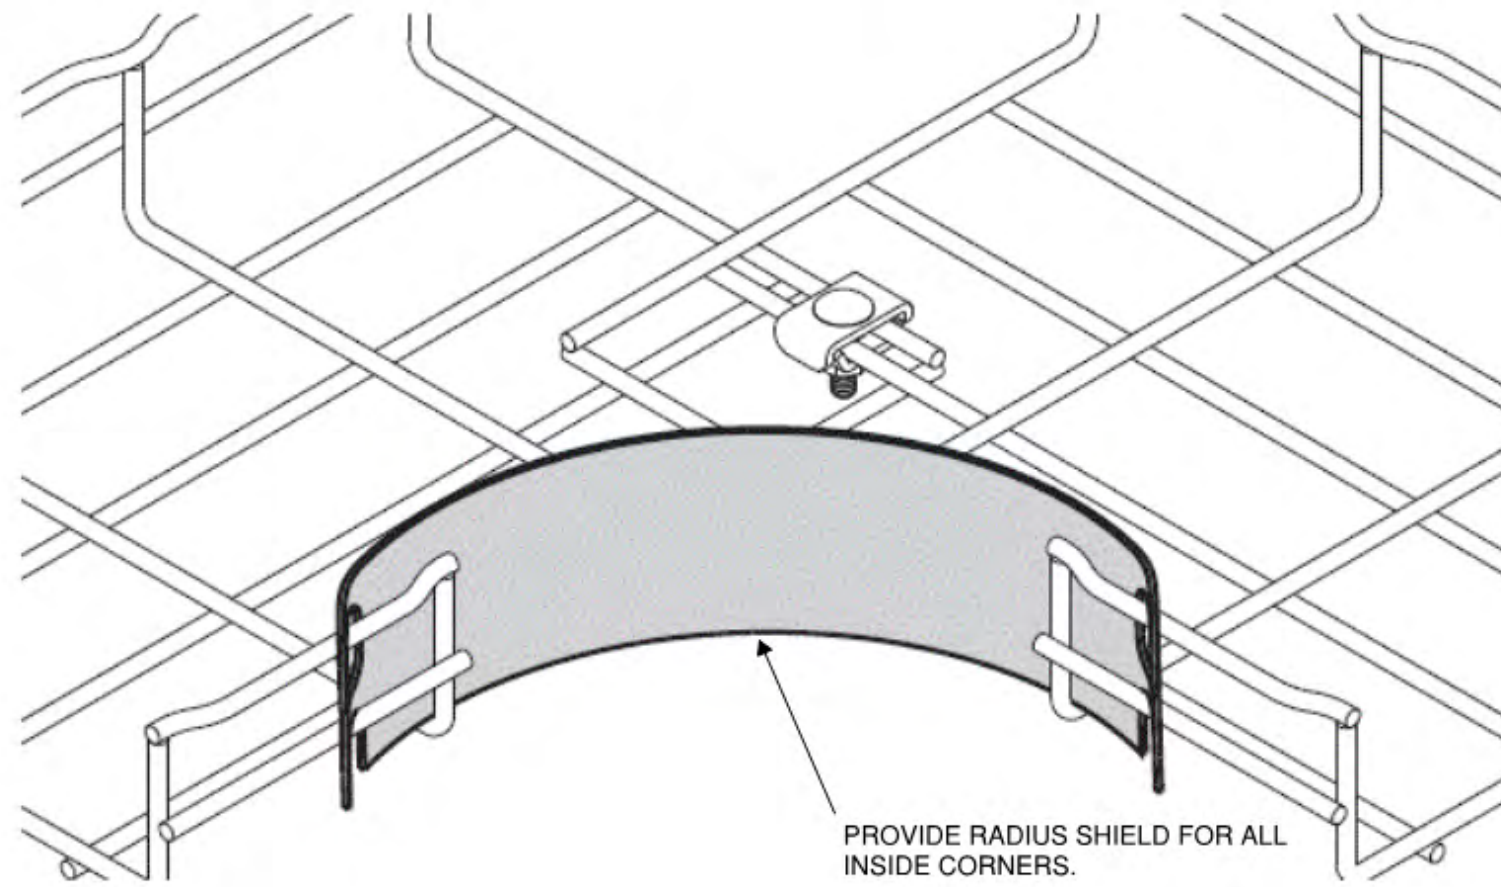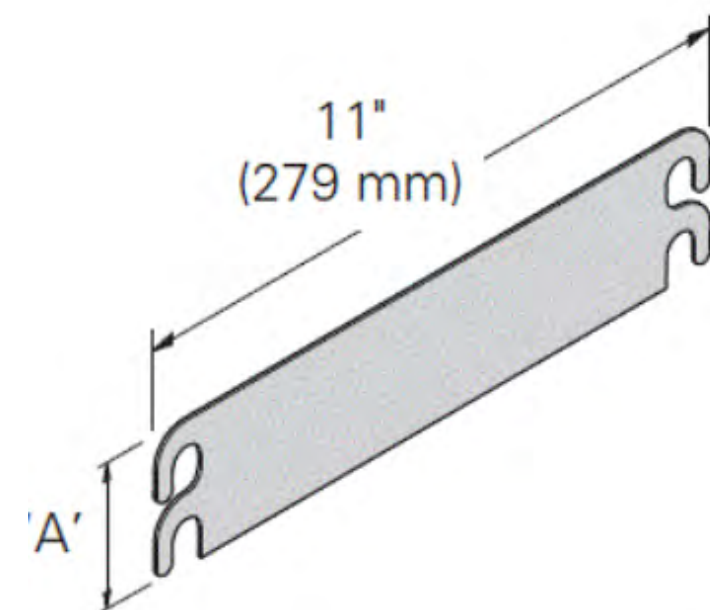


PROVIDE RADIUS SHIELD FOR ALL INSIDE CORNERS.

3 BASKET SPLICE DETAIL

Scale: NTS

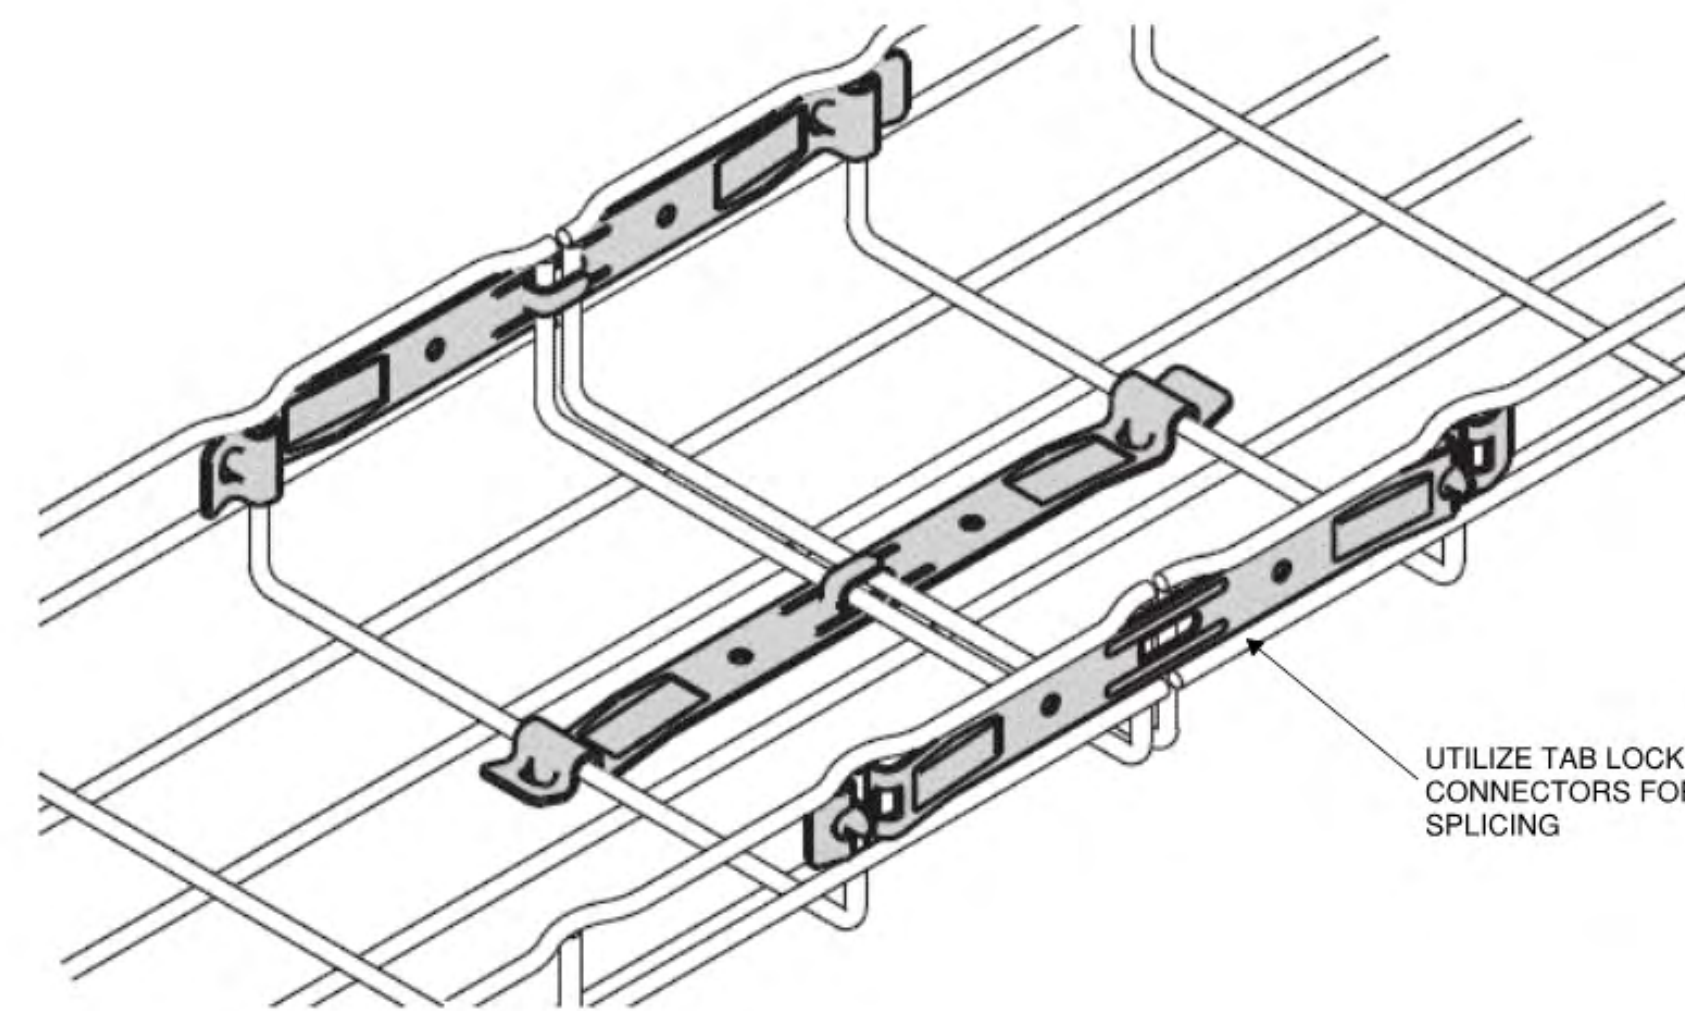

UTILIZE TAB LOCK CONNECTORS FOR SPLICING

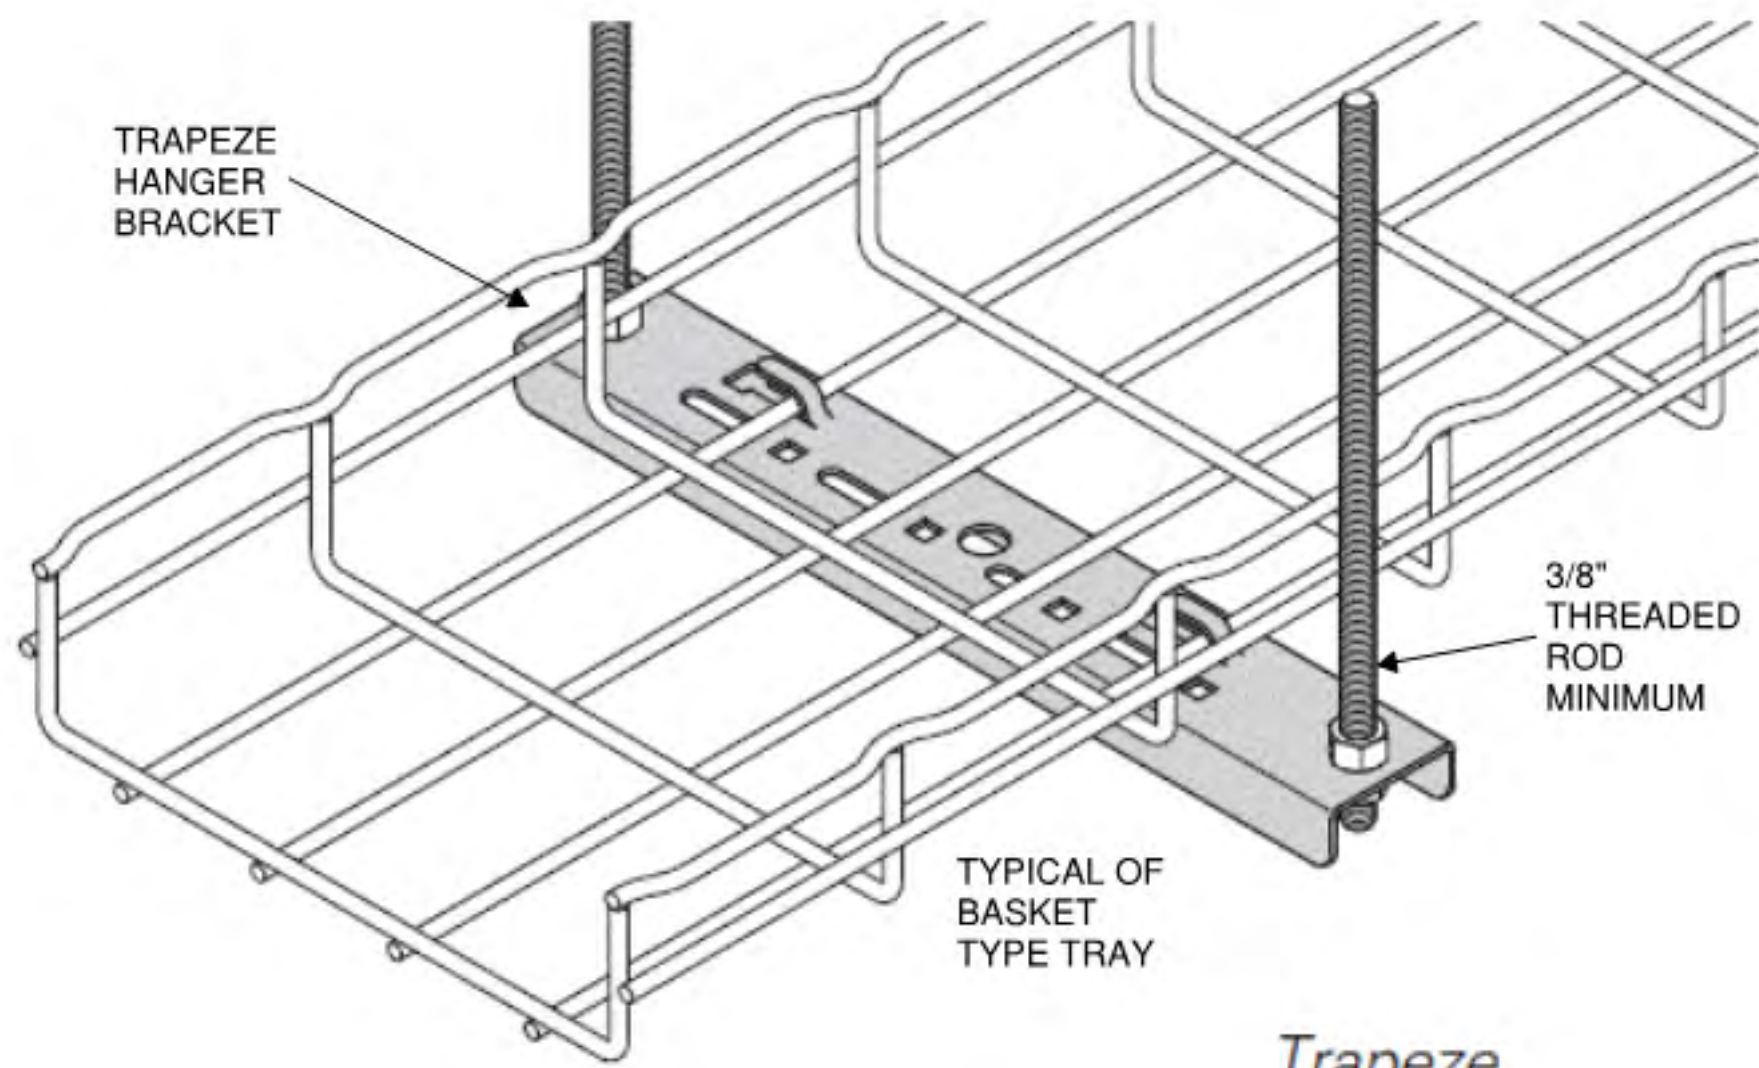


Trapeze

4 BASKET TRAPEZE DETAIL

Scale: NTS

5 BASKET TRAY CABLE DROP OUT


Scale: NTS

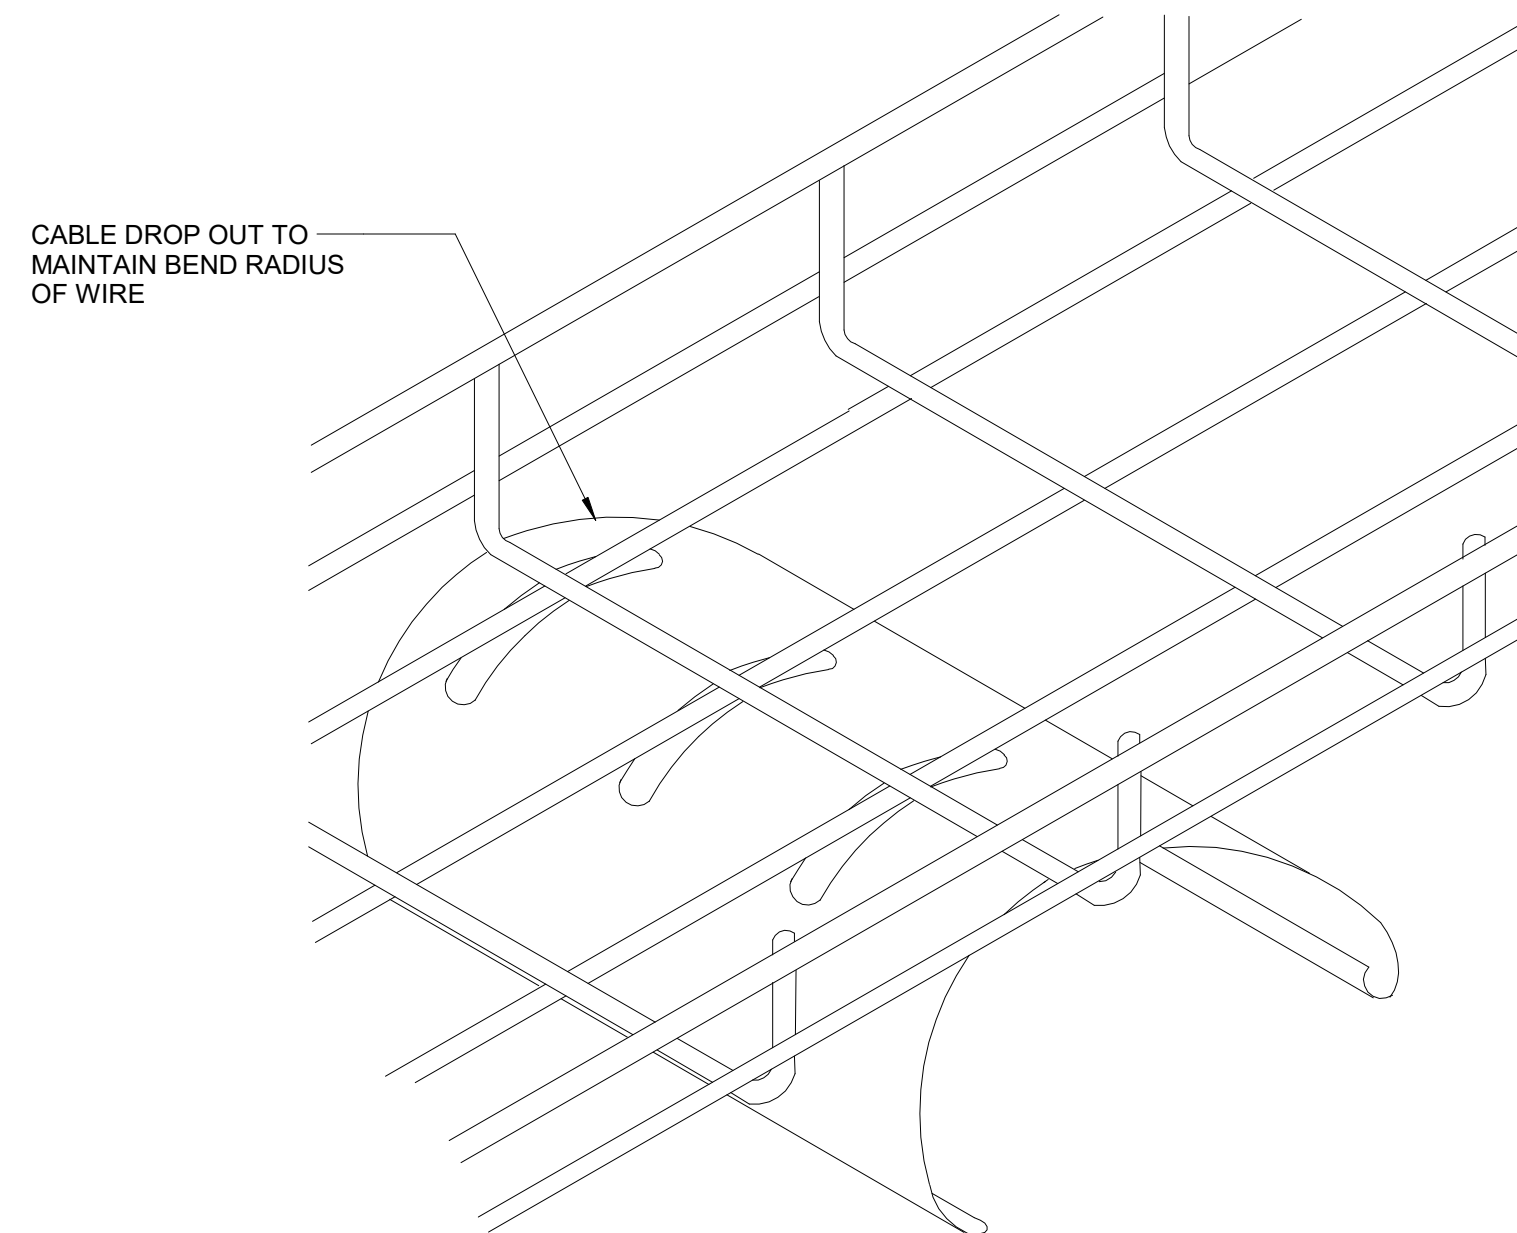

CABLE DROP OUT TO MAINTAIN BEND RADIUS OF WIRE

6 CABLE PATHWAY ABOVE FIXED CEILING DETAIL

Scale: NTS

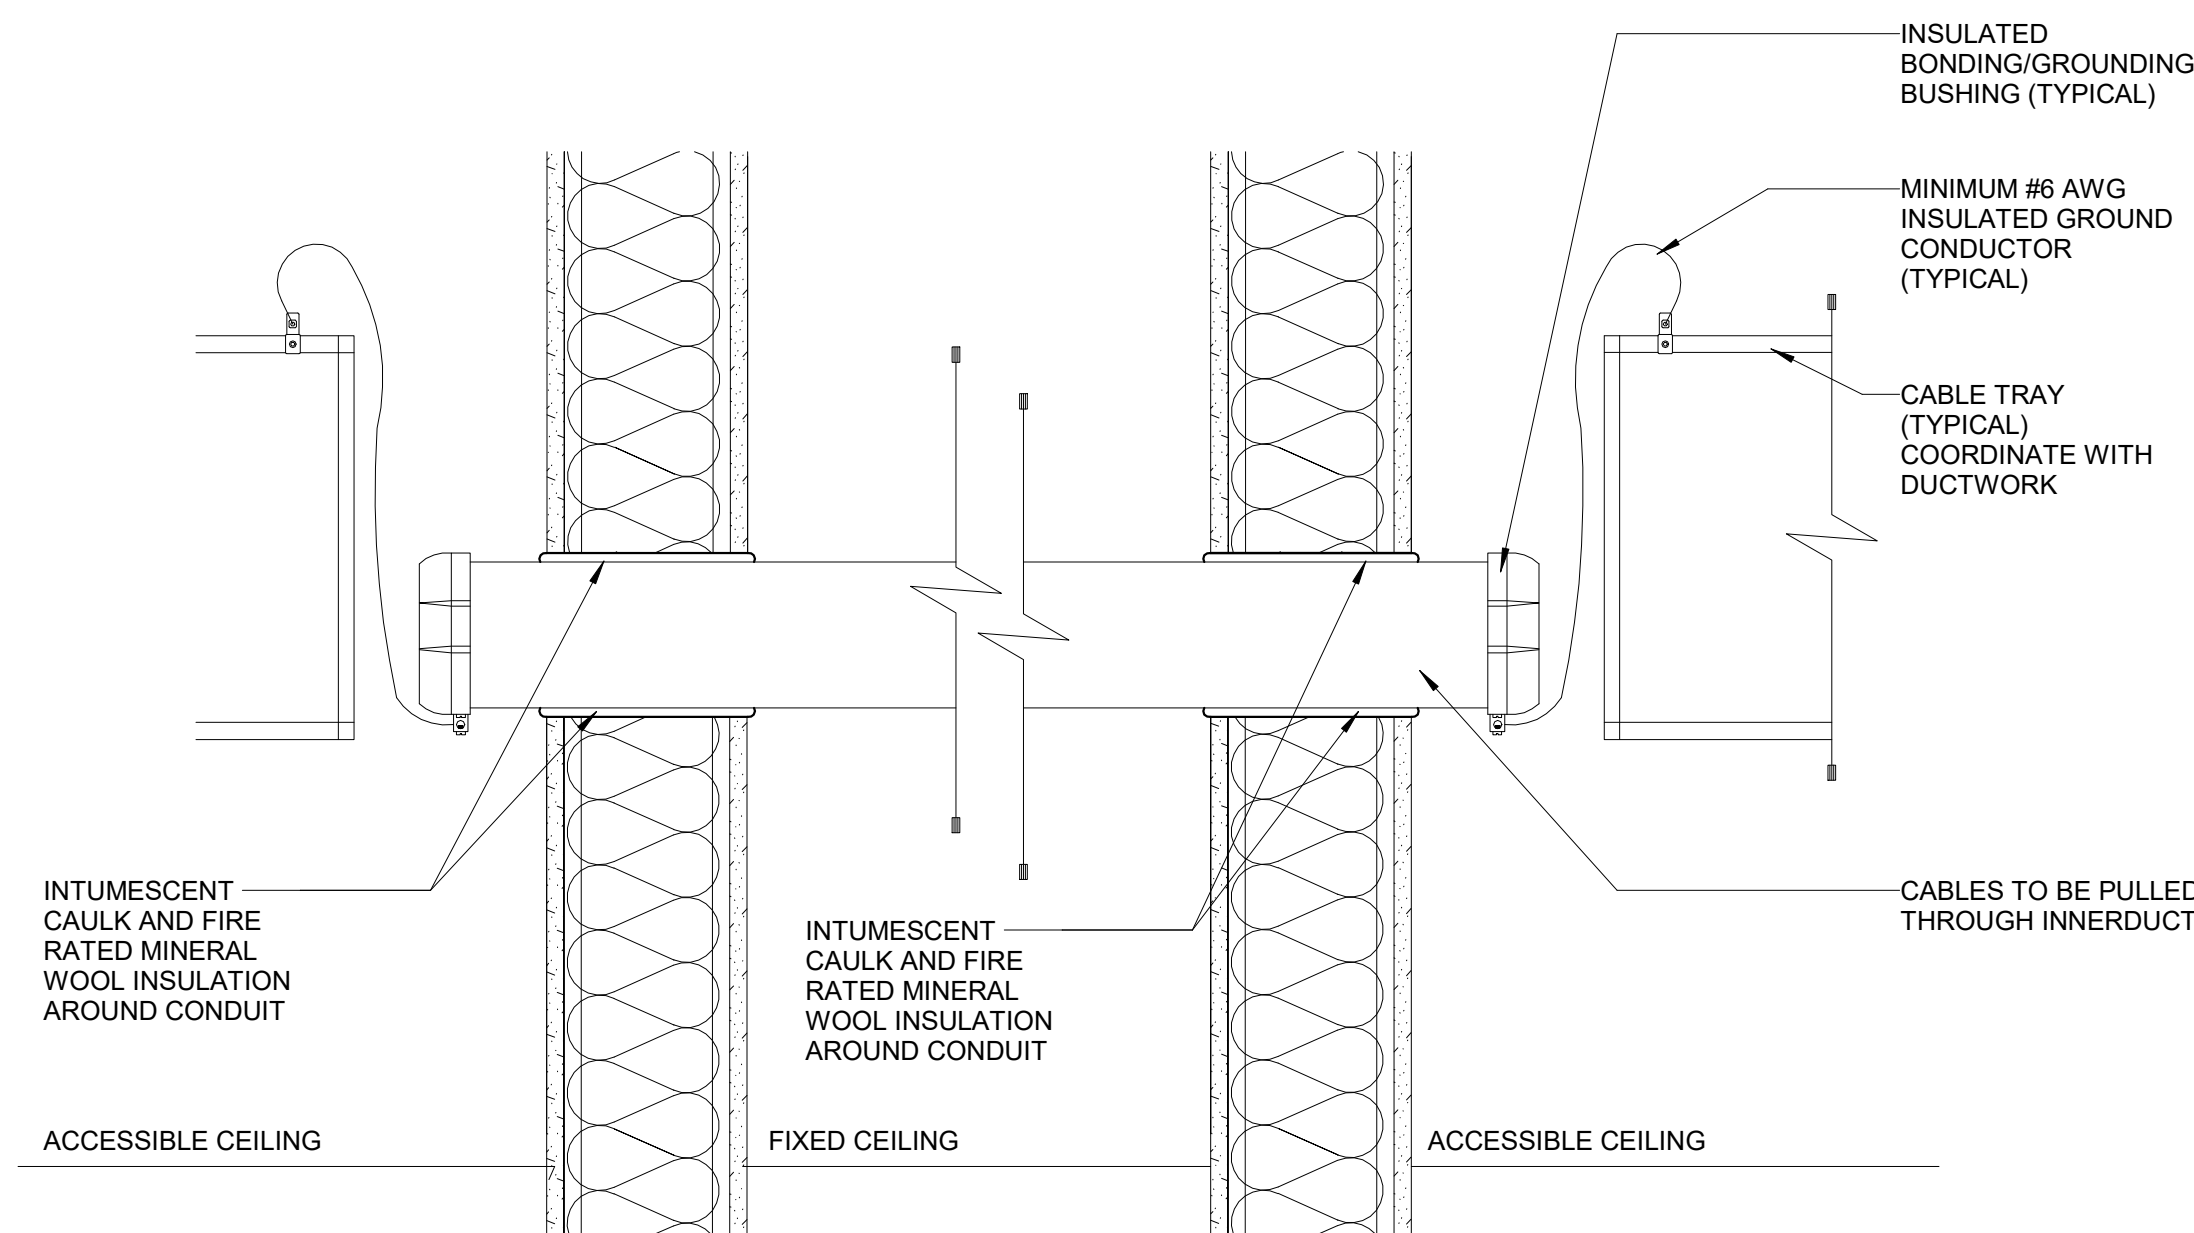

INSULATED BONDING/GROUNDING BUSHING (TYPICAL)


MINIMUM #6 AWG INSULATED GROUND CONDUCTOR (TYPICAL)

CABLE TRAY (TYPICAL) COORDINATE WITH DUCTWORK

CABLES TO BE PULLED THROUGH INNERDUCT.


INTUMESCENT CAULK AND FIRE RATED MINERAL WOOL INSULATION AROUND CONDUIT

INTUMESCENT CAULK AND FIRE RATED MINERAL WOOL INSULATION AROUND CONDUIT

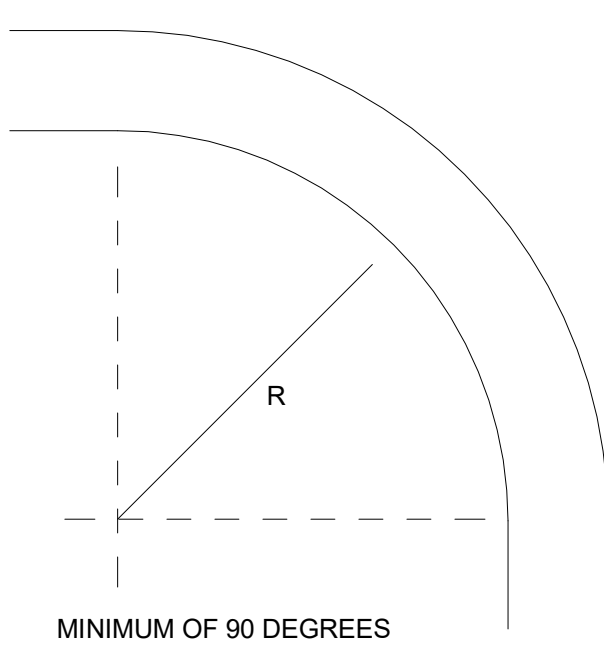

7 BEND RADIUS


Scale: NTS

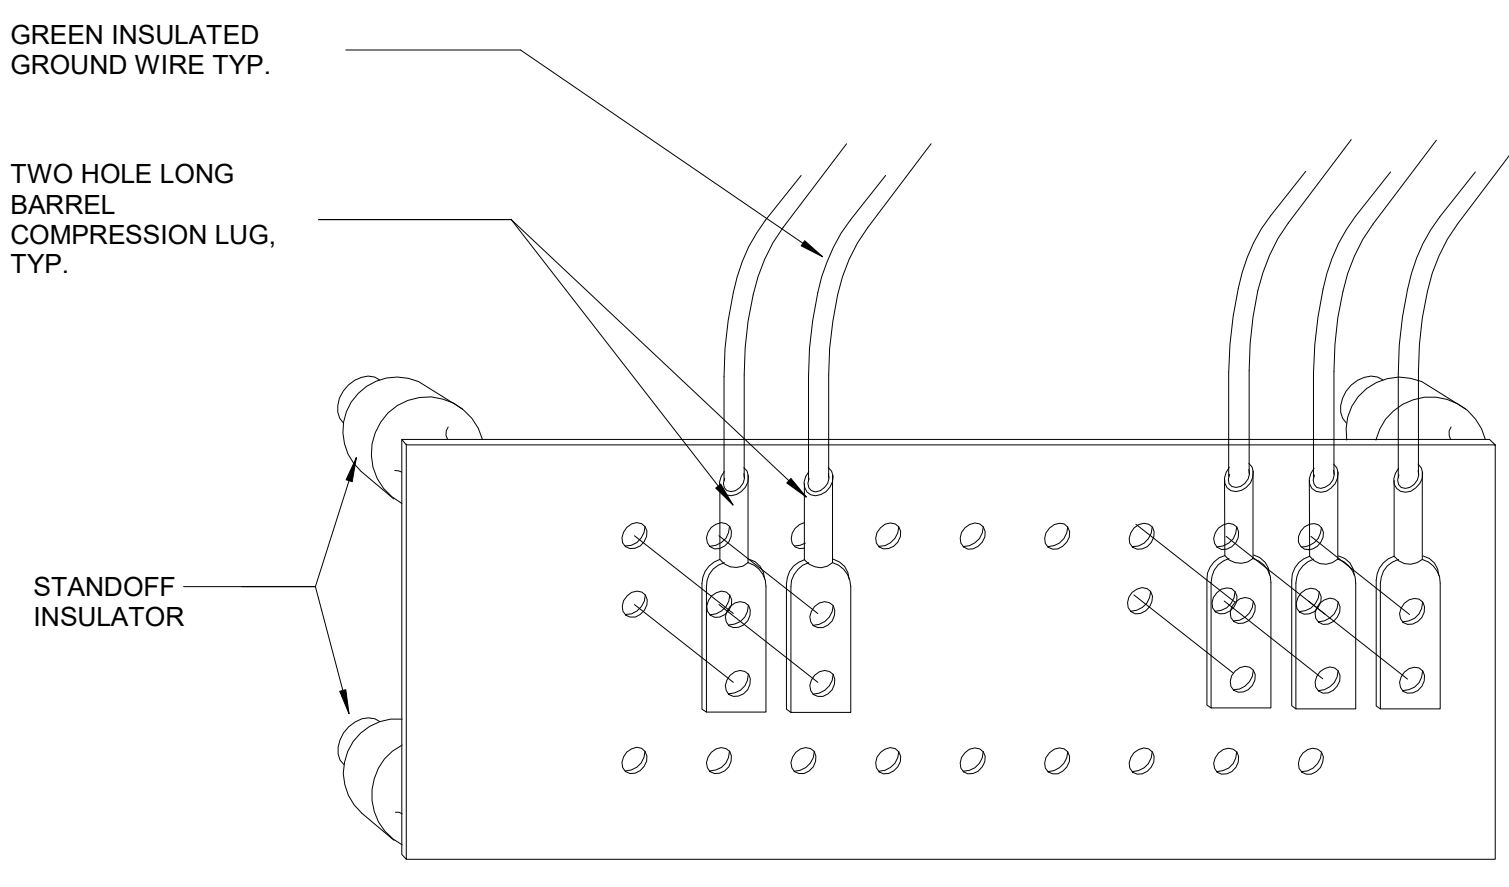

PBB&SBB: MINIMUM 4" X 12" BUSBAR

10 TELECOM GROUNDING BUSBAR (PBB/SBB)

Scale: NTS

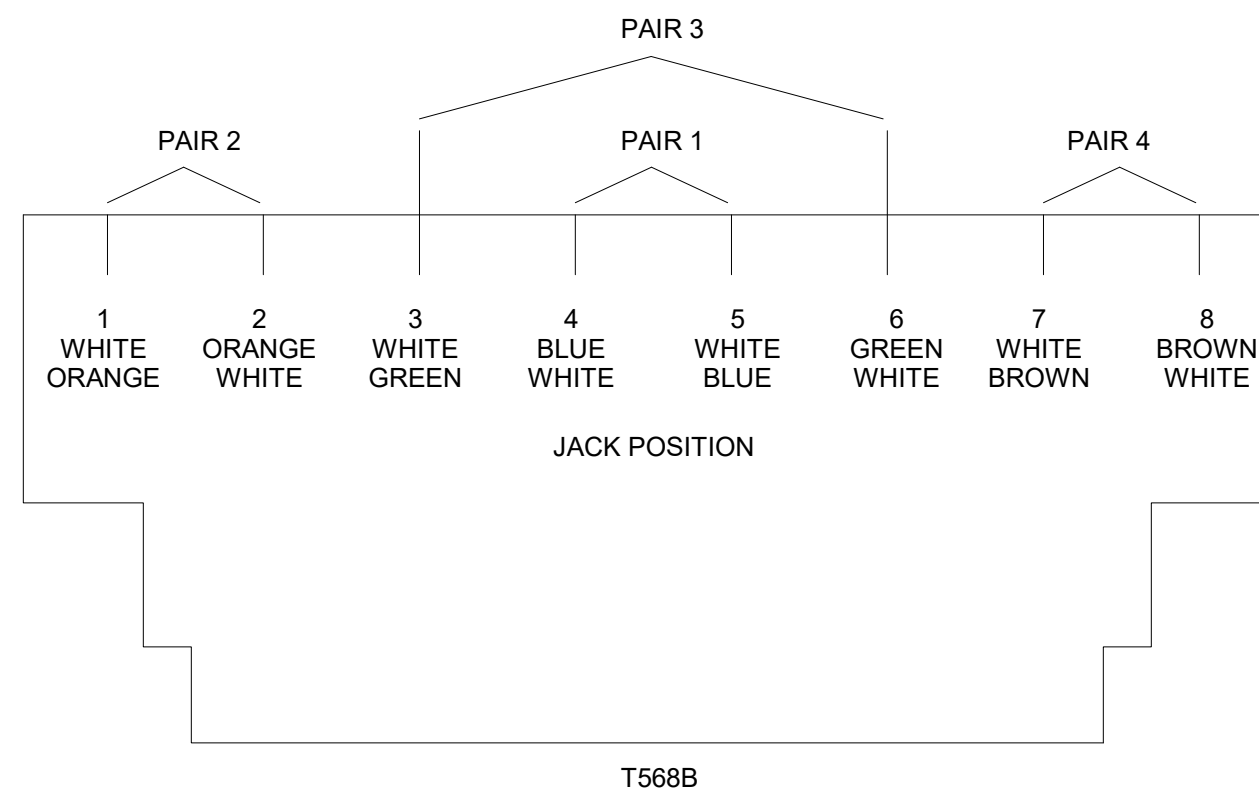

JACK POSITION


T568B

8 PIN PAIRING ASSIGNMENTS

Scale: NTS

9 BONDING CONDUCTOR TAP DETAIL

Scale: NTS

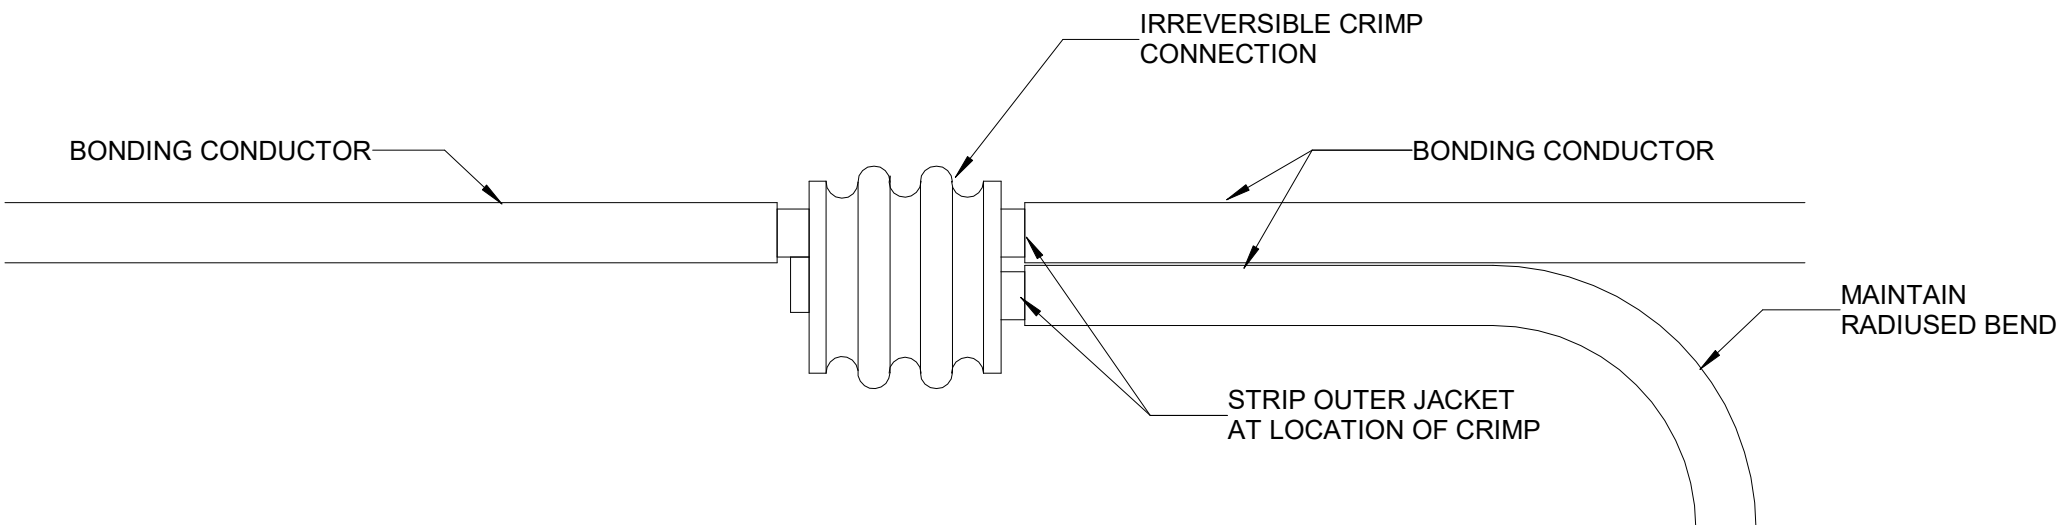


MAINTAIN RADIUS BEND

STRIP OUTER JACKET AT LOCATION OF CRIMP

BONDING CONDUCTOR

IRREVERSIBLE CRIMP CONNECTION

BONDING CONDUCTOR

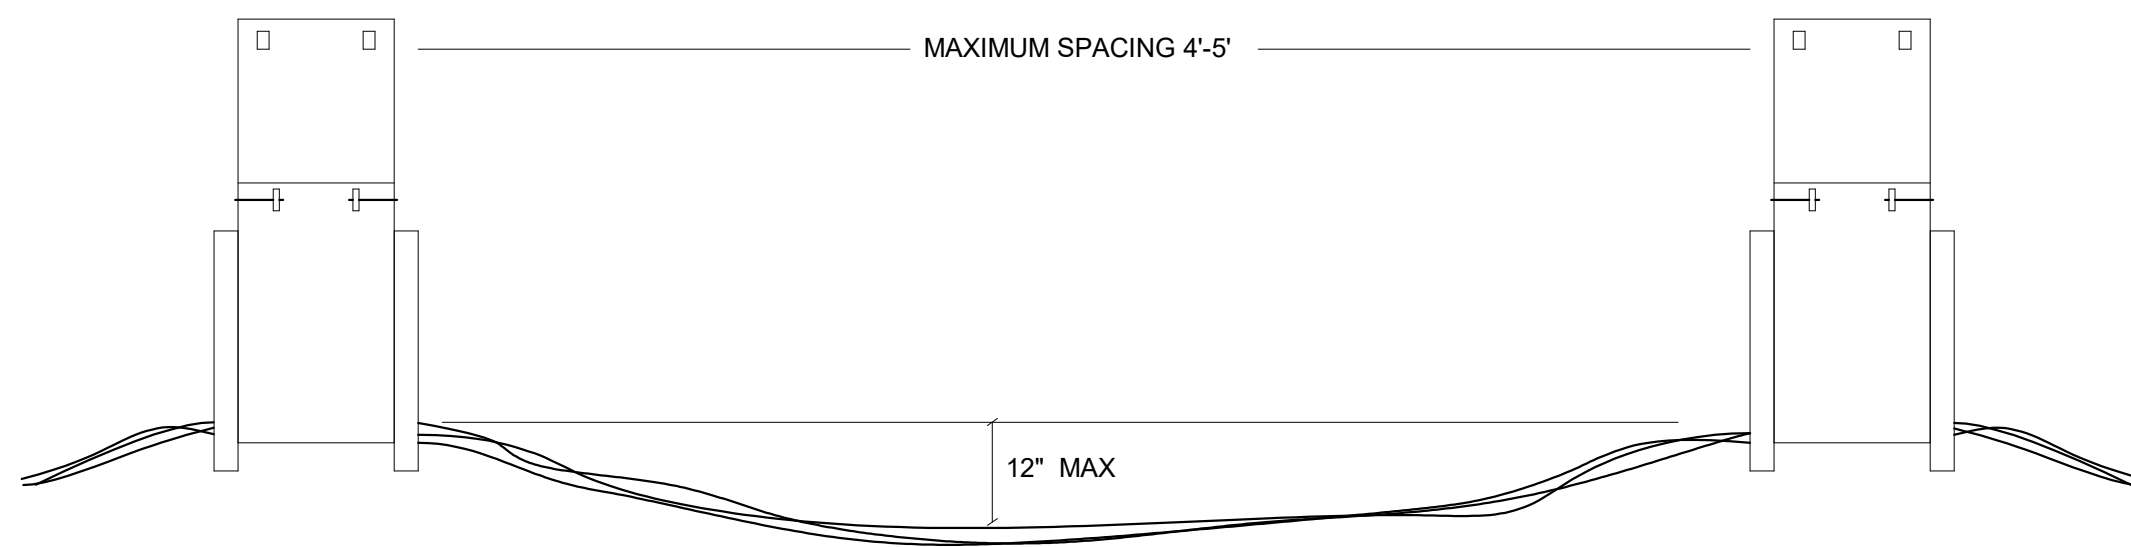


MAXIMUM SPACING 4'-5"

12" MAX

11 J-HOOK DETAIL


Scale: NTS

J-HOOK DIAMETER	CABLE CAPACITY
1"	10
1-5/16"	25
2"	35
3"	80
4"	140

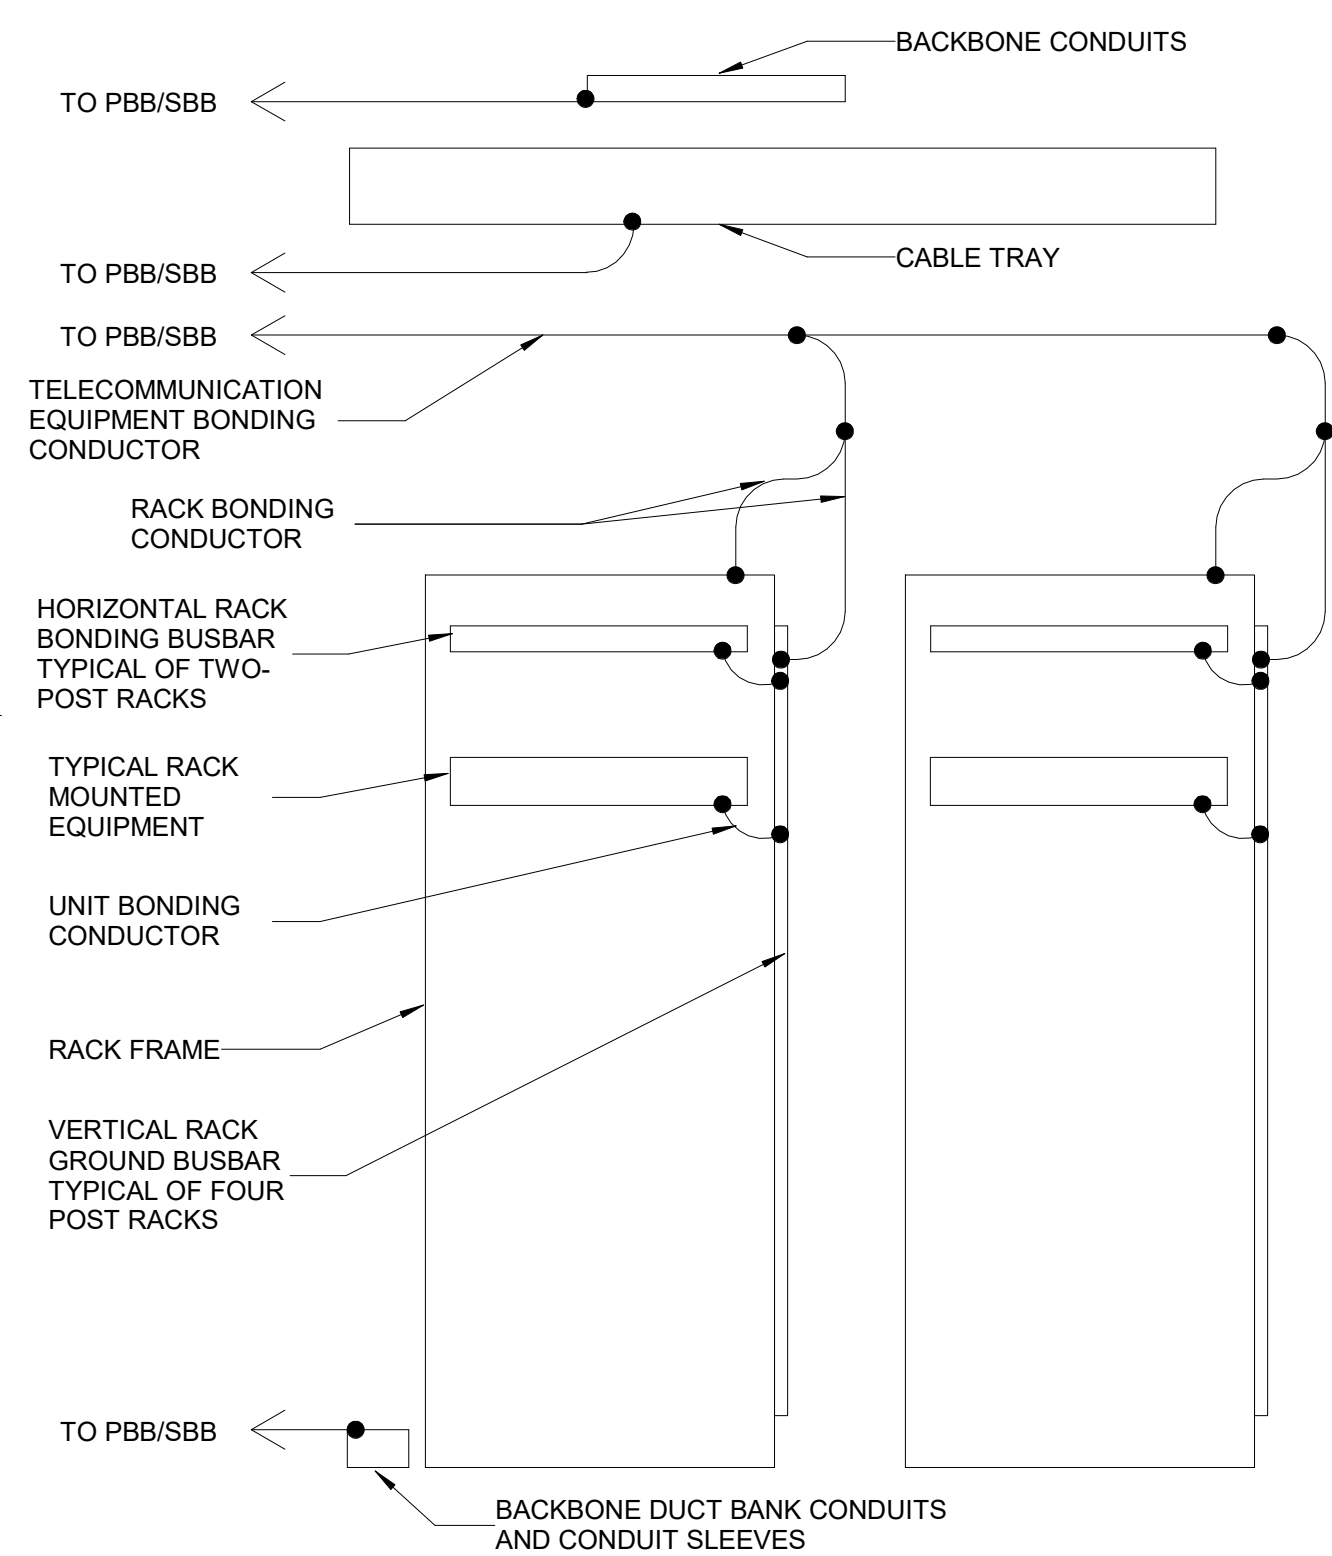


12 TYPICAL RACK/CABINET BONDING DETAIL


Scale: NTS

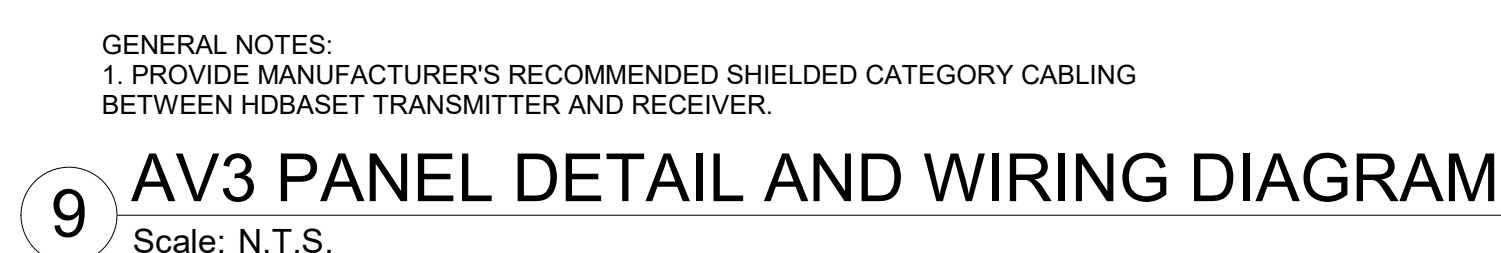


F
E
D
C
B
A

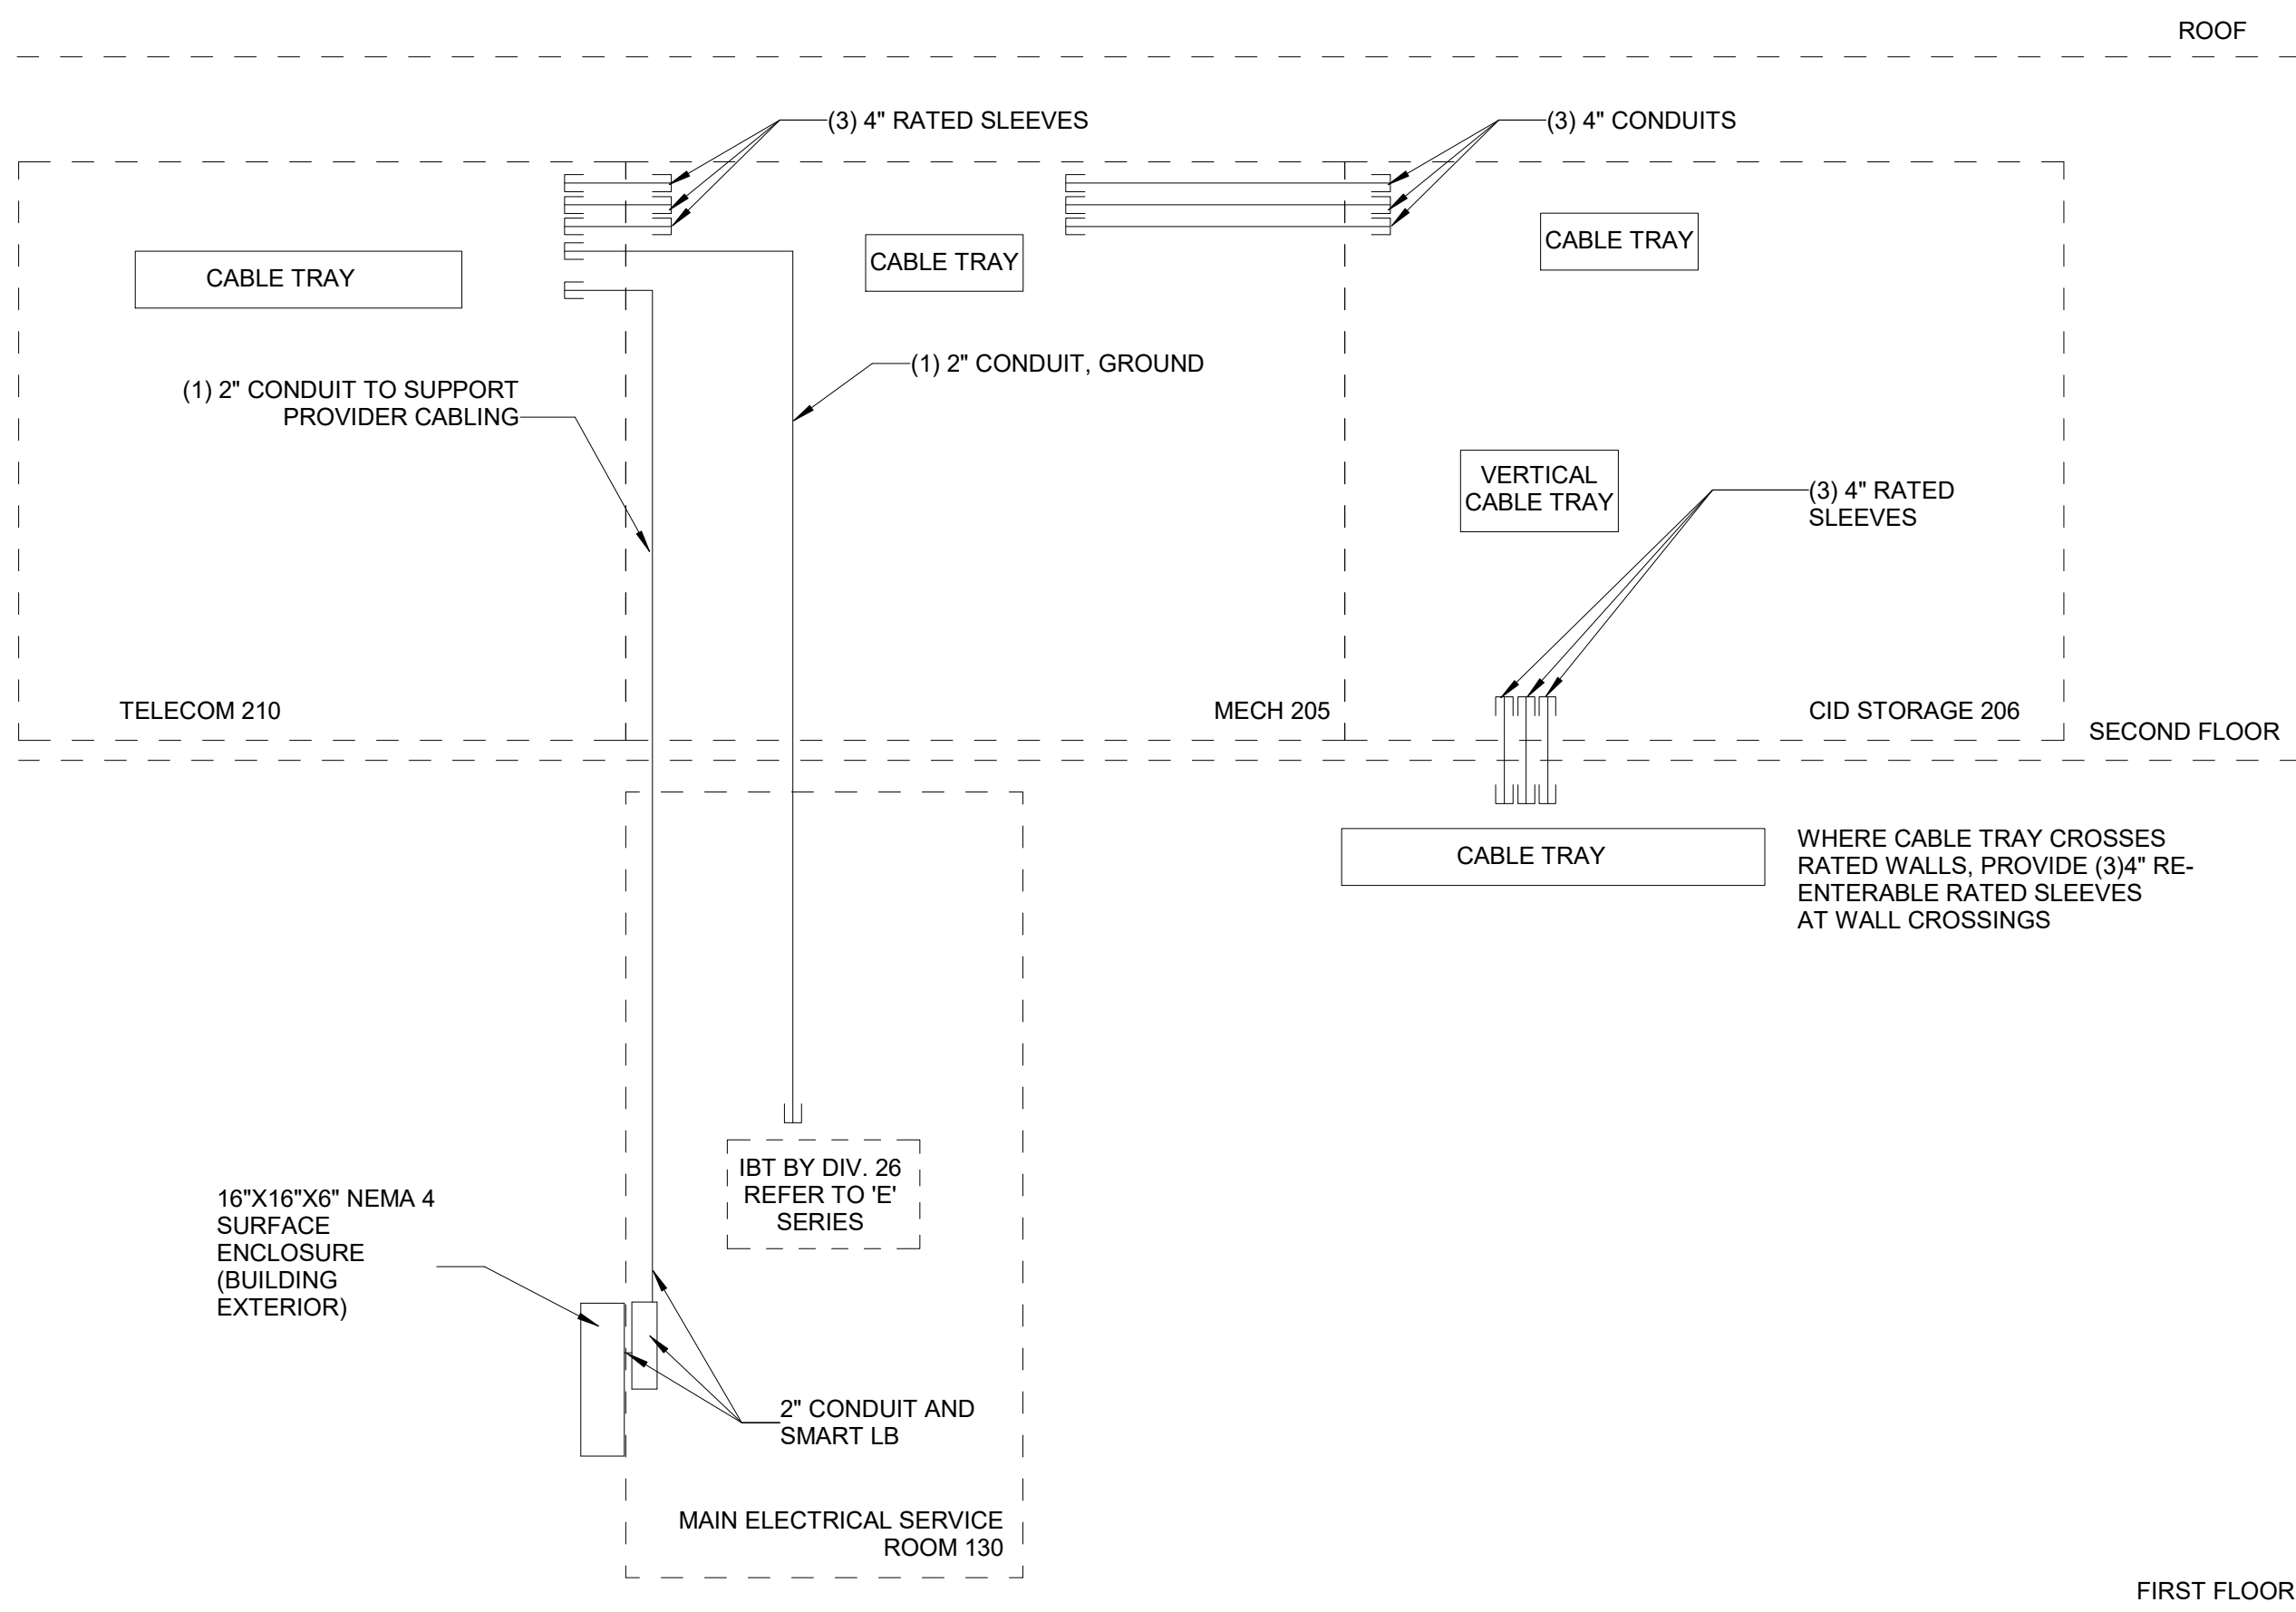


1 ICT BACKBONE CONDUIT BLOCK DIAGRAM
Scale: NTS

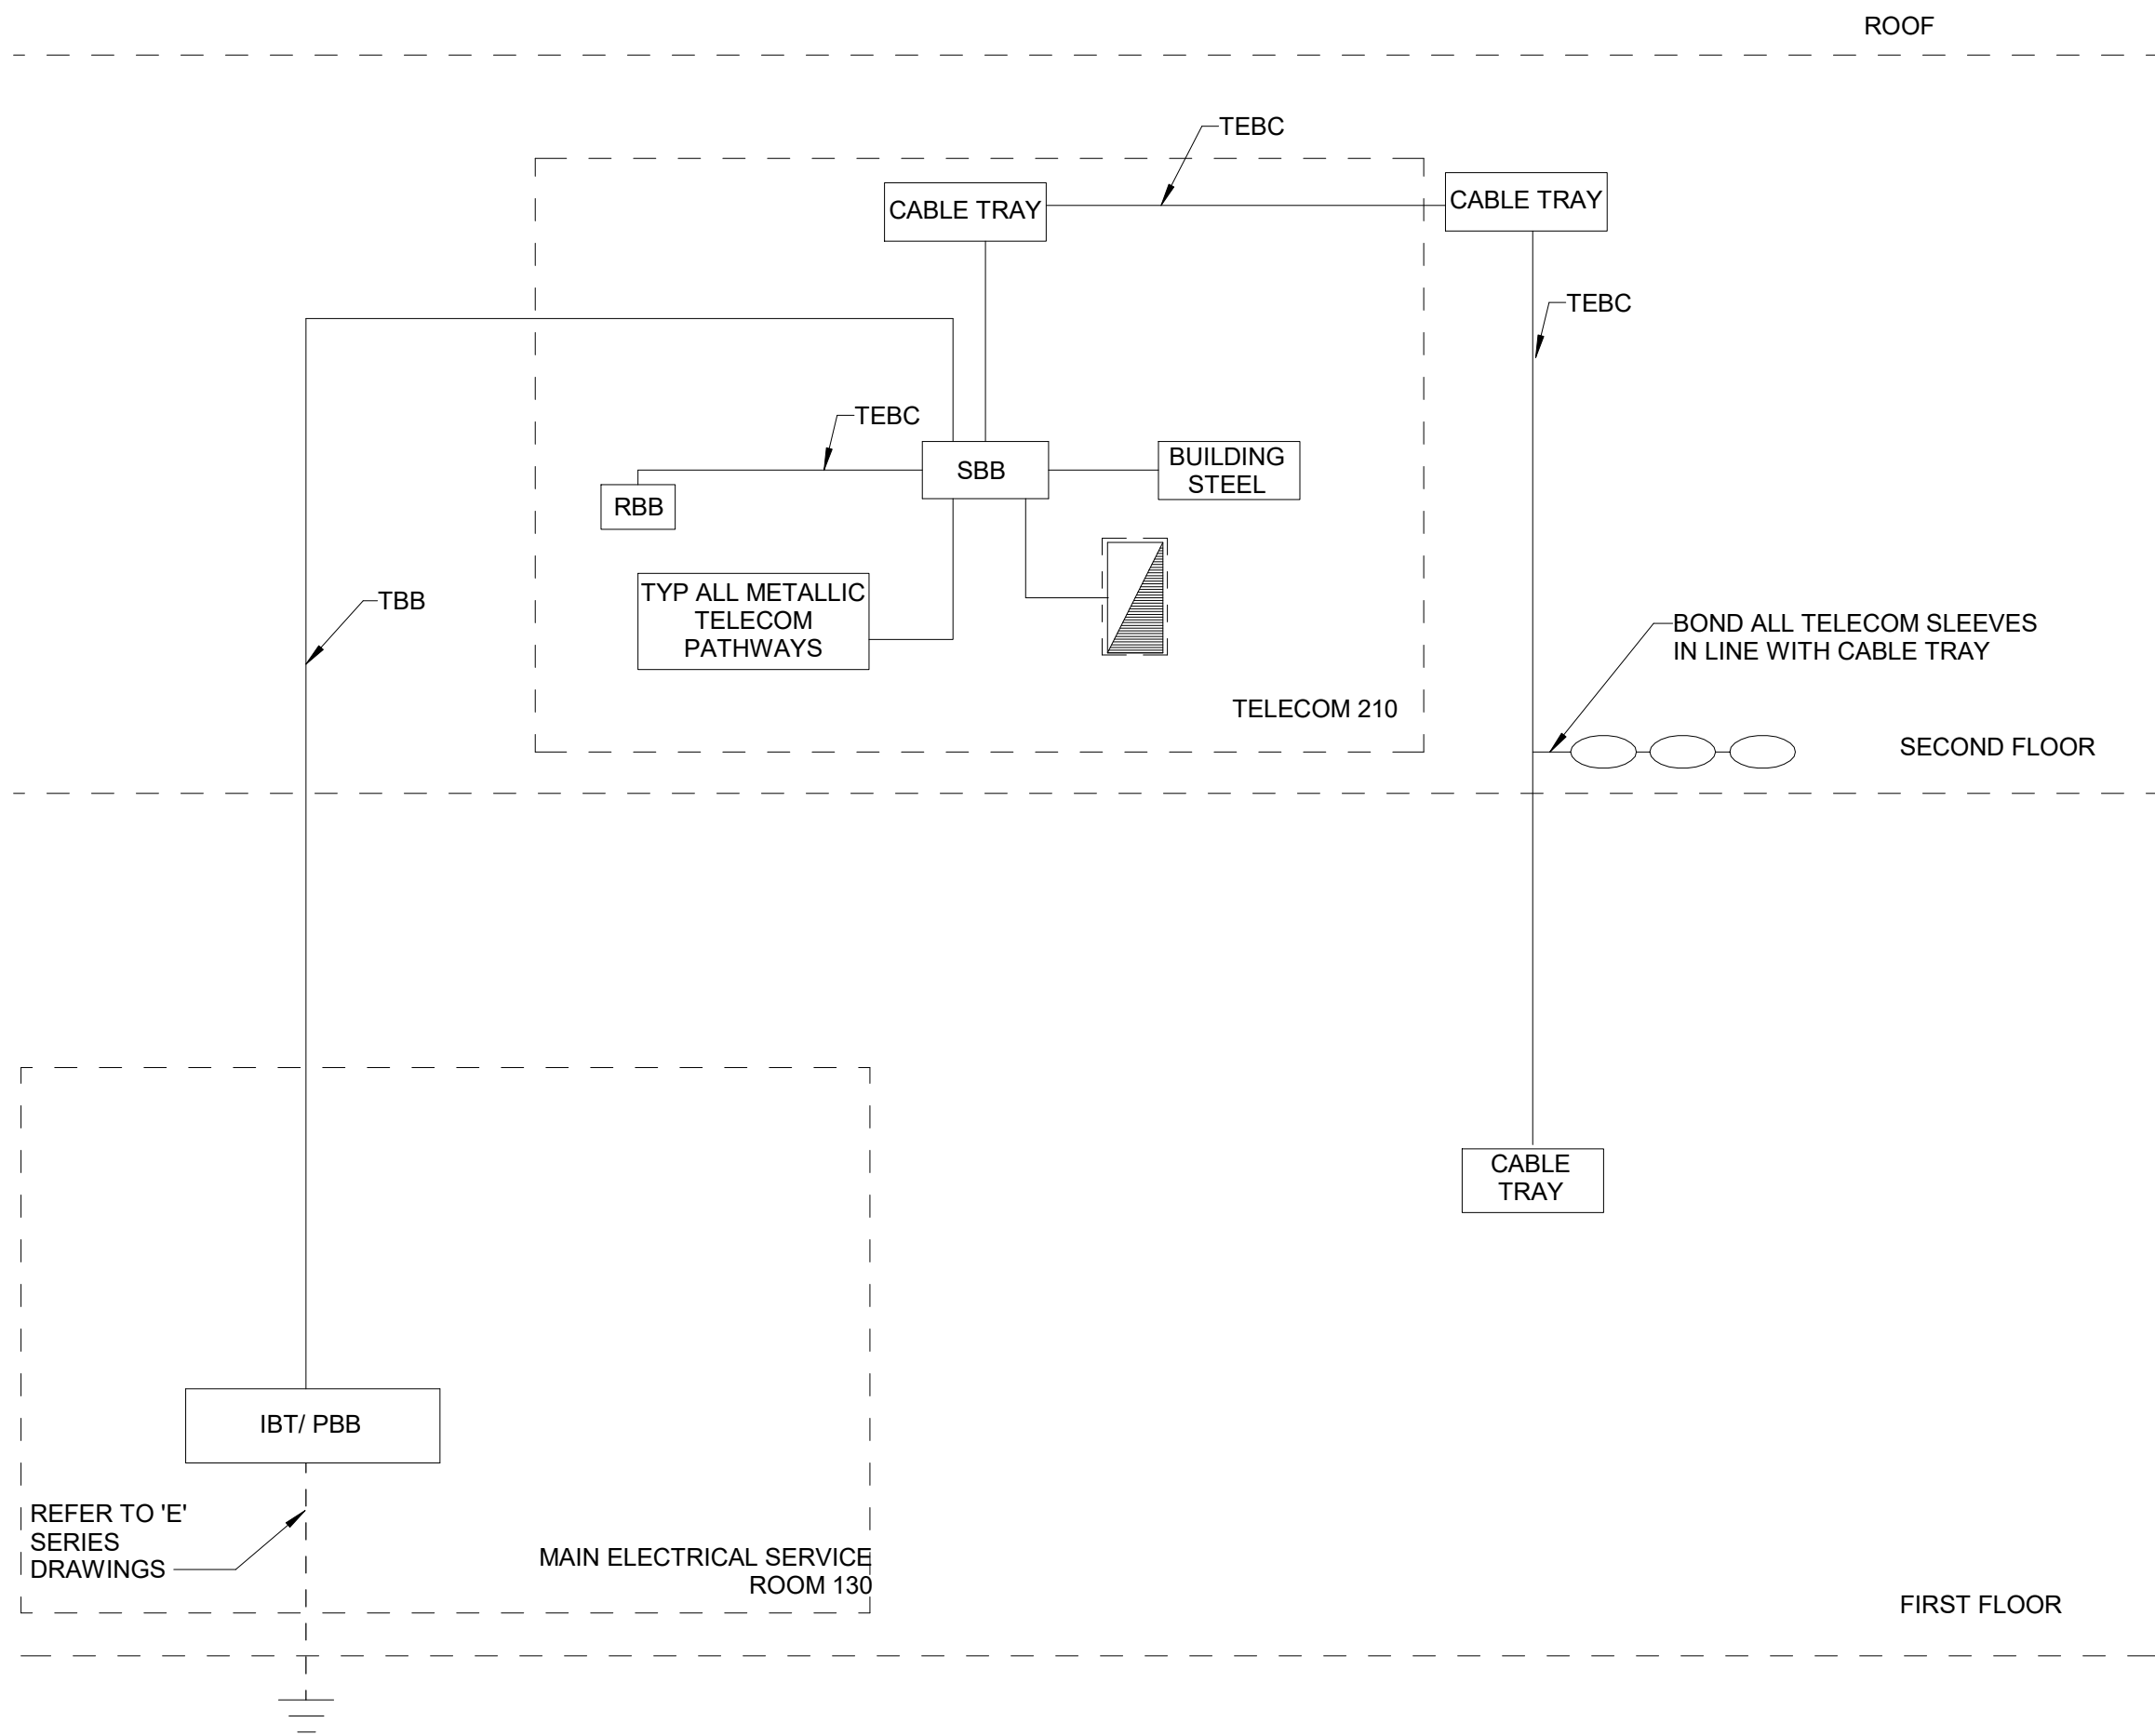

2 TELECOM GROUNDING SYSTEM BLOCK DIAGRAM
Scale: NTS

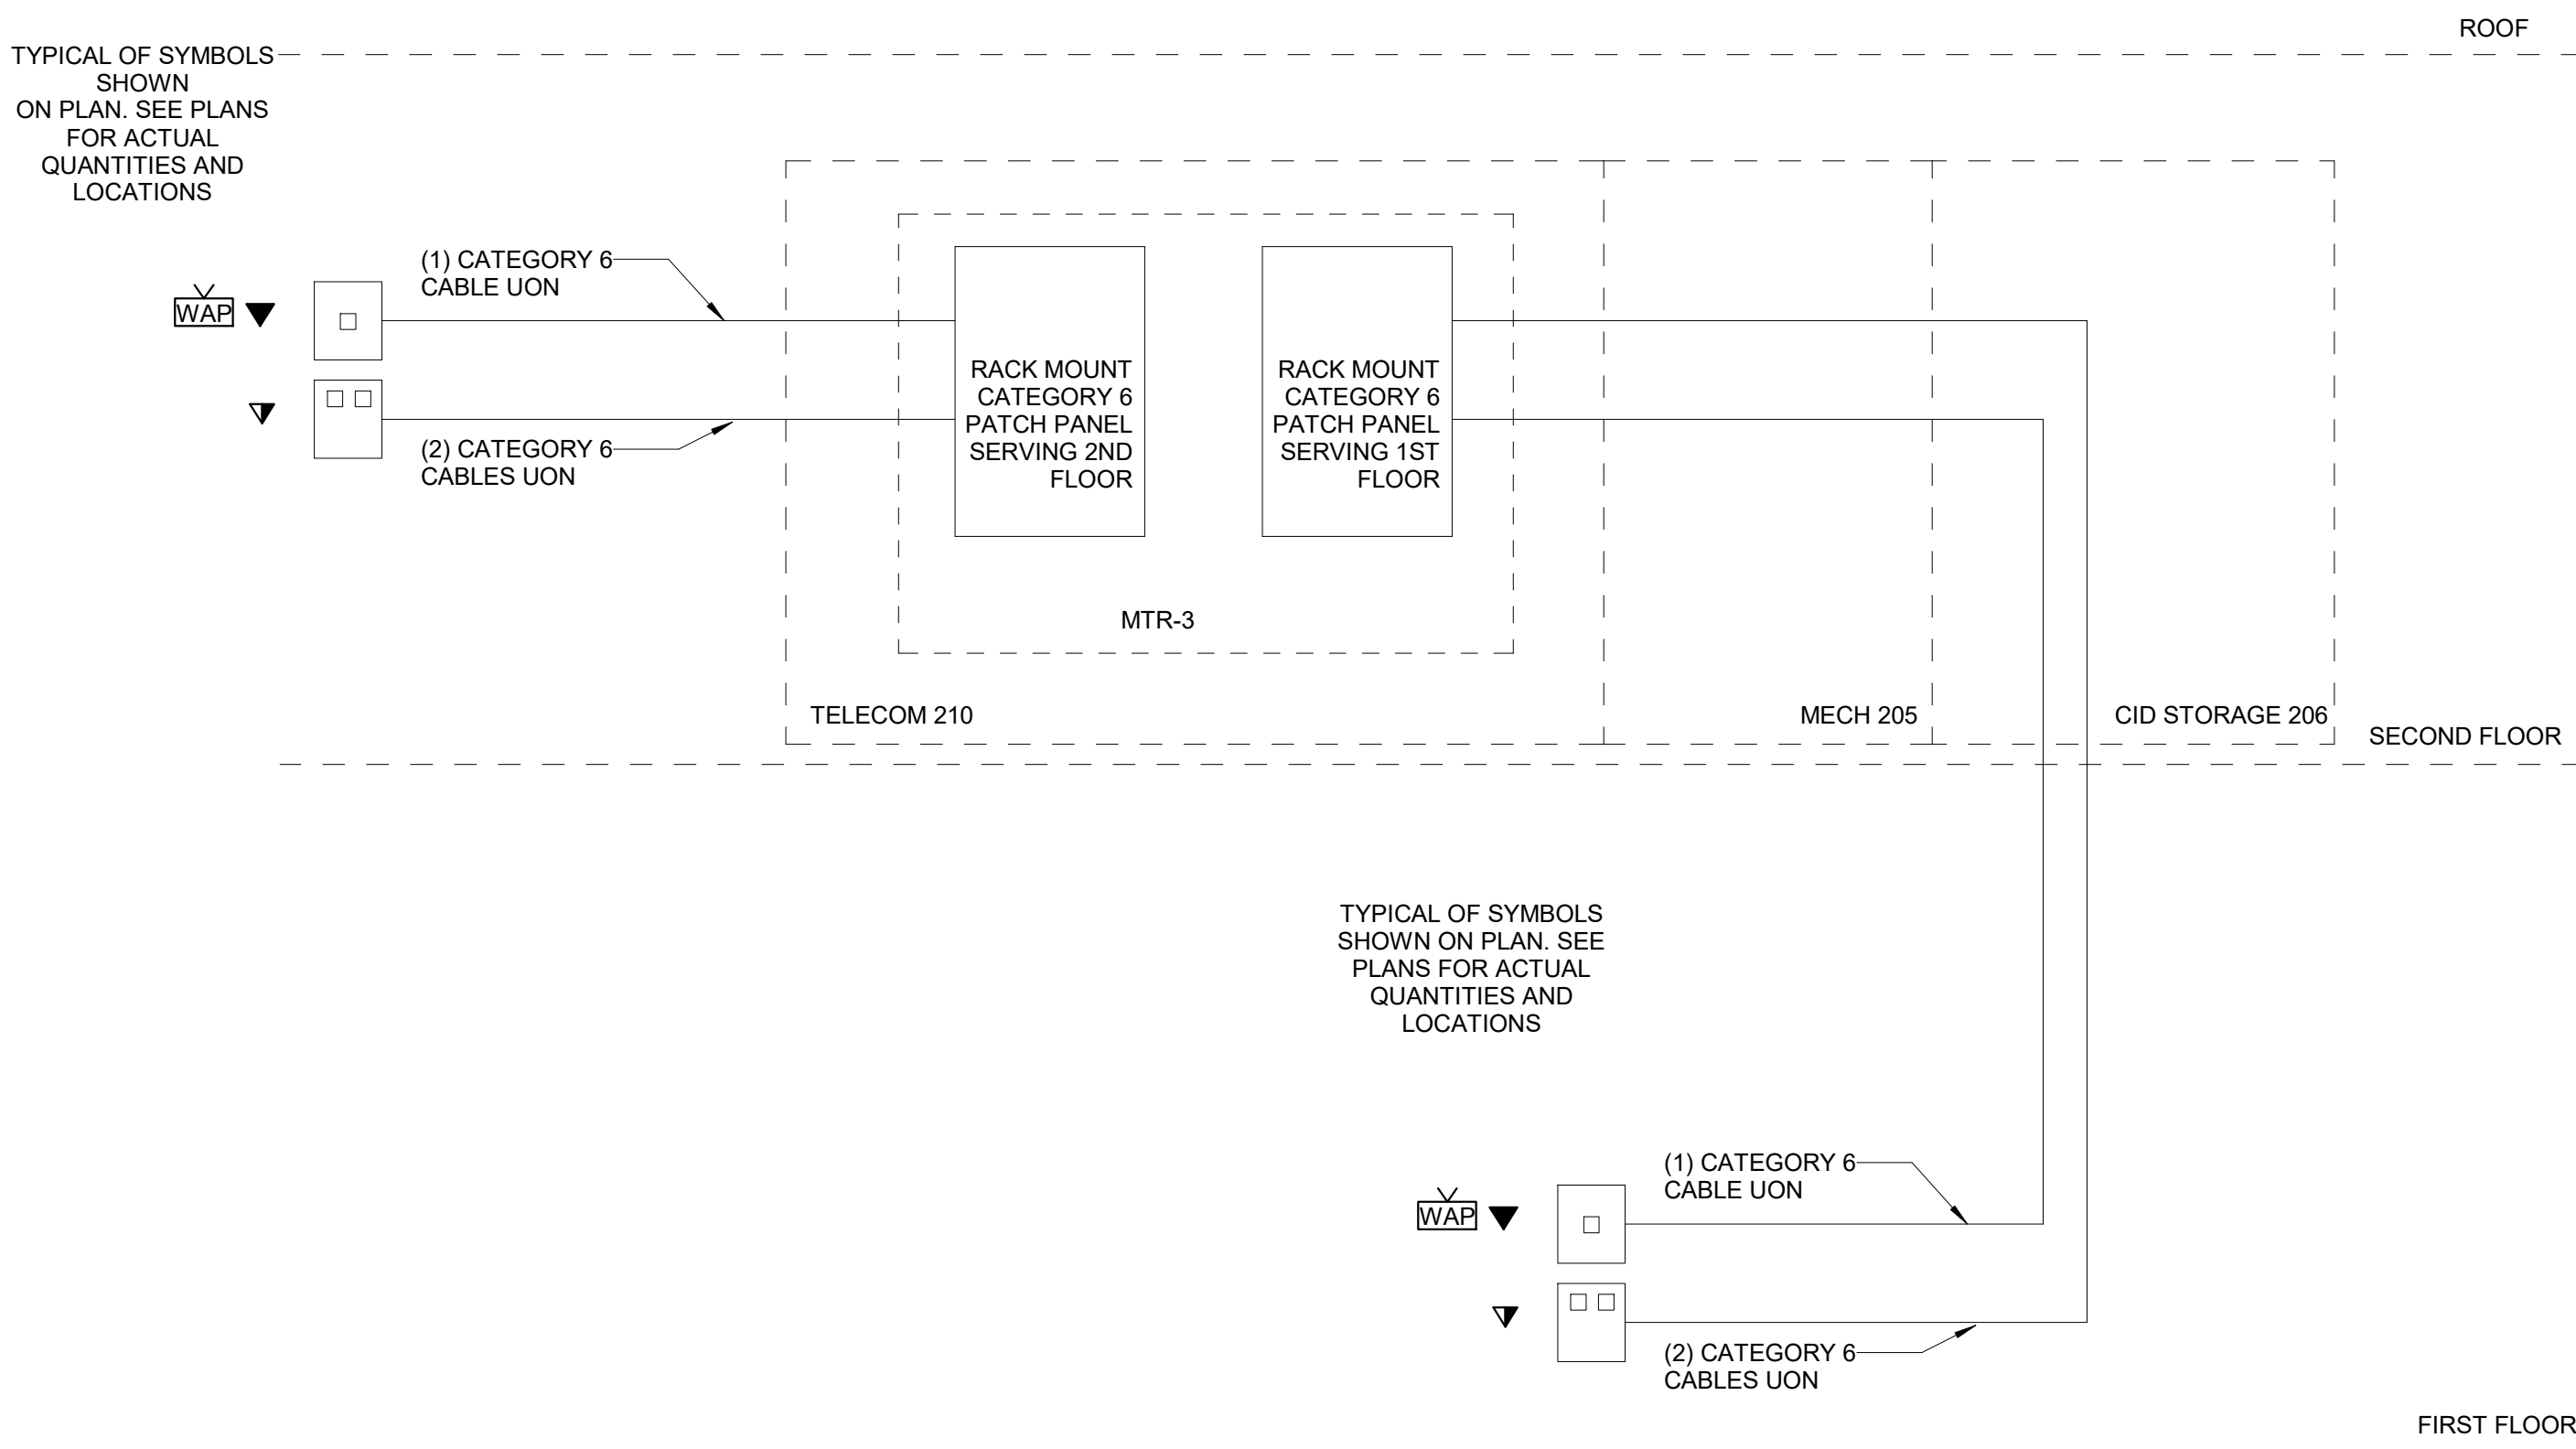

3 ICT SYSTEM HORIZONTAL CABLING BLOCK DIAGRAM
Scale: NTS

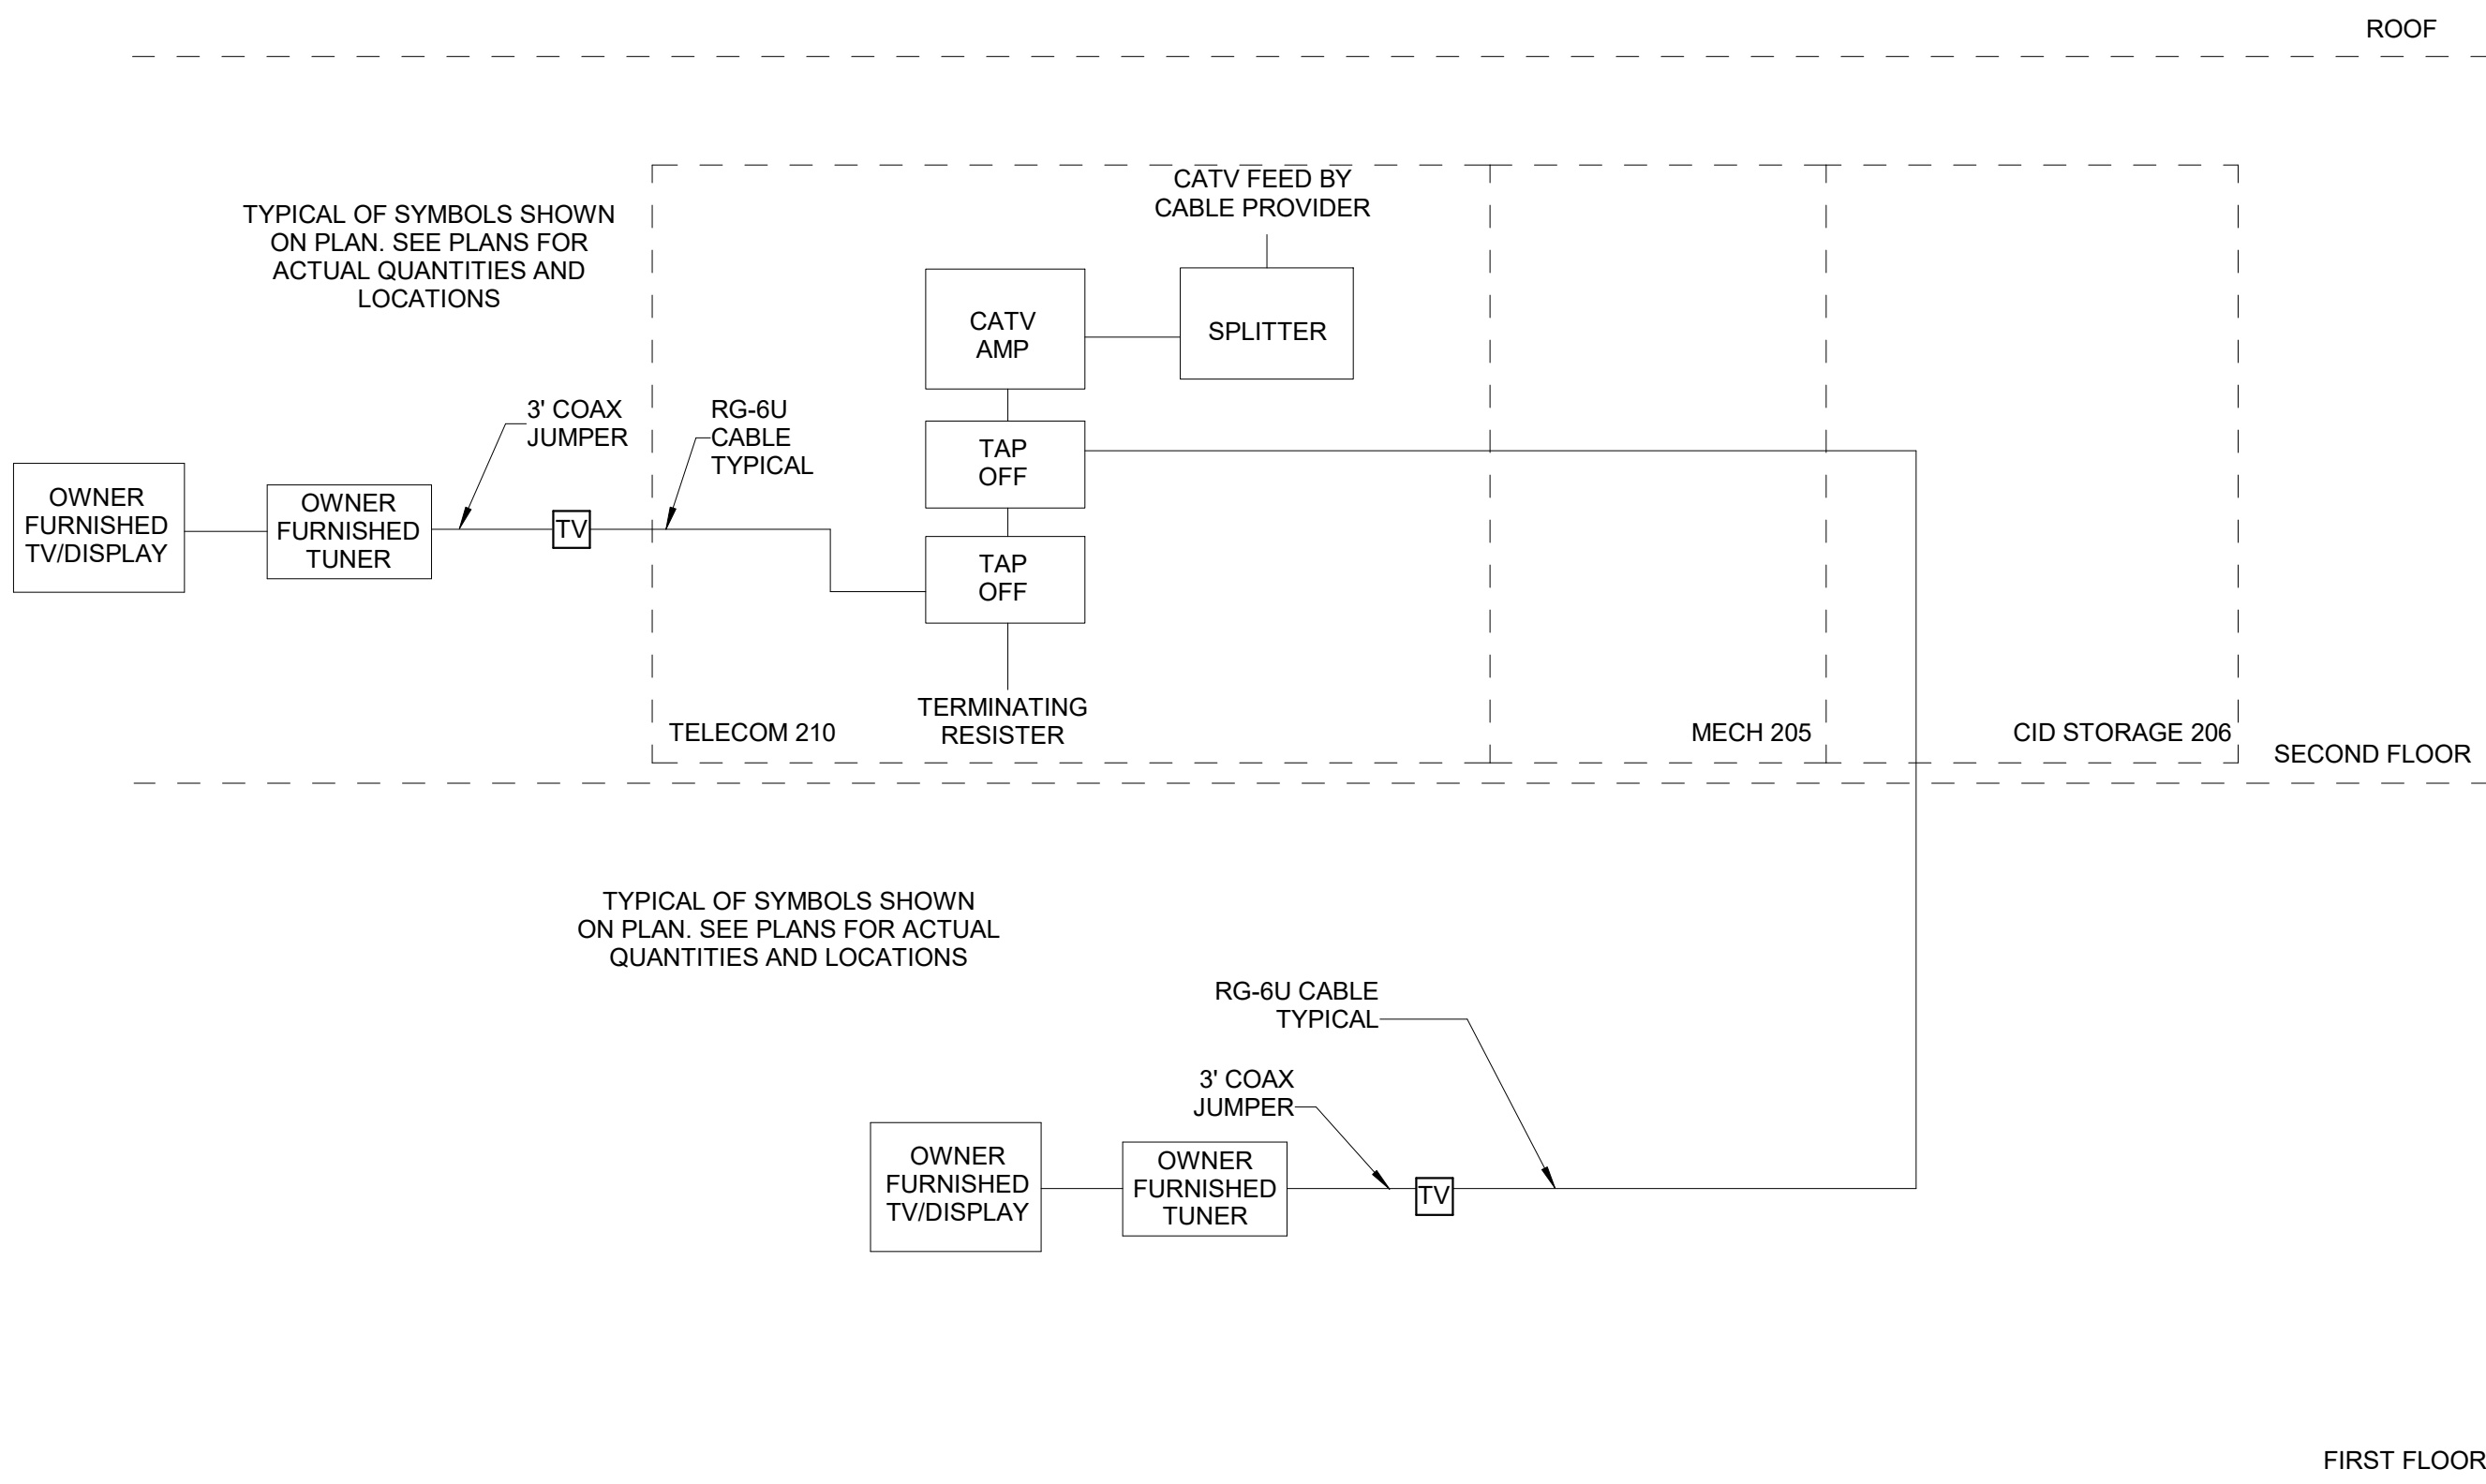

4 CATV SYSTEM BLOCK DIAGRAM
Scale: NTS

TBB CONDUCTOR IN ACCORDANCE WITH ANSI-TIA-607-E SIZE CONDUCTOR BASED ON LENGTH PER THE FOLLOWING:
LESS THAN 13'-#6 AWG
13'-20' - #4 AWG
21'-26' - #3 AWG
27'-33' - #2 AWG
34'-44' - #1 AWG
45'-52' - 1/0 AWG
53'-66' - 2/0 AWG
67'-84' - 3/0 AWG
85'-105' - 4/0 AWG
106'-125' - 250 kcmil
126'-150' - 300 kcmil
151'-175' - 350 kcmil
176'-250' - 500 kcmil
251'-300' - 600 kcmil
GREATER THAN 301' - 750 kcmil



Dewberry Architects Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100

Dewberry Engineers Inc.
401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID



SCALE

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE

BLOCK
DIAGRAMS -
TELECOM

PROJECT NO. 50165756

TT-601

SHEET NO.

SEAL

06/27/2026

COMMONWEALTH OF VIRGINIA

MICHAEL JASON
McTAVISH
Lic. No. 0402050286

PROFESSIONAL ENGINEER

08/24/2026

KEY PLAN

REVISIONS		
NO.	DESCRIPTION	DATE


DRAWN BY	JAC
APPROVED BY	MJM
CHECKED BY	GTR
DATE	08.26.2026
TITLE	

PROJECT NO.	50165756
-------------	----------

SHEET NO.



SEAL

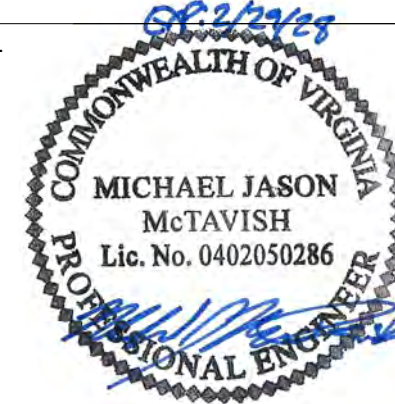

KEY PLAN 08/24/2026

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026


TITLE

BLOCK
DIAGRAMS - AV


PROJECT NO. 50165756

TT-603


SHEET NO.

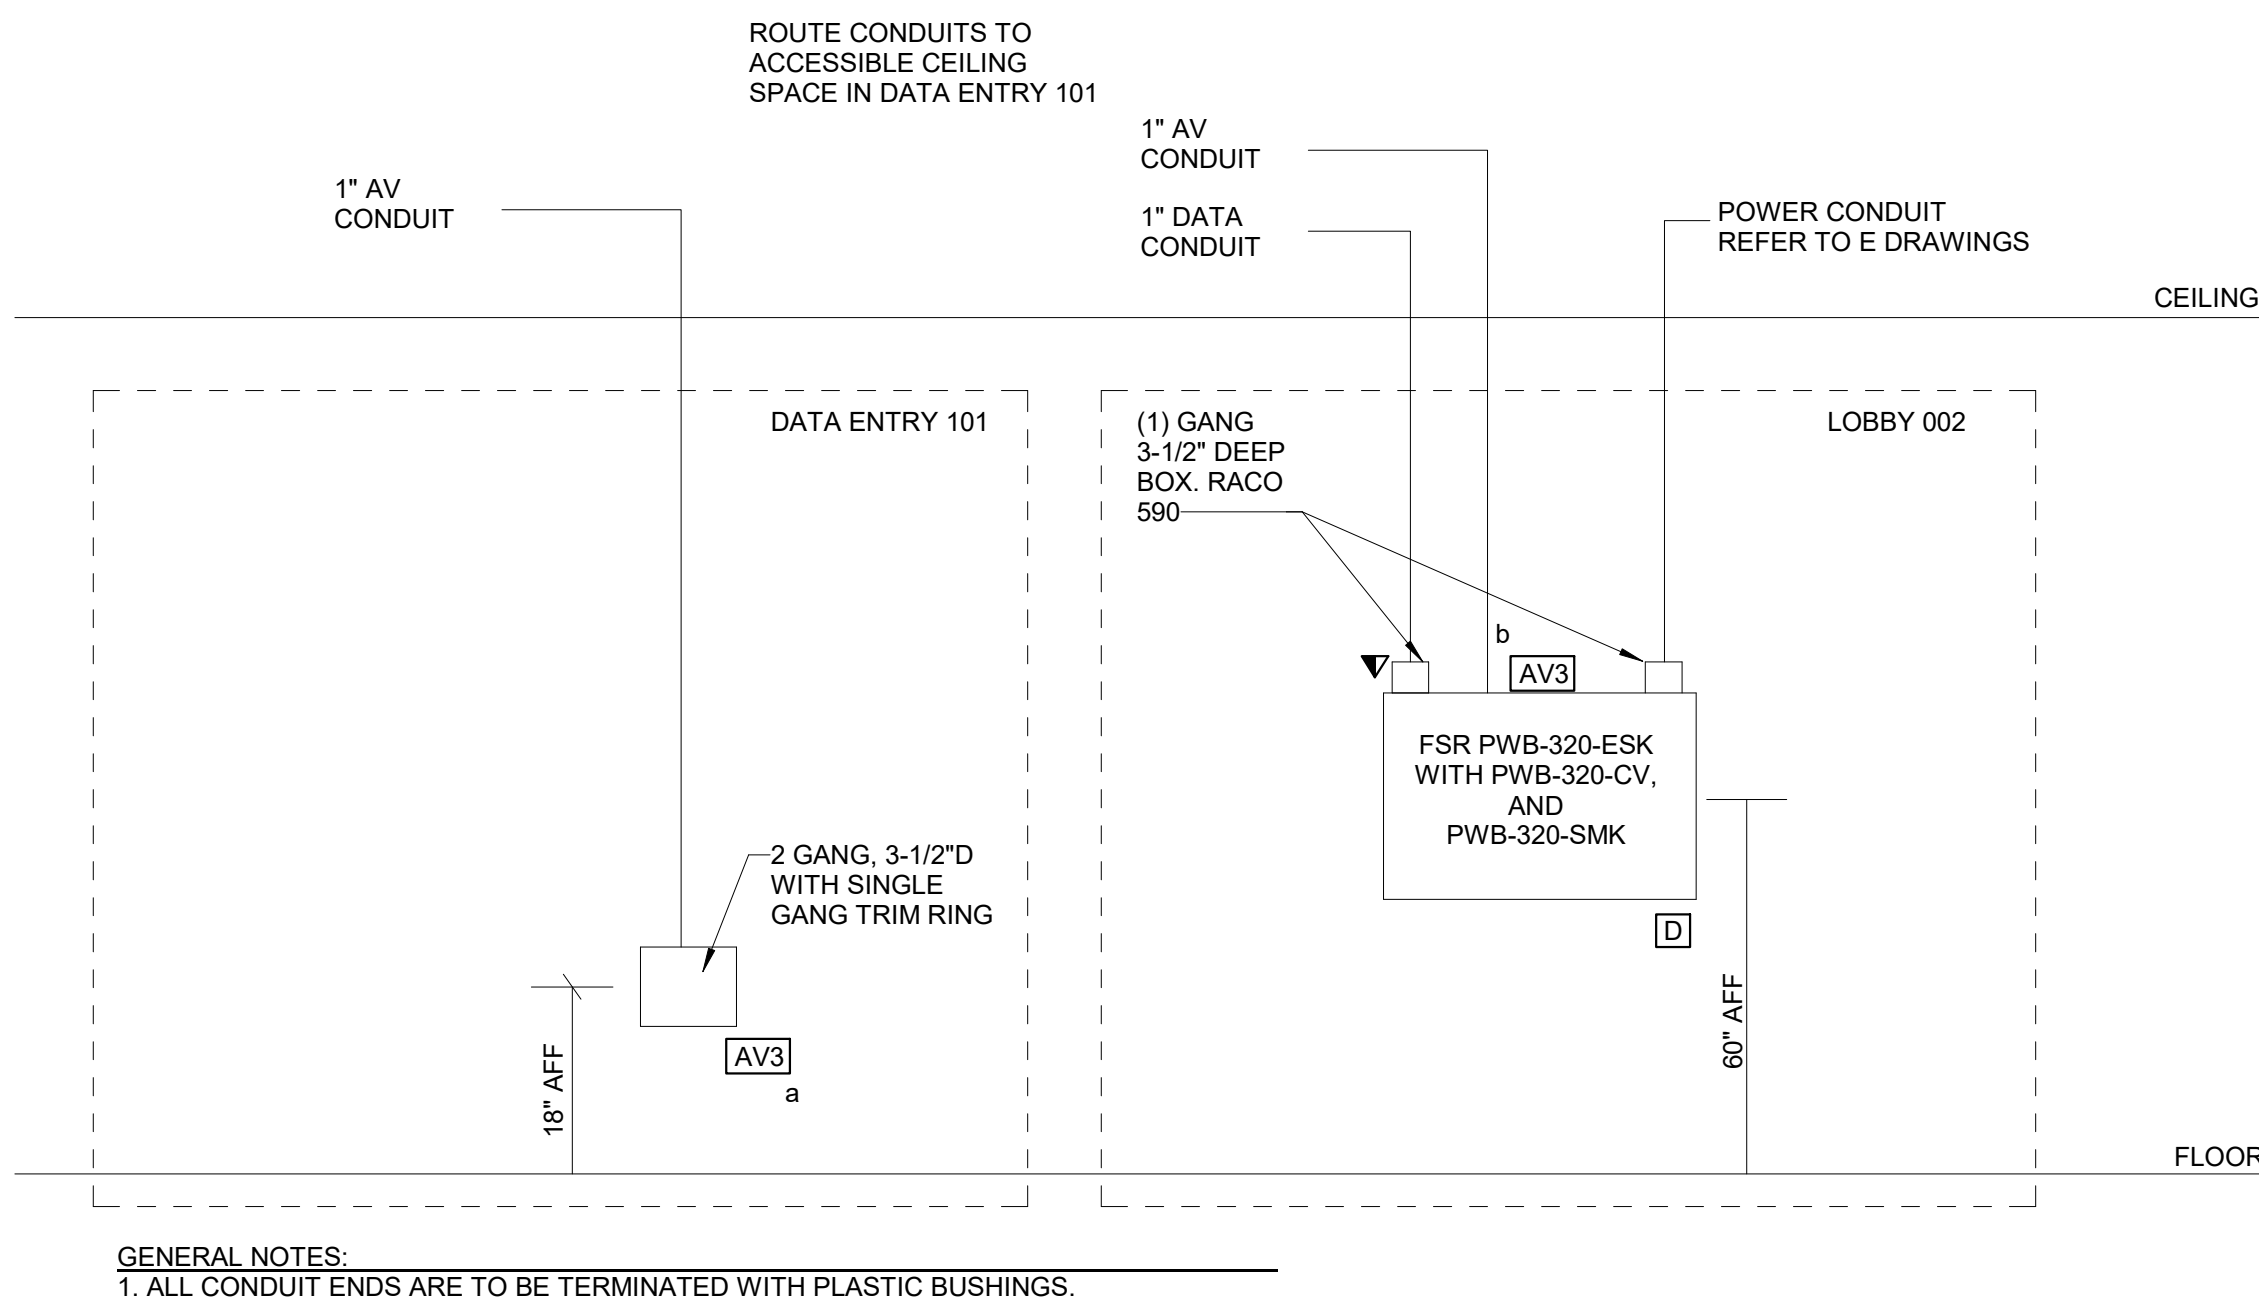


1 A/V CONDUIT BLOCK DIAGRAM - DIGITAL SIGNAGE
Scale: NTS

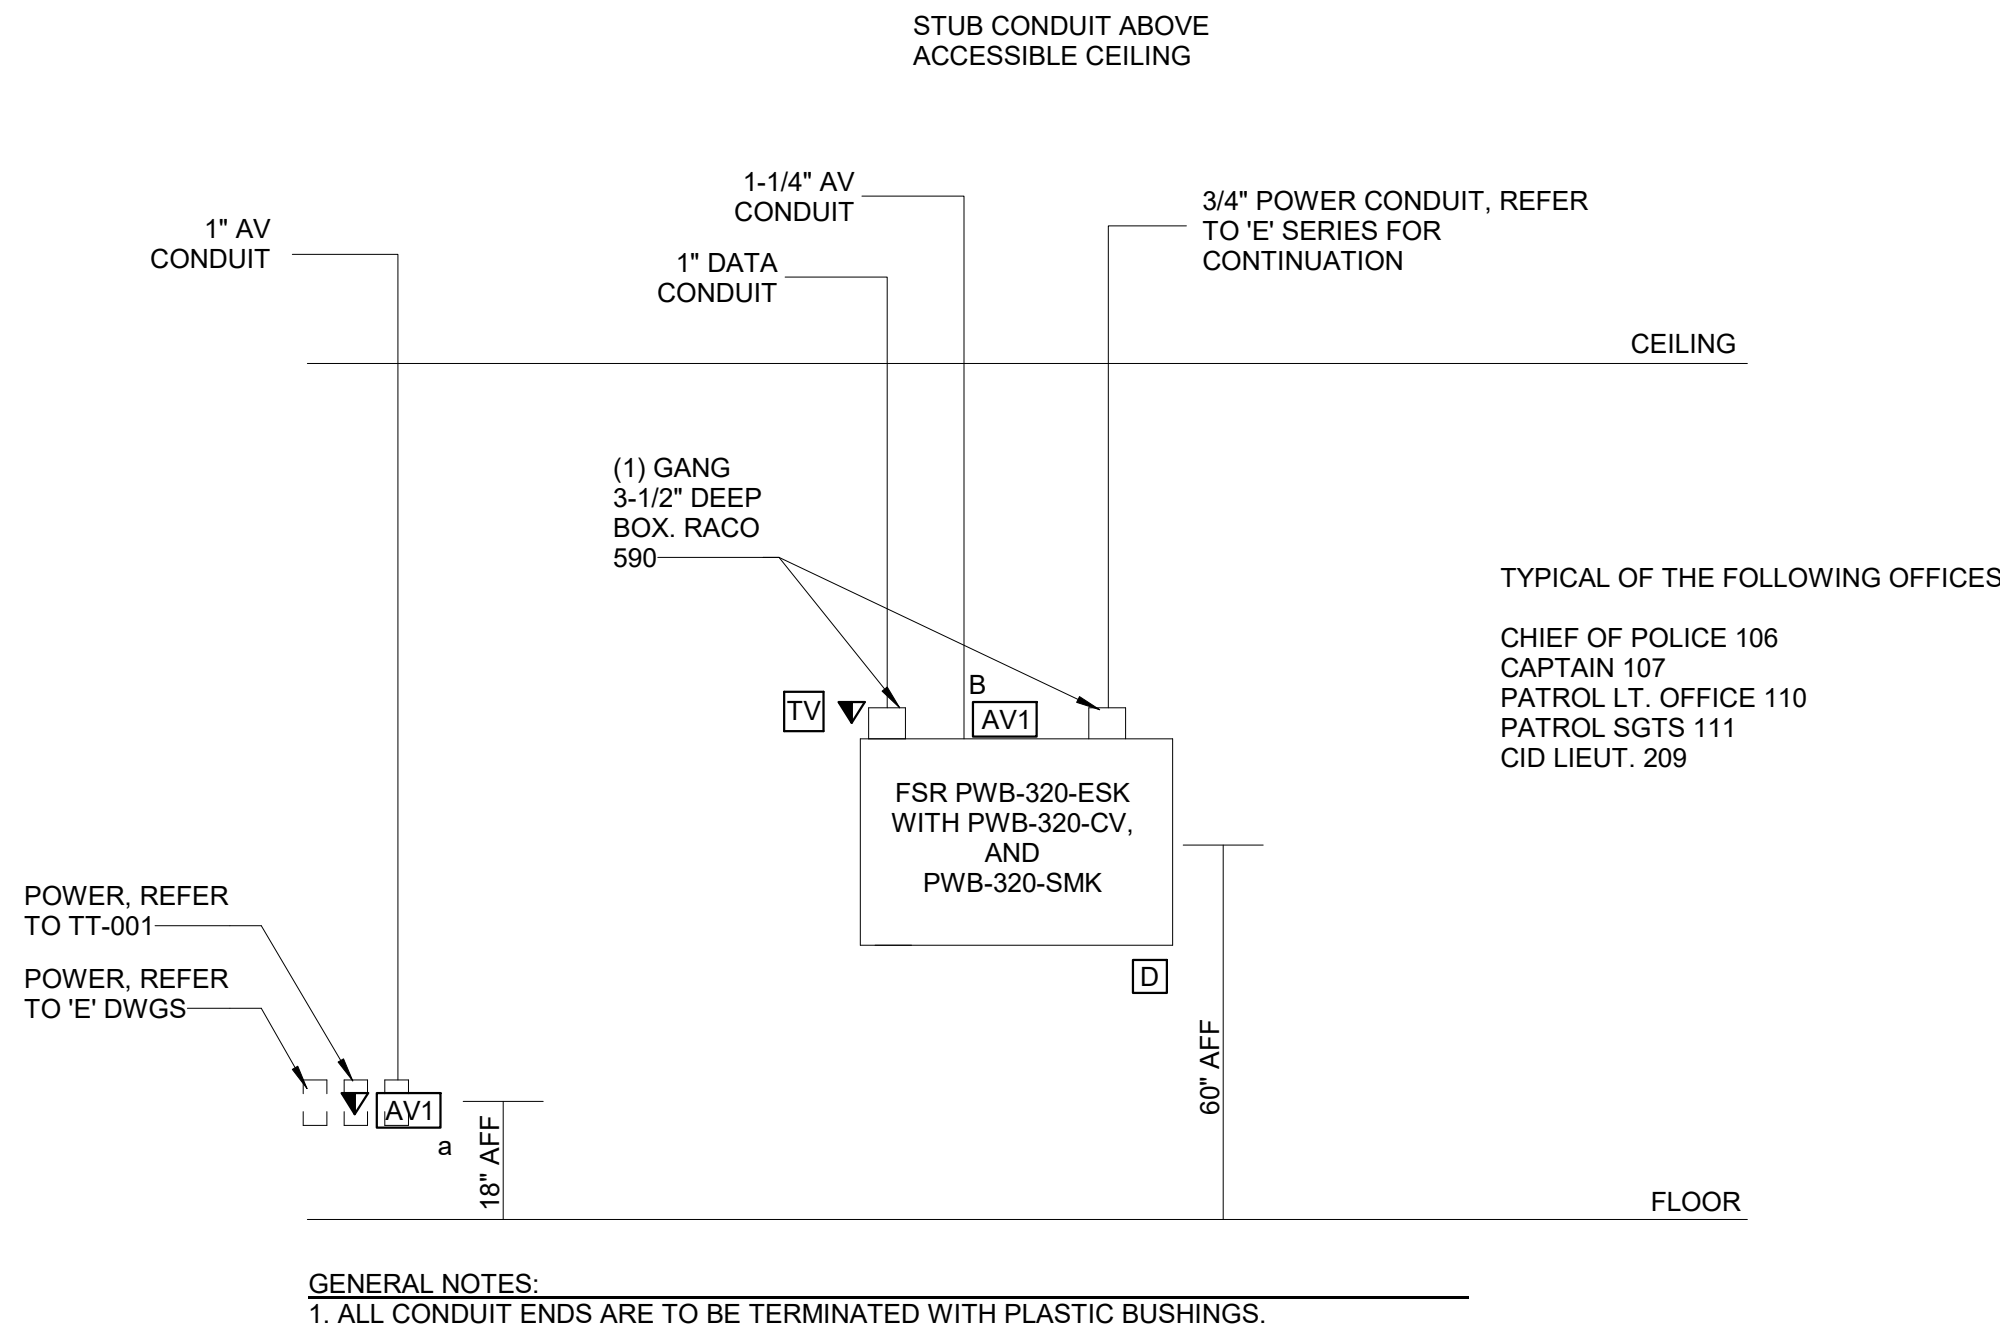


2 A/V CONDUIT BLOCK DIAGRAM - PRIVATE OFFICE
Scale: NTS

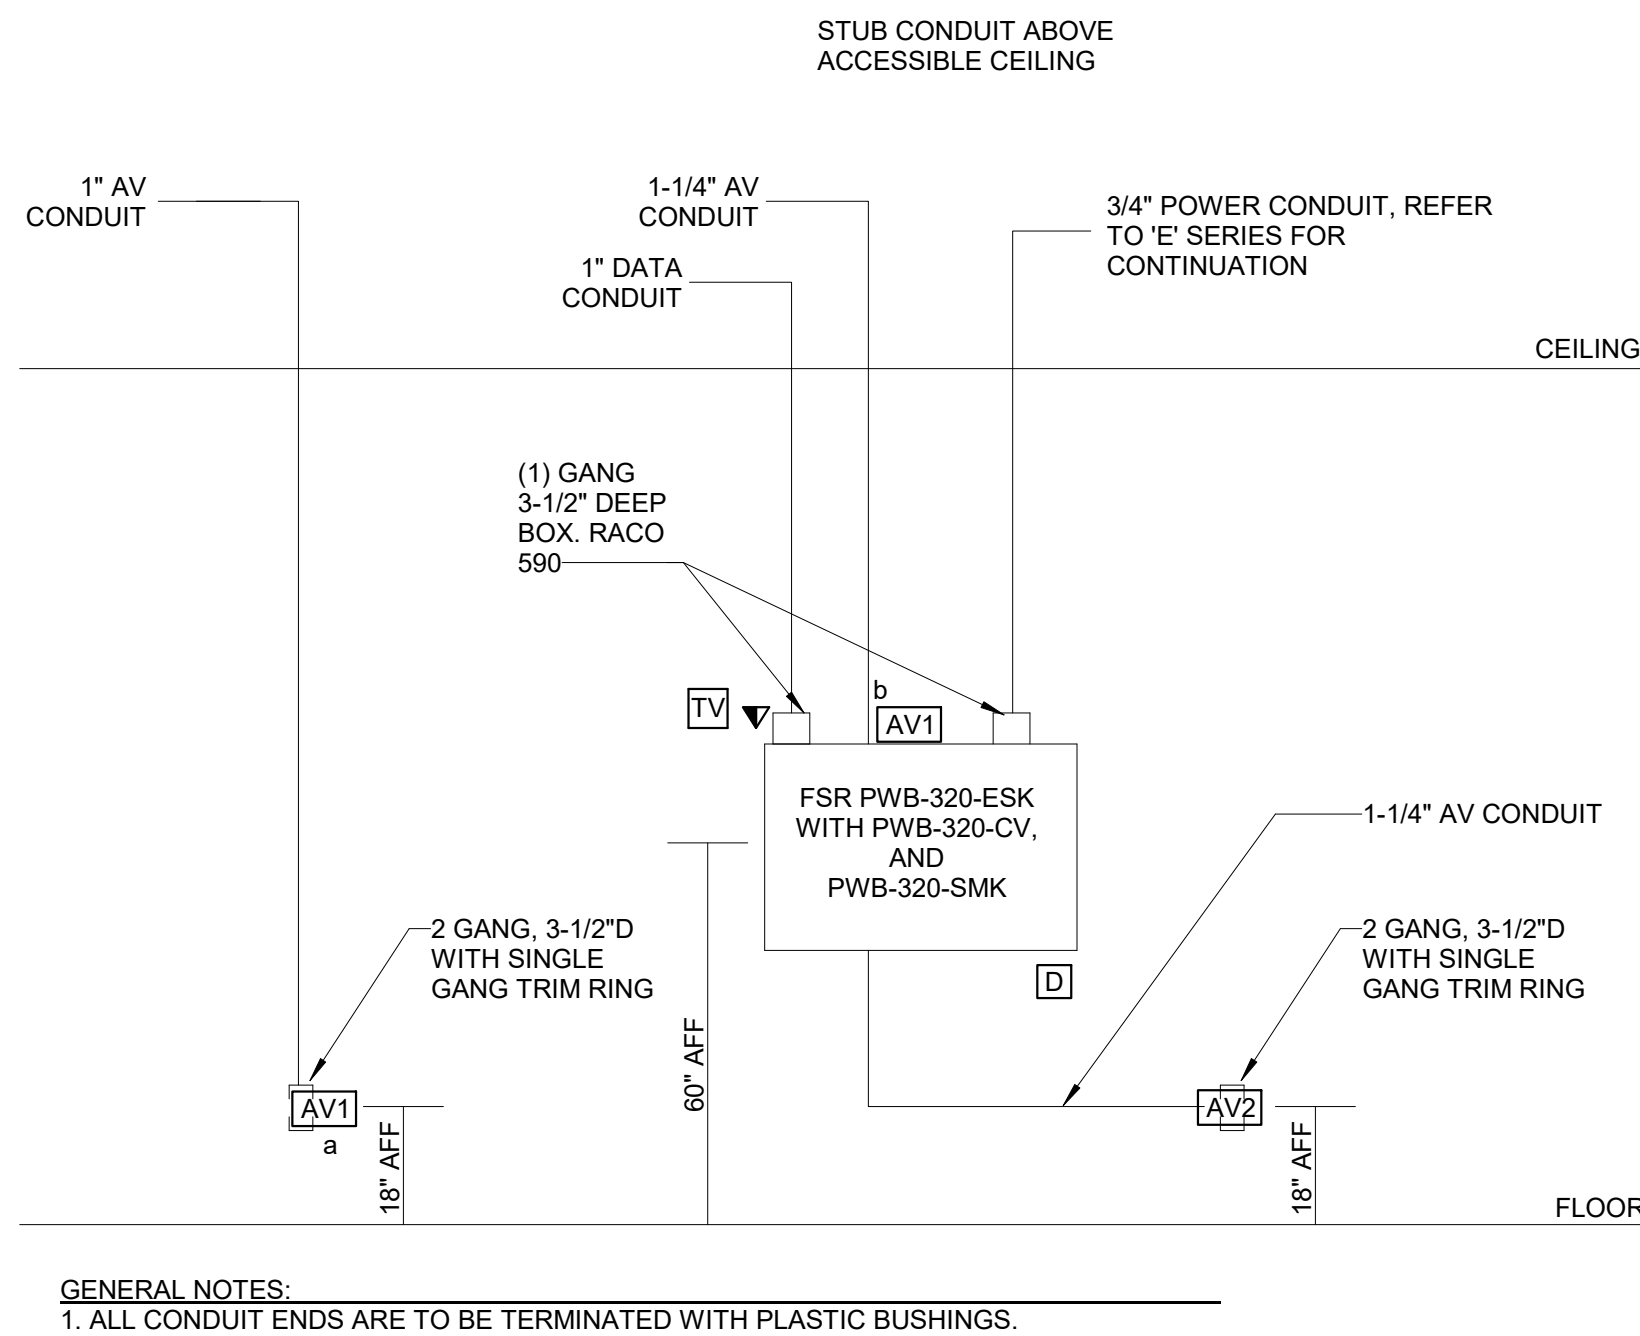

3 A/V CONDUIT BLOCK DIAGRAM - ROLL CALL 109
Scale: NTS

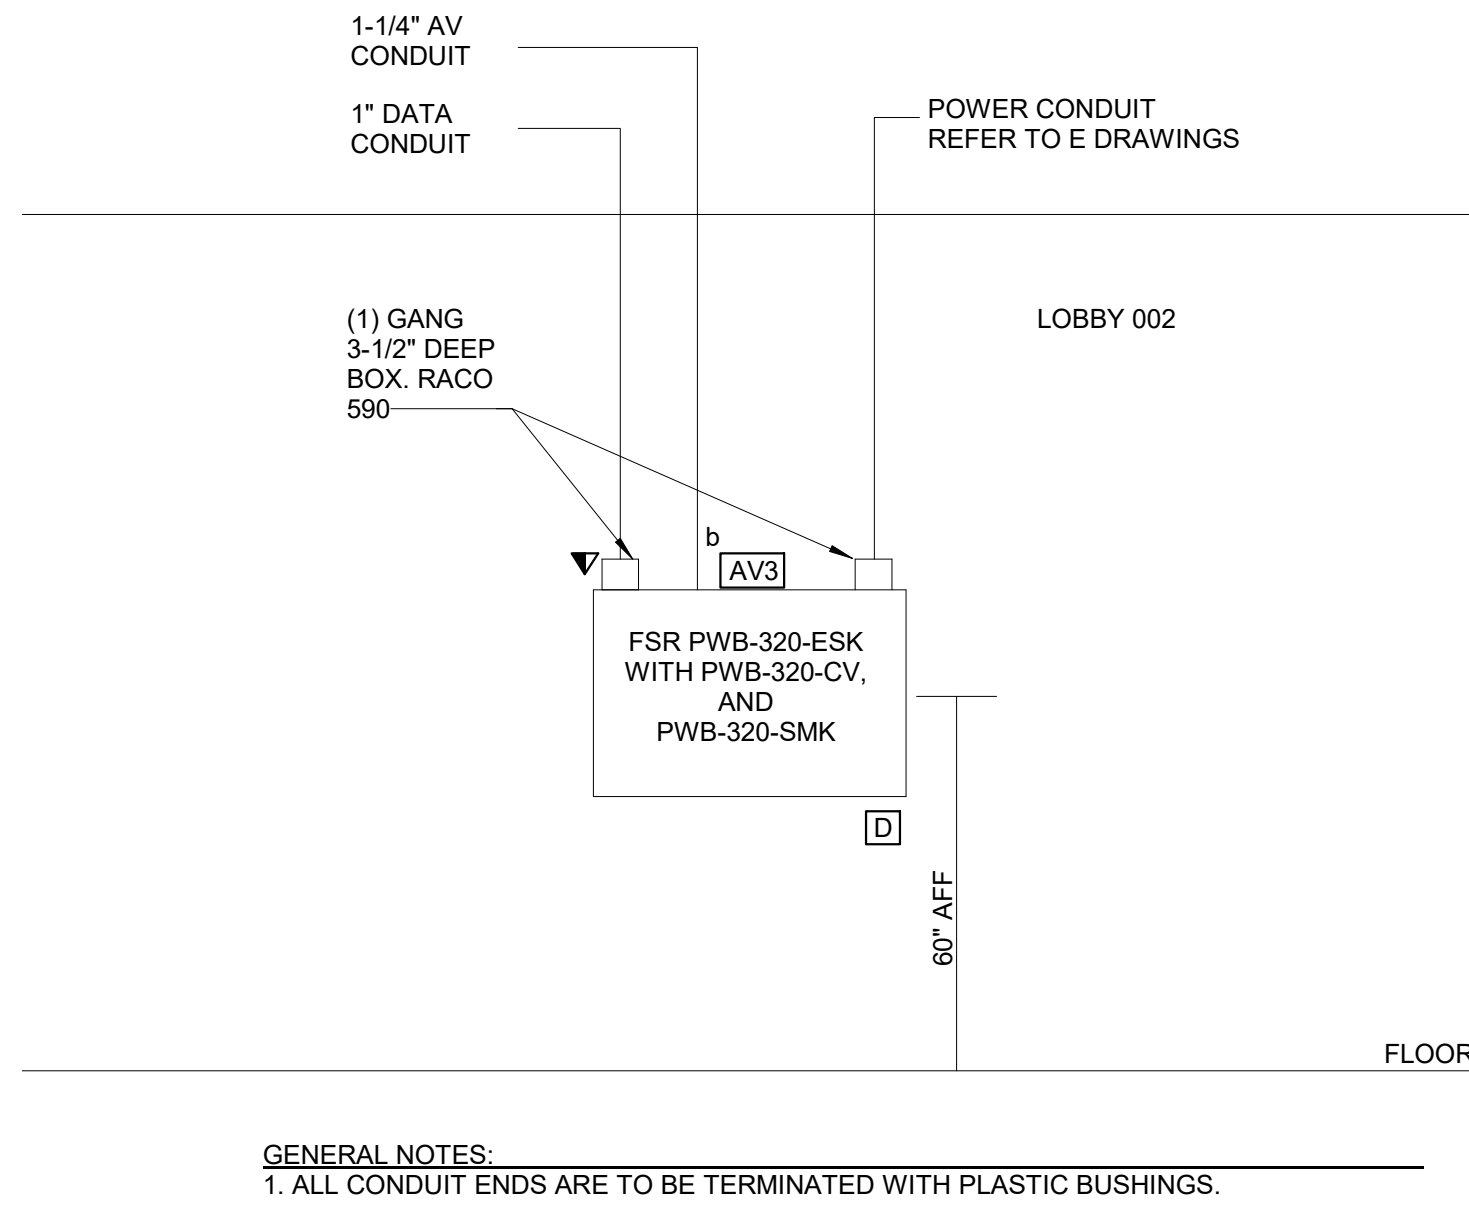

4 A/V CONDUIT BLOCK DIAGRAM - ROLL CALL 109 SECURITY MONITOR
Scale: NTS

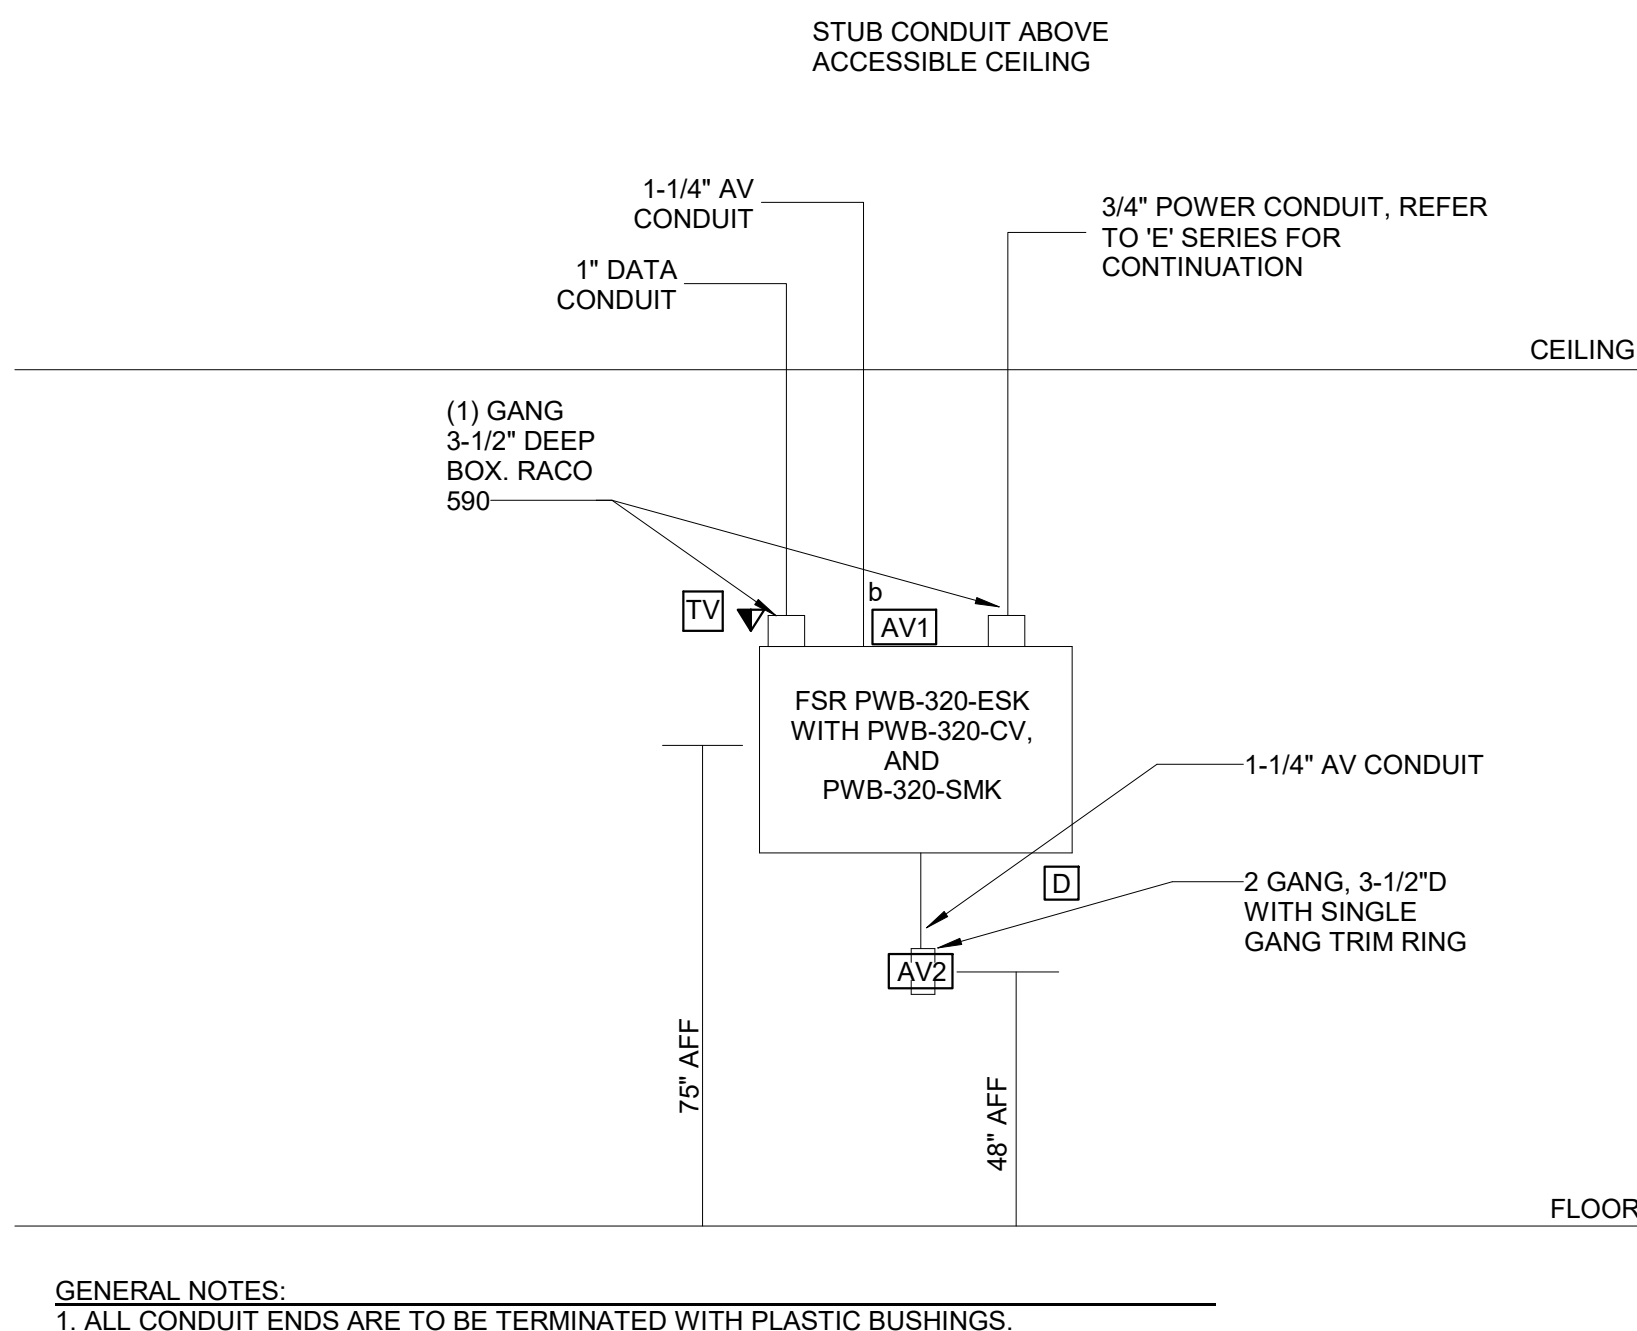

5 A/V CONDUIT BLOCK DIAGRAM - CID 204
Scale: NTS

F














E

D

C

B

A

SECURITY SYSTEMS SYMBOL LEGEND							
SYMBOL	DESCRIPTION	SPECIFICATION SECTION	WIRING REQUIREMENTS	CONDUIT SIZE	BACK BOX	MOUNTING HEIGHT	NOTES
	DOOR TAG X DENOTES ELECTRONIC CONTROL LOCK TYPE	AS NOTED	AS NOTED	AS NOTED	AS NOTED	AS NOTED	
	CONTROLLED AND MONITORED COMMERCIAL DOOR	28 05 00 / DIVISION 8	N/A	REFER TO DETAIL	REFER TO DETAIL	REFER TO DETAIL	①
	CONTROLLED AND MONITORED VEHICLE GATE	28 05 00 / DIVISION 8	N/A	REFER TO DETAIL	REFER TO DETAIL	REFER TO DETAIL	②
	CONTROLLED AND MONITORED PEDESTRIAN GATE	28 05 00 / DIVISION 8	N/A	REFER TO DETAIL	REFER TO DETAIL	REFER TO DETAIL	③
	CREDENTIAL READER SUBSCRIPT 'K' DENOTES CREDENTIAL READER WITH KEYPAD	28 05 00	N/A	1"	1 GANG 3 1/2" DEEP	46" AFF TO CENTER OF BOX	④
	REQUEST TO EXIT. DEVICE IS TO BE INTEGRAL TO THE ELECTRIFIED LOCK SET HARDWARE.	28 05 00	N/A	REFER TO DETAIL	REFER TO DETAIL	REFER TO DETAIL	⑤
	DURESS ALARM PUSH BUTTON, COVERT	28 05 00	N/A	1"	1 GANG 3 1/2" DEEP	WALL BOX - 18" AFF TO CENTER OF BOX. DEVICE MOUNTED TO UNDERSIDE OF DESK	⑥
	PANIC ALARM PUSH BUTTON, WALL MOUNTED	28 05 00	N/A	1"	1 GANG 3 1/2" DEEP	46" AFF TO CENTER OF BOX	⑦
	DOOR RELEASE PUSH BUTTON	28 50 00	N/A	1"	1 GANG 3 1/2" DEEP	WALL BOX - 18" AFF TO CENTER, DEVICE TO BE DESK TOP MOUNTED	⑧
	FIXED IP CAMERA	28 05 00	N/A	1"	2 GANG 3 1/2" DEEP	REFER TO SECURITY CAMERA SCHEDULE	⑨
	MULTI-SENSOR IP CAMERA	28 05 00	N/A	1"	2 GANG 3 1/2" DEEP	REFER TO SECURITY CAMERA SCHEDULE	⑩
	INTERCOM/VIDEO SUB-STATION WITH CALL BUTTON	28 05 00	N/A	3/4" CONDUIT	SPECIALTY BACK BOX	46" AFF TO PUSH BUTTON	⑪
	MASTER INTERCOM STATION WITH VIDEO AND DOOR RELEASE	28 05 00	N/A	3/4" CONDUIT	2 GANG 3 1/2" DEEP WITH ONE GANG TRIM PLATE	WALL BOX - 18" AFF TO CENTER, DEVICE TO BE DESK TOP MOUNTED	⑫
	WALL MOUNTED LARGE FORMAT VIDEO SURVEILLANCE MONITOR	28 05 00	N/A	1"	DISPLAY WALL BOX	REFER TO DETAIL	⑬
	DESK TOP SECURITY WORKSTATION MONITOR	28 05 00	N/A	1"	DISPLAY WALL BOX	REFER TO DETAIL	⑭
	ACCESS CONTROL AND ALARM SECURITY WORKSTATION	28 05 00	N/A	REFER TO DETAIL	REFER TO DETAIL	WALL BOX - 18" AFF TO CENTER, WORKSTATION TO BE LOCATED IN LOCKABLE/VENTILATED CASEWORK	⑮
	VIDEO MANAGEMENT WORKSTATION	28 05 00	N/A	REFER TO DETAIL	REFER TO DETAIL	WALL BOX - 18" AFF TO CENTER, WORKSTATION TO BE LOCATED IN LOCKABLE/VENTILATED CASEWORK	⑯
	INTERVIEW RECORD SYSTEM RECORDING MICROPHONE	28 05 00	N/A	3/4"	2 GANG 3 1/2" DEEP WITH ONE GANG TRIM PLATE	CEILING MOUNTED	⑰
	INTERVIEW RECORD SYSTEM CAMERA	28 05 00	N/A	1"	2 GANG 3 1/2" DEEP	REFER TO PLANS	⑱
	GATE RELEASE PUSH BUTTON STATION (FUNCTIONAL RELEASE BUTTON REQUIRED FOR EACH GATE)	28 05 00	N/A	1"	2 GANG 3 1/2" DEEP	WALL BOX - 18" AFF TO CENTER OF BOX. PUSH BUTTON STATION IS TO BE DESK TOP MOUNTED AND EACH BUTTON LABELED WITH THE GATE IT IS PROGRAMMED TO OPERATE	⑲

ABBREVIATIONS:

AC - ABOVE COUNTER
ACT - ACOUSTIC TILE CEILING
ADA - AMERICANS WITH DISABILITIES ACT
AFF - ABOVE FINISH FLOOR
AFO - ABOVE FINISH GRADE
ANSI - AMERICAN NATIONAL STANDARDS INSTITUTE
ATS - AUTOMATIC TRANSFER SWITCH
AWG - AMERICAN WIRE GAUGE
BAS - BUILDING AUTOMATION SYSTEM
BLDG - BUILDING
BMS - BUILDING MANAGEMENT SYSTEM
CATV - COMMUNITY ANTENNA TELEVISION
CCTV - CLOSED CIRCUIT TELEVISION
CLO - CEILING
CMP - COMMUNICATIONS MULTIPURPOSE CABLE
PLENUM
CMP - COMMUNICATIONS MULTIPURPOSE CABLE
RISER
COMM - COMMUNICATION
CU - COPPER
DB - DUCTBANK
DC - DIRECT CURRENT
DWG - DRAWING
EF - ENTRANCE FACILITY
EIA - ELECTRONIC INDUSTRIES ALLIANCE
ELEC - ELECTRIC, ELECTRICAL
ELEV - ELEVATOR
EMT - ELECTRICAL METALLIC TUBING
FUTP - OVERALL FOIL SHIELD TWISTED PAIR
FLR - FLOOR
FO - FIBER OPTIC
FURN - FURNITURE
GND - GROUND
GRG - GALVANIZED RIGID METALLIC CONDUIT
HH - HAND HOLE
ICT - INFORMATION COMMUNICATIONS TECHNOLOGIES
IDF - INTERMEDIATE DISTRIBUTION FRAME
LV - LOW VOLTAGE
MDF - MAIN DISTRIBUTION FRAME
MFR - MANUFACTURER
MM - MULTI MODE
N.C. - NORMALLY CLOSED
N.O. - NORMALLY OPEN
N/A - NOT APPLICABLE
NEC - NATIONAL ELECTRIC CODE
NEMA - NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
NFPA - NATIONAL FIRE PROTECTION ASSOCIATION
NIC - NOT IN CONTRACT
NTS - NOT TO SCALE
OSP - OUTSIDE PLANT
PBB - PRIMARY BONDING BUSBAR
PLC - PROGRAMMABLE LOGIC CONTROLLER
POE - POWER OVER ETHERNET
PVC - POLYVINYL CHLORIDE
QTY - QUANTITY
RBB - RACK BONDING BUSBAR
RCP - REFLECTED CEILING PLANT
REQ, REQD - REQUIRED
RMD - RIGID METALLIC CONDUIT
RNC - RIGID NON-METALLIC CONDUIT
SBB - SECONDARY BONDING BUSBAR
SPDT - SINGLE POLE DOUBLE THROW
SPST - SINGLE POLE SINGE THROW
SM - SINGLE MODE
TBB - TELECOMMUNICATIONS BONDING BACKBONE
TBC - TELECOMMUNICATIONS BONDING CONDUCTOR
TEBC - TELECOMMUNICATIONS EQUIPMENT BONDING CONDUCTOR
TEL - TELECOM - TELECOMMUNICATIONS
TGB - TELECOMMUNICATIONS GROUNDING BUSBAR
TIA - TELECOMMUNICATIONS INDUSTRIES ASSOCIATION
UG - UNDERGROUND
UON - UNLESS OTHERWISE NOTED
UPS - UNINTERRUPTIBLE POWER SUPPLY
UTP - UNSHIELDED TWISTED PAIR
V - VOLTS
VA - VOLT AMPERES
VMS - VIDEO MANAGEMENT SYSTEM
VOIP - VOICE OVER INTERNET PROTOCOL

SECURITY SYSTEMS GENERAL NOTES:

1. INDICATED MOUNTING HEIGHTS ARE FOR DESIGN PURPOSES ONLY. COORDINATE FINAL MOUNTING HEIGHT OF EQUIPMENT WITH SURROUNDING EQUIPMENT AND CONDITIONS. MOUNTING HEIGHTS INDICATED ARE TO CENTER OF BOX.
2. OWNER VENDOR AND CONTRACTOR FURNISHED CABLES SHALL BE CMP, WHERE INSTALLED UNDERGROUND, CABLE SHALL BE INDOOR/OUTDOOR RATED.
3. STORE EQUIPMENT IN A CLEAN AND DRY PLACE UNTIL READY FOR INSTALLATION.
4. PROTECT FROM WEATHER, THEFT, DIRT, FUMES, WATER, CONSTRUCTION DEBRIS, ETC., AT ALL TIMES. DAMAGED EQUIPMENT WILL BE RESTORED TO LIKE NEW CONDITION OR REPLACED BY THE CONTRACTOR.
5. CLEAN ALL EQUIPMENT TO PRESENT A "NEW" CONDITION AT PROJECT COMPLETION. VACUUM, CLEAN INTERNAL AREAS OF EQUIPMENT RACKS AND ENCLOSURES.
6. CONTRACTOR IS REQUIRED TO ACCOMMODATE INCIDENTAL MOVEMENT OF THE FIELD DEVICES AS DIRECTED BY THE ARCHITECT FROM THE LOCATION INDICATED UP TO 10 FEET PROVIDED THE DEVICE ROUGH IN HAS NOT COMMENCED.
7. MINIMUM CONDUIT SIZE FOR A SINGLE DEVICE CABLE IS 3/4" I.D. N. WHERE PRACTICAL. SIMILAR DEVICES MAY BE GROUPED TOGETHER AND CONDUIT SIZE INCREASED TO COMPLY WITH NEC CONDUIT FILL REQUIREMENTS. PROVIDE CONTINUOUS CONDUIT RUN BACK TO HEAD END LOCATION FOR SITE LOCATED FIELD DEVICES. CONDUIT SIZE MUST COMPLY WITH NEC MINIMUM SIZE REQUIREMENTS.
8. REFER TO RISER DIAGRAMS FOR DIAGRAMATIC DESIGN INTENT.
9. ELECTRICAL METALLIC TUBING (EMT); CONDUIT SHALL BE FORMED FROM COLD-ROLLED STRIP STEEL, AND SHALL MEET ANSI AND UL REQUIREMENTS. TERMINATION FITTINGS SHALL BE FITTED WITH INSULATED PLASTIC BUSHINGS.
10. COORDINATE THE WORK OF DIVISION 28 (OWNER/OWNER VENDOR PROVIDED SYSTEMS) WITH ALL OTHER TRADES TO AVOID CONFLICT.
11. ALL WIRE RUNS SHOULD FOLLOW THE SHORTEST PATH POSSIBLE. IF ANY CATEGORY 6 CABLE RUNS EXCEED 90 METERS, OR LENGTHS SPECIFIED IN THE REFERENCE AND REGULATIONS THE CONTRACTOR SHOULD NOTIFY THE ARCHITECT IMMEDIATELY.
12. WIRING REQUIREMENTS SHOWN ARE FOR REFERENCE ONLY. THE GC AND DIVISION 28 CONTRACTOR ARE RESPONSIBLE FOR COORDINATING THE FINAL REQUIREMENTS WITH THE OWNER'S SECURITY VENDOR FURNISHED SHOP DRAWINGS AND REQUIREMENTS PRIOR TO INSTALLATION.
13. CATEGORY 6 CABLE LENGTHS SHALL NOT EXCEED 295' IN LENGTH.
14. REFERENCE FURNITURE/ARCHITECTURAL DRAWINGS FOR DIMENSIONING OF FLOOR BOXES AND OTHER DEVICES.
15. REFERENCE ELECTRICAL DRAWINGS FOR COORDINATION WITH POWER.
16. CONTRACTOR TO PROTECT ALL EXISTING CABLING WHICH IS NOT SPECIFICALLY CALLED OUT FOR DEMOLITION AND REMOVAL. ANY CABLING WHICH BECOMES DAMAGED DURING THE COURSE OF THE WORK, WHICH IS NOT SCHEDULED FOR DEMOLITION, SHALL BE REPAIRED OR REPLACED PER SPEC AT THE CONTRACTORS EXPENSE.
17. CONDUITS FOR SECURITY OUTLETS SHALL BE SIZED AS FOLLOWS:

MAXIMUM NUMBER OF UTP CABLES PER TRADE SIZE

	3/4"	2
1"	4	
1-1/4"	7	
1-1/2"	9	
2"	16	

MAXIMUM FILL RATE PER CONDUIT SHALL NOT EXCEED 40%. ADJUSTMENT SHALL BE MADE TO MAXIMUM NUMBER OF CABLES AS NEEDED BASED ON DIAMETER OF CABLE USED.

19. 'RACEWAY SYSTEM' INCLUDES ALL CONDUITS, BACK BOXES, FITTINGS, PLASTIC BUSHINGS OR GROMMETS, CABLE TRAYS, GROUNDING BUSHINGS, AND PULL STRINGS/PULL TAPES.
20. REFER TO DIVISION 28 DRAWINGS AND SPECIFICATIONS FOR FIRE STOPPING SYSTEM REQUIREMENTS.
21. ACTIVE SECURITY DEVICES SHALL BE PROTECTED FROM TRANSIENT VOLTAGE SURGES BY SURGE PROTECTION DEVICES AND FURNISHED/INSTALLED BY THE OWNER'S SECURITY VENDOR.
22. INSTALLATION OF OUTSIDE PLANT AND UNDER GROUND RACEWAYS SHALL:
 - A. MEET THE REQUIREMENTS OF THE CONTRACT DOCUMENTS. PROJECT WORK ZONES AND SCHEDULING MUST BE COORDINATED WITH THE OWNER PRIOR TO THE COMMENCEMENT OF WORK.
 - B. FOLLOW ALL LOCAL AND OSHA 1926 SUBPART P SAFETY REGULATIONS WHEN WORKING IN AND AROUND OPEN EXCAVATIONS.
 - C. ALL COMMUNICATIONS CONDUITS AND INNERDUCTS WILL BE EQUIPPED WITH A MEASURING PULLY TAPE WITH PERMANENTLY PRINTED MEASUREMENTS IN ONE FOOT INCREMENTS AND HAVE A MINIMUM 1200 LB BREAKING STRENGTH.
 - D. ALL DUCT BANKS CONTAINING COMMUNICATIONS CONDUITS WILL BE EQUIPPED WITH AN ORANGE WARNING TAPE IMPRINTED WITH 'WARNING - FIBER OPTIC CABLE'. CONTINUOUS THE ENTIRE LENGTH OF THE DUCT BANK, BURIED 12" BELOW FINISHED GRADE. CONDUIT WILL BE BURIED MINIMUM 24" BELOW GRADE.
 - E. ALL UNDERGROUND DUCT BANK CONDUITS SHALL BE DIRECT BURY, SCHEDULE 80 PVC, WITH MATCHING FITTINGS OF THE SAME MANUFACTURER. CONDUIT TRANSITIONS TO ABOVE GRADE SHALL BE LONG-RADIUS GRS ELBOWS WITH MANUFACTURED PVC TO GRS CONDUIT TRANSITIONS EXPOSED CONDUITS ABOVE GRADE SHALL BE GRS AND INCLUDE AN EXPANSION FITTING.
 - F. EACH UNDERGROUND CONDUIT SHALL BE TESTED FOR BLOCKAGE AND DEFORMATION WITH A FLEXIBLE MANDREL NOT LESS THAN 12 INCHES LONG WITH A DIAMETER APPROXIMATELY 1/4 INCH LESS THAN THE INSIDE DIAMETER OF THE CONDUIT.
 - G. DUCT BANKS CONTAINING CONDUITS CARRYING POWER, WATER, OR OTHER UTILITIES SHALL MAINTAIN A SPACING OF NOT LESS THAN 12 INCHES FROM THE COMMUNICATIONS CONDUIT.
 - H. ALL HAND HOLE LIDS ARE TO BE FACTORY LABELED 'COMMUNICATIONS'.
 - I. NO MORE THAN TWO 90-DEGREE CONDUIT BENDS, OR A COMBINED TOTAL OF 180 DEGREES OF BEND IS ALLOWABLE BETWEEN HAND HOLES AND PULL BOXES. CONTRACTOR IS TO PROVIDE ADDITIONAL PULL BOXES WHERE DETERMINED NECESSARY BASED ON ACTUAL FIELD CONDITIONS.
 - J. ANY SECTION LENGTH OF CONDUIT BETWEEN PULL BOXES SHALL NOT EXCEED 800 FEET.
 - K. ALL EXTERIOR CABLING SHALL BE RATED FOR THE ENVIRONMENTS IN WHICH THEY ARE INSTALLED.
 - L. OUTSIDE PLANT CABLE SHALL NOT EXTEND MORE THAN FIFTY (50) FEET INTO A BUILDING, UNLESS THE CABLE IS INSTALLED IN A RACEWAY IN COMPLIANCE WITH NEC ARTICLE 770 AND 800.
 - M. ALL CONDUIT ENDS EXTENDING INSIDE A BUILDING FROM THE OUTSIDE SHALL BE SEALED WITH AN APPROVED SEALING PRODUCT OR PLUG.
 - N. ALL CONDUITS PENETRATING EXTERIOR WALLS SHALL BE SEALED FROM WATER AND MOISTURE INGRESS.
 - O. ALL CONDUITS PENETRATING FIRE-RATED WALL AND FLOOR PENETRATIONS ARE TO BE SEALED WITH APPROVED PRODUCT TO MAINTAIN FIRE RATING.

SECURITY LEGEND KEYED NOTES:

- ① CONTROLLED AND MONITORED DOOR. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 08 SCOPE OF WORK, FURNISH ELECTRICALLY LOOKING DOOR HARDWARE WITH INTEGRAL REQUEST TO EXIT DEVICE, DOOR POSITION SENSORS, DOOR HARDWARE POWER SUPPLIES, AND CONNECTORIZED PIG-TAILS FROM DOOR HARDWARE WITH LEADS IN BOX ABOVE ACCESSIBLE CEILING SPACE LEFT FOR TERMINATION TO THE FIELD ACCESS CONTROL CABLE BY THE OWNER'S SECURITY VENDOR. THE OWNER'S SECURITY VENDOR SHALL FURNISH CABLING, TERMINATION OF WIRING, ACCESS CONTROL SYSTEM HARDWARE, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICES TO FUNCTION. INSTALLATION, ADJUSTMENT, AND MAINTENANCE OF THE LOCK IS PER DIVISION 08. COORDINATION WITH ADA POWER ASSIST DOOR IS REQUIRED WHERE INDICATED ON THE DRAWINGS. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR AND DOOR PROVIDER FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ② CONTROLLED AND MONITORED VEHICLE GATE. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. UNDER DIVISION 32 SCOPE OF WORK, FURNISH EXTERNAL GATE SYSTEM, DETECTION LOOPS, AND INTERFACE WITH THE ACCESS CONTROL SYSTEM. THE OWNER'S SECURITY VENDOR SHALL FURNISH CABLING, TERMINATION OF WIRING, ACCESS CONTROL SYSTEM HARDWARE, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, SURGE PROTECTION, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICES TO FUNCTION. INSTALLATION, ADJUSTMENT, AND MAINTENANCE OF THE GATE IS PER DIVISION 32. COORDINATION WITH ADA POWER ASSIST DOOR IS REQUIRED WHERE INDICATED ON THE DRAWINGS. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER AND THE OWNER'S SECURITY VENDOR TO ALLOW FOR BOTH LOCAL AND REMOTE CONTROL.
- ③ CONTROLLED AND MONITORED PEDESTRIAN GATE. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. UNDER DIVISION 08 SCOPE OF WORK, FURNISH ELECTRICALLY LOOKING GATE AND GATE HARDWARE WITH INTEGRAL REQUEST TO EXIT DEVICE, GATE POSITION SENSORS, ELECTRONIC LOCKING HARDWARE, POWER SUPPLIES, AND PIG-TAILS FROM GATE HARDWARE TO AN EXTERNAL BOX FOR FINAL TERMINATIONS TO THE ACCESS CONTROL CABLING TO BE PROVIDED BY THE OWNER'S SECURITY VENDOR. THE OWNER'S SECURITY VENDOR SHALL FURNISH CABLING, TERMINATION OF WIRING, ACCESS CONTROL SYSTEM HARDWARE, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, SURGE PROTECTION, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICES TO FUNCTION. INSTALLATION, ADJUSTMENT, AND MAINTENANCE OF THE LOCK IS PER DIVISION 08.
- ④ CREDENTIAL READER. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE CREDENTIAL READER, CABLING, TERMINATION OF THE WIRING, ACCESS CONTROL SYSTEM HARDWARE, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, SURGE PROTECTION (EXTERIOR DEVICES), AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. SUBSCRIPT 'K' DENOTES CREDENTIAL READER WITH KEYPAD REQUIRED. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑤ REQUEST TO EXIT DEVICE. THE REQUEST TO EXIT DEVICE SHALL BE INTEGRAL TO THE ELECTRIFIED LOCK HARDWARE FURNISHED UNDER DIVISION 08. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑥ DURESS ALARM PUSH BUTTON, WALL MOUNTED. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DEVICE, CABLING, TERMINATION OF WIRING, ALARM SYSTEM, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICES TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑦ DURESS ALARM PUSH BUTTON, COVERT MOUNTED. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DEVICE, CABLING, TERMINATION OF WIRING, ALARM SYSTEM, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑧ DOOR RELEASE PUSH BUTTON. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DOOR RELEASE DEVICE AND ASSOCIATED SYSTEM, CABLING, TERMINATION OF THE WIRING, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑨ FIXED IP CAMERA. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE SECURITY CAMERA, ALL NECESSARY MOUNTING HARDWARE AND BOXES, VMS, CABLING, TERMINATION OF THE WIRING, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, SURGE PROTECTION (OUTDOOR DEVICES), AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑩ MULTI-SENSOR IP CAMERA. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE SECURITY CAMERA, ALL NECESSARY MOUNTING HARDWARE AND BOXES, VMS, CABLING, TERMINATION OF THE WIRING, INTEGRATION WITH THE ACCESS CONTROL SYSTEM, SURGE PROTECTION (OUTDOOR DEVICES), AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑪ INTERCOM/VIDEO SUBSTATION WITH CALL BUTTON. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DEVICE AND ASSOCIATED SYSTEM, CABLING, TERMINATION OF THE WIRING, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING ELEVATIONS OF BOXES AND ROUTING OF RACEWAYS.
- ⑫ MASTER INTERCOM STATION WITH VIDEO MONITOR AND DOOR RELEASE. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DEVICE AND ASSOCIATED SYSTEM, CABLING, TERMINATION OF THE WIRING, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION. CONTRACTOR IS TO PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR FOR FINAL MOUNTING LOCATIONS AND ROUTING OF RACEWAYS AND CABLING PATHWAYS.
- ⑬ WALL MOUNTED LARGE FORMAT 4K VIDEO SURVEILLANCE MONITOR. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE 4K VIDEO DISPLAY, MOUNTING HARDWARE, VMS, CABLING, TERMINATION OF THE WIRING, INTEGRATION OF VIDEO WITH ACCESS CONTROL, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DISPLAY TO FUNCTION AS PROGRAMMED PER THE OWNER'S REQUIREMENTS.
- ⑭ DESK TOP SECURITY WORKSTATION MONITOR. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE 4K VIDEO DISPLAY MONITOR, CABLING, TERMINATION OF THE WIRING, INTEGRATION OF VIDEO WITH ACCESS CONTROL, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DISPLAY TO FUNCTION AS PROGRAMMED PER THE OWNER'S REQUIREMENTS.
- ⑮ ACCESS CONTROL AND ALARM SECURITY WORKSTATION. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE WORKSTATION, CABLING, TERMINATION OF THE WIRING, INTEGRATION OF VIDEO WITH ACCESS CONTROL, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DISPLAY TO FUNCTION AS PROGRAMMED PER THE OWNER'S REQUIREMENTS.
- ⑯ VIDEO MANAGEMENT WORKSTATION. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE WORKSTATION, CABLING, TERMINATION OF THE WIRING, INTEGRATION OF VIDEO WITH ACCESS CONTROL, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DISPLAY TO FUNCTION AS PROGRAMMED PER THE OWNER'S REQUIREMENTS. SUBSCRIPT 'I' DENOTES INTERVIEW RECORD MANAGEMENT SYSTEM WORKSTATION. THE INTERVIEW MANAGEMENT SYSTEM IS OWNER FURNISHED AND INSTALLED.
- ⑰ INTERVIEW RECORD SYSTEM RECORDING MICROPHONE. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE DEVICE AND WIRING IS OWNER FURNISHED AND INSTALLED.
- ⑱ INTERVIEW RECORD SYSTEM CAMERA. UNDER DIVISION 26 ELECTRICAL SCOPE OF WORK FURNISH AND INSTALL THE RACEWAY SYSTEM. THE DEVICE AND WIRING IS OWNER FURNISHED AND INSTALLED.
- ⑲ GATE RELEASE PUSH BUTTON STATION (FUNCTIONAL RELEASE BUTTON REQUIRED FOR EACH GATE). THE OWNER'S SECURITY VENDOR SHALL PROVIDE THE DEVICE, CABLING, TERMINATION OF THE WIRING, INTEGRATION OF VIDEO WITH ACCESS CONTROL, AND ALL PROGRAMMING, TESTING, COMMISSIONING, AND ANY APPURTENANCES NECESSARY FOR THE DEVICE TO FUNCTION.

TY SHEET INDEX	
SHEET NO.	SHEET NAME
SECURITY	
TY-001	LEGEND SHEET - SECURITY
TY-101	SITE PLAN - SECURITY
TY-111	FIRST FLOOR PLAN - SECURITY
TY-112	FIRST FLOOR RCP - SECURITY
TY-121	SECOND FLOOR PLAN - SECURITY
TY-122	SECOND FLOOR RCP - SECURITY
TY-401	LARGE SCALE PLANS - SECURITY
TY-501	DETAILS - SECURITY
TY-502	DETAILS - SECURITY
TY-503	DETAILS & SCHEDULES - SECURITY
TY-601	BLOCK DIAGRAMS - SECURITY



Dewberry Architects Inc.

8401 Arlington Blvd
Fairfax, VA 22031
703.646.0100

Dewberry Engineers Inc.

401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID

SEAL



KEY PLAN 08/24/2026

SCALE

REVISONS

NO.	DESCRIPTION	DATE

DRAWN BY _____ JAC
APPROVED BY _____ MJM
CHECKED BY _____ GTR
DATE _____ 08.26.2026
TITLE _____

LEGEND SHEET - SECURITY

PROJECT NO. 50165756


TY-001

SHEET NO.

TOWN OF STRASBURG


STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

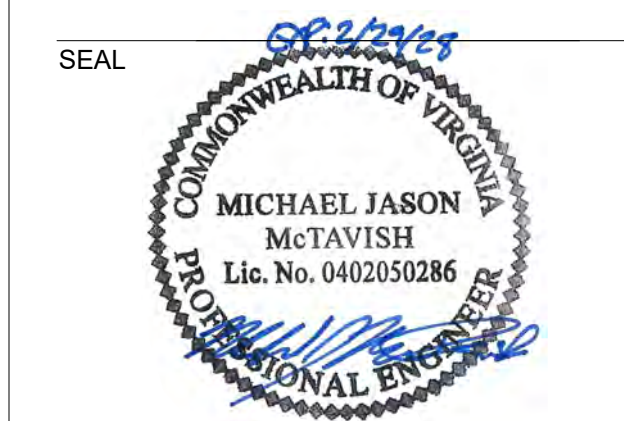

KEY PLAN	08/24/2026
----------	------------

SCALE

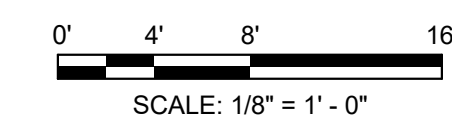

REVISIONS

[illegible]

DRAWN BY	JAC
APPROVED BY	MJM
CHECKED BY	GTR
DATE	08.26.2026

TITLE

SITE PLAN - SECURITY

PROJECT NO.	50165756
-------------	----------

TY-101


SHEET NO.

GENERAL NOTES:

1. ALL SECURITY DEVICE CAGING BY THE OWNER'S SECURITY VENDOR IS INTENDED TO RETURN TO HEAD END PANELS/SECURITY EQUIPMENT RACK LOCATED ON SECOND FLOOR TELECOM ROOM 210, UNLESS OTHERWISE NOTED. REFER TO TS SERIES DRAWINGS FOR COORDINATION WITH AND ROUTING OF CABLES THROUGH CABLE TRAYS.
2. ALL CABLES IN FINISHED PUBLIC AND OCCUPIED SPACES SHALL NOT BE VISIBLE. CABLEING IS TO BE CONCEALED IN RACEWAYS.
3. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE FINAL RACEWAY REQUIREMENTS WITH THE GATE PROVIDER, DOR PROVIDER, AND OWNERS SECURITY VENDOR.
4. HARDWARE IS TO BE INSTALLED IN THE MOST DISCREET AND ACCESSIBLE LOCATION POSSIBLE. LOCATE HARD HOLES OUT OF PARKING AND DRIVE LOCATIONS. REFER TO TS-001 FOR GENERAL INSTALLATION REQUIREMENTS PERTAINING TO THE OUTSIDE PLANT RACEWAY SYSTEM.
5. THE OWNERS SECURITY VENDOR IS TO PROVIDE FUNCTIONAL BUTTONS OR TOUCH SCREEN WITH GATE CONTROL INSIDE THE BUILDING AT DATA ENTRY 10 SECURITY WORKSTATION TO ALLOW REMOTE OPENING OF EACH GATE THROUGH THE ACCESS CONTROL SYSTEM.
6. CONDUIT ROUTING DEPICTED IS DIAGRAMATIC IN NATURE. COORDINATE ACTUAL RACEWAY ROUTING AND TERMINATION LOCATIONS WITH OTHER UTILITIES AND FINAL GATE FURNISHED BY CONTRACTOR.
7. GATE LOOPS SHOWN ON PLANS ARE INTENDED FOR SAFETY AND NOT USED TO INITIATE GATE OPEN SEQUENCE.

KEYED NOTES:

- (1) (2) 4" CONDUIT WITH (3)-1/4" INTERNAL INNERDUCTS. SURFACE MOUNT CONDUIT TRANSITION FROM BELOW GRADE TO SECOND FLOOR IT ROOM 210 (REFER TO TY-122 FOR CONTINUATION ABOVE GRADE). COORDINATE VERTICAL ROUTING WITH ADJACENT ROOF ACCESS LADDER.
- (2) (2) 4" CONDUIT WITH (3)-1/4" INNERDUCTS. 24" BELOW GRADE WITH TRACER WIRE AND ORANGE DETECTABLE WARNING LINE ABOVE CONDUIT BURIED 12" BELOW GRADE.
- (3) (1) 4" CONDUIT WITH (3)-1/4" INNERDUCTS. 24" BELOW GRADE WITH TRACER WIRE AND ORANGE DETECTABLE WARNING LINE ABOVE CONDUIT BURIED 12" BELOW GRADE.
- (4) (1)-1/4" CONDUIT 24" BELOW GRADE WITH TRACER WIRE AND ORANGE DETECTABLE WARNING LINE ABOVE CONDUIT BURIED 12" BELOW GRADE.
- (5) (1) 1" CONDUIT BELOW GRADE FROM GATE CONTROLLER TO SAFETY DETECTION LOOP. COORDINATE FINAL PLACEMENT AND REQUIREMENTS AS WELL AS PROVIDE ALL ADDITIONAL RACEWAYS DETERMINED AS NECESSARY TO THE GATE SAFETY DEVICES AND THE LOCAL RF RECEIVER WITH THE GATE PROVIDER. THE GATE PROVIDER, SAFETY LOOP, SAFETY DETECTION DEVICES, AND RF SYSTEM TO BE PROVIDED BY THE GATE PROVIDER.
- (6) (1) 1" CONDUIT 24" BELOW GRADE WITH TRACER WIRE AND ORANGE DETECTABLE WARNING LINE ABOVE CONDUIT BURIED 12" BELOW GRADE. EXTEND RACEWAY UP UTILITY POLE TO 12' AFG AND CAP. FINAL POLE MOUNTED ENCLOSURE TO BE PROVIDED BY OWNER'S SECURITY VENDOR.
- (7) AVOID RUNNING RACEWAYS UNDER GENERATOR.
- (8) (1) 1" CONDUIT 24" BELOW GRADE WITH TRACER WIRE AND ORANGE DETECTABLE WARNING LINE ABOVE CONDUIT BURIED 12" BELOW GRADE. EXTEND RACEWAY FROM HANDHOLE TO PEDESTAL.

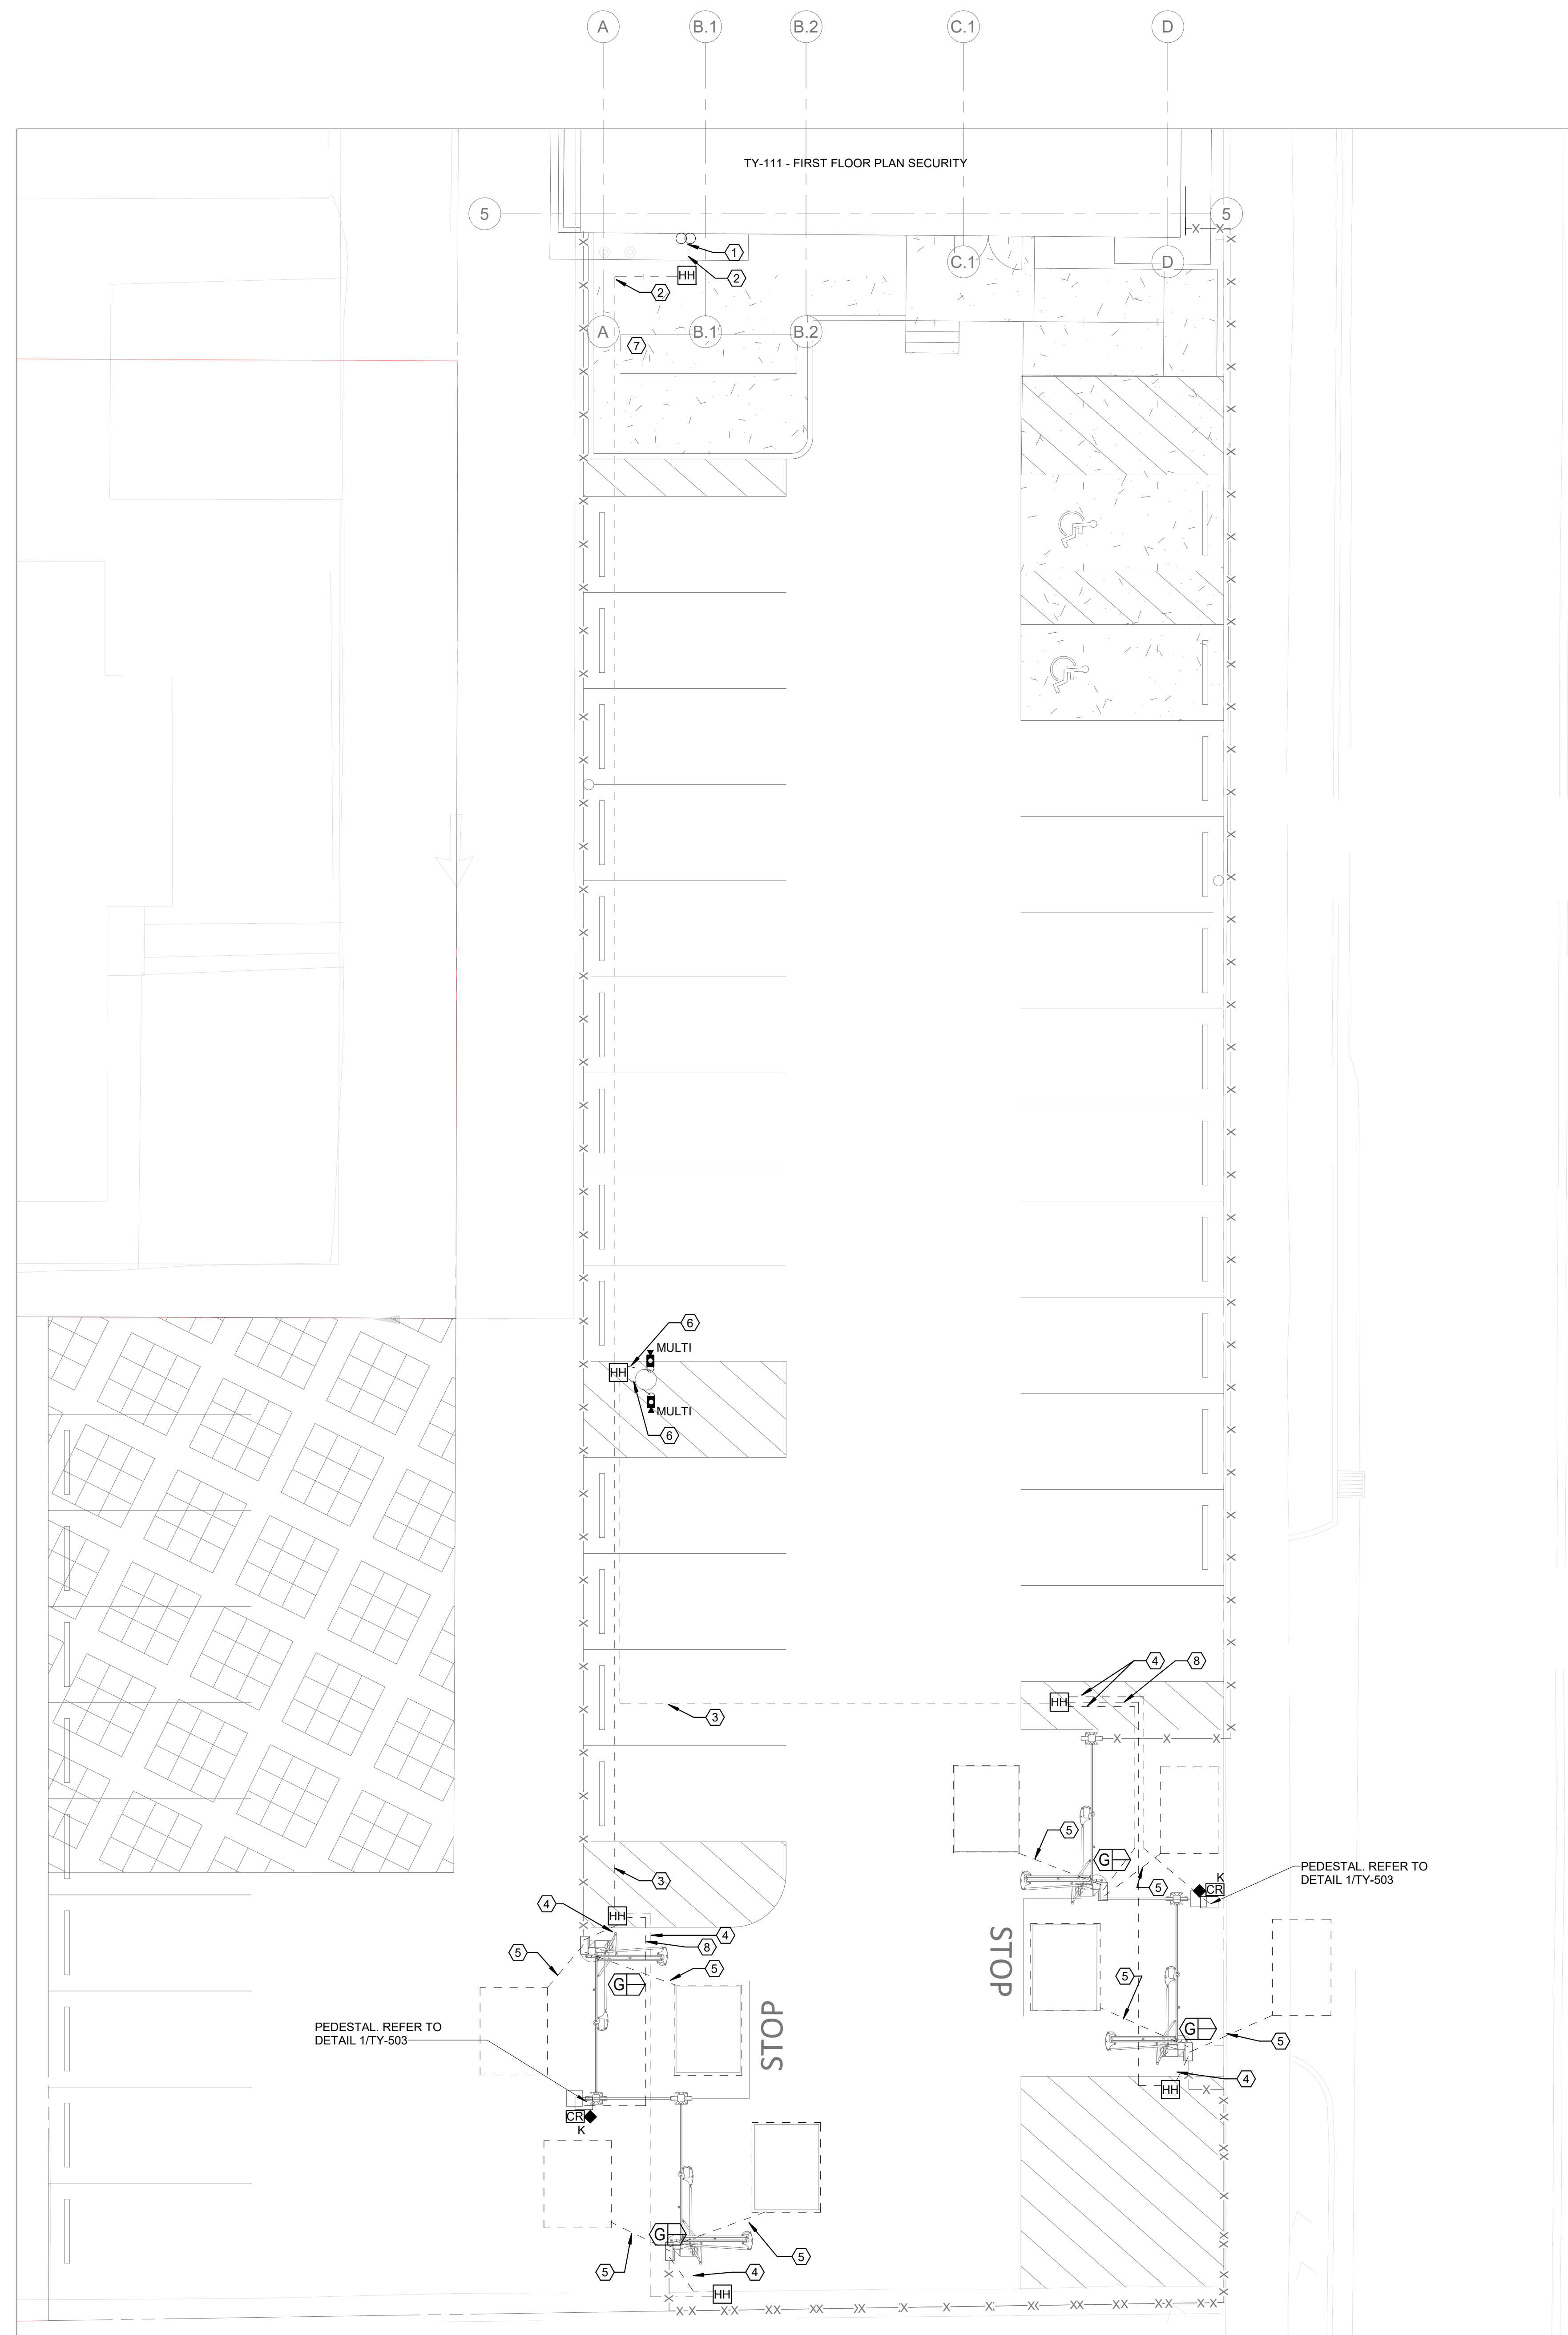

1 SITE PLAN - SECURITY

Scale: 1/8" = 1'-0"

8/24/2026 11:39:13 AM

A


B

C

D

E

F

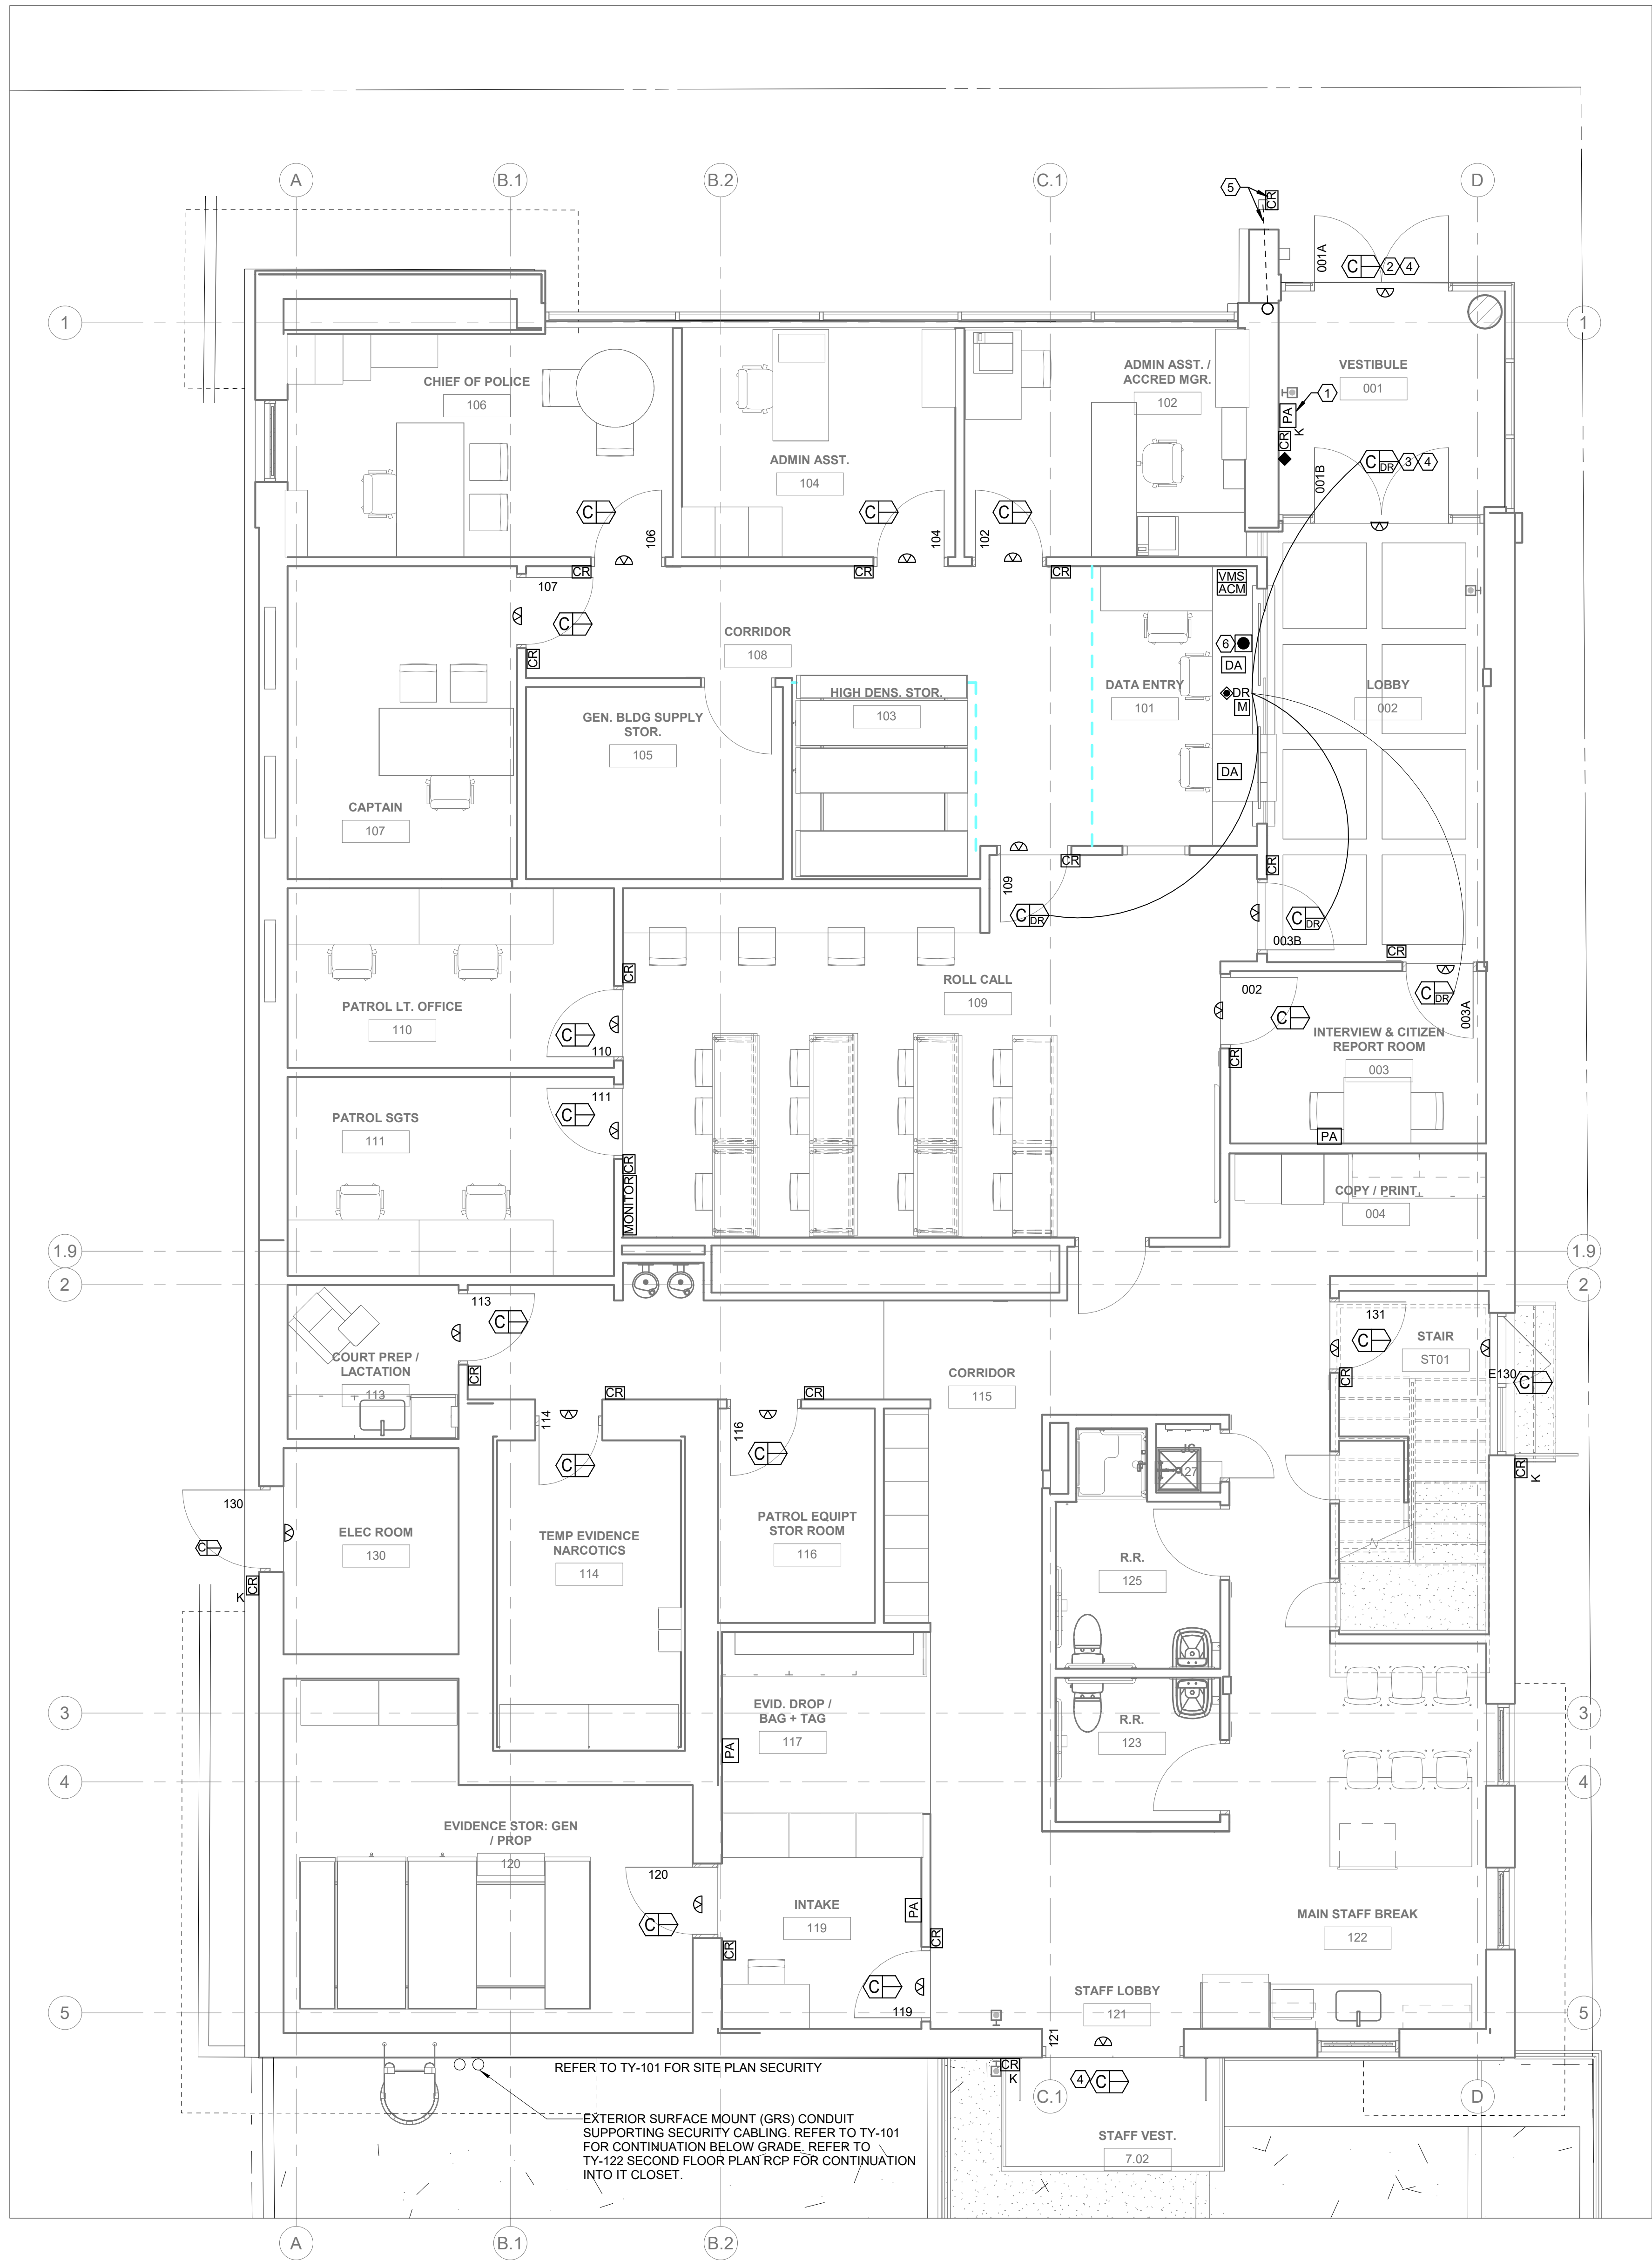

1 FIRST FLOOR PLAN - SECURITY
Scale: 1/4" = 1'-0"

GENERAL NOTES:

1. ALL SECURITY DEVICE CABLING TO ROUTE TO HEAD END PANELS/SECURITY EQUIPMENT RACK LOCATED ON SECOND FLOOR TELECOM ROOM 210. UNLESS OTHERWISE NOTED. REFER TO TT SERIES DRAWINGS FOR COORDINATION WITH AND ROUTING OF CABLES THROUGH CABLE TRAYS.
2. ALL CABLING IN FINISHED PUBLIC AND OCCUPIED SPACES SHALL NOT BE VISIBLE. CABLING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.
3. REFER TO DRAWING TY-101 SITE PLAN FOR ADDITIONAL EXTERIOR SECURITY REQUIREMENTS.

KEYED NOTES:

- 1 WALL MOUNTED PANIC BUTTON TO INITIATE ALARM NOTIFICATION TO DISPATCH, AS WELL AS INITIATE LOCKING OF EXTERNAL VESTIBULE DOORS WHEN PRESSED. DEVICE AND SYSTEM FURNISHED BY OWNER'S SECURITY VENDOR.
- 2 DOOR SHALL NORMALLY BE IN THE NON-SECURE/UNLOCKED STATE. WHEN THE PANIC ALARM BUTTON WITHIN THE VESTIBULE IS PRESSED, THE DOORS ARE TO CHANGE TO THE SECURED/LOCKED STATE UNTIL A SECURITY SYSTEM ADMINISTRATOR RETURNS THE DOOR TO THE UNSECURED STATE. ALL PROGRAMMING WILL BE BY THE OWNER'S SECURITY VENDOR.
- 3 DOOR SHALL BE PROGRAMMED TO THE NON-SECURE STATE DURING NORMAL OPERATING HOURS. THE SECURITY CONTROL STATIONS SHALL SUPPORT REMOTE UNLOCK OF THIS DOOR DURING AFTER HOURS. ALL PROGRAMMING WILL BE BY THE OWNER'S SECURITY VENDOR.
- 4 COORDINATE ACCESS CONTROL INTERFACE WITH ADA/DOOR OPERATOR AND SEQUENCE OF OPERATION. PROVIDE COORDINATION WITH THE OWNER'S SECURITY VENDOR.
- 5 BOLLARD MOUNTED READER BY THE OWNER'S SECURITY VENDOR. BOLLARD BY GC. FURNISH AND INSTALL A 1-1/2" RACEWAY UNDER GROUND TO SUPPORT OWNER VENDOR FURNISHED ACCESS CONTROL CABLING TO THE BOLLARD AND THE ADA PUSH PAD WIRING. COORDINATE THE FINAL STUB-OUT AND CONDUIT TERMINATING LOCATION INSIDE THE BUILDING WITH THE DOOR SYSTEM.
- 6 THE OWNER'S SECURITY VENDOR IS TO PROVIDE FUNCTIONAL BUTTONS OR TOUCH SCREEN WITH GATE CONTROL INSIDE THE BUILDING AT DATA ENTRY 101 SECURITY WORKSTATION TO BE ABLE TO REMOTELY OPEN ALL OF THE GATES FROM THE ACCESS CONTROL SYSTEM.



Dewberry Architects Inc.

8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100

Dewberry Engineers Inc.


401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION


115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

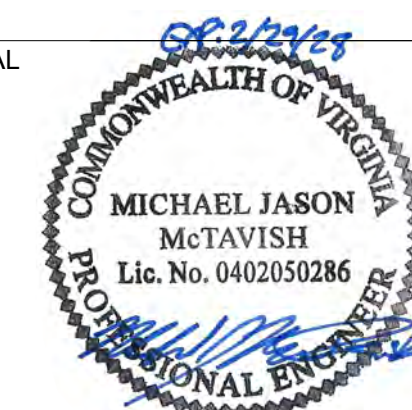

KEY PLAN 08/24/2026

SCALE

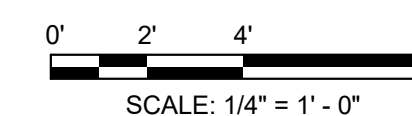

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC

APPROVED BY MJM

CHECKED BY GTR

DATE 08.26.2026

TITLE

FIRST FLOOR
PLAN - SECURITY

PROJECT NO. 50165756

TY-111

SHEET NO.

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID



SCALE



0' 2' 4' 8'

SCALE: $\frac{1}{4}" = 1' - 0"$

REVISIONS		
NO.	DESCRIPTION	DATE
DRAWN BY	JAC	
APPROVED BY	MJM	
CHECKED BY	GTR	
DATE		08.26.2026
TITLE _____		

FIRST FLOOR
RCP - SECURITY

PROJECT NO.	50165756
-------------	----------

TY-112

SHEET NO. _____

GENERAL NOTES:

1. ALL SECURITY DEVICE CABLEING TO ROUTE TO HEAD END PANELS/SECURITY EQUIPMENT RACK LOCATED ON SECOND FLOOR TELECOM ROOM 210, UNLESS OTHERWISE NOTED. REFER TO TT SERIES DRAWINGS FOR COORDINATION WITH AND ROUTING OF CABLES THROUGH CABLE TRAYS.
2. ALL CABLEING IN FINISHED PUBLIC/OCCUPABLE SPACES SHALL NOT BE VISIBLE. CABLEING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.




1 FIRST FLOOR RCP - SECURITY
Scale: 1/4" = 1'-0"

TOWN OF STRASBURG

STRASBURG POLICE STATION

SEAL



KEY PLAN

08/24/2026

SCALE

0' 2' 4' 8'

SCALE: 1/4" = 1' - 0"

[illegible]

DRAWN BY	JAC
APPROVED BY	MJM
CHECKED BY	GTR
DATE	08.26.2026

TITLE

SECOND FLOOR
PLAN - SECURITY

PROJECT NO.	50165756
-------------	----------

TY-121


SHEET NO. _____

GENERAL NOTES:

1. ALL SECURITY DEVICES/BLINDING TO ROUTE TO HEAD END PANELS/SECURITY EQUIPMENT RACK LOCATED ON SECOND FLOOR TELECOM ROOM 210, UNLESS OTHERWISE NOTED, REFER TO TT SERIES DRAWINGS FOR COORDINATION WITH AND ROUTING OF CABLES THROUGH CABLE TRAYS.
2. ALL CABLEING IN FINISHED PUBLIC/OCCUPABLE SPACES SHALL NOT BE VISIBLE, CABLEING TO BE CONCEALED IN RACEWAYS, FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.

KEYED NOTES:

1. CONDUIT SUPPORTING WALL MOUNTED MICROPHONE DEVICE IS TO ROUTE TO CEILING MOUNTED INTERVIEW SYSTEM CAMERA BACK BOX

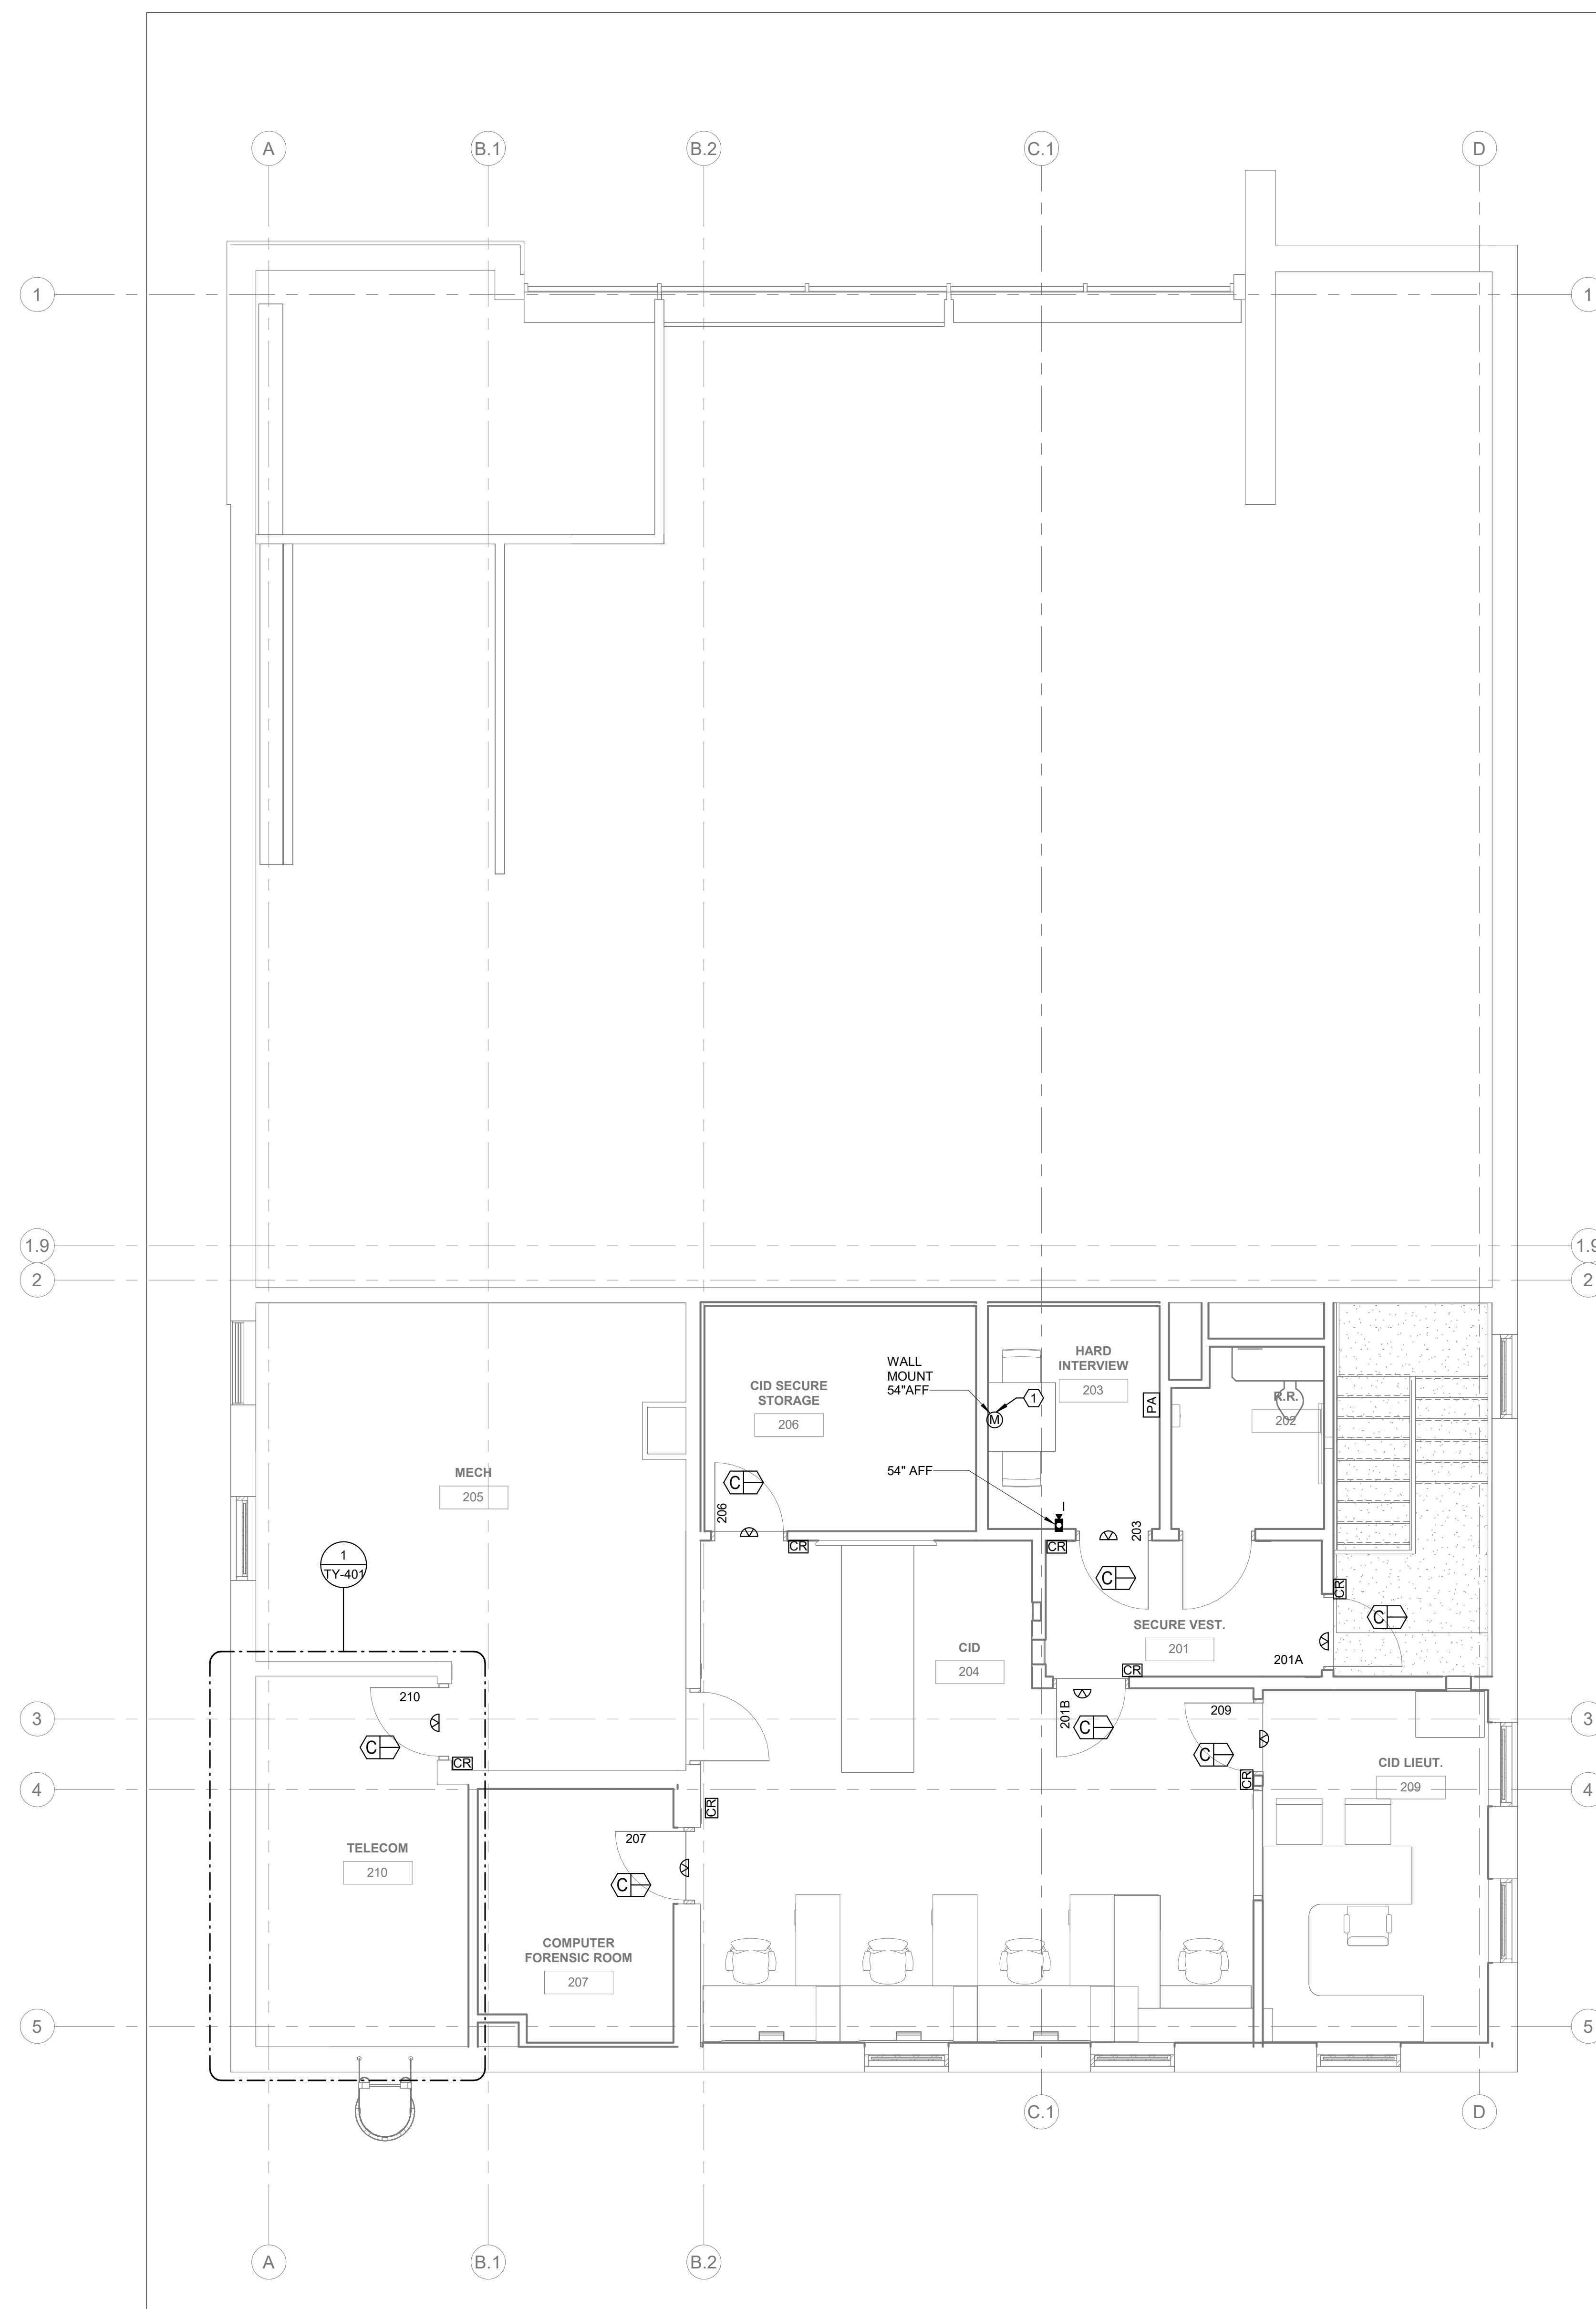

1 SECOND FLOOR PLAN - SECURITY

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

COMMONWEALTH OF VIRGINIA
MICHAEL JASON
McTAVISH
Lic. No. 0402050286
PROFESSIONAL ENGINEER

KEY PLAN 08/24/2026

SCALE



0' 2' 4' 8'

SCALE: 1/4" = 1' - 0"

[illegible]

DRAWN BY	JAC
APPROVED BY	MJM
CHECKED BY	GTR
DATE	08.26.2026

TITLE

SECOND FLOOR
RCP - SECURITY

PROJECT NO.	50165756
-------------	----------

TY-122


SHEET NO. _____

GENERAL NOTES:

1. ALL SECURITY DEVICE CABLEING TO ROUTE TO HEAD END PANELS/SECURITY EQUIPMENT RACK LOCATED ON SECOND FLOOR TELECOM ROOM 210, UNLESS OTHERWISE NOTED. REFER TO TT SERIES DRAWINGS FOR COORDINATION WITH AND ROUTING OF CABLES THROUGH CABLE TRAYS.
2. ALL CABLEING IN FINISHED PUBLIC/OCCUPABLE SPACES SHALL NOT BE VISIBLE. CABLEING TO BE CONCEALED IN RACEWAYS. FURNISH CONDUITS OR SURFACE RACEWAY TO SUPPORT THE DESIGN INTENT.
3. SEAL CONDUITS THAT PENETRATE THE EXTERIOR WALL WITH WATER BLOCKING SEAL. PROVIDE REMOVABLE CONDUIT SEALANT WITHIN CONDUITS AFTER OWNER'S SECURITY VENDOR INSTALLS CABLEING SUPPORTING SITE SECURITY.

KEYED NOTES:


1. (2) 4" GRS CONDUITS EACH FILLED WITH (3) 1-1/4" INNERDUCT, SURFACE MOUNTED ROUTED FROM PULL BOX TO HANDHOLE. REFER TO TY-101 SITE PLAN FOR CONTINUATION BELOW GRADE.

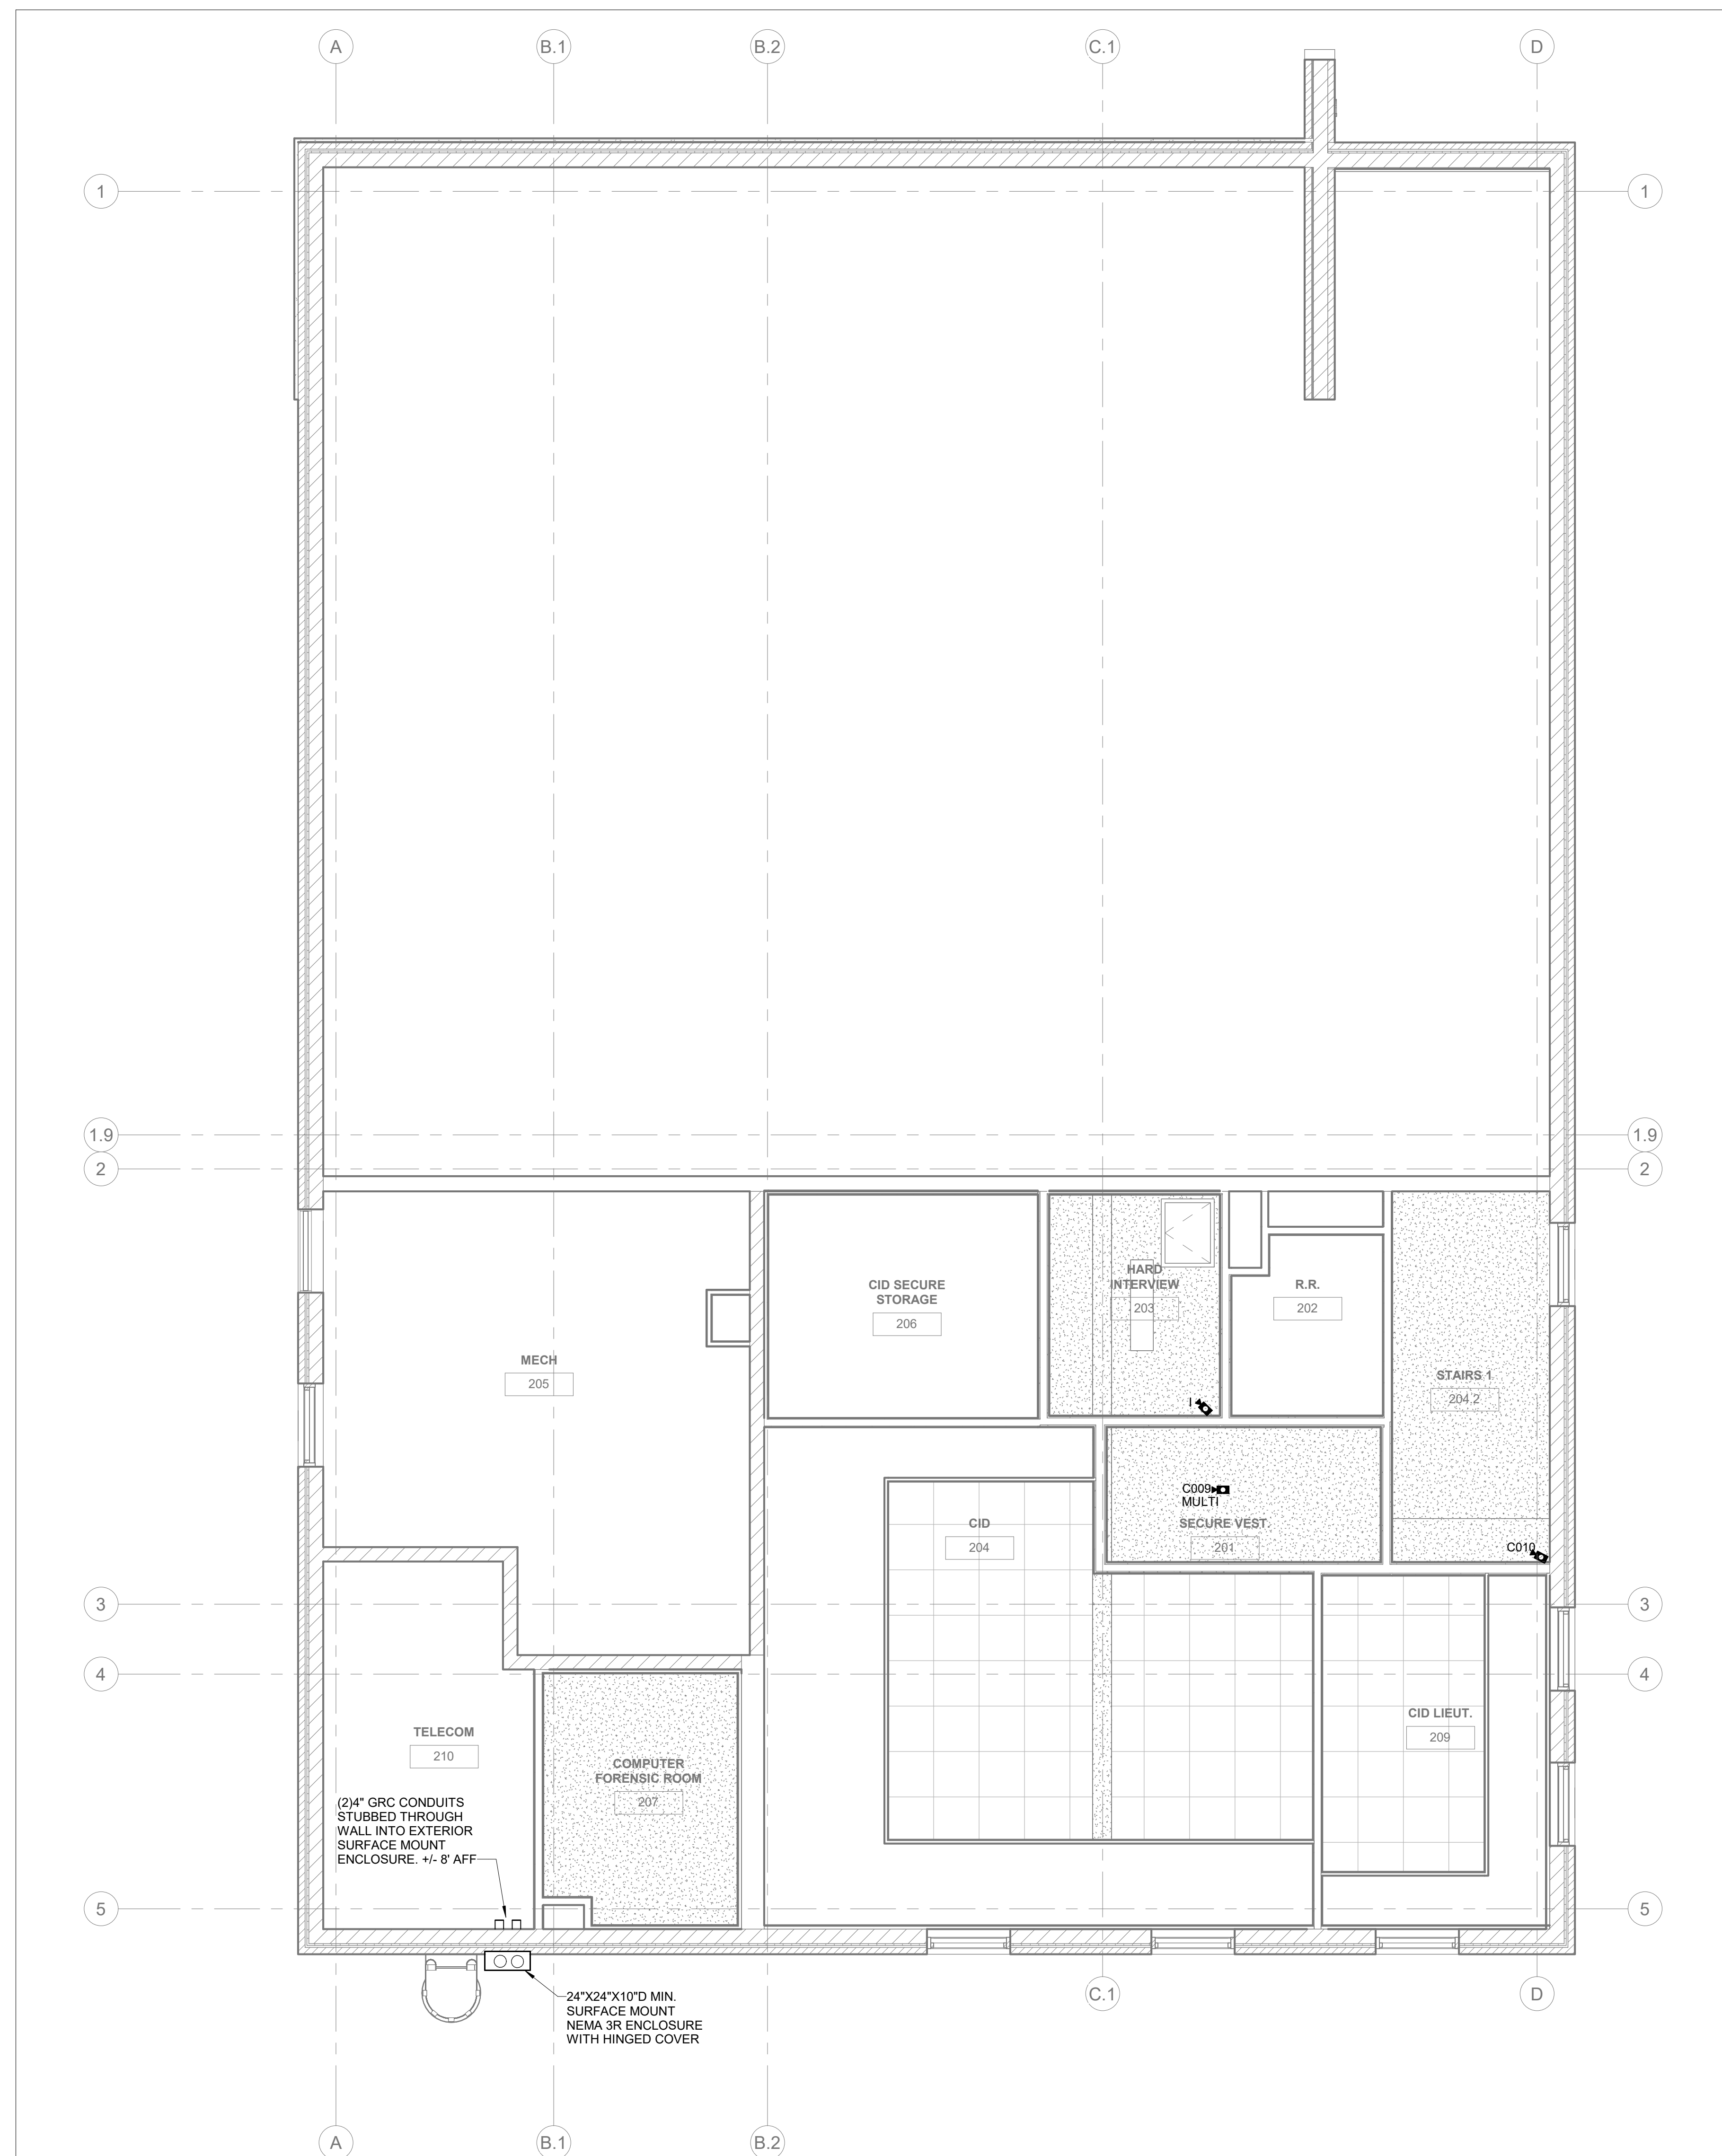

1 SECOND FLOOR RCP - SECURITY
Scale: 1/4" = 1'-0"

1. REFER TO SHEET TY-001 FOR GENERAL NOTES, SYMBOLS, & ABBREVIATIONS PERTAINABLE TO THIS DRAWING.

1. 3/4" AC GRADE PLYWOOD, WALL MOUNTED SPECIFIED ON "TT" SERIES DRAWINGS.
2. PRIMARY BONDING BUSBAR (PBB) WALL MOUNTED BELOW CABLE TRAY BY DIV. 27.
3. 4-POST RACK WITH VERTICAL CABLE MANAGERS, TYP. FURNISHED BY DIV. 27.
4. 2-POST RACK WITH VERTICAL CABLE MANAGERS FURNISHED BY DIV. 27.
5. ACCESS CONTROL/ALARM SECURITY PANELS AND DOOR HARDWARE POWER SUPPLIES
6. CATV DISTRIBUTION HEAD END FURNISHED BY DIV. 27

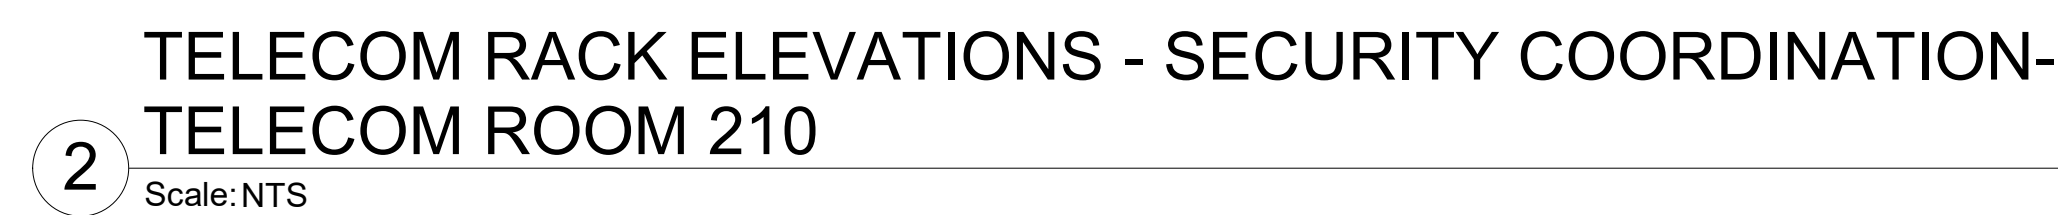

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657

ISSUED FOR BID

SEAL

COMMONWEALTH OF VIRGINIA
MICHAEL JASON
McTAVISH
Lic. No. 0402050286
PROFESSIONAL ENGINEER

KEY PLAN 08/24/2026

SCALE



0' 1' 2' 4'

SCALE: $\frac{1}{2}" = 1' - 0"$

[illegible]

DRAWN BY	JAC
APPROVED BY	MJM
CHECKED BY	GTR
DATE	08.26.2026
TITLE	

LARGE SCALE
PLANS -
SECURITY

PROJECT NO.	50165756
-------------	----------

TY-401

SHEET NO.

8/24/2026 11:39:15 AM

A

B

C

D

E

F

1
Scale: NTS

TYPICAL CONTROLLED & MONITORED DOUBLE DOOR
ROUGH-IN

3
Scale: N.T.S.

TYPICAL MONITORED SINGLE DOOR ROUGH-IN



2
Scale: NTS

TYPICAL CONTROLLED & MONITORED SINGLE DOOR
ROUGH-IN


4
Scale: NTS

INTERCOM SUB-STATION ROUGH-IN DETAIL



7
Scale: NTS

INTERCOM/ VIDEO SUB-STATION WITH CALL BUTTON

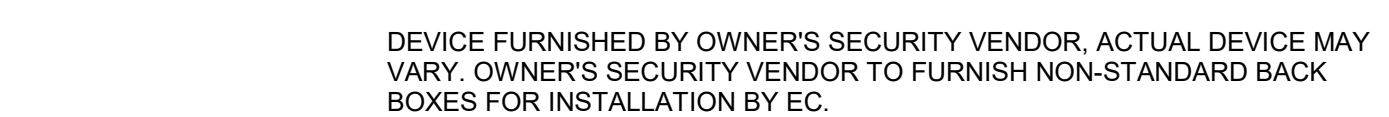


6
Scale: NTS

CREDENTIAL READER WITH KEY PAD


5
Scale: NTS

CREDENTIAL READER


F
E
D
C
B
A

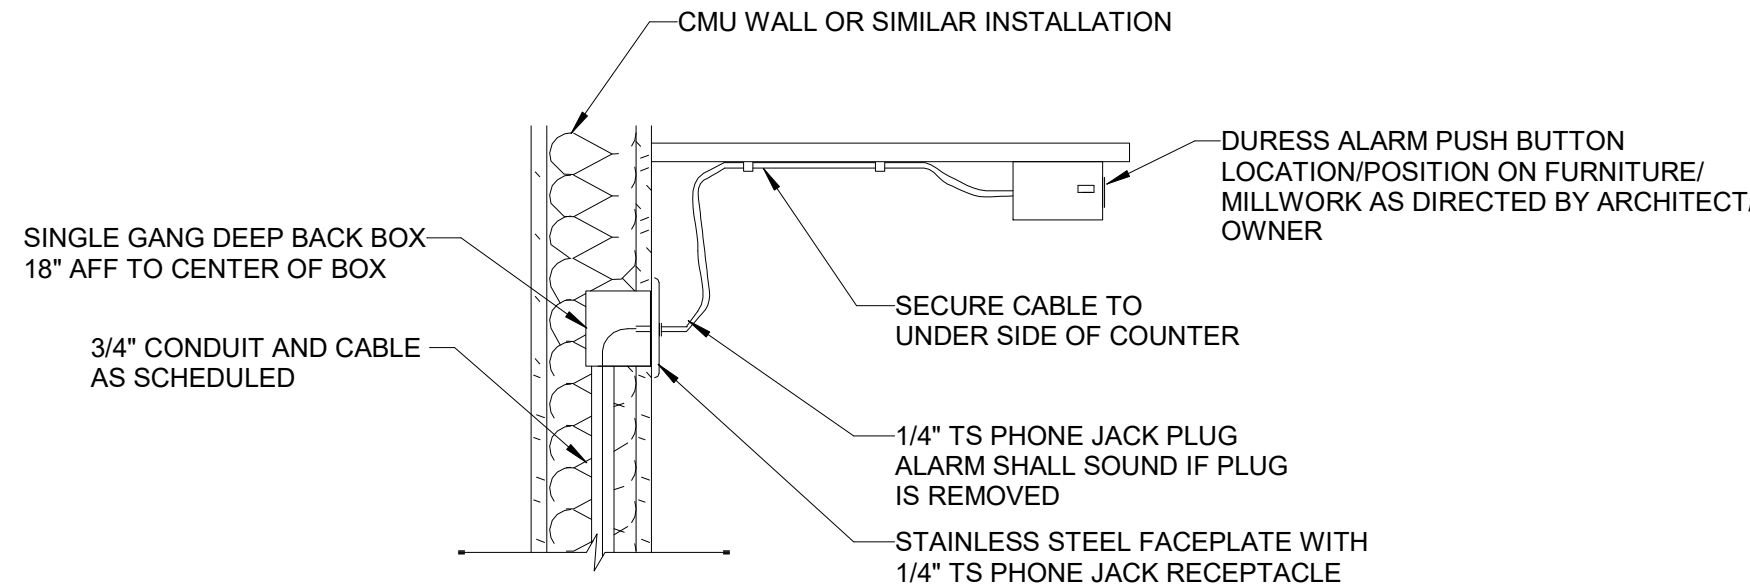


1 UNDER DESK DURESS ALARM
Scale: NTS

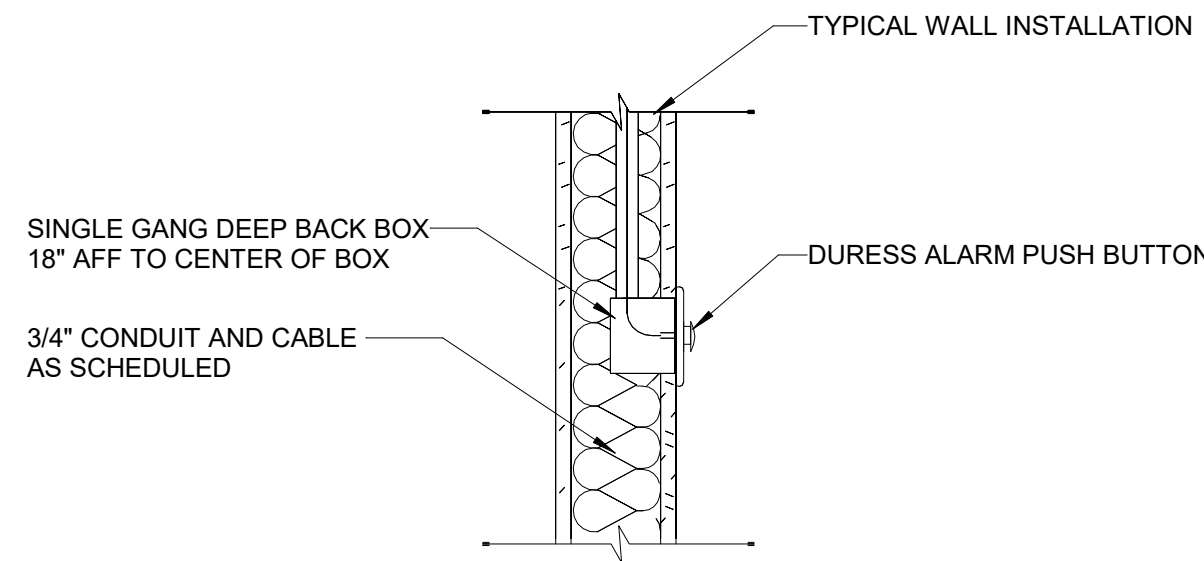


2 PANIC ALARM DETAIL - WALL
Scale: NTS

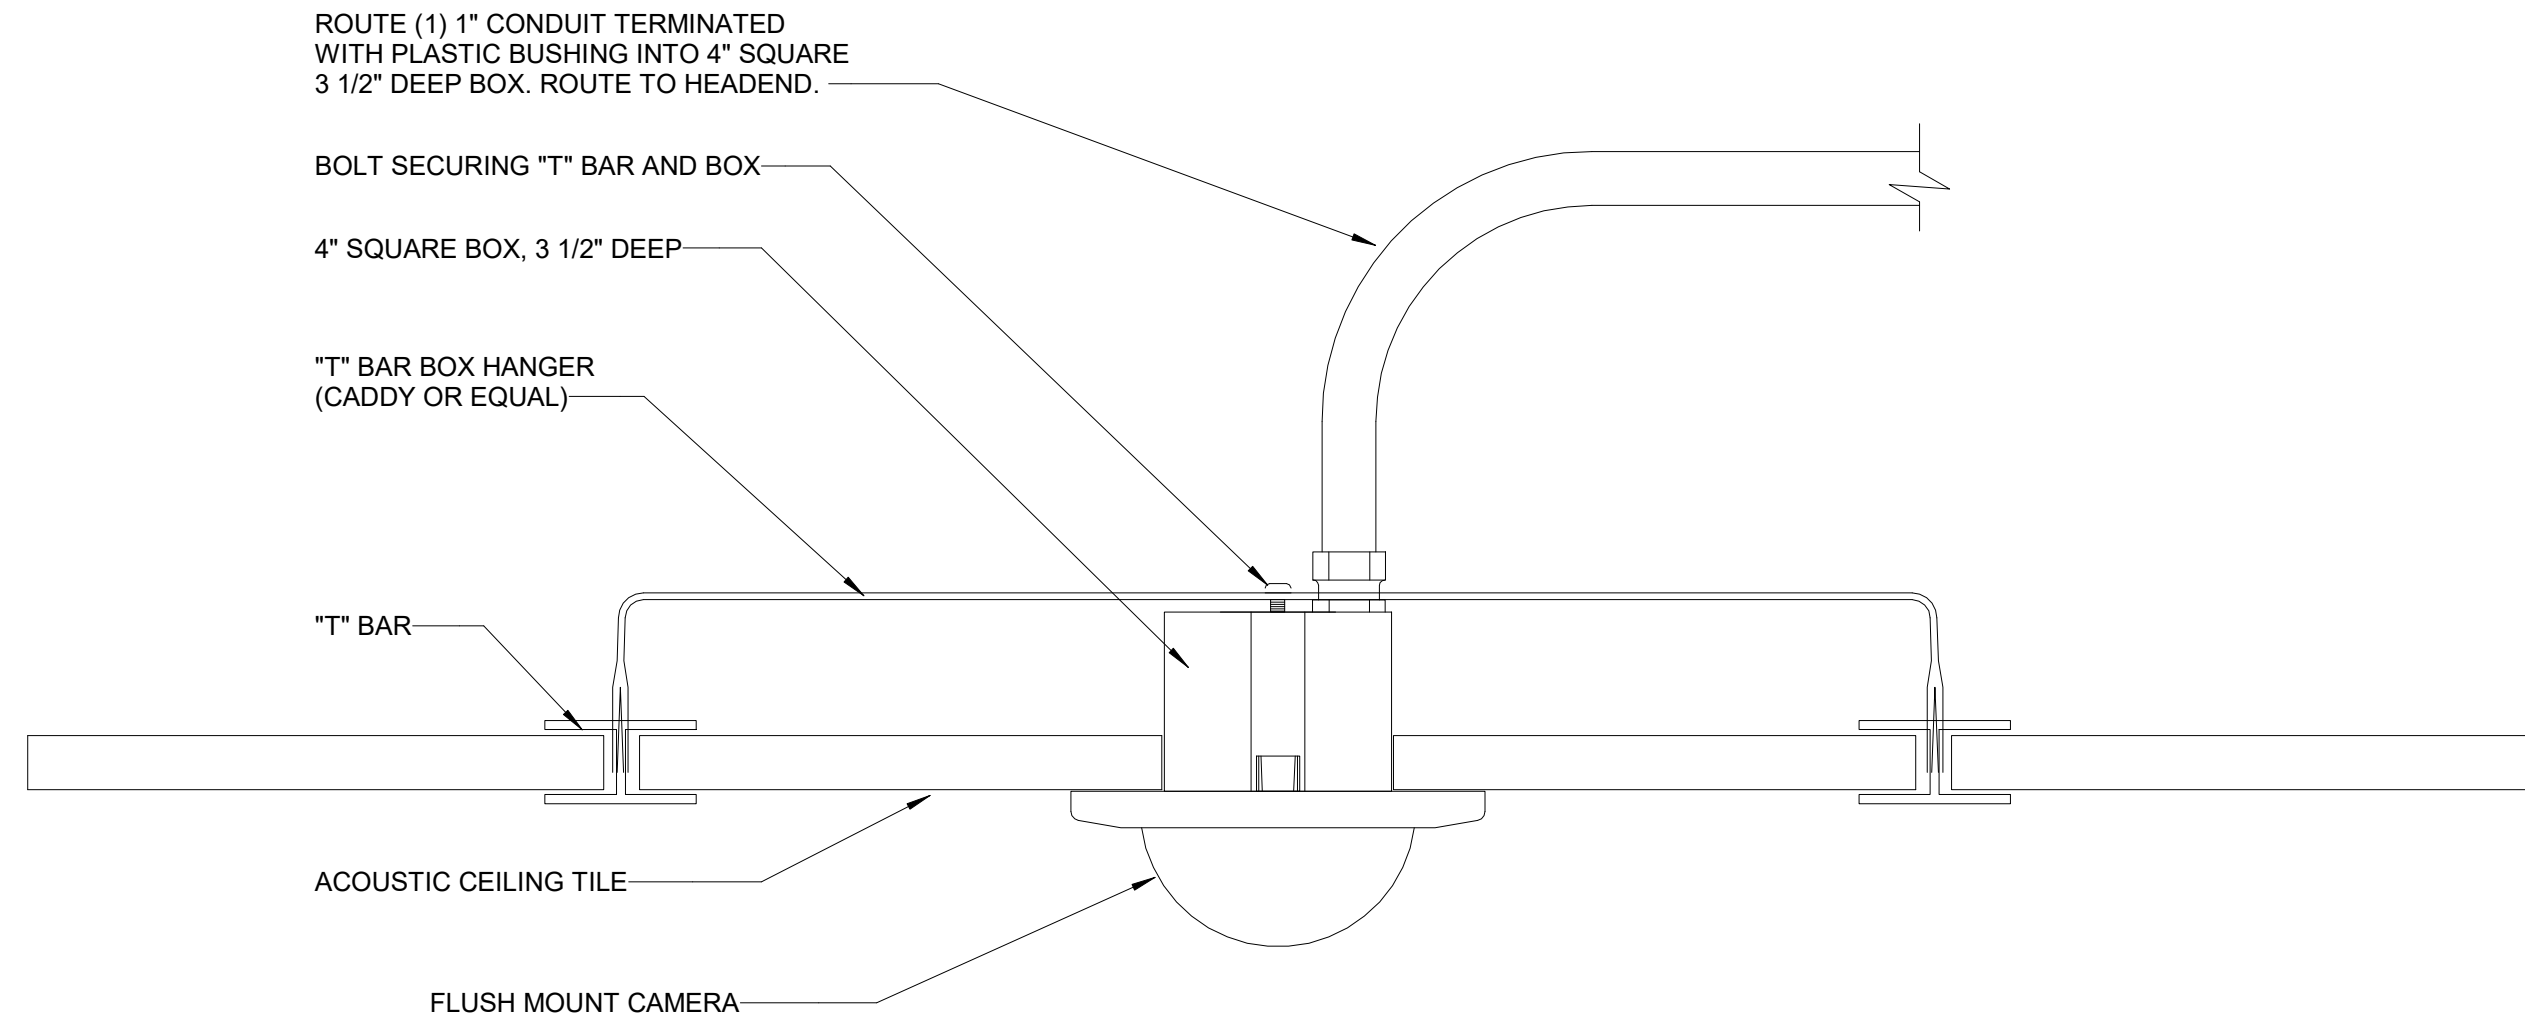



3 CCTV CAMERA CEILING MOUNT DETAIL - ACOUSTICAL CEILING
Scale: NTS

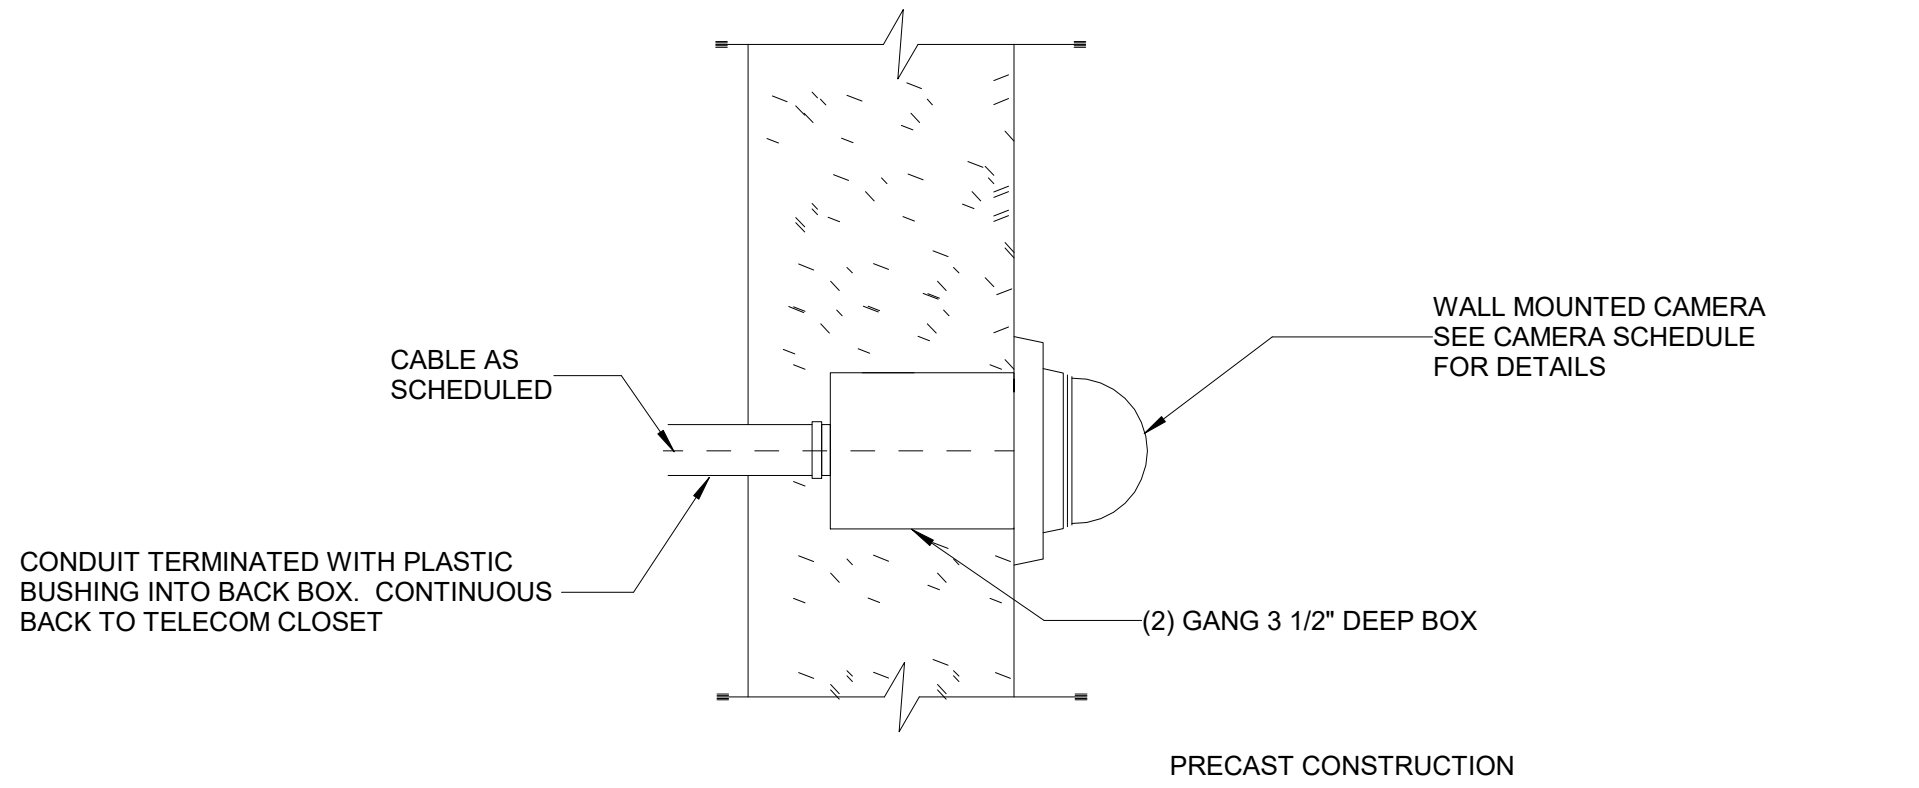


4 CCTV CAMERA - WALL MOUNT
Scale: NTS

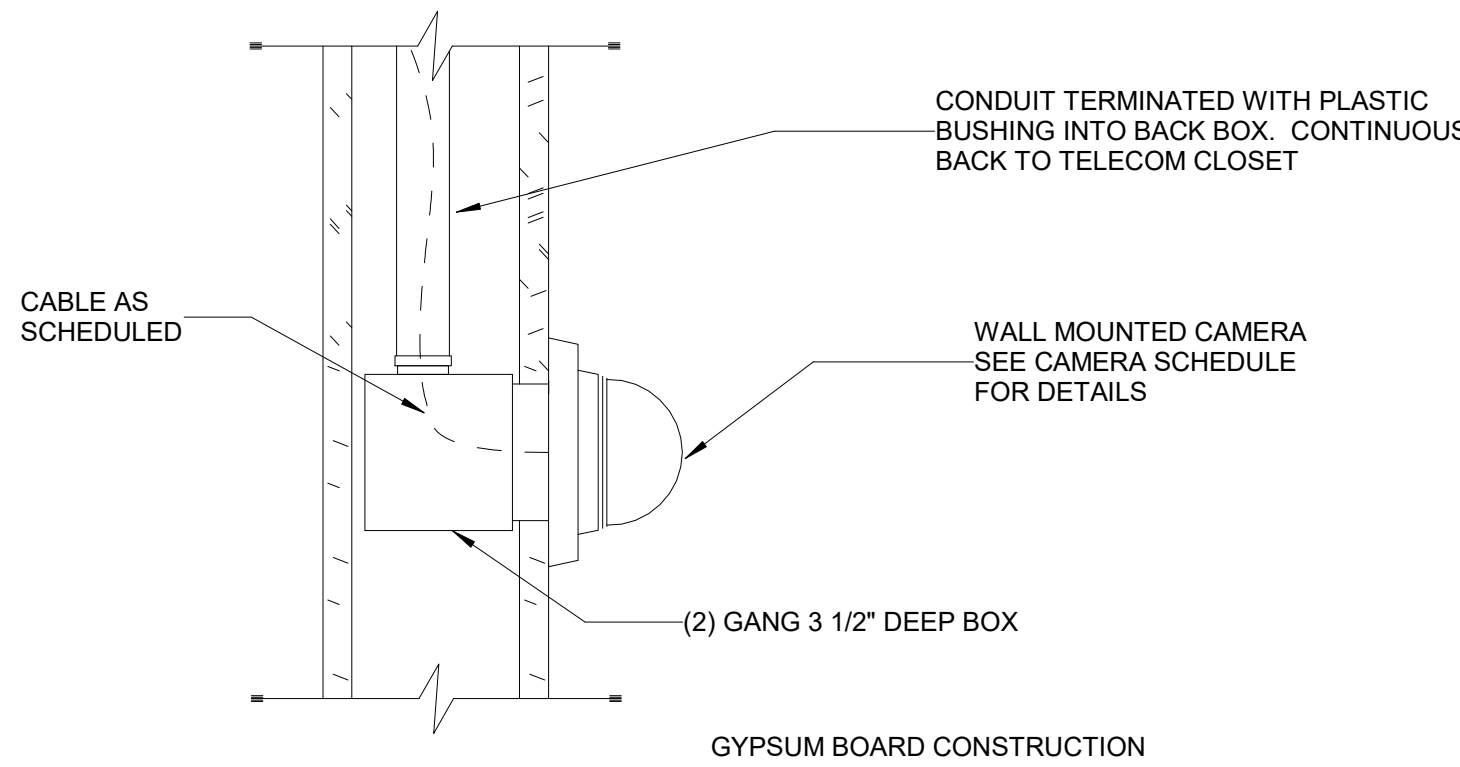

5 MULTI ELEMENT CAMERA WALL MOUNT INSTALLATION DETAIL
Scale: NTS

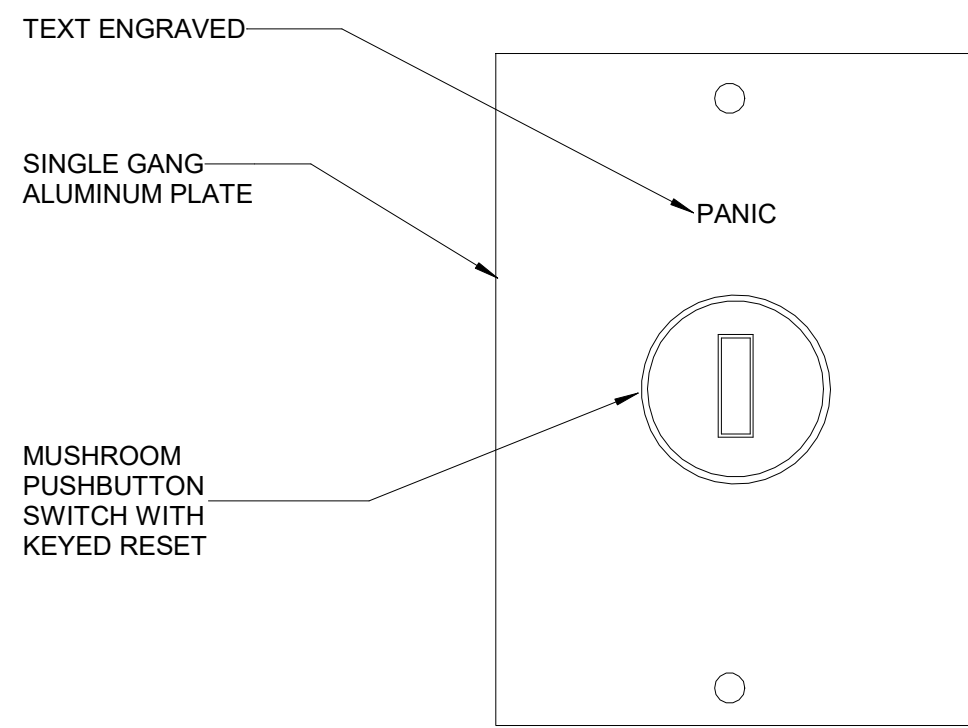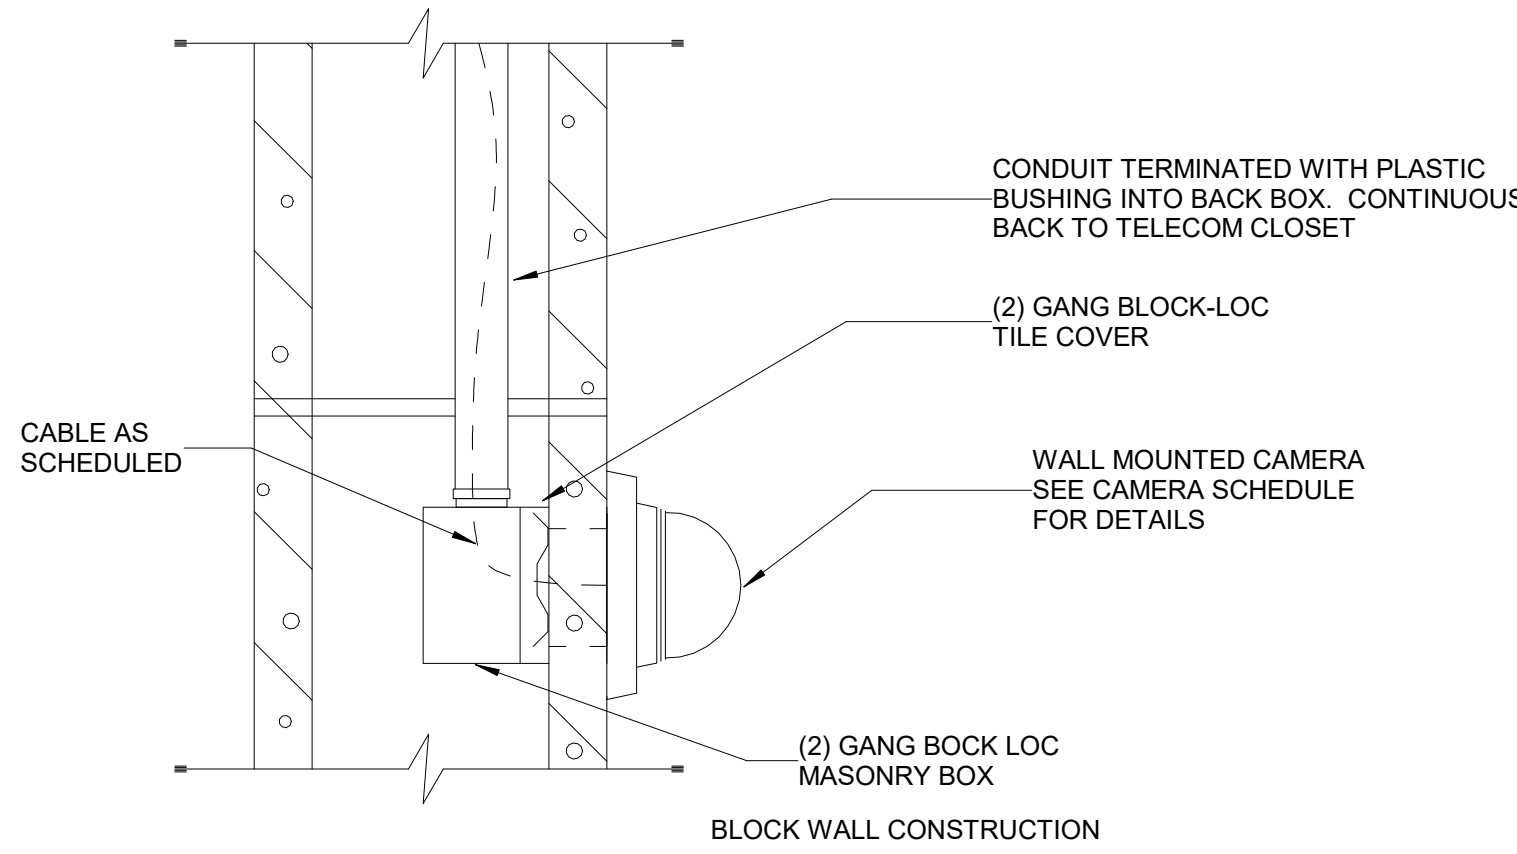


7 PANIC WALL MOUNT PUSHBUTTON DETAIL
Scale: NTS

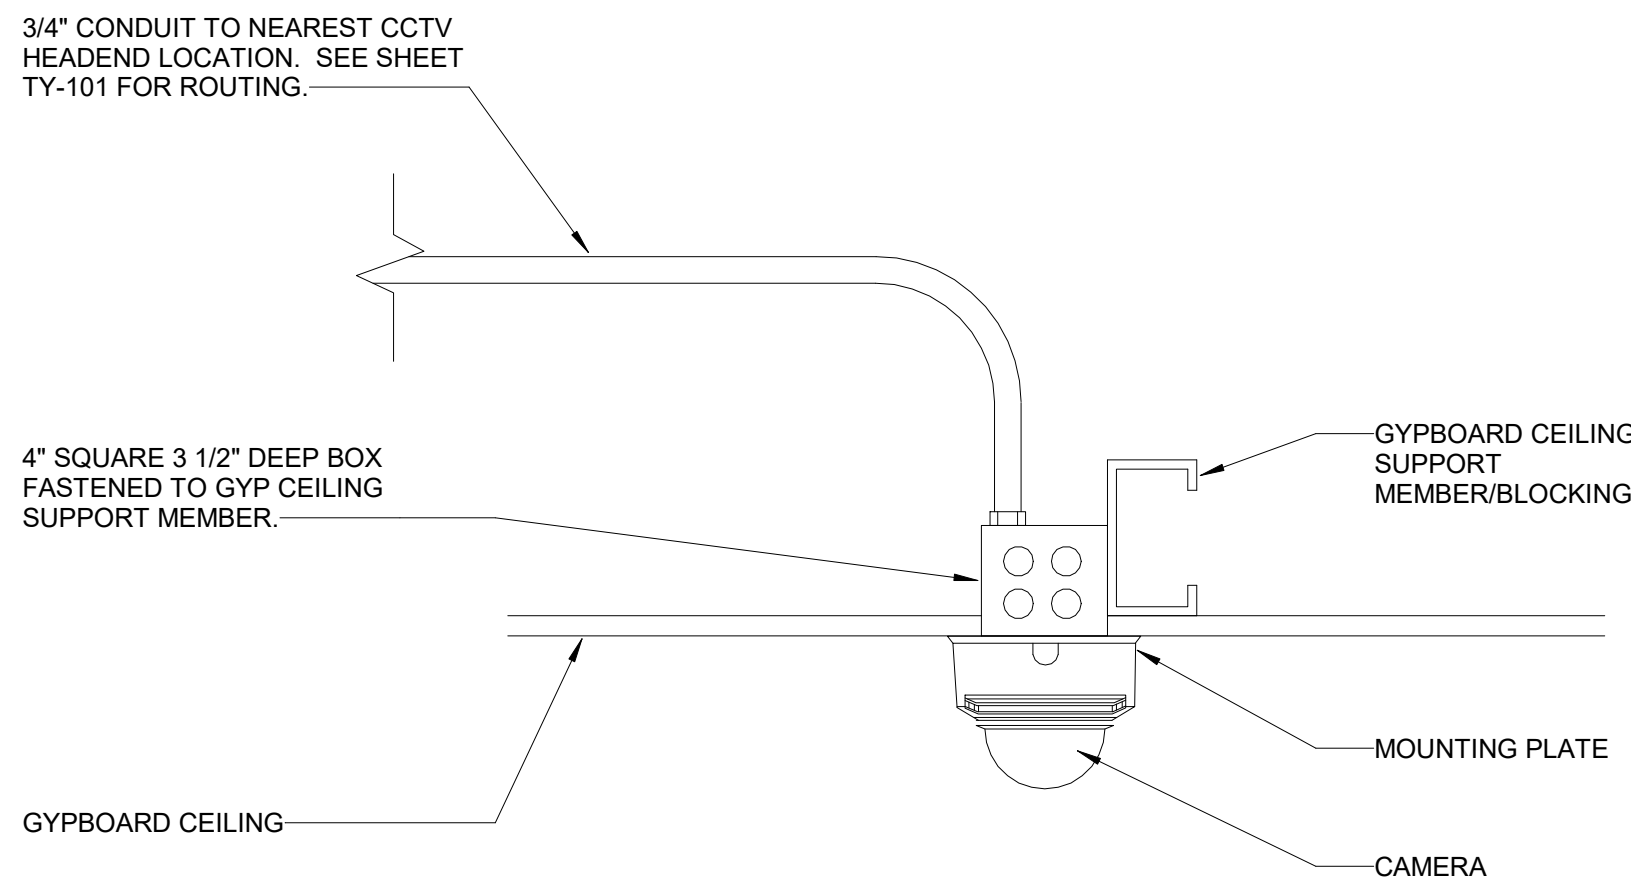

8 ACCESS CONTROL AND ALARM PANEL DETAIL
Scale: NTS

ACCESS CONTROL & ALARM PANELS ARE FURNISHED BY THE OWNER'S SECURITY VENDOR. ACTUAL ENCLOSURE AND CONFIGURATION MAY VARY. ALL LOW VOLTAGE DOOR SUPPLIES ARE TO BE LOCATED WITH THE ACCESS CONTROL ALARM PANELS.

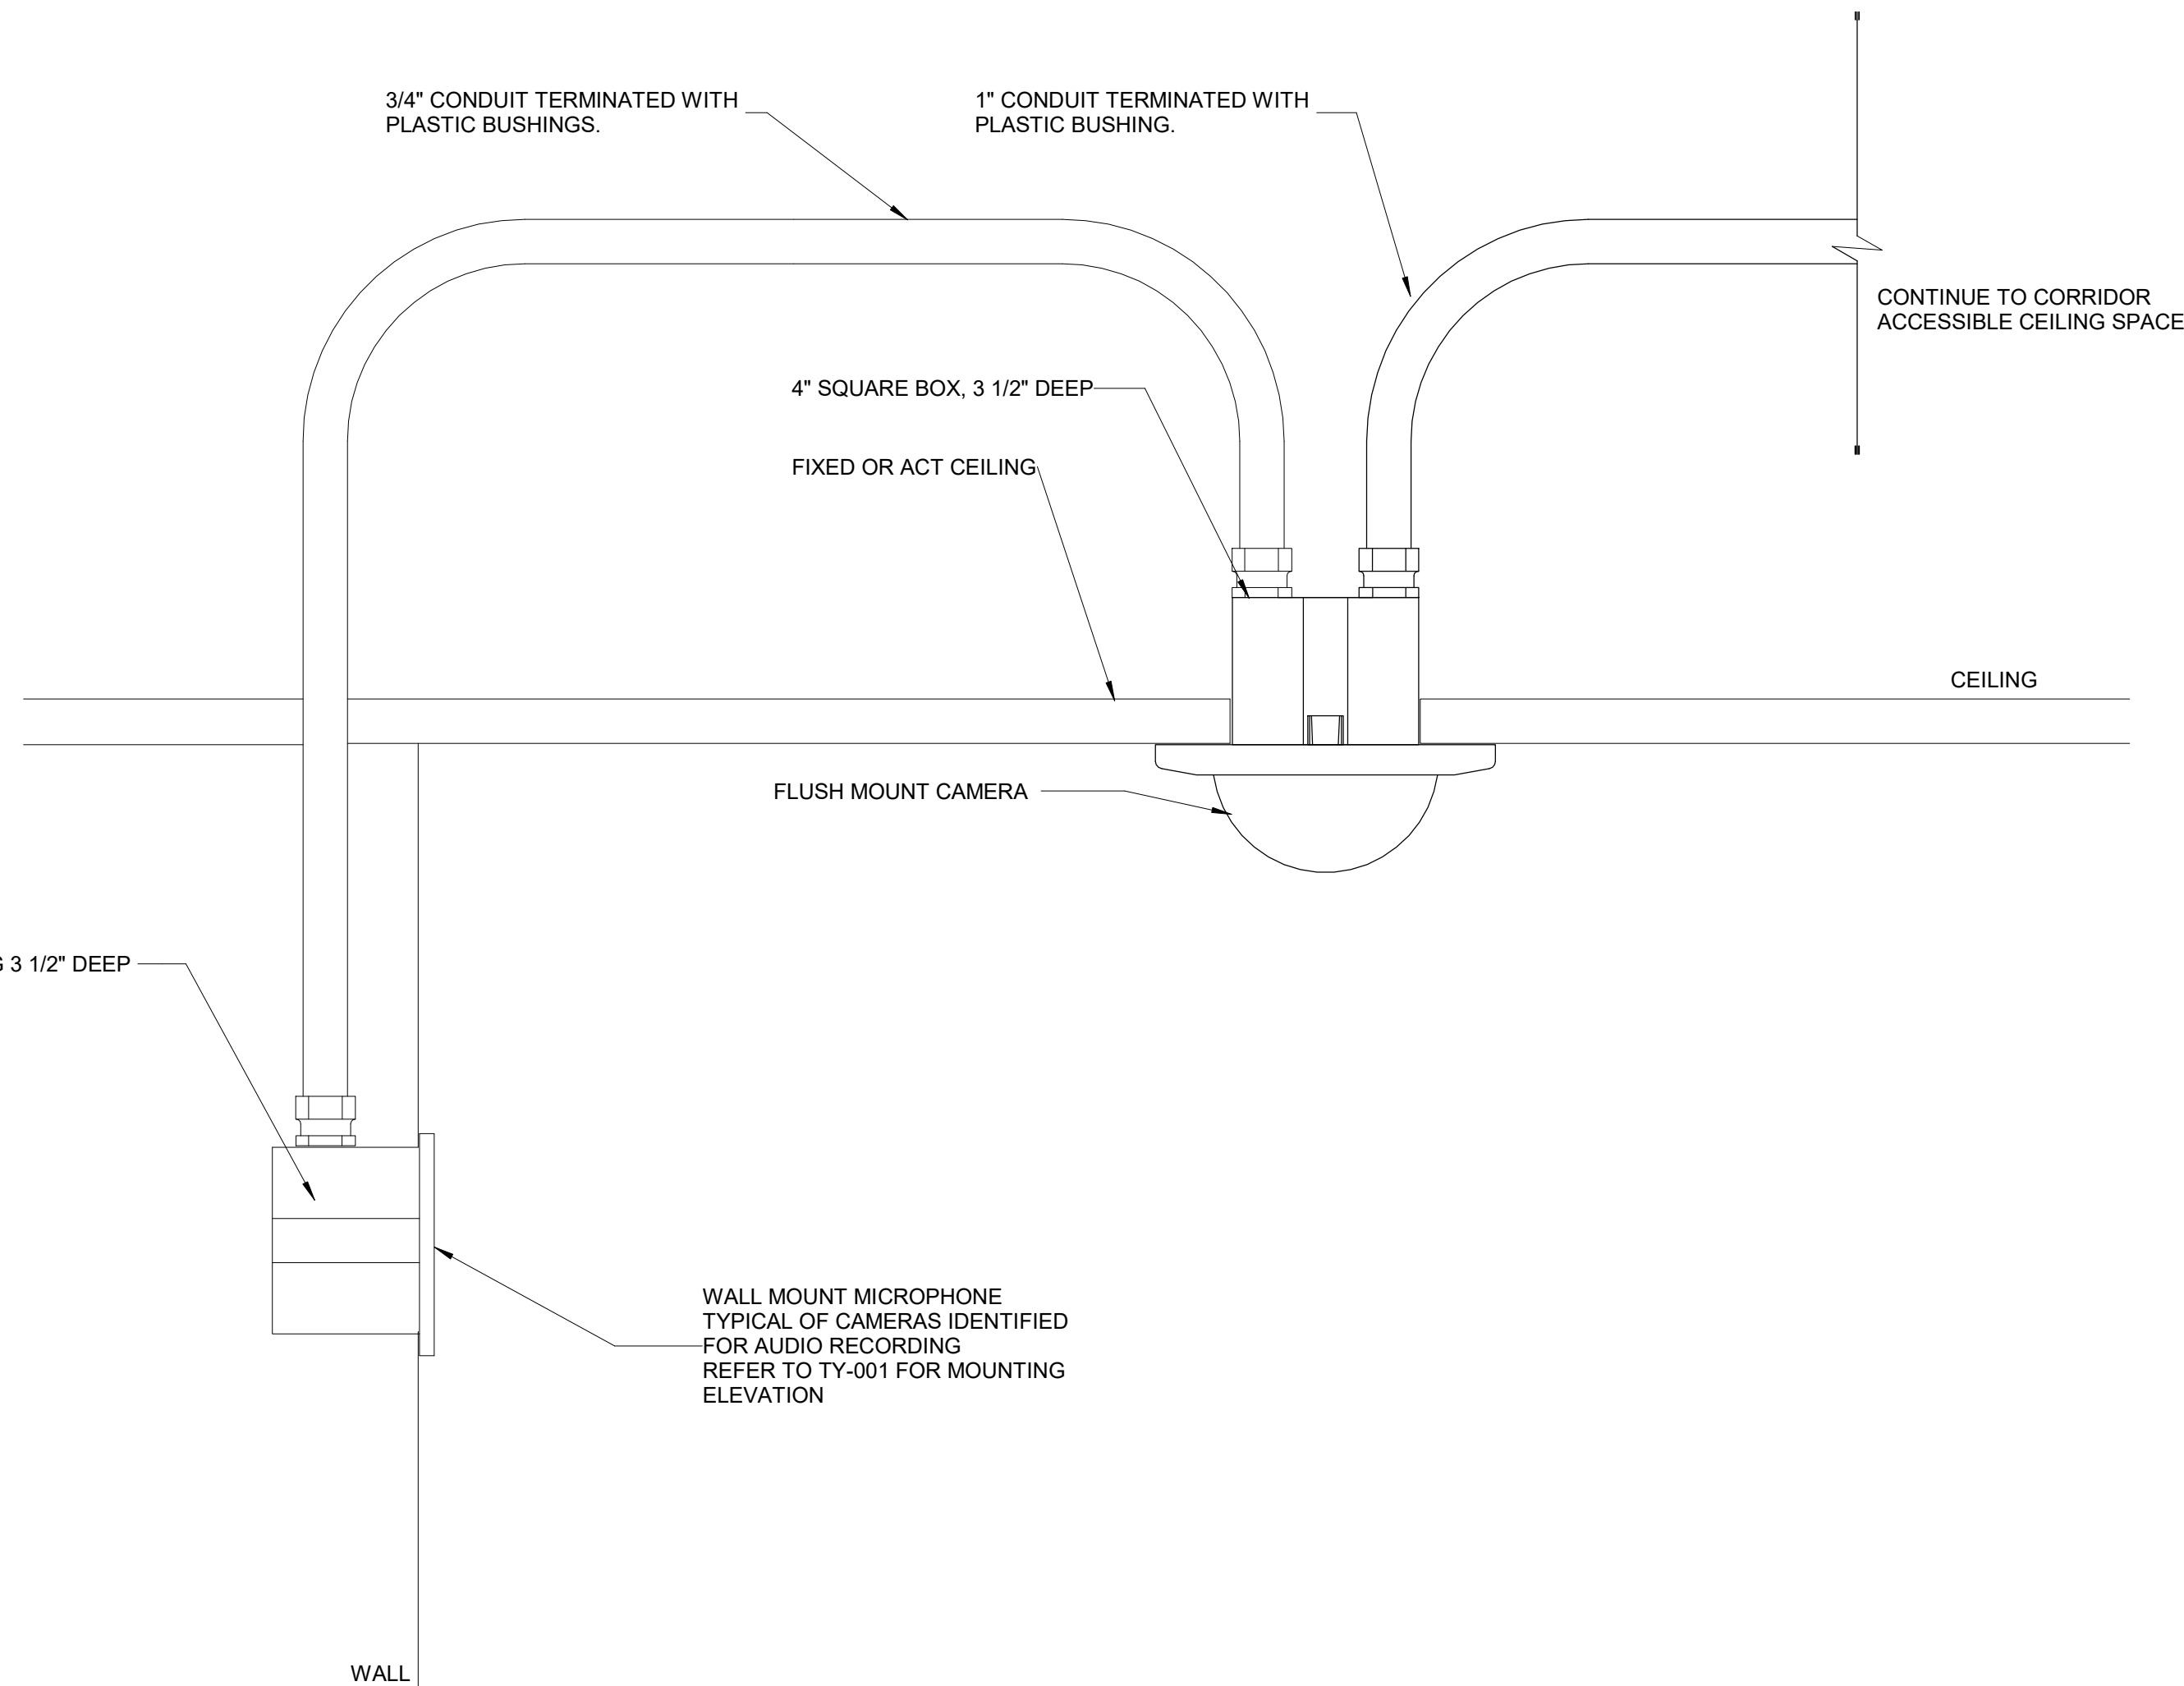

9 INTERIOR FLUSH MOUNT CAMERA WITH MICROPHONE DETAIL
Scale: NTS



Dewberry Architects Inc.
8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100


Dewberry Engineers Inc.
401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

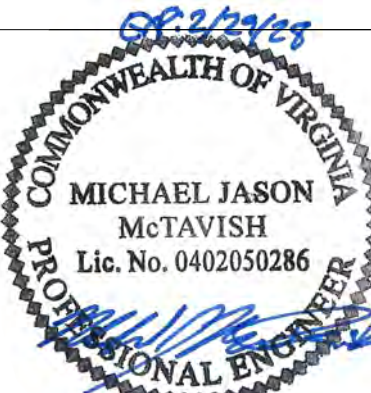

KEY PLAN 08/24/2026

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026

TITLE


DETAILS -
SECURITY

PROJECT NO. 50165756

TY-502


SHEET NO.

F
E
D
C
B
A

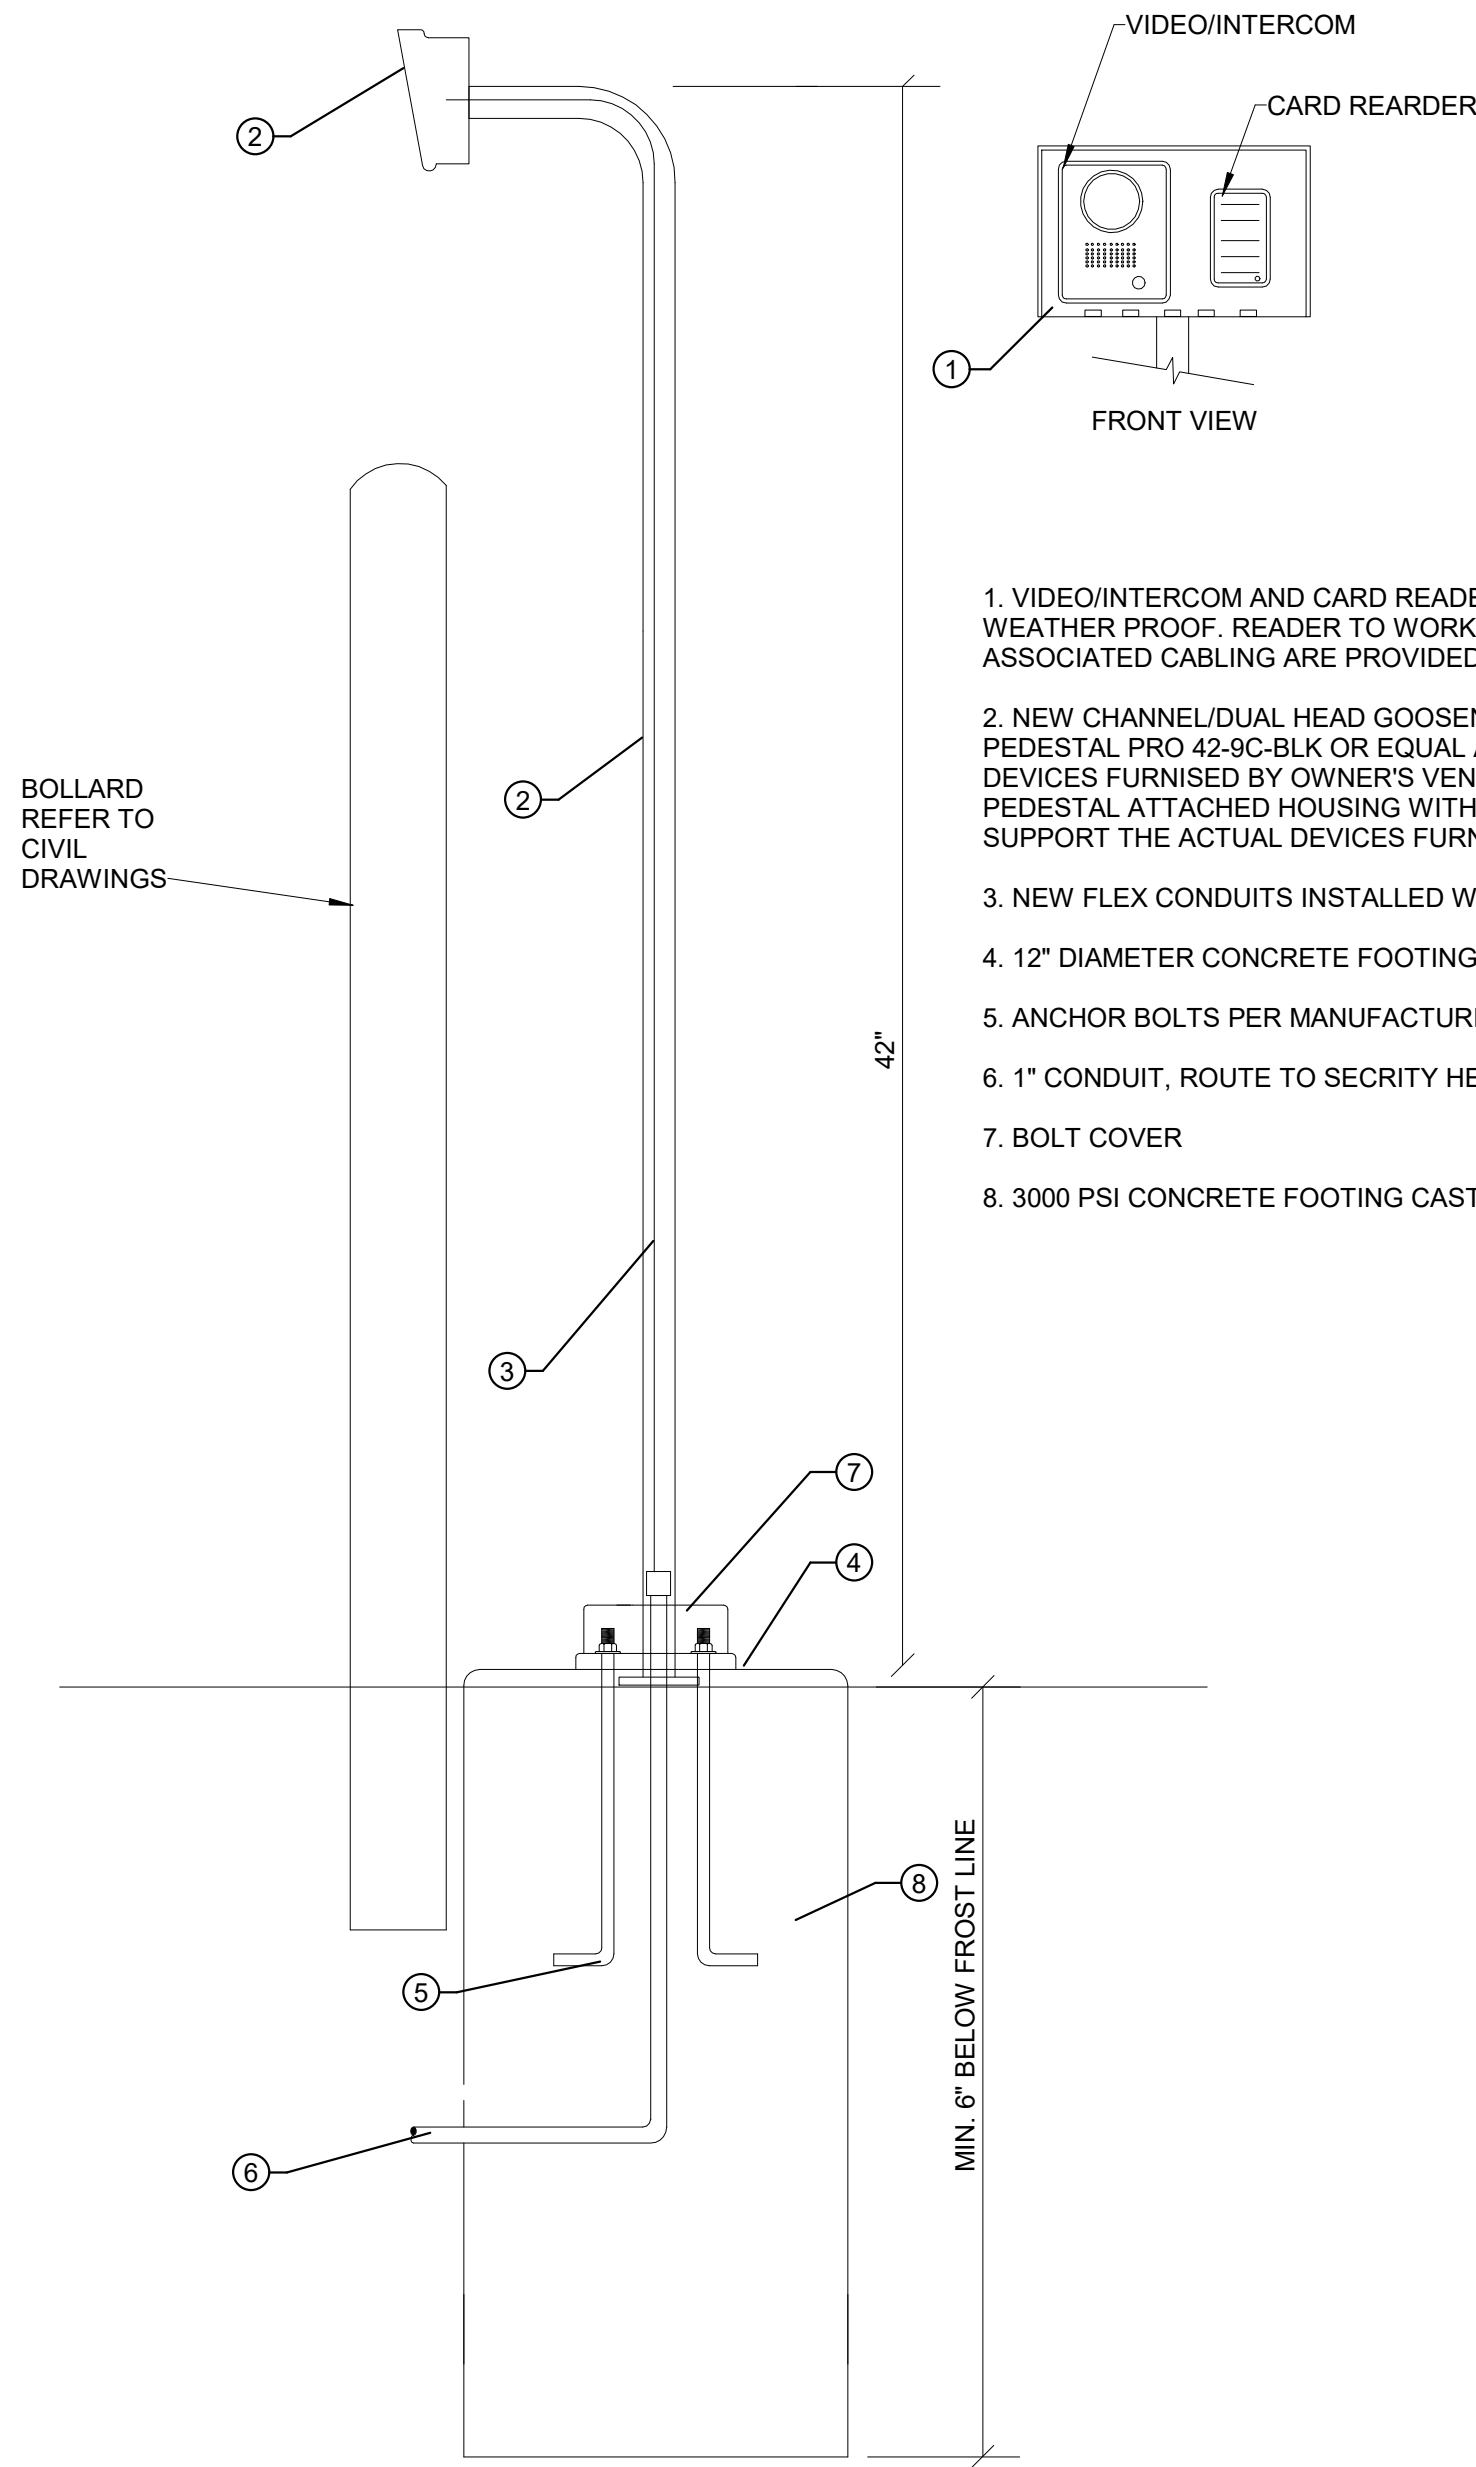

1 SITE PEDESTAL DETAIL


Scale: NTS

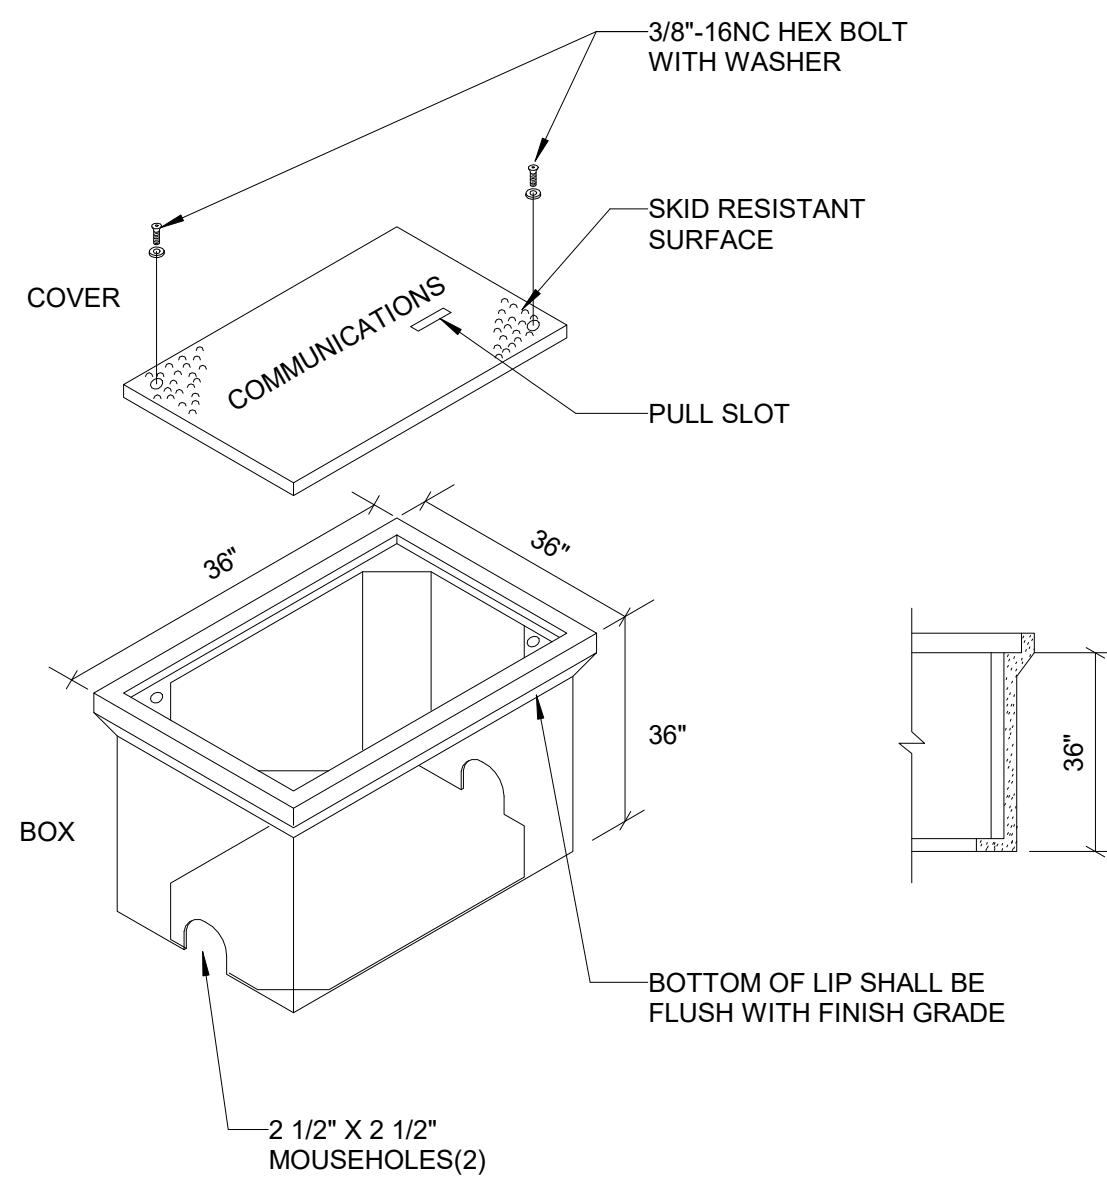

NOTES:
COVER SHALL BE FLUSH WITH TOP OF GRADE.

2 HAND HOLE DETAIL

Scale: NTS

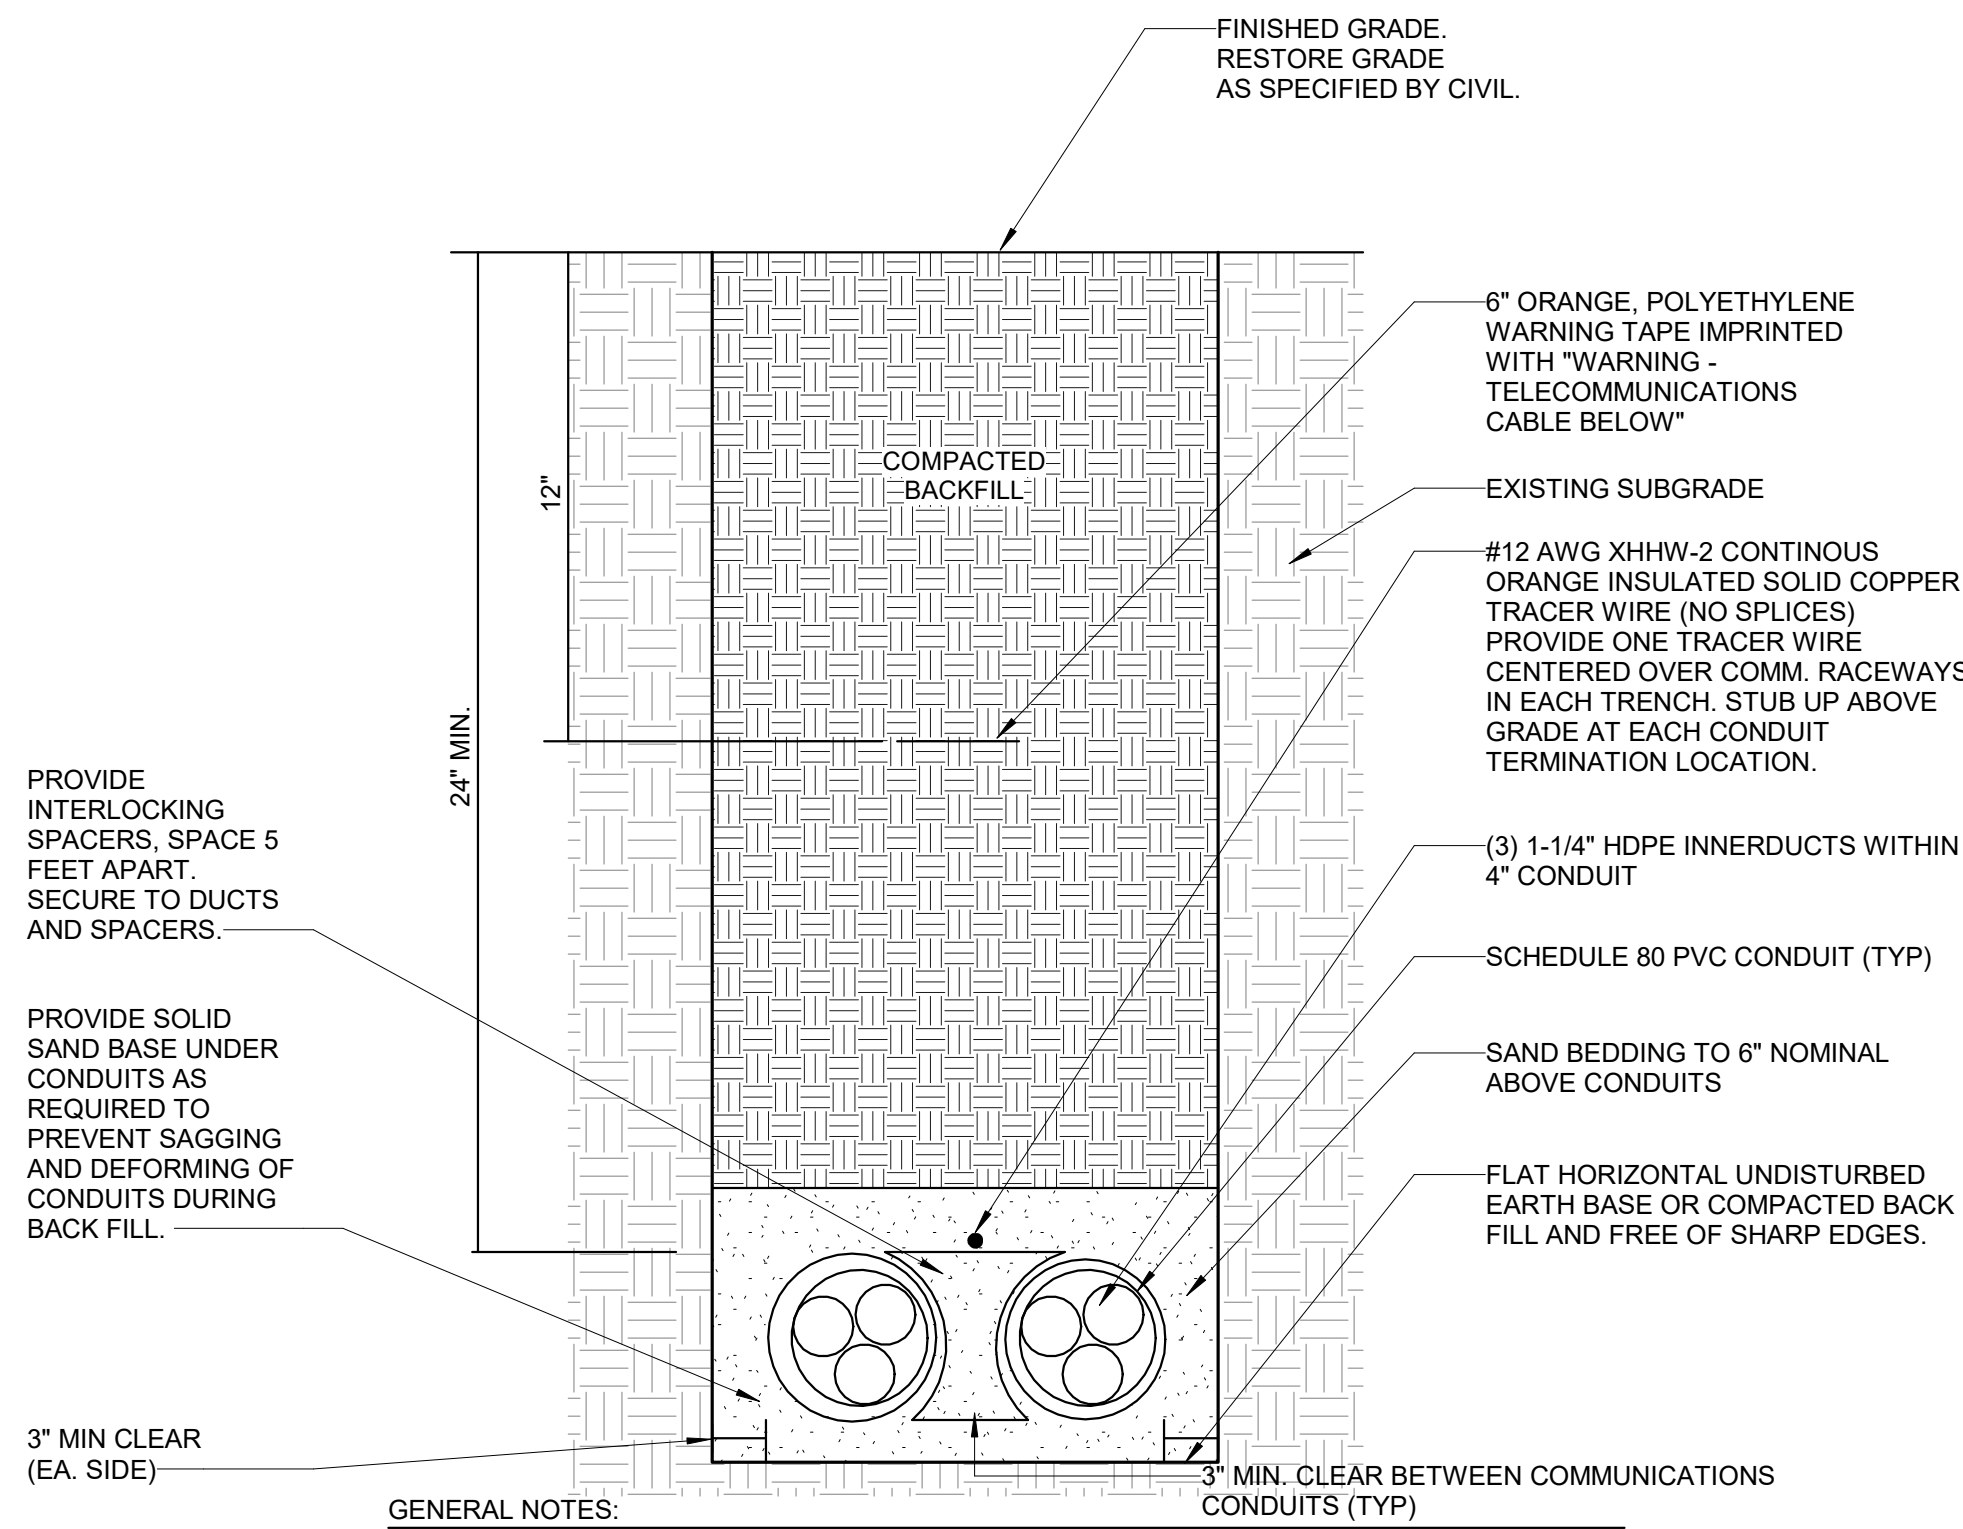

GENERAL NOTES:
1. REFER TO PLANS FOR ACTUAL SIZE AND ROUTING OF CONDUITS.
2. CONDUITS STUB UPS ARE TO BE LONG SWEEP 90 GALVANIZED RIGID STEEL.

3 DIRECT BURY COMM DUCTBANK DETAIL

Scale: NTS

SECURITY CCTV CAMERA SCHEDULE				
Camera #	Camera Type	Intended View	Location	Floor
C001	INDOOR - FIXED	VESTIBULE	VESTIBULE 001, CEILING	FIRST FLOOR
C002	INDOOR - 360 MULTI-IMAGE	LOBBY	LOBBY 002, CEILING MOUNTED	FIRST FLOOR
C003	INDOOR - FIXED	INTERVIEW & CITIZEN REPORT ROOM	INTERVIEW & CITIZEN REPORT ROOM 003, CEILING MOUNTED	FIRST FLOOR
C004	INDOOR - FIXED	STAIR	STAIR ST01, CEILING MOUNTED	FIRST FLOOR
C007	INDOOR - 360 MULTI-IMAGE	EVIDENCE STOR: GEN / PROP	EVIDENCE STOR: GEN / PROP 120, CEILING MOUNTED	FIRST FLOOR
C008	INDOOR - 360 MULTI-IMAGE	TEMP EVIDENCE NARCOTICS	TEMP EVIDENCE NARCOTICS 114, CEILING MOUNTED	FIRST FLOOR
C005	INDOOR - 360 MULTI-IMAGE	INTAKE	INTAKE 119, CEILING MOUNTED	FIRST FLOOR
C006	INDOOR - 360 MULTI-IMAGE	EVID. DROP/ BAG + TAG	EVID. DROP/ BAG + TAG 117, CEILING MOUNTED	FIRST FLOOR
SC01	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, CORNER MOUNTED	EXTERIOR - SITE
SC03	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, CORNER MOUNTED	EXTERIOR - SITE
SC05	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, CORNER MOUNTED	EXTERIOR - SITE
SC07	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, CORNER MOUNTED	EXTERIOR - SITE
SC02	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, WALL MOUNTED	EXTERIOR - SITE
SC06	OUTDOOR - 360 MULTI-IMAGE	BUILDING PERIMETER	BUILDING EXTERIOR, WALL MOUNTED	EXTERIOR - SITE
SC04	OUTDOOR - FIXED	BUILDING PERIMETER	BUILDING EXTERIOR, WALL MOUNTED	EXTERIOR - SITE
SC08	OUTDOOR - FIXED	BUILDING PERIMETER	BUILDING EXTERIOR, CORNER MOUNTED	EXTERIOR - SITE
C009	INDOOR - 360 MULTI-IMAGE	SECURE VEST.	SECURE VEST. 201, CEILING MOUNTED	SECOND FLOOR
C010	INDOOR - FIXED	STAIR	STAIR ST01, CEILING MOUNTED	SECOND FLOOR



Dewberry Architects Inc.

8401 Arlington Blvd
Fairfax, VA 22031
703.949.0100

Dewberry Engineers Inc.


401 Southwest Water Street
Suite 701
Peoria, IL 61602-1585
309.282.8000
IL REG #184.005007-006

TOWN OF STRASBURG

STRASBURG POLICE STATION

115 W King Street,
Strasburg, VA 22657
ISSUED FOR BID

SEAL

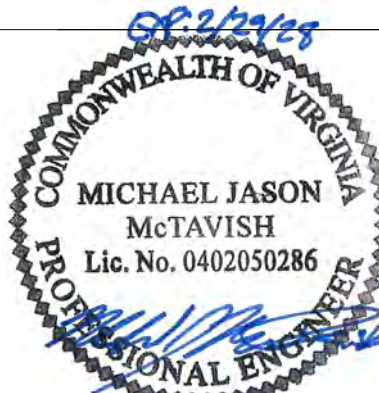

KEY PLAN 08/24/2026

SCALE

REVISIONS

NO.	DESCRIPTION	DATE

DRAWN BY JAC
APPROVED BY MJM
CHECKED BY GTR
DATE 08.26.2026


TITLE

DETAILS &
SCHEDULES -
SECURITY


PROJECT NO. 50165756

TY-503

SHEET NO.

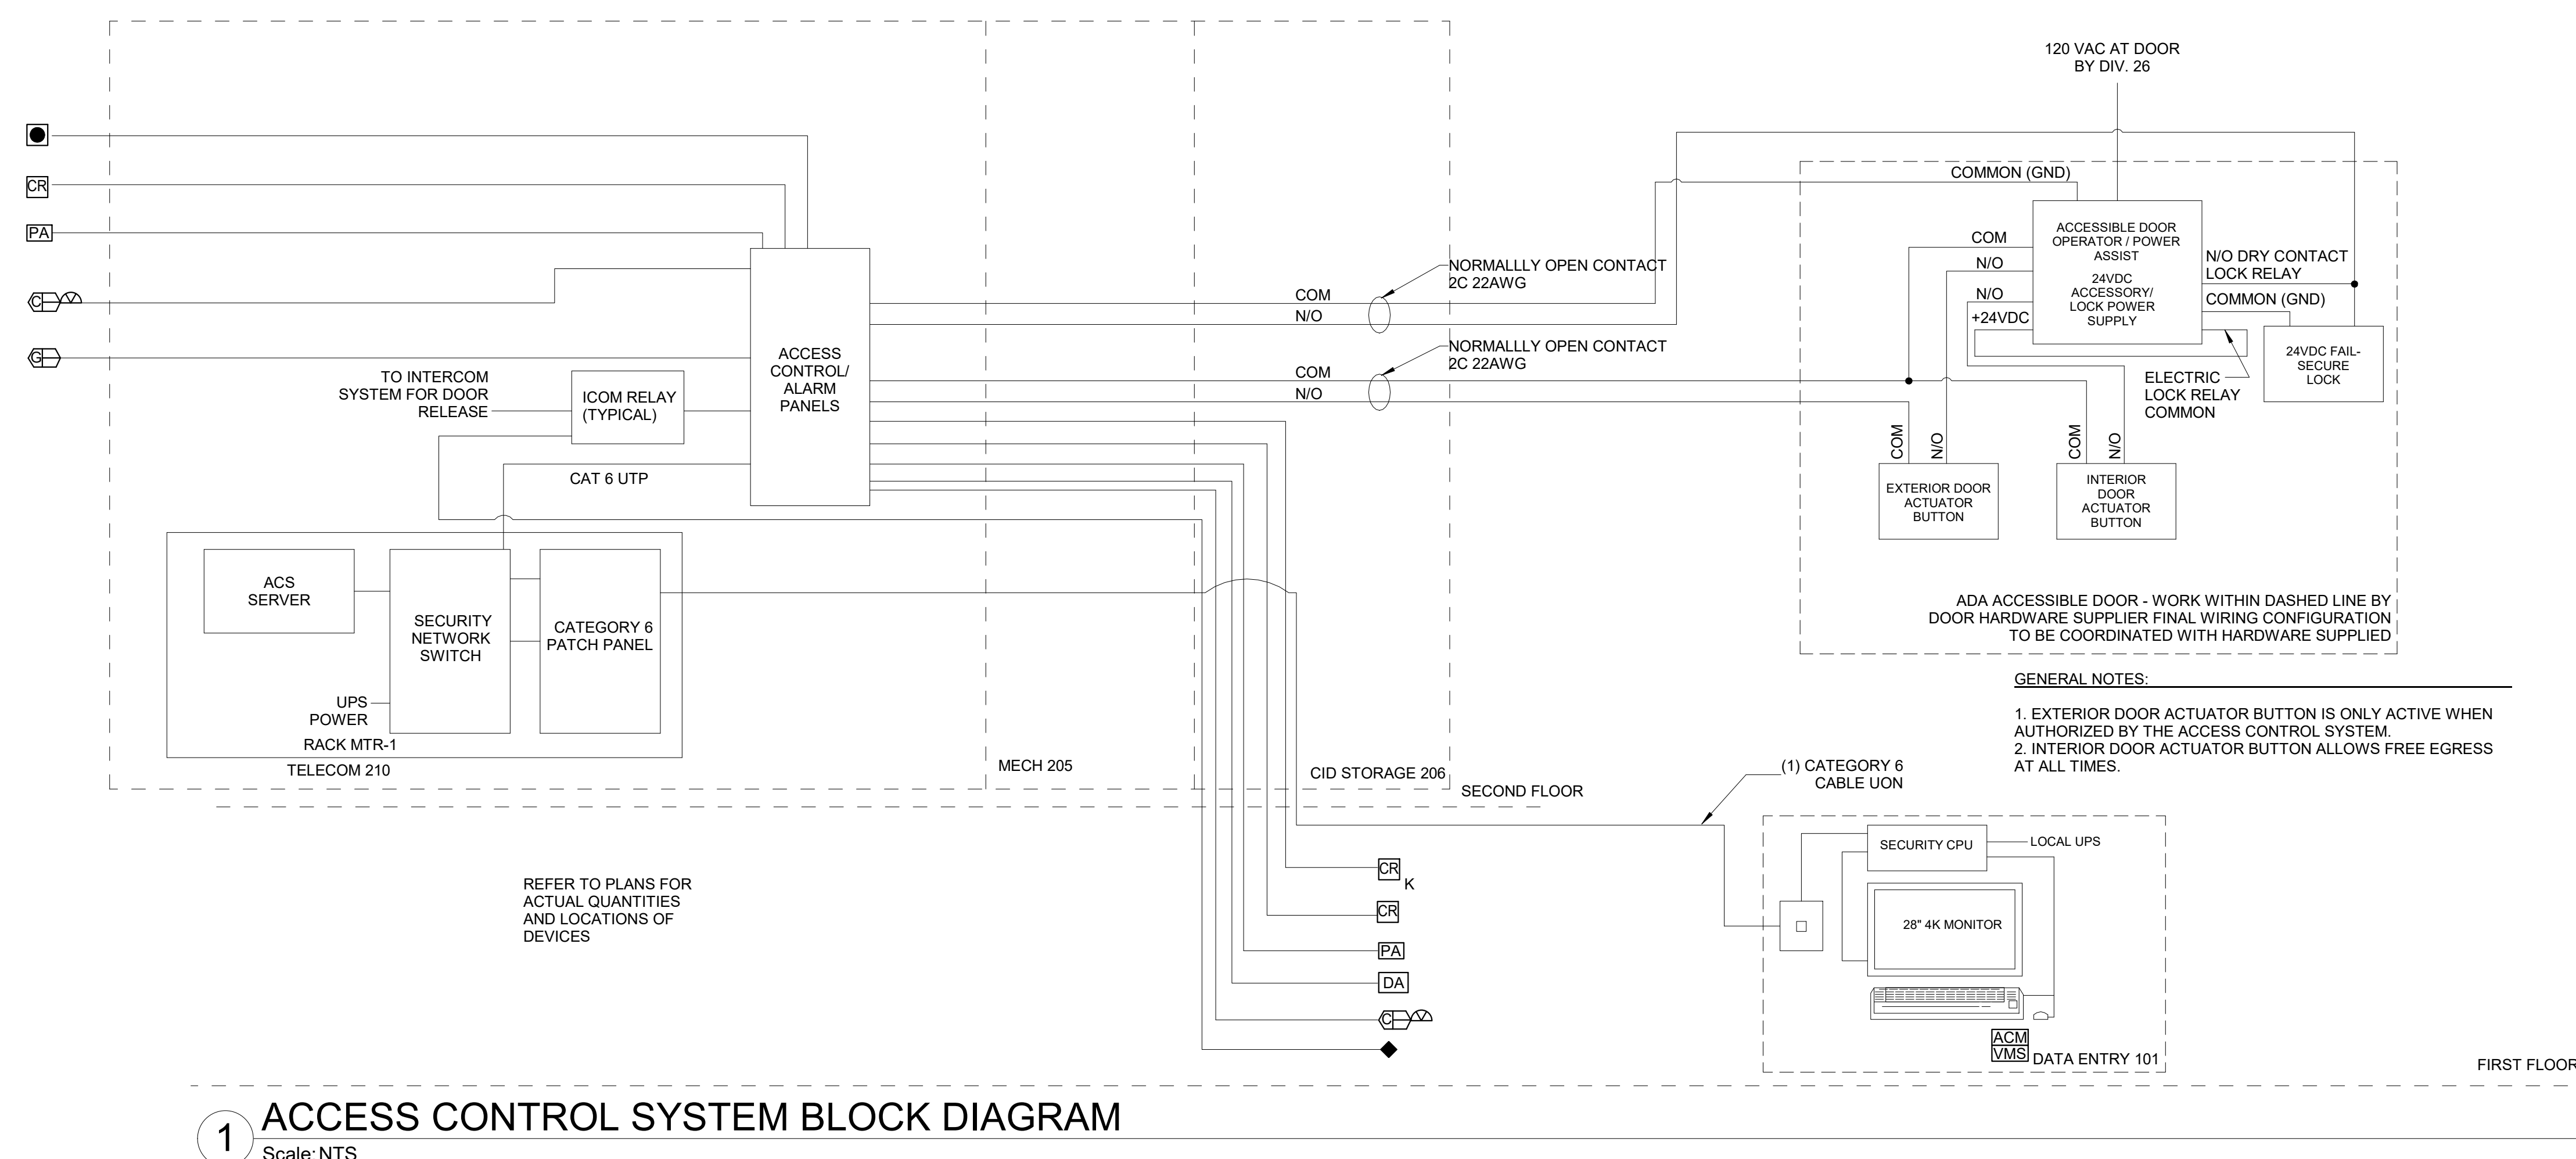

2 CCTV & INTERCOM SYSTEM BLOCK DIAGRAM

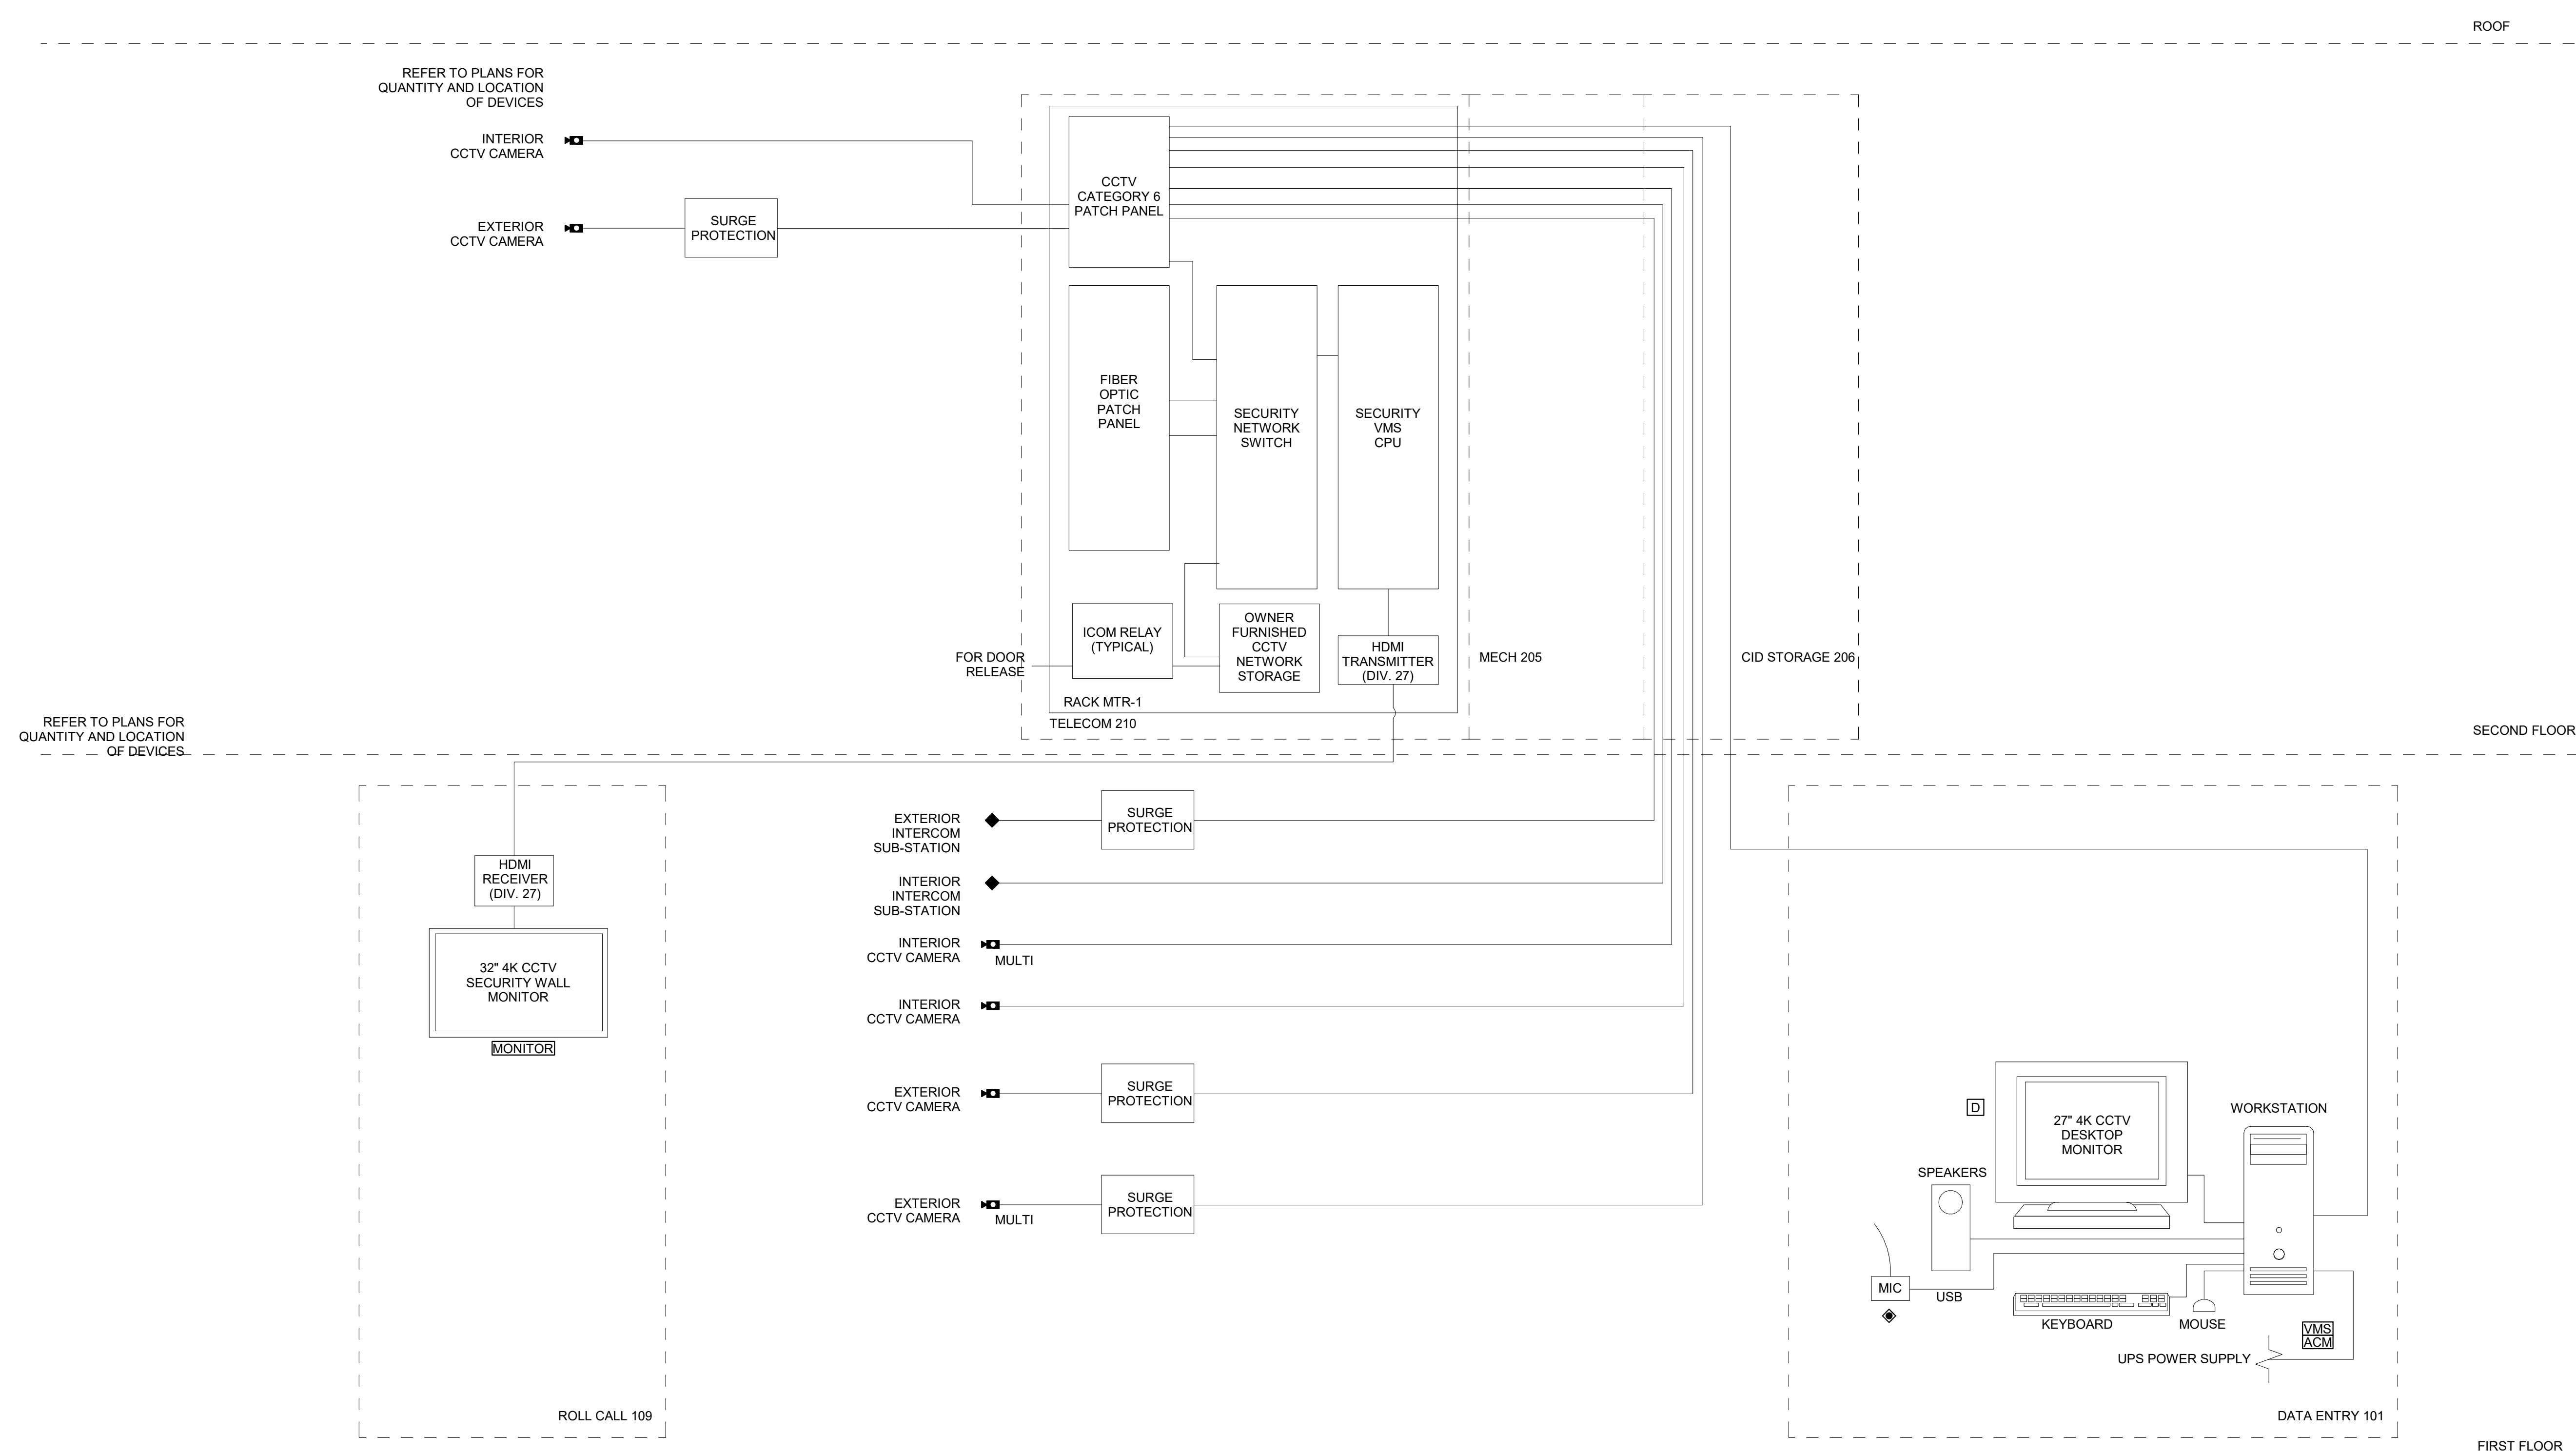

2 CCTV & INTERCOM SYSTEM BLOCK DIAGRAM